



Code of Federal Regulations

46

Parts 1 to 40

Revised as of October 1, 2000

Shipping

Containing a Codification of documents
of general applicability and future effect

As of October 1, 2000

With Ancillaries

Published by
Office of the Federal Register
National Archives and Records
Administration

As a Special Edition of the Federal Register

U.S. GOVERNMENT PRINTING OFFICE
WASHINGTON : 2000

For sale by U.S. Government Printing Office
Superintendent of Documents, Mail Stop: SSOP, Washington, DC 20402-9328

Table of Contents

Explanation	<i>Page</i> v
Title 46:	
Chapter I—Coast Guard, Department of Transportation	3
Finding Aids:	
Material Approved for Incorporation by Reference	533
Table of CFR Titles and Chapters	537
Alphabetical List of Agencies Appearing in the CFR	555
List of CFR Sections Affected	565

Cite this Code: CFR

*To cite the regulations in
this volume use title,
part and section num-
ber. Thus, 46 CFR
1.01-05 refers to title 46,
part 1, section 01-05.*

Explanation

The Code of Federal Regulations is a codification of the general and permanent rules published in the Federal Register by the Executive departments and agencies of the Federal Government. The Code is divided into 50 titles which represent broad areas subject to Federal regulation. Each title is divided into chapters which usually bear the name of the issuing agency. Each chapter is further subdivided into parts covering specific regulatory areas.

Each volume of the Code is revised at least once each calendar year and issued on a quarterly basis approximately as follows:

Title 1 through Title 16.....	as of January 1
Title 17 through Title 27.....	as of April 1
Title 28 through Title 41.....	as of July 1
Title 42 through Title 50.....	as of October 1

The appropriate revision date is printed on the cover of each volume.

LEGAL STATUS

The contents of the Federal Register are required to be judicially noticed (44 U.S.C. 1507). The Code of Federal Regulations is prima facie evidence of the text of the original documents (44 U.S.C. 1510).

HOW TO USE THE CODE OF FEDERAL REGULATIONS

The Code of Federal Regulations is kept up to date by the individual issues of the Federal Register. These two publications must be used together to determine the latest version of any given rule.

To determine whether a Code volume has been amended since its revision date (in this case, October 1, 2000), consult the "List of CFR Sections Affected (LSA)," which is issued monthly, and the "Cumulative List of Parts Affected," which appears in the Reader Aids section of the daily Federal Register. These two lists will identify the Federal Register page number of the latest amendment of any given rule.

EFFECTIVE AND EXPIRATION DATES

Each volume of the Code contains amendments published in the Federal Register since the last revision of that volume of the Code. Source citations for the regulations are referred to by volume number and page number of the Federal Register and date of publication. Publication dates and effective dates are usually not the same and care must be exercised by the user in determining the actual effective date. In instances where the effective date is beyond the cut-off date for the Code a note has been inserted to reflect the future effective date. In those instances where a regulation published in the Federal Register states a date certain for expiration, an appropriate note will be inserted following the text.

OMB CONTROL NUMBERS

The Paperwork Reduction Act of 1980 (Pub. L. 96-511) requires Federal agencies to display an OMB control number with their information collection request.

Many agencies have begun publishing numerous OMB control numbers as amendments to existing regulations in the CFR. These OMB numbers are placed as close as possible to the applicable recordkeeping or reporting requirements.

OBSOLETE PROVISIONS

Provisions that become obsolete before the revision date stated on the cover of each volume are not carried. Code users may find the text of provisions in effect on a given date in the past by using the appropriate numerical list of sections affected. For the period before January 1, 1986, consult either the List of CFR Sections Affected, 1949-1963, 1964-1972, or 1973-1985, published in seven separate volumes. For the period beginning January 1, 1986, a "List of CFR Sections Affected" is published at the end of each CFR volume.

INCORPORATION BY REFERENCE

What is incorporation by reference? Incorporation by reference was established by statute and allows Federal agencies to meet the requirement to publish regulations in the Federal Register by referring to materials already published elsewhere. For an incorporation to be valid, the Director of the Federal Register must approve it. The legal effect of incorporation by reference is that the material is treated as if it were published in full in the Federal Register (5 U.S.C. 552(a)). This material, like any other properly issued regulation, has the force of law.

What is a proper incorporation by reference? The Director of the Federal Register will approve an incorporation by reference only when the requirements of 1 CFR part 51 are met. Some of the elements on which approval is based are:

- (a) The incorporation will substantially reduce the volume of material published in the Federal Register.
- (b) The matter incorporated is in fact available to the extent necessary to afford fairness and uniformity in the administrative process.
- (c) The incorporating document is drafted and submitted for publication in accordance with 1 CFR part 51.

Properly approved incorporations by reference in this volume are listed in the Finding Aids at the end of this volume.

What if the material incorporated by reference cannot be found? If you have any problem locating or obtaining a copy of material listed in the Finding Aids of this volume as an approved incorporation by reference, please contact the agency that issued the regulation containing that incorporation. If, after contacting the agency, you find the material is not available, please notify the Director of the Federal Register, National Archives and Records Administration, Washington DC 20408, or call (202) 523-4534.

CFR INDEXES AND TABULAR GUIDES

A subject index to the Code of Federal Regulations is contained in a separate volume, revised annually as of January 1, entitled CFR INDEX AND FINDING AIDS. This volume contains the Parallel Table of Statutory Authorities and Agency Rules (Table I). A list of CFR titles, chapters, and parts and an alphabetical list of agencies publishing in the CFR are also included in this volume.

An index to the text of "Title 3—The President" is carried within that volume.

The Federal Register Index is issued monthly in cumulative form. This index is based on a consolidation of the "Contents" entries in the daily Federal Register.

A List of CFR Sections Affected (LSA) is published monthly, keyed to the revision dates of the 50 CFR titles.

REPUBLICATION OF MATERIAL

There are no restrictions on the republication of material appearing in the Code of Federal Regulations.

INQUIRIES

For a legal interpretation or explanation of any regulation in this volume, contact the issuing agency. The issuing agency's name appears at the top of odd-numbered pages.

For inquiries concerning CFR reference assistance, call 202-523-5227 or write to the Director, Office of the Federal Register, National Archives and Records Administration, Washington, DC 20408 or e-mail info@fedreg.nara.gov.

SALES

The Government Printing Office (GPO) processes all sales and distribution of the CFR. For payment by credit card, call 202-512-1800, M-F, 8 a.m. to 4 p.m. e.s.t. or fax your order to 202-512-2233, 24 hours a day. For payment by check, write to the Superintendent of Documents, Attn: New Orders, P.O. Box 371954, Pittsburgh, PA 15250-7954. For GPO Customer Service call 202-512-1803.

ELECTRONIC SERVICES

The full text of the Code of Federal Regulations, The United States Government Manual, the Federal Register, Public Laws, Public Papers, Weekly Compilation of Presidential Documents and the Privacy Act Compilation are available in electronic format at www.access.gpo.gov/nara ("GPO Access"). For more information, contact Electronic Information Dissemination Services, U.S. Government Printing Office. Phone 202-512-1530, or 888-293-6498 (toll-free). E-mail, gpoaccess@gpo.gov.

The Office of the Federal Register also offers a free service on the National Archives and Records Administration's (NARA) World Wide Web site for public law numbers, Federal Register finding aids, and related information. Connect to NARA's web site at www.nara.gov/fedreg. The NARA site also contains links to GPO Access.

RAYMOND A. MOSLEY,

Director,

Office of the Federal Register.

October 1, 2000.

THIS TITLE

Title 46—SHIPPING is composed of nine volumes. The parts in these volumes are arranged in the following order: Parts 1–40, 41–69, 70–89, 90–139, 140–155, 156–165, 166–199, 200–499 and 500 to End. The first seven volumes containing parts 1–199 comprise chapter I—Coast Guard, DOT. The eighth volume, containing parts 200 to 499, includes chapter II—Maritime Administration, DOT and chapter III—Coast Guard (Great Lakes Pilotage), DOT. The ninth volume, containing part 500 to End, includes chapter IV—Federal Maritime Commission. The contents of these volumes represent all current regulations codified under this title of the CFR as of October 1, 2000.

Subject indexes appear in subchapters A—I, I–A, J, K, L, and Q—W following the subchapters.

For this volume, Ruth Reedy Green was Chief Editor. The Code of Federal Regulations publication program is under the direction of Frances D. McDonald, assisted by Alomha S. Morris.

Title 46—Shipping

(This book contains parts 1 to 40)

	<i>Part</i>
CHAPTER I—Coast Guard, Department of Transportation	1

CHAPTER I—COAST GUARD, DEPARTMENT OF TRANSPORTATION

SUBCHAPTER A—PROCEDURES APPLICABLE TO THE PUBLIC

<i>Part</i>		<i>Page</i>
1	Organization, general course and methods governing marine safety functions	5
2	Vessel inspections	12
3	Designation of oceanographic research vessels	35
4	Marine casualties and investigations.	37
5	Marine investigation regulations—personnel action	52
6	Waivers of navigation and vessel inspection laws and regulations	63
7	Boundary lines	66
8	Vessel inspection alternatives	73
9	Extra compensation for overtime services	85
	Index	89

SUBCHAPTER B—MERCHANT MARINE OFFICERS AND SEAMEN

10	Licensing of maritime personnel	102
12	Certification of seamen	194
13	Certification of tankermen	223
14	Shipment and discharge of merchant mariners	243
15	Manning requirements	248
16	Chemical testing	269
	Index	285

SUBCHAPTER C—UNINSPECTED VESSELS

24	General provisions	301
25	Requirements	308
26	Operations	318
27	Towing vessels	321
28	Requirements for commercial fishing industry vessels	327

46 CFR Ch. I (10–1–00 Edition)

Index	375
-------------	-----

SUBCHAPTER D—TANK VESSELS

30	General provisions	379
31	Inspection and certification	400
32	Special equipment, machinery, and hull requirements	417
34	Firefighting equipment	447
35	Operations	467
36	Elevated temperature cargoes	488
38	Liquefied flammable gases	489
39	Vapor control systems	505
	Index	515

SUBCHAPTER A—PROCEDURES APPLICABLE TO THE PUBLIC

PART 1—ORGANIZATION, GENERAL COURSE AND METHODS GOVERNING MARINE SAFETY FUNCTIONS

Subpart 1.0—Organization and General Flow of Functions

Sec.

- 1.01-5 Definitions of terms used in this part.
- 1.01-10 Organization.
- 1.01-15 Organization; districts.
- 1.01-20 Suspension and revocation proceedings.
- 1.01-25 General flow of functions.
- 1.01-30 Judicial review.
- 1.01-35 OMB control numbers assigned pursuant to the Paperwork Reduction Act.

Subpart 1.03—Rights of Appeal

- 1.03-10 Definition of terms used in this subpart.
- 1.03-15 General.
- 1.03-20 Appeals from decisions or actions of an OCMI.
- 1.03-25 Appeals from decisions or actions of a District Commander.
- 1.03-30 Appeals from decisions or actions of the Marine Safety Center.
- 1.03-35 Appeals from decisions or actions of a recognized classification society acting on behalf of the Coast Guard.
- 1.03-45 Appeals from decisions or actions involving documentation of vessels and suspension or withdrawal of course approvals.

AUTHORITY: 5 U.S.C. 552; 14 U.S.C. 633; 46 U.S.C. 7701; 49 CFR 1.45, 1.46; §1.01-35 also issued under the authority of 44 U.S.C. 3507.

SOURCE: CGD 88-033, 54 FR 50376, Dec. 6, 1989, unless otherwise noted.

Subpart 1.01—Organization and General Flow of Functions

§ 1.01-05 Definitions of terms used in this part.

(a) The term *Commandant* means the Commandant of the Coast Guard.

(b) The term *District Commander* means an officer of the Coast Guard designated as such by the Commandant to command all Coast Guard activities within a district.

§ 1.01-10 Organization.

(a) The Commandant is the head of the agency and exercises overall direction over the policy and administration of the Coast Guard.

(b) To carry out the regulatory and enforcement aspects of marine safety, the staff officers designated in this paragraph are assigned to the Commandant. The chain of military command is from the Commandant directly to the District Commanders. The staff officers at Headquarters act only on the basis of the Commandant's authority and direction.

(1) The Assistant Commandant for Marine Safety and Environmental Protection under the general direction of the Commandant, directs, supervises and coordinates the activities of the Standards Directorate, consisting of the Office of Design and Engineering Standards, the Office of Operating and Environmental Standards, and the Office of Standards Evaluation and Development; the Field Activities Directorate, consisting of the Office of Compliance, the Office of Response, and the Office of Investigations and Analysis; and the Resource Management Directorate, consisting of the Office of Planning and Resources and the Office of Information Resources. The Port Safety and Security programs administered by the Chief, Office of Compliance and the Marine Environmental Response programs administered by the Chief, Office of Response are guided by regulations contained in 33 CFR chapter I. The Assistant Commandant for Marine Safety and Environmental Protection exercises technical control over the Commanding Officer, National Maritime Center and, through the District Commander, supervises the administration of the Marine Safety Division of District Offices and Officers in Charge, Marine Inspection.

(i) The Director of Standards (G-MS), under the general direction and supervision of the Assistant Commandant for Marine Safety and Environmental Protection establishes federal policies for development of marine safety and environmental protection treaties,

laws, and regulations; develops safety, security and environmental protection standards for the maritime industry; integrates all marine safety and environmental protection regulatory programs; prepares legislation, regulations, and industry guidance for new safety and environmental protection programs; and maintains an active program for development of third party consensus industry standards.

(A) The Chief, Office of Design and Engineering Standards (G-MSE), at Headquarters, under the direction of the Assistant Commandant for Marine Safety and Environmental Protection and the Director of Standards, manages the program for defining the overall regulatory approach for vessels, offshore structures, and other marine systems incorporating safety considerations regarding the role of the human element; develops policies and regulations on load line matters and supervises classification societies authorized to assign load lines on behalf of the Coast Guard; oversees the development and maintenance of programs that incorporate risk-based methods in making safety determinations and policies; and oversees technical research and development for safety and environmental protection associated with marine vessels, structures and facilities.

(B) The Chief, Office of Operating and Environmental Standards (G-MSO), at Headquarters, under the direction of the Assistant Commandant for Marine Safety and Environmental Protection and the Director of Standards, coordinates and integrates program standards for personnel qualification, vessel manning, vessel and facility operations, cargo systems and handling, and environmental protection; develops and maintains standards, regulations and industry guidance for maritime industry operations to prevent deaths, injuries, property damage, and environmental harm; develops and maintains safety standards and regulations for commercial fishing industry vessels and uninspected commercial vessels; and develops and maintains health and safety standards and regulations for U.S. inspected vessels.

(C) The Chief, Office of Standards Evaluation and Development (G-MSR), at Headquarters, under the Direction of

the Assistant Commandant for Marine Safety and Environmental Protection and the Director of Standards, coordinates the development of new standards and programs across all technical and operational areas of marine safety and environmental protection; provides comprehensive analytical support for all standards assessment and development efforts; and coordinates development of measures of effectiveness for assessing regulatory programs and consensus standards.

(ii) The Director of Field Activities (G-MO), under the general direction and supervision of the Assistant Commandant for Marine Safety and Environmental Protection, acts as Program Manager for the Marine Safety and Marine Environmental Protection Programs; directs, coordinates, and integrates the Coast Guard's marine safety and environmental protection compliance programs, contingency planning, response operations, and investigations programs; establishes and coordinates field implementation policies and priorities for all marine safety commands and units; serves as the focal point for field support and technical guidance; and provides oversight of marine documentation and marine personnel administration matters.

(A) The Chief, Office of Compliance (G-MOC), at Headquarters, under the direction of the Assistant Commandant for Marine Safety and Environmental Protection and the Director of Field Activities, administers and balances all marine safety and environmental protection compliance programs, including direction of Coast Guard activities and oversight of third parties and industry programs; develops, publishes and maintains program policies for vessel compliance, interprets standards and regulations, and provides field guidance for execution and enforcement; administers the marine inspection program and foreign vessel boarding program for the enforcement of commercial vessel material and operational safety standards; and supervises the administration of licensing and documenting of merchant personnel, the issuance of certificates of registry to merchant marine staff officers, and the manning of U.S. vessels.

Coast Guard, DOT

§ 1.01-15

(B) The Chief, Office of Response (G-MOR), at Headquarters, under the Direction of the Assistant Commandant for Marine Safety and Environmental Protection and the Director of Field Activities, coordinates and integrates field planning, preparedness, and response operations for pollution incidents, natural disasters, marine accidents, terrorism, and other threats to public safety, the marine environment, or marine transportation and commerce; develops, publishes, and maintains program policies for preparedness and response, interprets laws and regulations, and provides field guidance for execution; provides guidance regarding emergency authorities of the Captain of the Port (COTP); and administers Office programs for ports and waterway management, bridging compliance and response efforts with an active presence in the marine environment.

(C) The Chief, Office of Investigations and Analyses (G-MOA), at Headquarters, under the direction of the Assistant Commandant for Marine Safety and Environmental Protection and the Director of Field Activities, reviews investigations of marine casualties; manages, develops policy for and evaluates domestic and international programs and processes associated with investigations of marine casualties and injuries; manages analysis of casualties and casualty data, civil penalties and other remedial programs (including proceedings to suspend or revoke Coast Guard licenses, documents or certificates held by mariners); and manages marine employer drug and alcohol testing programs.

(D) The Commanding Officer, Coast Guard National Maritime Center (NMC) under technical control of the Assistant Commandant for Marine Safety and Environmental Protection, administers operational and administrative control of the Marine Safety Center which conducts reviews and approvals of plans, calculations, and other materials concerning the design, construction, alterations, and repair of commercial vessels to determine conformance with the marine inspection laws, regulations, and implementing directions, and administers the U.S. Tonnage Measurement program; administers operational and

administrational control over the National Vessel Documentation Center which administers U.S. vessel identification and documentation; administers merchant mariner licensing and seaman's documentation; and oversees the national pilotage program.

(iii) The Director of Resource Management (G-MR), under the general direction and supervision of the Assistant Commandant for Marine Safety and Environmental Protection, serves as Facility Manager for the marine safety programs; coordinates and integrates financial, informational, and human resources; plans, acquires, develops, and allocates resources for development and execution of the Coast Guard's marine safety programs; provides the focal point for all resource issues in support of the Standards and Operations Directorates; and oversees the development and management of the Coast Guard's direct user fee program.

(2) The Chief Counsel of the Coast Guard at Headquarters, under the general direction and supervision of the General Counsel, Department of Transportation and the Commandant, considers cases involving alleged violations of navigation and vessel inspection laws or regulations prescribed thereunder and published in this chapter or in 33 CFR chapter I, and reviews appeals to the Commandant from statutory monetary penalties assessed therefor. Upon completion of such a review, the Chief Counsel prepares a proposed action for the Commandant's consideration or, in appropriate cases, takes final action on behalf of, and as directed by, the Commandant.

[CGD 88-033, 54 FR 50376, Dec. 6, 1989, as amended by CGD 95-072, 60 FR 50458, Sept. 29, 1995; CGD 95-072, 60 FR 54106, Oct. 19, 1995; CGD 96-041, 61 FR 50724, Sept. 27, 1996; CGD 97-057, 62 FR 51041, Sept. 30, 1997; USCG-1998-4442, 63 FR 52188, Sept. 30, 1998; USCG-2000-7790, 65 FR 58457, Sept. 29, 2000]

§ 1.01-15 Organization; districts.

(a) To assist the District Commander in carrying out the regulatory and enforcement aspects of marine safety in the Coast Guard Districts, there is assigned to each District Commander a

staff officer designated as Chief, Marine Safety Division. The chain of military command is from the District Commander to each Officer in Charge, Marine Inspection, within the district. The Chief, Marine Safety Division, is a staff officer assigned to the District Commander and acts only on the basis of the authority and by direction of the District Commander.

(1) The Chiefs, Marine Safety Division, in the District Offices, under the supervision of their respective District Commanders, direct the activities in their district relative to vessel, factory and shipyard inspections; reports and investigations of marine casualties and accidents; processing of violations of navigation and vessel inspection laws; the licensing, certificating, shipment and discharge of seaman; the investigation and institution of proceedings looking to suspension and revocation under 46 U.S.C. chapter 77 of licenses, certificates, and documents held by persons; and all other marine safety regulatory activities except those functions related to recreational boating when under the supervision of the Chiefs, Boating Safety Division, in the District Offices.

(2) Unless otherwise provided for, the Chiefs, Boating Safety Division, in the District Offices, under the supervision of their respective District Commanders, direct the activities in their districts relative to administration of the law enforcement program applicable to uninspected vessels used for recreational purposes and the imposition and collection of penalties in connection therewith; maintain liaison with Federal and State agencies having related interests; develop and coordinate agreements and arrangements with Federal and State agencies for cooperation in the enforcement of State and Federal laws related to recreational boating; and review investigative reports of recreational boating accidents.

(b) The Officers in Charge, Marine Inspection, in the Coast Guard districts, under the supervision of their respective District Commanders, are in charge of marine inspection offices and marine safety offices located in various ports and have command responsibility with assigned marine safety zones for the performance of duties with respect

to the inspection, enforcement, and administration of navigation and vessel inspection laws, and rules, and regulations governing marine safety. The Officer in Charge, Marine Inspection, has been designated and delegated to give immediate direction to Coast Guard activities relating to marine safety functions consisting of inspection of vessels in order to determine that they comply with the applicable laws, rules, and regulations relating to construction, equipment, manning and operation, and to be satisfied that such vessels are in seaworthy condition for the services in which such vessels are to be operated; shipyard inspections; factory inspections of materials and equipment for vessels; the licensing, certificating, shipment and discharge of seaman; investigations of marine casualties and accidents; investigations of violations of law; negligence, misconduct, unskillfulness, incompetence or misbehavior of persons holding licenses, certificates, or documents issued by the Coast Guard; initiations of actions seeking suspension or revocation under 46 U.S.C. chapter 77 of licenses, certificates and documents held by persons, and presentation of cases at hearings before Administrative Law Judges; and the enforcement of navigation, vessel inspection and seaman laws in general.

NOTE: Licensing and Certification functions are performed only by the Officer in Charge, Marine Inspection, at the following locations:

Boston, MA
 New York, NY
 Baltimore, MD
 Charleston, SC
 Miami, FL
 New Orleans, LA
 Houston, TX
 Memphis, TN
 St. Louis, MO
 Toledo, OH
 San Pedro, CA
 San Francisco, CA
 Portland, OR
 Seattle, WA
 Anchorage, AK
 Juneau, AK
 Honolulu, HI

Where the term *Officer in Charge, Marine Inspection, Marine Inspection Office, or Marine Safety Office* is used within the context of parts 10 or 12 of this chapter, it is understood to mean that

Coast Guard, DOT

§ 1.01-25

particular *Officer* or *Office* at one of the above listed locations.

(c) For descriptions of Coast Guard districts and marine safety zones, see 33 CFR part 3.

[CGD 88-033, 54 FR 50376, Dec. 6, 1989, as amended by CGD 97-057, 62 FR 51040, Sept. 30, 1997; USCG-2000-7790, 65 FR 58457, Sept. 29, 2000]

§ 1.01-20 Suspension and revocation proceedings.

(a) The Commandant takes final agency action on each proceeding concerned with revocation.

(b) The Commandant has delegated authority to the Vice Commandant in 33 CFR 1.01-40 to take final agency action under subparts I, J, and K of part 5 of this chapter on each proceeding except on a petition or appeal in a case on which an order of revocation has been issued.

(c) The Commandant assigns to his staff a Chief Administrative Law Judge who is an Administrative Law Judge appointed under 5 U.S.C. 3105 and whose assignment is to:

(1) Act as adviser and special assistant to the Commandant on matters concerning the administration of hearings conducted under 46 U.S.C. chapter 77;

(2) Conduct hearings under 46 U.S.C. chapter 77;

(3) Train new Administrative Law Judges assigned to conduct hearings under 46 U.S.C. chapter 77;

(4) Review the written decisions and orders of each Administrative Law Judge assigned to conduct a hearing under 46 U.S.C. chapter 77; and

(5) Act as adviser to the Chief Counsel in preparation of the final action of proceedings conducted under subparts I, J, and K of part 5 of this chapter.

(d) The Chief Counsel of the Coast Guard, under the general direction and supervision of the Commandant, U.S. Coast Guard:

(1) Acts as an adviser and as a special assistant to the Commandant in matters of law; and

(2) Prepares for the consideration of the Commandant or the Vice Commandant, as appropriate, proposed decisions on cases on appeal or review in suspension and revocation proceedings.

§ 1.01-25 General flow of functions.

(a) The Officer in Charge, Marine Inspection, has final authority with respect to the functions described in § 1.01-15(b) of this subpart, subject to the rights of appeal set forth in subpart 1.03 of this part.

(b) The general course and method by which the functions (other than those dealing with suspension and revocation of licenses, certificates, or documents described in paragraph (c) of this section) concerning marine safety activities are channeled begins with the Officer in Charge, Marine Inspection, at the local Marine Safety Office. From this officer the course is to the Chief, Marine Safety Division, on the staff of the District Commander and then to the District Commander. From the District Commander the course is to the Chief of one of the offices within Marine Safety and Environmental Protection at Headquarters. In most administrative cases the channel ends at this point; however, on matters of policy and other appropriate cases, the course continues to the Assistant Commandant for Marine Safety and Environmental Protection, and then to the Commandant, whose decisions are final.

(c) In proceedings involving the suspension or revocation of a Coast Guard license, certificate or document issued to an individual, the course and method by which such proceedings are channeled are as follows:

(1) In the United States, the Commonwealth of Puerto Rico, Territory of Guam, the Virgin Islands, and other possessions, the proceedings are initiated by the preferment of charges and specifications against the holder of the Coast Guard license, certificate or document. A Coast Guard Investigating Officer under the supervision of an Officer in Charge, Marine Inspection, or an Officer in Charge, Marine Inspection causes the charges and specifications to be served on the person described therein (person charged) who is a holder of a Coast Guard license, certificate or document. At a hearing the Coast Guard submits evidence to support the charges and specifications, while the person charged may submit evidence in rebuttal or mitigation. The Administrative Law Judge renders a decision

§ 1.01-30

on the basis of the evidence adduced at the hearing and the law. The Administrative Law Judge's decision is given to the person charged.

(i) In a case where an appeal is made by the person charged, the notice of appeal is filed with the Administrative Law Judge who heard the case or with any Officer in Charge, Marine Inspection, for forwarding to such Administrative Law Judge.

(ii) [Reserved]

(2) [Reserved]

(d) In the performance of their duties, all Coast Guard Administrative Law Judges are bound by law and the regulations in this chapter or in 33 CFR chapter I. Statements of policy, clarification of points of procedure, and general administrative instructions are published in *Administrative Law Judges' Circulars and Administrative Law Judges' Internal Practices and Procedures Series*. The Chief Administrative Law Judge, located in the Office of the Commandant, U.S. Coast Guard, maintains a complete file of these publications for reading purposes during normal working hours.

[CGD 88-033, 54 FR 50376, Dec. 6, 1989, as amended by CGD 96-041, 61 FR 50725, Sept. 27, 1996; CGD 97-057, 62 FR 51040, 51041, Sept. 30, 1997]

§ 1.01-30 Judicial review.

(a) Nothing in this chapter shall be construed to prohibit any party from seeking judicial review of any Commandant's decision or action taken pursuant to the regulations in this part or part 5 of this chapter with respect to suspension and revocation proceedings arising under 46 U.S.C. chapter 77.

(b) If the person found guilty of any offense fails to make a timely appeal, the decision of the Administrative Law Judge is final and binding on the person charged as of the date that the decision is delivered to the person charged or his authorized representative.

§ 1.01-35 OMB control numbers assigned pursuant to the Paperwork Reduction Act.

(a) *Purpose.* This section collects and displays the control numbers assigned to information collection and record keeping requirements in this sub-

46 CFR Ch. I (10-1-00 Edition)

chapter by the Office of Management and Budget (OMB) pursuant to the Paperwork Reduction Act of 1980 (44 U.S.C. 3501 *et seq.*). The Coast Guard intends that this section comply with the requirements of 44 U.S.C. 3507(f) which requires agencies display a current control number assigned by the Director of the OMB for each approved agency information collection requirement.

(b) *Display.*

46 CFR part or section where identified or described	Current OMB control No.
§ 2.01	2115-0007
§ 2.95-10	2115-0141
§ 3.10	2115-0053
Part 4	2115-0003
Part 6	2115-0005

Subpart 1.03—Rights of Appeal

§ 1.03-10 Definition of terms used in this subpart.

(a) The term *recognized classification society* means the American Bureau of Shipping or other classification society recognized by the Commandant.

(b) The term *new vessel* means:

(1) For vessels which require a Certificate of Inspection, a new vessel is a vessel which has not received an initial Certificate of Inspection.

(2) For vessels which do not require a Certificate of Inspection, a new vessel is a vessel which has not received a Load Line assignment.

(c) The term *existing vessel* means a vessel which is not a new vessel.

§ 1.03-15 General.

(a) Any person directly affected by a decision or action taken under this chapter, by or on behalf of the Coast Guard, except for matters covered by subpart J of part 5 of this chapter dealing with suspension and revocation hearings, shall follow the procedures contained in this section when requesting that the decision or action be reviewed, set aside or revised.

(b) When requesting that a decision or action be reconsidered or reviewed, as may be required by this subpart, such request must be made within 30 days after the decision is rendered or the action is taken.

(c) When making a formal appeal of a decision or action, as permitted by this

Coast Guard, DOT

§ 1.03-30

subpart, such appeal must be submitted in writing and received by the authority to whom the appeal is required to be made within 30 days after the decision or action being appealed, or within 30 days after the last administrative action required by this subpart. Upon written request and for good cause, the 30 day time limit may be extended by the authority to whom the appeal is required to be made.

(d) A formal appeal must contain a description of the decision or action being appealed and the appellant's reason(s) why the decision or action should be set aside or revised.

(e) When considering an appeal, the Commandant or a District Commander may stay the effect of a decision or action being appealed pending determination of the appeal.

(f) While a request for reconsideration or review or a formal appeal is pending, the original decision or action remains in effect, unless otherwise stayed under paragraph (e) of this section.

(g) The Commandant may delegate authority to act on administrative appeals under this subpart to the Assistant Commandant for Marine Safety and Environmental Protection, and appropriate office chiefs within Marine Safety and Environmental Protection.

(h) Formal appeals made to the Commandant shall be addressed to:

(1) Commandant (G-MOC) for appeals involving vessel inspection issues, load line issues, and vessel manning issues;

(2) Commandant (G-MS) for appeals involving vessel plan review or tonnage measurement issues;

(3) Commanding Officer, National Maritime Center, for appeals involving vessel documentation issues, marine personnel issues, including medical waivers, and suspension or withdrawal of course approvals; or

(4) Commandant (G-MSE) for appeals involving the recognition of a classification society.

(i) Failure to submit a formal appeal in accordance with the procedures and time limits contained in this subpart results in the decision or action becoming final agency action.

(j) Any decision made by the Commandant, or by the Assistant Commandant for Marine Safety and Envi-

ronmental Protection, or by an office chief pursuant to authority delegated by the Commandant is final agency action on the appeal.

[CGD 88-033, 54 FR 50376, Dec. 6, 1989, as amended by CGD 89-007, CGD 89-007a, 58 FR 60265, Nov. 15, 1993; CGD 96-041, 61 FR 50725, Sept. 27, 1996; CGD 97-057, 62 FR 51040, Sept. 30, 1997; CGD 95-010, 62 FR 67532, Dec. 24, 1997; USCG-1998-4442, 63 FR 52188, Sept. 30, 1998; USCG-1999-6216, 64 FR 53222, Oct. 1, 1999; USCG-2000-7790, 65 FR 58457, Sept. 29, 2000]

§ 1.03-20 Appeals from decisions or actions of an OCMI.

Any person directly affected by a decision or action of an OCMI may, after requesting reconsideration of the decision or action by the cognizant OCMI, make a formal appeal of that decision or action, via the office of the cognizant OCMI, to the District Commander of the district in which the office of the cognizant OCMI is located, in accordance with the procedures contained in § 1.03-15 of this subpart.

§ 1.03-25 Appeals from decisions or actions of a District Commander.

Any person directly affected by a decision or action of a District Commander made pursuant to § 1.03-20 of this subpart, may make a formal appeal of that decision or action, via the office of the cognizant District Commander, to the Commandant, in accordance with the procedures contained in § 1.03-15 of this subpart.

§ 1.03-30 Appeals from decisions or actions of the Marine Safety Center.

(a) Any person directly affected by a decision or action of the Marine Safety Center involving tonnage measurement or which otherwise affects a new vessel or plans for a vessel to be built may, after requesting reconsideration of the decision or action by the Commanding Officer, Marine Safety Center, make a formal appeal, of that decision or action, via the Commanding Officer, Marine Safety Center, to the Commandant, in accordance with the procedures contained in § 1.03-15 of this subpart.

(b) Any person directly affected by a decision or action of the Marine Safety Center not involving tonnage measurement but which otherwise affects an existing vessel, prior to initiating a

§ 1.03-35

formal appeal, must request review of that decision or action by the cognizant OCMI. Following review by the cognizant OCMI, the decision or action under review may be appealed to the District Commander, in accordance with the procedures contained in § 1.03-20 of this subpart.

[CGD 97-057, 62 FR 51040, Sept. 30, 1997, as amended by USCG-1998-4442, 63 FR 52188, Sept. 30, 1998]

§ 1.03-35 Appeals from decisions or actions of a recognized classification society acting on behalf of the Coast Guard.

(a) Any person directly affected by a decision or action of a recognized classification society performing plan review, tonnage measurement, or load line assignment on behalf of the Coast Guard may, after requesting reconsideration of the decision or action by the classification society, make a formal appeal, via the classification society headquarters, to the Commandant, in accordance with the procedures contained in § 1.03-15 of this subpart.

(b) Any person directly affected by a decision or action of a recognized classification society acting as a marine inspector, as defined in § 30.10-43 of this chapter, on behalf of the Coast Guard, prior to initiating a formal appeal, must request review of that decision or action by the cognizant OCMI. Following review by the cognizant OCMI, the decision or action under review may be appealed to the District Commander, in accordance with the procedures contained in § 1.03-20 of this subpart.

[CGD 88-033, 54 FR 50376, Dec. 6, 1989, as amended by CGD 97-057, 62 FR 51041, Sept. 30, 1997]

§ 1.03-45 Appeals from decisions or actions involving documentation of vessels and suspension or withdrawal of course approvals.

Any person directly affected by a decision or action of an officer or employee of the Coast Guard acting on or in regard to the documentation of a vessel under part 67 or suspension or withdrawal of course approvals under part 10 of this chapter, may make a formal appeal of that decision or action to the Commandant (G-MO) via

46 CFR Ch. I (10-1-00 Edition)

the Commanding Officer, National Maritime Center, in accordance with procedures contained in §§ 1.03-15 through 1.03-25 of this subpart.

[USCG-1998-3824, 64 FR 4984, Feb. 2, 1999]

PART 2—VESSEL INSPECTIONS

Subpart 2.01—Inspecting and Certifying of Vessels

Sec.

- 2.01-1 Applications for inspections.
- 2.01-3 Notification of inspection.
- 2.01-5 Certificate of inspection.
- 2.01-6 Certificates issued to foreign vessels.
- 2.01-7 Classes of vessels (including motorboats) examined or inspected and certificated.
- 2.01-8 Application of regulations to vessels or tankships on an international voyage.
- 2.01-10 Inspection requirements—domestic vessels.
- 2.01-13 Inspection requirements—foreign vessels.
- 2.01-15 Vessel repairs.
- 2.01-20 Suspension or revocation of certificates of inspection.
- 2.01-25 International Convention for Safety of Life at Sea, 1974.
- 2.01-30 Delegation of OCMI signature authority.
- 2.01-40 Passengers or persons in addition to crew on cargo or tank vessels.
- 2.01-45 Excursion permit.
- 2.01-50 Persons other than crew on towing, oyster, or fishing steam vessels.
- 2.01-60 Overtime compensation.
- 2.01-70 Right of appeal.
- 2.01-80 Vessel inspections in Alaska.

Subpart 2.10—Fees

- 2.10-1 Applicability.
- 2.10-5 Exemptions.
- 2.10-10 Waivers.
- 2.10-20 General requirements.
- 2.10-25 Definitions.
- 2.10-101 Annual vessel inspection fee.
- 2.10-105 Prepayment of annual vessel inspection fees.
- 2.10-115 Changes in vessel service.
- 2.10-120 Overseas inspection and examination fees.
- 2.10-125 Fees for examination of foreign tankships.
- 2.10-130 Fees for examination of foreign mobile offshore drilling units.
- 2.10-135 Penalties.

Subpart 2.20—Reports and Forms

- 2.20-40 Chief engineer's reports.
- 2.20-50 Repairs or alterations in lifesaving or fire prevention equipment.

Coast Guard, DOT

§2.01-1

Subpart 2.45 [Reserved]

Subpart 2.50—Penalties

2.50-1 Penalty procedures.

Subpart 2.75—Approvals of Safety Equipment, Materials and Installations, and Qualifications for Construction Personnel

- 2.75-1 Approvals.
- 2.75-5 Certificates of approval.
- 2.75-10 Procedures for obtaining approvals.
- 2.75-15 Requirements and tests.
- 2.75-25 Portable fire extinguishers.
- 2.75-40 Suspension of approval.
- 2.75-50 Withdrawals or terminations of approvals and appeals.
- 2.75-60 Hazardous ships' stores.
- 2.75-70 Welding procedure and performance qualifications.

Subpart 2.85—Load Lines

2.85-1 Assignment of load lines.

Subpart 2.90—Plans, Drawings or Blueprints

2.90-1 General requirements.

Subpart 2.95—Retention of Records by the Public

- 2.95-1 Certificates or documents issued by Coast Guard.
- 2.95-5 Certificates or documents issued by others.
- 2.95-10 Equipment or material required to be approved.

AUTHORITY: 33 U.S.C. 1903; 43 U.S.C. 1333; 46 U.S.C. 3103, 3205, 3306, 3307, 3703; E.O. 12234, 45 FR 58801, 3 CFR, 1980 Comp., p. 277; 49 CFR 1.46; subpart 2.45 also issued under the authority of Act Dec. 27, 1950, Ch. 1155, secs. 1, 2, 64 Stat. 1120 (see 46 U.S.C. App. note prec. 1).

SOURCE: CGFR 65-50, 30 FR 16604, Dec. 30, 1965, unless otherwise noted.

Subpart 2.01—Inspecting and Certifying of Vessels

§2.01-1 Applications for inspections.

(a) *Application forms.* (1) Applications for inspections of vessels required to be inspected under Subtitle II, Title 46 of the U.S. Code, Title 46 and Title 33 U.S. Code, or under 50 U.S.C. 198 shall be made by the master, owner, or agent on the following Coast Guard forms which are obtainable from the Officer in Charge, Marine Inspection, at any

local U.S. Coast Guard Marine Safety Office.

(i) CG-3752—Application for Inspection of U.S. Vessel.

(ii) CG-986—Application for Inspection of Foreign Vessel.

(2) These applications require information on name and type of vessel, nature of employment and route in which to be operated, and place where and date when the vessel may be inspected.

(b) *To whom submitted.* The completed form must be submitted to the Officer in Charge, Marine Inspection, in the Marine Inspection Zone within which the inspection is to be conducted.

(c) *New vessels.* Applications for inspection of new vessels must be preceded by the submission of applicable drawings or prints in accordance with the specific requirements in subchapters D (Tank Vessels), E (Load Lines), F (Marine Engineering), H (Passenger Vessels), I (Cargo and Miscellaneous Vessels), J (Electrical Engineering), K (Small Passenger Vessels Carrying More Than 150 Passengers Or With Overnight Accommodations For More Than 49 Passengers), L (Offshore Supply Vessels), O (Certain Bulk Dangerous Cargoes), S (Subdivision and Stability), and T (Small Passenger Vessels) of this chapter applicable to that particular type of vessel or type of service in which the vessel is proposed to be operated.

(d) *Foreign-built vessels.* (1) Those foreign-built vessels which are specifically authorized by public or private laws to engage in the coastwise trade, and those foreign-built vessels which are documented to engage in the foreign trade shall be inspected and certificated as required by law and/or the regulations in this chapter which are applicable to their class and employment.

(2) Foreign-built vessels are not permitted to engage in the U.S. coastwise trade (domestic trade) unless specifically authorized by law. Therefore, when foreign-built vessels are intended for use in the coastwise trade as defined by the U.S. Customs Service, such vessels will not be inspected and

§2.01-3

certificated unless specifically authorized by law to engage in coastwise trade.

[CG FR 65-50, 30 FR 16604, Dec. 30, 1965, as amended by CGD 79-023, 48 FR 51006, Nov. 4, 1983; CGD 91-030, 60 FR 13563, Mar. 13, 1995; CGD 97-057, 62 FR 51041, Sept. 30, 1997; CGD 95-028, 62 FR 51194, Sept. 30, 1997]

§2.01-3 Notification of inspection.

(a) At least 30 days prior to the expiration of the Certification of Inspection, a vessel's owner, charterer, managing operator, agent, master or individual in charge shall notify the Coast Guard if the vessel will be required to be reinspected for certification or will be operated in such a manner as to not require a Certificate of Inspection.

(b) The notification required by paragraph (a) shall be in writing and shall be submitted to the Officer in Charge, Marine Inspection for the Marine Inspection or Marine Safety Office of the port that:

(1) Will be reinspecting and Certificating the Vessel;

(2) Issued the vessel's current Certificate of Inspection if the vessel's schedule is such that it is not known where the next reinspection will take place; or

(3) Issued the vessel's current Certificate of Inspection if the vessel will not be requiring reinspection for the issuance of a Certificate of Inspection.

[CGD 85-015, 51 FR 19340, May 29, 1986, as amended by USCG-1999-4976, 65 FR 6498, Feb. 9, 2000]

§2.01-5 Certificate of inspection.

(a) *Issuance of certificates.* Upon completion of the inspection of a United States vessel, and on condition that the vessel and its equipment are approved by the inspector, a certificate of one or more of the following Coast Guard forms is issued by the Officer in Charge, Marine Inspection:

(1) CG-841—Certificate of Inspection.

(2) CG-854—Temporary Certificate of Inspection.

(b) *Description of certificates.* The certificates of inspection issued to United States vessels describe the vessel, the route the vessel may travel, the minimum manning requirements, the safety equipment and appliances required to be on board, the total number of per-

46 CFR Ch. I (10-1-00 Edition)

sons that may be carried, and the names of the owners and operators. The period of validity is stated on the certificate. The certificate may be renewed by applying for inspection under §2.01-1.

(c) *Amending certificates.* When because of a change in the character of the vessel or vessel's route, equipment, etc. the vessel does not comply with the requirements of the Certificate of Inspection previously issued, a certificate amending such certificate may be issued at the discretion of the Officer in Charge, Marine Inspection, to whom request is made on Coast Guard form CG-858, Certificate of Inspection Amendment.

[CGD 77-014, 44 FR 5316, Jan. 25, 1979, as amended by USCG-1999-4976, 65 FR 6498, Feb. 9, 2000]

§2.01-6 Certificates issued to foreign vessels.

(a) *Issuance of certificates.* Upon completion of an examination of a foreign vessel, one or more of the following certificates is issued by the Officer in Charge, Marine Inspection:

(1) CG-4504—Control Verification for Foreign Vessel—issued to a foreign vessel that is registered in a country which is signatory to the International Convention for the Safety of Life at Sea, 1974.

(2)(i) CG-2832A—Letter of Compliance—issued to a foreign vessel that is suitable for carriage of hazardous cargoes in bulk as defined in 46 Code of Federal Regulations, subchapter 0 and is in compliance with Tankship Cargo Venting and Handling Systems and Minimum Pollution Prevention Regulations and Transfer Procedures (33 CFR parts 155, 156, 157 and 159), and Navigation Safety Inspection Regulations (33 CFR part 164).

(ii) Letter of Compliance—issued to Foreign Mobile Offshore Drilling Units engaged in Outer Continental Shelf activities under 33 CFR 143.210.

(3) CG-840S-1—Tank Vessel Examination Letter—issued to a foreign vessel that is suitable for carriage of cargoes as defined in 46 Code of Federal Regulations, subchapter D and is in compliance with Tankship Cargo Venting and Handling Systems and Minimum Safety Standards (SOLAS 74—46 CFR part

Coast Guard, DOT

§ 2.01-7

35), Pollution Prevention Regulations and Transfer Procedures (33 CFR parts 155, 156, 157 and 159), and Navigation Safety Regulations (33 CFR part 164).

(4) Foreign vessels of countries which are nonsignatory to the International Convention for the Safety of Life at Sea, 1974, are issued a Temporary Certificate of Inspection (CG-854) and a Certificate of Inspection (CG-841) as described in § 2.01-5.

(b) *Description of Certificates.* (1) CG-4504—Control Verification for Foreign Vessels—describes the vessel, type of certificate required by the International Convention for the Safety of Life at Sea, 1974, country issued by, and its expiration date. The period of validity of a control verification for foreign vessel is stated on the certificate.

(2) CG-2832A—Letter of Compliance—describe the vessel and the period for which the letter is valid.

(3) CG-840S-1—Tank Vessel Examination Letter—describe the vessel and if

there are any deficiencies as to applicable regulations at the time the vessel was examined. If there are deficiencies they are listed in an attachment to this letter (CG-840S-2). The Tank Vessel Examination Letter is valid for a period of 1 year from the date the examination is completed.

(4) Temporary Certificate of Inspection (CG-854) and Certificate of Inspection (CG-841) are amended as provided for in § 2.01-5(c).

[CGD 77-014, 44 FR 5316, Jan. 25, 1979, as amended by CGD 90-008, 55 FR 30659, July 26, 1990; CGD 91-030, 60 FR 13563, Mar. 13, 1995]

§ 2.01-7 Classes of vessels (including motorboats) examined or inspected and certificated.

(a) The regulations in this chapter concerning inspecting and certificating vessels are applicable to vessels (including motorboats) as indicated in the following table 2.01-7(a):

TABLE 2.01-7(A)

Method of propulsion	Classes of vessels (including motorboats) examined or inspected under various Coast Guard Regulations ¹							
	Size or other limitations	Vessels inspected and certificated under either Subchapter D—Tank Vessels ²	Vessels inspected and certificated under either Subchapter H—Passenger Vessels ^{2,3,4,5} or Subchapter T—Small Passenger Vessels ^{2,3,4}	Vessels inspected and certificated under Subchapter I—Cargo and Miscellaneous Vessels ^{2,5}	Vessels subject to provisions of Subchapter C—Uninspected Vessels ^{2,6,7,8}	Vessels subject to provisions of Subchapter O—Oceanographic Vessels ^{2,5,6,7,8}	Vessels subject to the provisions of Subchapter O—Certain Bulk Dangerous Cargoes ¹⁰	
Column 1	Column 2	Column 3	Column 4	Column 5	Column 6	Column 7	Column 8	
Steam	Vessels not over 65 feet in length.	All vessels carrying combustible or flammable liquid cargo in bulk.	All vessels carrying more than 6 passengers. ⁷	All tugboats and towboats.	All vessels except those covered by columns 3, 4, 5, and 7.	None	All vessels carrying in bulk the cargoes listed in Table I of Pt. 153 and Table 4 of Pt. 154.	
	Vessels over 65 feet in length.	All vessels carrying combustible or flammable liquid cargo in bulk. ⁵	1. All vessels carrying more than 12 passengers on an international voyage, except yachts. 2. All vessels of not over 15 gross tons which carry more than 6 passengers. ⁷ 3. All other vessels carrying passengers, ⁷ except: a. Yachts. b. Documented cargo or tank vessels issued a permit to carry not more than 16 persons in addition to the crew.	All vessels except those covered by columns 3 and 4.	None	All vessels engaged in oceanographic research.	Do.	

Coast Guard, DOT

\$2.01-7

Motor	Vessels not over 15 gross tons.	All vessels carrying combustible or flammable liquid cargo in bulk.	c. Towing and fishing vessels, in other than ocean and coastwise service, may carry persons on the legitimate business of the vessel ⁵ in addition to crew, but not to exceed one for each net ton of the vessel. All vessels carrying more than 6 passengers. ⁷	Those vessels carrying dangerous cargoes when required by 46 CFR part 98 or 49 CFR parts 171-179.	All vessels except those covered by columns 3, 4, 5, and 7.	None	Do.
	Vessels over 15 gross tons except seagoing motor vessels of 300 gross tons and over.	All vessels carrying combustible or flammable liquid cargo in bulk. ⁵	1. All vessels carrying more than 12 passengers on an international voyage, except yachts. 2. All vessels not over 65 feet in length which carry more than 6 passengers. ⁷ 3. All other vessels of over 65 feet in length carrying passengers for hire except documented cargo or tank vessels issued a permit to carry not more than 16 persons in addition to the crew.	All vessels carrying freight for hire except those covered by columns 3 and 4.	All vessels except those covered by columns 3, 4, 5, and 7.	None	Do.

TABLE 2.01-7(a)—Continued

Method of propulsion	Size or other limitations	Classes of vessels (including motorboats) examined or inspected under various Coast Guard Regulations ¹					
		Vessels inspected and certificated under Subchapter D—Tank Vessels ²	Vessels inspected and certificated under either Subchapter H—Passenger Vessels ^{2,3,4,5} or Subchapter T—Small Passenger Vessels ^{2,3,4}	Vessels inspected and certificated under Subchapter I—Cargo and Miscellaneous Vessels ^{2,5}	Vessels subject to provisions of Subchapter C—Uninspected Vessels ^{2,3,6,7,8}	Vessels subject to provisions of Subchapter O—Certain Bulk Dangerous Cargoes ¹⁰	
Column 1	Column 2	Column 3	Column 4	Column 5	Column 6	Column 7	Column 8
Sail	Seagoing motor vessels of 300 gross tons and over.	All vessels carrying combustible or flammable liquid cargo in bulk. ⁵	1. All vessels carrying more than 12 passengers on an international voyage, except yachts. 2. All other vessels carrying passengers, ⁷ except: a. Yachts. b. Documented cargo or tank vessels issued a permit to carry not more than 16 persons in addition to the crew.	All vessels except those covered by columns 3 and 4, and those engaged in the fishing, oystering, clamming, crabbing, or any other branch or the fishery, kelp, or sponge industry.	All vessels except those covered by columns 3, 4, 5, and 7.	All vessels engaged in oceanographic research.	Do.
	Vessels not over 700 gross tons.	All vessels carrying combustible or flammable liquid cargo in bulk.	All vessels carrying more than 6 passengers. ⁷	Those vessels carrying dangerous cargoes when required by 46 CFR part 98 or 49 CFR parts 171–179.	None	None	Do.

Non-self-propelled	Vessels over 700 gross tons.	All vessels carrying combustible or flammable liquid cargo in bulk.	All vessels carrying passengers for hire.	Those vessels carrying dangerous cargoes when required by 46 CFR part 98 or 49 CFR parts 171-179.	None	None	Do.
Vessels 100 gross tons or over.	Vessels less than 100 gross tons.	All vessels carrying combustible or liquid cargo in bulk.	All vessels carrying more than 6 passengers. ⁷	Those vessels carrying dangerous cargoes when required by 49 CFR parts 171-179.	All barges carrying passengers except those covered by column 4.	None	All tank barges carrying in bulk the cargoes listed in Table 151.05 of this chapter. ¹¹
	All vessels carrying combustible or flammable liquid cargo in bulk.	All vessels carrying passengers for hire.	All seagoing barges except those covered by columns 3 and 4; and those inland barges carrying dangerous cargoes when required by 49 CFR parts 171-179.	All barges carrying passengers except those covered by columns 4 and 7.	All seagoing barges engaged in oceanographic research.	Do.	

¹ Where length is used in this table it means the length measured from end to end over the deck, excluding sheer. This expression means a straight line measurement of the overall length from the foremost part of the vessel to the aftermost part of the vessel, measured parallel to the centerline.

² Subchapters E (Load Lines), F (Marine Engineering), J (Electrical Engineering), and N (Dangerous Cargoes) of this chapter may also be applicable under certain conditions. The provisions of 49 CFR parts 171-179 apply whenever hazardous materials are on board vessels (including motorboats), except when specifically exempted by law.

³ Public nautical schoolships, other than vessels of the Navy and Coast Guard, shall meet the requirements of part 167 of subchapter R (Nautical Schools) of this chapter. Civilian nautical schoolships, as defined by 46 U.S.C. 1331, shall meet the requirements of subchapter H (Passenger Vessels) and part 168 of subchapter R (Nautical Schools) of this chapter.

⁴ Subchapter H (Passenger Vessels) of this chapter covers only those vessels of 100 gross tons or more, subchapter T (Small Passenger Vessels) of this chapter covers only those vessels of less than 100 gross tons.

⁵ Vessels covered by subchapter H (Passenger Vessels) or I (Cargo and Miscellaneous Vessels) of this chapter, where the principal purpose or use of the vessel is not for the carriage of liquid cargo, may be granted a permit to carry a limited amount of flammable or combustible liquid cargo in bulk. The portion of this vessel used for the carriage of the flammable or combustible liquid cargo shall meet the requirements of subchapter D (Tank Vessels) in addition to the requirements of subchapter H (Passenger Vessels) or I (Cargo and Miscellaneous Vessels) of this chapter.

⁶ Any vessel on an international voyage is subject to the requirements of the International Convention for Safety of Life at Sea, 1974.

⁷ The meaning of the term *passenger* is as defined in the Act of May 10, 1936 (Sec. 1, 70 Stat. 151; 46 U.S.C. 390). On oceanographic vessels scientific personnel on board shall not be deemed to be passengers nor seamen, but for calculations of lifesaving equipment, etc., shall be counted as persons.

⁸ Boilers and machinery are subject to examination on vessels over 40 feet in length.

⁹ Under 46 U.S.C. 441 an *oceanographic research vessel* is a vessel " * * * being employed exclusively in instruction in oceanography or limnology, or both, or exclusively in oceanographic research * * * ". Under 46 U.S.C. 443, "an oceanographic research vessel shall not be deemed to be engaged in trade or commerce." If or when an oceanographic vessel engages in trade or commerce, such vessel cannot operate under its certificate of inspection as an oceanographic vessel, but shall be inspected and certificated for the service in which engaged, and the scientific personnel aboard then become persons employed in the business of the vessel.

¹⁰ Bulk dangerous cargoes are cargoes specified in table 151.01-10(b), in table I of part 153, and in table 4 of part 154 of this chapter.

¹¹ For manned tank barges see § 151.01-10(e) of this chapter.

§2.01-8

(b) The specific application of regulations concerning inspecting and certificating vessels is set forth in the specific subchapter governing a particular class of vessels.

(1) For passenger vessels see part 70 of subchapter H (Passenger Vessels) of this chapter.

(2) For cargo and miscellaneous vessels see part 90 of subchapter I (Cargo and Miscellaneous Vessels) of this chapter.

(3) For tank vessels see part 30 of subchapter D (Tank Vessels) of this chapter.

(4) For small passenger vessels see part 114 of subchapter K (Small Passenger Vessels Carrying More Than 150 Passengers or with Overnight Accommodations for More Than 49 Passengers) and part 175 of subchapter T (Small Passenger Vessels) of this chapter.

(5) For uninspected vessels see part 24 of subchapter C (Uninspected Vessels) of this chapter.

(6) For vessels carrying certain bulk dangerous cargoes see subchapter O of this chapter.

[CGFR 65-50, 30 FR 16604, Dec. 30, 1965, as amended by CGFR 67-83, 33 FR 1102, Jan. 27, 1968; CGFR 70-10, 35 FR 3706, Feb. 25, 1970; CGD 73-96, 42 FR 49022, Sept. 26, 1977; CGD 86-033, 53 FR 36023, Sept. 16, 1988; 53 FR 46871, Nov. 21, 1988; CGD 90-008, 55 FR 30659, July 26, 1990; CGD 97-057, 62 FR 51041, Sept. 30, 1997]

§2.01-8 Application of regulations to vessels or tankships on an international voyage.

(a) Where, in various places or portions in this chapter, requirements are stipulated specifically for *vessels on an international voyage* or *tankships on an international voyage*, it is intended that these requirements apply only to vessels or tankships, as applicable, which are subject to the International Convention for Safety of Life at Sea, 1974.

(b) For details regarding application of Convention requirements to tankships, see §30.01-6 of this chapter; to passenger vessels, see §70.05-10 of this chapter; to cargo ships other than tankships, see §90.05-10 of this chapter; and to small passenger vessels, see §§115.900 and 176.900 of this chapter.

46 CFR Ch. I (10-1-00 Edition)

(E.O. 11239, 30 FR 9671, 3 CFR, 1965 Supp.).

[CGFR 65-50, 30 FR 16604, Dec. 30, 1965, as amended by CGD 90-008, 55 FR 30659, July 26, 1990; USCG-1999-4976, 65 FR 6499, Feb. 9, 2000]

§2.01-10 Inspection requirements—domestic vessels.

(a) If during the inspection of a vessel made at the request of the master, owner, or agent, the vessel or her equipment is found not to conform to the requirements of law or regulations in this chapter, the requirements which must be met will be listed on Form CG-835, Notice of Merchant Marine Inspection Requirements, and given to the master of the vessel.

(b) The Coast Guard on its own initiative may examine or inspect or reinspect at any time any vessel subject to inspection under Subtitle II, Title 46 of the U.S. Code, Title 46 and Title 33 U.S. Code. If during such examination, inspection, or reinspection, any failure to comply with any applicable requirement of law and/or applicable regulations in this chapter, or any defects or imperfections become apparent tending to render the navigation of the vessel unsafe, or that repairs have become necessary, the Coast Guard will so notify the master and state what is required.

[CGFR 65-50, 30 FR 16604, Dec. 30, 1965, as amended by CGD 95-028, 62 FR 51194, Sept. 30, 1997]

§2.01-13 Inspection requirements—foreign vessels.

(a) Foreign vessels registered in countries which are parties to the effective International Convention for Safety of Life at Sea are normally subject to the examination provided for in Chapter I of that Convention. However, in the case of any vessel involving novel features of design or construction, upon which that Convention is silent or which involve potential unusual operating risks, a more extensive inspection may be required when considered necessary to safeguard the life or property in United States ports where such vessel may enter. In such a case, pertinent plans and/or calculations may be required to be submitted sufficiently in advance to permit evaluation before inspection.

Coast Guard, DOT

§2.01-15

(b) Foreign vessels registered in countries which are not parties to the effective International Convention for Safety of Life at Sea, or foreign vessels registered in countries which are parties to the effective Convention but which vessels are exempted from part or all of the Convention, may under conditions specified in applicable inspection laws be subject to inspection and certification as specified in regulations governing specific categories of vessels.

(c) For details concerning application of regulations to foreign vessels, see part 30 (Tank Vessels), part 70 (Passenger Vessels), part 90 (Cargo and Miscellaneous Vessels), §147.1 (Dangerous Cargoes), part 148 (Bulk Solid Hazardous Materials), parts 153 and 154 (Certain Bulk Dangerous Cargoes), and part 175 (Small Passenger Vessels) of this chapter.

[CGFR 65-50, 30 FR 16604, Dec. 30, 1965, as amended by CGD 73-96, 42 FR 49022, Sept. 26, 1977; CGD 97-057, 62 FR 51041, Sept. 30, 1997]

§2.01-15 Vessel repairs.

(a) No repairs or alterations affecting the safety of the vessel or its machinery shall be made unless applicable requirements in this chapter are met. The procedures to be followed in notifying the Coast Guard about vessel repairs vary according to the type of vessel and service in which engaged. The requirements are set forth in the subchapter governing a particular class of vessels or in a subchapter governing a particular subject as follows:

(1) For passenger vessels that are 100 gross tons or more, see §§71.55-1 and 71.60-1 of subchapter H (Passenger Vessels) of this chapter.

(2) For small passenger vessels under 100 gross tons, see §176.700 of subchapter T (Small Passenger Vessels) of this chapter.

(3) For cargo and miscellaneous vessels, see §§91.45-1 and 91.50-1 of subchapter I (Cargo and Miscellaneous Vessels) of this chapter.

(4) For tank vessels, see §§31.10-25 and 35.01-1 of subchapter D (Tank Vessels) of this chapter.

(5) For public nautical schoolships, see §§167.30-1 and 167.30-10 of subchapter R (Nautical Schools) of this chapter.

(6) For oceanographic vessels, see §§189.45-1 and 189.50-1 of subchapter U (Oceanographic Vessels) of this chapter.

(7) For repairs to a vessel after it has been surveyed, see §42.09-50 of subchapter E (Load Lines) of this chapter.

(8) For repairs to boilers, pressure vessels, and appurtenances, see part 59 of subchapter F (Marine Engineering) of this chapter.

(9) For repairs to electrical installations or equipment, see §§111.05-5(e), 111.05-10(e), and 111.90-5 of subchapter J (Electrical Engineering) of this chapter.

(10) For vessels carrying compressed gases regulated by subchapter O (Certain Bulk Dangerous Cargoes), see §151.50 30(c) of this chapter.

(11) For repairs to a vessel that affects its subdivision or stability, see §170.005 of this chapter.

(b) If repairs to a vessel are necessary, such a vessel may be permitted to proceed to another port for repairs, if in the opinion of the marine inspector it can be done with safety. The permit is granted by the Officer in Charge, Marine Inspection, upon request in writing by the master or owner of the vessel and is issued on Coast Guard Form CG-948, Permit to Proceed to Another Port for Repairs. The requirements for such permits are set forth in the subchapter governing a particular class of vessels as follows:

(1) For passenger vessels that are 100 gross tons or more, see subpart 71.05 of subchapter H (Passenger Vessels) of this chapter.

(2) For small passenger vessels under 100 gross tons, see subpart B of subchapter T (Small Passenger Vessels) of this chapter.

(3) For cargo and miscellaneous vessels, see subpart 91.05 of subchapter I (Cargo and Miscellaneous Vessels) of this chapter.

(4) For tank vessels, see §31.10-35 of subchapter D (Tank Vessels) of this chapter.

(5) For public nautical schoolships, see §167.30-5 of subchapter R (Nautical Schools) of this chapter.

§ 2.01-20

(6) For oceanographic vessels, see subpart 189.05 of subchapter U (Oceanographic Vessels) of this chapter.

[CGFR 68-126, 34 FR 9010, June 5, 1969, as amended by CGD 73-96, 42 FR 49023, Sept. 26, 1977; CGD 79-023, 48 FR 51006, Nov. 4, 1983; CGD 97-057, 62 FR 51041, Sept. 30, 1997]

§ 2.01-20 Suspension or revocation of certificates of inspection.

Under the authority of 46 U.S.C. 3313 and 46 U.S.C. 3710, a certificate of inspection issued to a vessel may be suspended or revoked if a vessel is found not to comply with the terms of its certificate or fails to meet a standard required by this chapter.

[CGD 95-028, 62 FR 51195, Sept. 30, 1997, as amended by USCG-1998-4442, 63 FR 52188, Sept. 30, 1998]

§ 2.01-25 International Convention for Safety of Life at Sea, 1974.

(a) *Certificates required.* (1) The International Convention for Safety of Life at Sea, 1974, requires one or more of the following certificates to be carried on board certain passenger, cargo or tankships engaged in international voyages:

- (i) Passenger Ship Safety Certificate.
- (ii) Cargo Ship Safety Construction Certificate.
- (iii) Cargo Ship Safety Equipment Certificate.
- (iv) Cargo Ship Safety Radio Certificate.
- (v) Nuclear Passenger Ship Safety Certificate.
- (vi) Nuclear Cargo Ship Safety Certificate.
- (vii) Safety Management Certificate.

(2) The U.S. Coast Guard will issue through the Officer In Charge, Marine Inspection, the following certificates after performing an inspection or safety management audit of the vessel's systems and determining the vessel meets the applicable requirements:

- (i) Passenger Ship Safety Certificate.
- (ii) Cargo Ship Safety Construction Certificate, except when issued to cargo ships by a Coast Guard recognized classification society at the option of the owner or agent.
- (iii) Cargo Ships Safety Equipment Certificate.
- (iv) Exemption Certificate.

46 CFR Ch. I (10-1-00 Edition)

(v) Nuclear Passenger Ship Safety Certificate.

(vi) Nuclear Cargo Ship Safety Certificate.

(vii) Safety Management Certificate, except when issued by a recognized organization authorized by the Coast Guard.

(3) When authorized by the Commandant, U.S. Coast Guard, the American Bureau of Shipping may issue to cargo and tankships which it classes the Cargo Ship Safety Construction Certificate.

(4) The Federal Communications Commission will issue the following certificates:

(i) Cargo Ship Safety Radio Certificate.

(ii) Exemption Certificate.

(b) *Applications.* (1) The application for inspection and issuance of a certificate or certificates is made on the appropriate form listed in § 2.01-1, or by letter, to the Officer in Charge, Marine Inspection, in or nearest the port at which the inspection is to be made and shall be signed by the master or agent of the vessel. The certificates previously issued are surrendered at the time the inspection is performed. Further details are set forth in subchapter D (Tank Vessels), subchapter H (Passenger Vessels), subchapter I (Cargo and Miscellaneous Vessels), subchapter K (Small Passenger Vessels Carrying more than 150 Passengers or with overnight accommodations for more than 49 Passengers), subchapter L (Offshore Supply Vessels), subchapter O (Certain Bulk Dangerous Cargoes), and subchapter T (Small Passenger Vessels), of this chapter.

(2) For vessels other than passenger vessels, you must contact the local office of the Federal Communications Commission to apply for the inspection concerning the issuance of a Cargo Ship Safety Radio Certificate.

(c) *Certificates issued.* (1) If a vessel meets the applicable requirements of the Convention, it shall be issued appropriate certificates listed in paragraph (a) of this section. These certificates describe the vessel and state the vessel is in compliance with the applicable requirements of the Convention.

(2) A Convention certificate may be withdrawn, revoked or suspended at

Coast Guard, DOT

§2.01-45

any time when it is determined the vessel is no longer in compliance with applicable requirements. (See §2.01-70 for appeal procedures.)

(d) *CG-969—Notice of Receipt of Application for Passenger Ship Safety Certificate.* (1) The Passenger Ship Safety Certificate is issued by the Commandant after determining all applicable requirements of the Convention have been met. In the event the completion of the certification of any passenger vessel cannot be effected prior to the sailing of the passenger ship on a foreign voyage, or in any case where the Passenger Ship Safety Certificate is not received from the Commandant before the ship sails on a foreign voyage, the Officer in Charge, Marine Inspection, will issue a completed Form CG-969, describing the passenger ship and certifying that an application for a Passenger Ship Safety Certificate is being processed, and that in his opinion the vessel meets applicable requirements of the Convention administered by the Coast Guard.

(2) The completed Form CG-969 may be exhibited in explanation of the failure of the passenger ship to have on board a current Passenger Ship Safety Certificate. This completed form CG-969 may be accepted as prima facie evidence that the passenger ship described therein is in compliance with the applicable requirements of the Convention.

(e) *Exempted vessel.* (1) A vessel may be exempted by the Commandant from complying with certain requirements of the Convention under his administration upon request made in writing to him and transmitted via the Officer in Charge, Marine Inspection. In such case the exemptions are stated in the Exemption Certificate, which is issued by the Commandant through the appropriate Officer in Charge, Marine Inspection.

(2) The Federal Communications Commission issues the Exemption Certificate, which modifies the Cargo Ship Safety Radio Certificate.

(f) *Availability of Certificates.* The Convention certificates must be on board the vessel and readily available for examination at all times.

(g) *Foreign flag vessels.* At the request of the government of a country in which is registered a vessel engaged in

an international voyage, such a vessel may be issued the applicable certificate or certificates listed in paragraph (a) of this section. The certificate will be issued only after inspection has been made by the issuing agency, providing the vessel is found to comply with the requirements of the Convention.

[CGFR 65-50, 30 FR 16604, Dec. 30, 1965, as amended by CGD 73-96, 42 FR 49023, Sept. 16, 1977; CGD 90-008, 55 FR 30659, July 26, 1990; CGD 95-073, 62 FR 67514, Dec. 24, 1997; USCG-1999-6216, 64 FR 53222, Oct. 1, 1999; USCG-1999-4976, 65 FR 6499, Feb. 9, 2000]

§2.01-30 Delegation of OCMI signature authority.

The OCMI may redelegate to one individual on his or her staff authority to sign documents issued under this subpart.

[CGD 97-001, 62 FR 17748, Apr. 11, 1997]

§2.01-40 Passengers or persons in addition to crew on cargo or tank vessels.

(a) Under the authority of 46 U.S.C. 3304, a documented vessel transporting cargo may be allowed by its certificate of inspection to carry not more than 12 individuals in addition to the crew on international voyages and not more than 16 individuals in addition to the crew on other voyages.

(b) The application for permission to carry persons in addition to the crew may be included in the application described in §2.01-1. If granted it is endorsed on the certificate of inspection.

[CGFR 65-50, 30 FR 16604, Dec. 30, 1965, as amended by CGD 95-028, 62 FR 51195, Sept. 30, 1997]

§2.01-45 Excursion permit.

(a) Under the authority of 46 U.S.C. 2113, a passenger vessel may be permitted to engage in excursions and carry additional numbers of passengers. For details see part 71 of subchapter H (Passenger Vessels) of this chapter.

(b) The application for an excursion permit is made by the master, owner, or agent of the vessel to the Officer in Charge, Marine Inspection, on Coast Guard Form CG-950, Application for Excursion Permit. If, after inspection, permission is granted, it is given on Coast Guard Form CG-949, Permission

§ 2.01-50

to Carry Excursion Party. The permit describes the vessel, the route over which and the period during which the excursions may be made, and the safety equipment required for the additional persons indicated.

[CGFR 65-50, 30 FR 16604, Dec. 30, 1965, as amended by CGD 95-028, 62 FR 51195, Sept. 30, 1997]

§ 2.01-50 Persons other than crew on towing, oyster, or fishing steam vessels.

(a) A steam vessel engaged in towing, oyster dredging and planting, and fishing may be permitted to carry persons in addition to its crew.

(b) The application for a permit to carry such persons may be included in the application described in § 2.01-1. If granted it is endorsed on the certificate of inspection.

[CGFR 65-50, 30 FR 16604, Dec. 30, 1965, as amended by CGD 95-028, 62 FR 51195, Sept. 30, 1997]

§ 2.01-60 Overtime compensation.

(a) *General.* Extra compensations for overtime services performed by inspectors of vessels and their assistants who may be required to remain on duty between the hours of 5:00 p.m. and 8:00 a.m. or on Sundays or holidays to perform services in connection with the inspection of vessels or their equipment, supplying or signing on or discharging crews of vessels is authorized by 46 U.S.C. 2111 and regulations in part 9 of this chapter, together with the method of computing such extra compensation.

(b) *Application and certification of time.* Application for the performance of such overtime services and certification of services performed is made by the master, owner, or agent of a vessel to the Officer in Charge, Marine Inspection, on Form CG-830, Application for and Certificate of Overtime Service.

(c) *Collection.* The bill for the collection of the overtime compensation is submitted by the Officer in Charge, Marine Inspection to the master, owner, or agent on whose vessel overtime services are performed on Form CG-832, Bill for Collection Overtime Services. Payment is made to the Col-

46 CFR Ch. I (10-1-00 Edition)

lector of Customs of the port designated.

[CGFR 65-50, 30 FR 16604, Dec. 30, 1965, as amended by CGD 97-057, 62 FR 51041, Sept. 30, 1997; USCG-2000-7790, 65 FR 58458, Sept. 29, 2000]

§ 2.01-70 Right of appeal.

Any person directly affected by a decision or action taken under this part, by or on behalf of the Coast Guard, may appeal therefrom in accordance with subpart 1.03 of this chapter.

[CGD 88-033, 54 FR 50379, Dec. 6, 1989]

§ 2.01-80 Vessel inspections in Alaska.

(a) The waters of southeastern Alaska inside of the general trend of the shore from Cape Spencer, southeasterly to Cape Muzon, and thence easterly to Sitklan Island, shall be considered as bays, sounds, and lakes other than the Great Lakes, for the purpose of administering the vessel inspection laws and applicable regulations in this chapter.

Subpart 2.10—Fees

SOURCE: CGD 91-030, 60 FR 13563, Mar. 13, 1995, unless otherwise noted.

§ 2.10-1 Applicability.

(a) This subpart establishes vessel inspection fees for all vessels required to have a Certificate of Inspection and vessel examination fees for all foreign vessels required to have either a Letter of Compliance or a Tank Vessel Examination Letter.

(b) The fees in this subpart do not apply to:

(1) Vessels being inspected for the initial issuance of a Certificate of Inspection;

(2) Foreign passenger vessels;

(3) Training vessels operated by State maritime academies;

(4) Public vessels of the United States except for Maritime Administration vessels; and

(5) Publicly owned ferries.

[CGD 91-030, 60 FR 13563, Mar. 13, 1995, as amended by CGD 96-067, 62 FR 19232, Apr. 21, 1997]

Coast Guard, DOT

§ 2.10-25

§ 2.10-5 Exemptions.

(a) Vessels owned or operated by a non-profit organization may be exempted from payment of the fees required by this subpart, only if the vessel is used exclusively for one or more of the following:

- (1) Training youth in boating, seamanship, or navigation skills;
- (2) Educating youth in a course of marine environmental studies;
- (3) Providing excursions for persons with disabilities as defined under the Americans with Disabilities Act (ADA) [42 U.S.C. 12102(2)]; or
- (4) Providing medical services.

(b) Vessels owned or operated by the Federal government or the government of any State or political subdivision thereunder may be exempted from the fees required by this subpart provided the vessel is used exclusively for one or more of the purposes listed in paragraph (a) of this section.

(c) The term *used exclusively* in paragraphs (a) and (b) of this section does not preclude:

- (1) The carriage of adult volunteers or crew, or
- (2) The vessel's use for fundraising activities without regard to the age of the participants aboard the vessel, provided revenues raised are for the operation and maintenance of the vessel and that such fundraising activities do not exceed one day of fundraising for each month of the vessel's operating season.

(d) Vessel owners or operators may submit a written request for exemption to the Officer in Charge, Marine Inspection, of the Marine Inspection Zone in which the vessel normally operates. The exemption request must provide the vessel name, the vessel identification number, and evidence that the organization and the vessel meet the criteria set forth in this section.

[CGD 96-067, 62 FR 19232, Apr. 21, 1997, as amended by CDG 96-067, 63 FR 59474, Nov. 4, 1998]

§ 2.10-10 Waivers.

The Commandant (G-MRP) will waive collection of vessel inspection fees in this subpart for a Federally-owned or operated vessel if the fee would be directly paid by an agency acting as the vessel owner using Fed-

eral appropriated funds. By October 1 of each year, Federal agencies shall provide Commandant (G-MRP) with a list of the names and vessel identification numbers of vessels for which a fee waiver is requested.

[CGD 91-030, 60 FR 13563, Mar. 13, 1995, as amended by CGD 95-072, 60 FR 50459, Sept. 29, 1995; CGD 96-041, 61 FR 50725, Sept. 27, 1996]

§ 2.10-20 General requirements.

(a) Unless otherwise specified, vessel owners must pay the fees required by this subpart before inspection or examination services are provided.

(b) Fees required by this subpart must be paid in U.S. currency by check or money order, drawn on a U.S. bank, and made payable to the U.S. Treasury.

(c) All payments must be accompanied by the vessel name and its vessel identification number.

(d) Unless otherwise specified, fees required by this subpart must be mailed to the following address: USCG Inspection Fees, PO Box 105663, Atlanta, GA 30348-5663.

(e) For purposes of this subpart, the address for Commandant (G-MRP) is: Commandant (G-MRP), United States Coast Guard, 2100 Second Street S.W., Washington, DC 20593-0001.

(f) Information concerning a vessel's user fee anniversary date may be obtained from any Coast Guard Marine Safety or Marine Inspection Office.

[CGD 91-030, 60 FR 13563, Mar. 13, 1995, as amended by CGD 95-072, 60 FR 50459, Sept. 29, 1995; CGD 96-041, 61 FR 50725, Sept. 27, 1996]

§ 2.10-25 Definitions.

The following definitions apply to this subpart:

Drill ship MODU means a mobile offshore drilling unit with a ship shape displacement hull intended for operation in the floating condition.

Ferry means a vessel that:

- (1) Operates in other than ocean or coastwise service;
- (2) Has provisions only for deck passengers or vehicles, or both;
- (3) Operates on a short run on a frequent schedule between two points over the most direct water route; and
- (4) Offers a public service of a type normally attributed to a bridge or tunnel.

Freight barge means a non-self-propelled vessel carrying freight for hire.

Freight ship means a self-propelled freight vessel.

Freight vessel means a motor vessel of more than 15 gross tons that carries freight for hire, except an oceanographic research vessel or an offshore supply vessel.

Industrial vessel means a vessel which, by reason of its special outfit, purpose, design, or function engages in certain industrial ventures. For the purposes of this subpart, this classification includes such vessels as dredges, cable layers, derrick barges, and construction and wrecking barges, but does not include vessels which carry passengers or freight for hire, OSVs, oceanographic research vessels, or vessels engaged in the fisheries.

Liquefied gas tankship means a self-propelled vessel equipped with cargo tanks primarily designed to carry liquefied or compressed gases in bulk.

Mobile offshore drilling unit (MODU) means a vessel capable of engaging in drilling operations for the exploration or exploitation of subsea resources that is: seagoing and 300 or more gross tons and self-propelled by machinery; Seagoing and 100 or more gross tons and non-self-propelled; or more than 65 feet in length and propelled by steam.

Nautical school vessel means a vessel operated by or in connection with a nautical school or an educational institution under section 13 of the Coast Guard Authorization Act of 1986, Public Law 99-640.

Non-profit organization means an organization under Internal Revenue Code (I.R.C.) section 501(c) which is exempt for the purposes of federal income taxation.

Oceanographic research vessel means a vessel that is being employed only in instruction in oceanography or limnology, or both, or only in oceanographic or limnological research, including those studies about the sea such as seismic, gravity meter, and magnetic exploration and other marine geophysical or geological surveys, atmospheric research, and biological research.

Offshore supply vessel or *OSV* means a vessel that—

(1) Is propelled by machinery other than steam;

(2) Does not meet the definition of a passenger-carrying vessel in 46 U.S.C. 2101(22) or 46 U.S.C. 2101(35);

(3) Is more than 15 but less than 500 gross tons (as measured under the Standard, Dual, or Simplified Measurement System under part 69, subpart C, D or E of this chapter) or less than 6,000 gross tons (as measured under the Convention Measurement System under part 69, subpart B of this chapter); and

(4) Regularly carries goods, supplies, individuals in addition to the crew, or equipment in support of exploration, exploitation, or production of offshore mineral or energy resources.

Passenger barge means a non-self-propelled passenger vessel, including a prison barge or a barge which carries occupied recreational vehicles.

Passenger ship means a self-propelled passenger vessel.

Passenger vessel means a vessel of at least 100 gross tons:

(1) Carrying more than 12 passengers, including at least one passenger for hire;

(2) That is chartered and carrying more than 12 passengers; or

(3) That is a submersible vessel carrying at least one passenger for hire.

Political subdivision means a county, district, parish, township, city or similar governmental entity established within a State.

Publicly owned means, owned by (1) the federal government, or (2) the government of any State or political subdivision thereunder.

Sailing school vessel means a vessel of less than 500 gross tons, carrying more than 6 individuals who are sailing school instructors or sailing school students, principally equipped for propulsion by sail even if the vessel has an auxiliary means of propulsion, and owned or demise chartered and operated by a qualified organization during such times as the vessel is operated exclusively for the purposes of sailing instruction.

Sea-going towing vessel means a sea-going commercial vessel engaged in or intending to engage in the service of pulling, pushing or hauling alongside,

Coast Guard, DOT

§2.10-101

or any combination of pulling, pushing or hauling alongside.

Self-elevating MODU means a mobile offshore drilling unit with movable legs capable of raising its hull above the surface of the sea.

Semi-submersible MODU means a mobile offshore drilling unit with the main deck connected to an underwater hull by columns or caissons, that is intended for drilling operations in the floating condition.

Small passenger vessel means a vessel of less than 100 gross tons:

(1) Carrying more than 6 passengers, including at least one passenger for hire;

(2) That is chartered with the crew provided or specified by the owner or the owner's representative and carrying more than 6 passengers;

(3) That is chartered with no crew provided or specified by the owner or the owner's representative and carrying more than 12 passengers; or

(4) That is a submersible vessel carrying at least one passenger for hire.

State means a State of the United States, Guam, Puerto Rico, the Virgin Islands, American Samoa, the District of Columbia, the Northern Mariana Islands and any other territory or possession of the United States.

Submersible MODU means a mobile offshore drilling unit intended for drilling operations in the bottom-bearing condition, having the main deck connected to an underwater hull or pontoons by way of columns or caissons.

Submersible vessel means a vessel that is capable of operating below the surface of the water.

Tank barge means any tank vessel not equipped with means of propulsion.

Tank vessel means a vessel that is constructed or adapted to carry, or that carries, oil or hazardous material in bulk as cargo or cargo residue.

Tankship means any tank vessel propelled by power or sail, including an integrated tug and barge designed to operate together only in the pushing mode.

User fee anniversary date means the date on which a vessel's annual inspection fee is due each year. Once established by the Coast Guard, a vessel's user fee anniversary date remains fixed

for as long as the vessel remains in service.

Vessel identification number (VIN) means a U.S. official number, a number assigned by a State, a number assigned by the Coast Guard, or a Lloyd's Register of Shipping identification number issued to a U.S. or foreign commercial vessel for purposes of vessel identification. For U.S. vessels, VIN means the number listed on the Certificate of Inspection. For foreign vessels, VIN means either the Lloyd's Register of Shipping identification number or the number assigned by the Coast Guard.

Youth means an individual 21 years of age or younger.

[CGD 91-030, 60 FR 13563, Mar. 13, 1995, as amended by CGD 96-067, 62 FR 19232, Apr. 21, 1997; CGD 97-057, 62 FR 51041, Sept. 30, 1997; CDG 96-067, 63 FR 59474, Nov. 4, 1998]

§2.10-101 Annual vessel inspection fee.

(a)(1) Unless otherwise provided by this subpart, each vessel required to have a Certificate of Inspection is subject to the annual vessel inspection fee listed in table 2.10-101 for its vessel category.

(2) A vessel certificated for more than one service must pay only the higher of the two applicable fees in table 2.10-101 of this section.

(b) The vessel owner or operator must pay the annual vessel inspection fee each year on or before the vessel's user fee anniversary date, unless the fee has been prepaid under §2.10-103 of this subpart.

(c) Payment of the annual vessel inspection fee entitles a vessel to all inspection services related to compliance with its Certificate of Inspection, including but not limited to the inspection for renewal of the Certificate of Inspection, reinspections (midperiod inspections), hull (drydock) inspections, deficiency inspections, damage surveys, repair and modification inspections, change in vessel service inspections, permit to proceed inspections, drydock extension inspections, and all inspections required for the issuance of international certificates.

(d) Entitlement to inspection services for the current year remains with the vessel if it is sold. The entitlement

§ 2.10-101

46 CFR Ch. I (10-1-00 Edition)

to inspection services may not be transferred to any other vessel.

TABLE 2.10-101.—ANNUAL VESSEL INSPECTION FEES FOR U.S. AND FOREIGN VESSELS REQUIRING A CERTIFICATE OF INSPECTION

Any inspected vessel not listed in this table	\$1,030
Freight Barges:	
Length not greater than 150 feet	495
More than 150 feet but not more than 300 feet	610
More than 300 feet	955
Freight Ships:	
Length not greater than 100 feet	1,425
More than 100 feet but no more than 300 feet	1,870
More than 300 feet	5,410
Industrial Vessels:	
Length not greater than 200 feet	1,435
More than 200 feet	2,550
Mobile Offshore Drilling Units (MODUs):	
Drill ship MODUs	6,710
Submersible MODUs	4,695
Self-elevating MODUs	4,695
Semi-submersible MODUs	8,050
Nautical School Vessels:	
Length not greater than 100 feet	835
More than 100 feet but not more than 200 feet	1,450
More than 200 feet	7,205
Oceanographic Research Vessels:	
Length not greater than 170 feet	840
More than 170 feet but not more than 240 feet	1,980
More than 240 feet	3,610
Offshore Supply Vessels:	
Length not greater than 140 feet	1,135
More than 140 feet	1,470
Offshore Supply Vessels: Alternate Reinspection Program*:	
Length not greater than 140 feet	940
More than 140 feet	1,260
Passenger Barges:	
Less than 100 gross tons and:	
Less than 65 feet in length	300
65 feet or more in length	600
100 gross tons or more and:	
Certified for fewer than 150 passengers	2,215
Certified for 150 or more passengers	2,525
Passenger Ships:	
Length not greater than 250 feet:	
Certified for fewer than 150 passengers	3,600
Certified for 150 or more passengers	4,050
More than 250 feet but not more than 350 feet	5,330
More than 350 feet but not more than 450 feet	6,835
More than 450 feet	14,650
Sailing School Vessels:	
Length not greater than 30 feet	530
More than 30 feet but not more than 65 feet	560
More than 65 feet	980
Sea-going Towing Vessels	2,915
Small Passenger Vessels:	
Less than 65 feet in length	300

TABLE 2.10-101.—ANNUAL VESSEL INSPECTION FEES FOR U.S. AND FOREIGN VESSELS REQUIRING A CERTIFICATE OF INSPECTION—Continued

65 feet or more in length	600
Tank Barges	500
Tankships:	
Length not greater than 100 feet	1,295
More than 100 feet but not more than 300 feet	2,310
More than 300 feet	5,805
Liquefied Gas Tankships	12,120

*Note: Eligibility for the reduced annual vessel inspection fee for Offshore Supply Vessels is contingent upon the vessel's continued acceptance in the alternative reinspection program by the cognizant Officer in Charge, Marine Inspection.

[CGD 91-030, 60 FR 13563, Mar. 13, 1995, as amended by CGD 96-067, 62 FR 19232, Apr. 21, 1997]

§ 2.10-105 Prepayment of annual vessel inspection fees.

(a) Vessel owners may prepay the annual vessel inspection fee for any period of not less than three years, and not more than the design life or remaining expected service life of the vessel.

(b) To prepay the annual vessel inspection fee for a period of three or more years, the owner must submit a written request to Commandant (G-MRP) specifying the vessel identification number and the period for which prepayment is to be made.

(c) The total of the annual fees for the requested prepayment period will be discounted to its net present value using the following formula:

$$PV = \sum_{t=0}^n \frac{R_0(1+\pi)^t}{(1+i)^t}$$

Where:

PV is the Present Value of the series of annual user fees to be prepaid (the net amount to be prepaid)

R_0 is the published user fee of the vessel

i is the interest rate for 10-year Treasury notes at the time of prepayment calculation

π is the rate of inflation (based on projected military personnel costs at the time of prepayment calculation)

n is the total number of years to be prepaid

t is the number of years after prepayment of the fee, for each annual increment ($t=0, 1, 2, 3 \dots n$)

(d) When the annual vessel inspection fee has been prepaid, the entitlement to inspection services for the prepayment period attaches to the vessel and remains with the vessel if it is sold. The entitlement to inspection services may not be transferred to any other vessel.

(e) If a vessel is removed from Coast Guard certification and the vessel owner surrenders the vessel's Certificate of Inspection, the owner may request a refund of the remaining prepayment amount. The annual vessel inspection fee will not be refunded for the year in which the Certificate of Inspection is surrendered. The request for refund must be submitted to the Officer in Charge, Marine Inspection to whom the Certificate of Inspection is surrendered.

[CGD 91-030, 60 FR 13563, Mar. 13, 1995, as amended by CGD 95-072, 60 FR 50459, Sept. 29, 1995; CGD 96-041, 61 FR 50725, Sept. 27, 1996; USCG-1999-6216, 64 FR 53223, Oct. 1, 1999]

§ 2.10-115 Changes in vessel service.

(a) If a vessel certificated for a single service changes service, the annual vessel inspection fee is not adjusted during the year in which a change in service occurs. The annual vessel inspection fee for the new vessel category is payable on the vessel's user fee anniversary date immediately following the date of the change in service.

(b) If a change in service occurs and the annual vessel inspection fee has been prepaid, Commandant (G-MRP) will recalculate the prepayment

§ 2.10-120

amount based on the new vessel category and advise the owner of available prepayment options.

[CGD 91-030, 60 FR 13563, Mar. 13, 1995, as amended by CGD 95-072, 60 FR 50459, Sept. 29, 1995; CGD 96-041, 61 FR 50725, Sept. 27, 1996]

§ 2.10-120 Overseas inspection and examination fees.

(a) In addition to any other fee required by this subpart, an overseas inspection and examination fee of \$4,585 must be paid for each vessel inspection and examination conducted outside the United States and its territories. This fee does not apply to vessel inspections and examinations conducted in Canada, Mexico, or the British Virgin Islands.

(b) The overseas inspection and examination fee for each vessel must accompany each request to the cognizant Officer in Charge, Marine Inspection for an overseas inspection or examination.

§ 2.10-125 Fees for examination of foreign tankships.

Each foreign tankship of a country party to the International Convention for the Safety of Life at Sea, 1974 as amended, must pay:

(a) For examination for the issuance of a Letter of Compliance under § 2.01-6(a)(2)(i) of this part, or examination for the annual endorsement to a Letter of Compliance, a fee of \$1,100.

(b) For examination for the issuance of a Tank Vessel Examination Letter under § 2.01-6(a)(3) of this part, a fee of \$1,100.

§ 2.10-130 Fees for examination of foreign mobile offshore drilling units.

Each foreign mobile offshore drilling unit must pay:

(a) For examination for the issuance of a Letter of Compliance indicating compliance with the design and equipment standards of either the documenting nation or the International Maritime Organization Code for Construction and Equipment of Mobile Offshore Drilling Units, a fee of \$1,830.

(b) For examination for the issuance of a Letter of Compliance indicating compliance with the design and equipment standards of 46 CFR part 108, the inspection fee listed in table 2.10-101 of

46 CFR Ch. I (10-1-00 Edition)

this subpart for the same type of mobile offshore drilling unit.

§ 2.10-135 Penalties.

(a) A vessel owner or operator who fails to pay a fee or charge established under this subpart is liable to the United States Government for a civil penalty.

(b) In addition to the fees established in this subpart, the Coast Guard may recover collection and enforcement costs associated with delinquent payments of, or failure to pay, a fee. Coast Guard inspection and examination services may also be withheld pending payment of outstanding fees owed to the Coast Guard for inspection and examination services provided.

(c) Each District Commander or Officer in Charge Marine Inspection may request the Secretary of the Treasury, or the authorized representative thereof, to withhold or revoke the clearance required by 46 U.S.C. app. 91 of a vessel for which a fee or charge established under this part has not been paid or until a bond is posted for the payment.

[CGD 91-030, 60 FR 13563, Mar. 13, 1995, as amended by CGD 96-052, 62 FR 16703, Apr. 8, 1997]

Subpart 2.20—Reports and Forms

§ 2.20-40 Chief engineer's reports.

(a) Repairs to boilers and pressure vessels. The chief engineer is required to report any repairs to boilers or unfired pressure vessels in accordance with §§ 33.25-5, 78.33-1, and 97.30-1 of this chapter.

(b) The chief engineer of any vessel is required to report any accident to a boiler, unfired pressure vessel, or machinery tending to render the further use of the item unsafe until repairs are made by §§ 35.25-5, 78.33-5, and 97.30-5 of this chapter.

(c) The chief engineer shall report the renewal of fusible plugs in boilers by letter to the Officer in Charge, Marine Inspection, who issued the certificate of inspection when such fusible plugs are renewed at other than the inspection for certification and there is no marine inspector in attendance at the renewal. This letter report shall contain the following information:

Coast Guard, DOT

§ 2.75-1

- (1) Name and official number of vessel.
- (2) Date of renewal of fusible plugs.
- (3) Number and location of fusible plugs renewed in each boiler.
- (4) Manufacturer and heat number of each plug.
- (5) Reason for renewal.

[CGFR 65-50, 30 FR 16604, Dec. 30, 1965, as amended by CGFR 68-82, 33 FR 18804, Dec. 18, 1968]

§ 2.20-50 Repairs or alterations in lifesaving or fire prevention equipment.

No repairs or alterations shall be made to any lifesaving or fire-detecting or fire-extinguishing equipment except in an emergency without advance notice to the Officer in Charge, Marine Inspection. See §§ 78.33-10 and 97.30-10 of this chapter.

[CGFR 65-50, 30 FR 16604, Dec. 30, 1965, as amended by CGD 97-057, 62 FR 51041, Sept. 30, 1997]

Subpart 2.45 [Reserved]

Subpart 2.50—Penalties

§ 2.50-1 Penalty procedures.

Civil and criminal penalty procedures appear in 33 CFR part 1. Civil monetary penalty amounts are set forth in 33 CFR part 27.

[CGD 96-052, 62 FR 16703, Apr. 8, 1997]

Subpart 2.75—Approvals of Safety Equipment, Materials and Installations, and Qualifications for Construction Personnel

§ 2.75-1 Approvals.

(a) Certain navigation and vessel inspection laws, or regulations in this chapter or in 33 CFR chapter I, require the Commandant's approval before specific types of safety equipment, materials, or installations may be installed or used on vessels subject to Coast Guard inspection, or on other described vessels, motorboats, artificial islands, and fixed structures.

(b) The Commandant's approvals are issued to persons, partnerships, companies, or corporations who offer for sale specific items of safety equipment, ma-

terials, or installations, or intend them for their own or others' use. These approvals are intended to provide a control over the quality of such approved items. The Commandant's approvals apply only to those items constructed or installed in accordance with applicable requirements, and the details as described in the documents granting specific approval. If a specific item when manufactured does not comply with these details, then it is not considered to be approved and the approval issued does not apply to such modified item. For example, if an item is manufactured with changes in design or material not previously approved, the approval does not apply to such modified item. The failure to comply with applicable requirements and details specified in the approval subjects the holder to immediate suspension of approval as described in § 2.75-40, and if necessary, to a public hearing seeking withdrawal of approval and removal of all such items from use or installation as provided in § 2.75-50.

(c) The Commandant's approvals are issued to qualified holders in the form of certificates of approval (Form CGHQ-10030), by appropriate description and identification in documents filed with the Office of the Federal Register and published in the FEDERAL REGISTER, or by letters, or by appropriate markings on drawings, plans, etc. Under the direction of the Commandant, the Assistant Commandant for Marine Safety and Environmental Protection is delegated the authority to exercise the necessary actions relating to the granting, suspension, cancellation or revocation of approvals for special items of safety equipment, materials or installations required by law in regulation in this chapter or in 33 CFR chapter I to have the Commandant's approval. The authority delegated to the Assistant Commandant for Marine Safety and Environmental Protection may be further delegated by him.

(d) The approvals granted to holders qualifying under the regulations in this chapter or in specifications, copies of which may be obtained from the Commandant (G-MSE), and to which official Coast Guard numbers are assigned,

§ 2.75-5

will be in the form of certificates of approval. Unless specifically provided otherwise, the approval shall be valid for a period of five years from the date on the certificate of approval, but subject to suspension and/or cancellation if it is found the item offered, sold, or used as Coast Guard approved differs in any detail from the item as described in the certificate of approval and referenced material.

(e) A specific Commandant's approval granted to anyone, which is described in a certificate of approval, or a letter, or marked plans, etc., cannot be transferred to another without a specific prior authorization from the Commandant. Such a transfer without the Commandant's authorization normally terminates such approval.

(f) A listing of current and formerly approved equipment and materials is published by the Coast Guard from time to time in "Equipment Lists" (COMDTINST M16714.3 series), which is available for sale from the Superintendent of Documents, Government Printing Office.

[CGFR 65-50, 30 FR 16604, Dec. 30, 1965, as amended by CGD 82-063b, 48 FR 4781, Feb. 3, 1983; CGD 88-070, 53 FR 34533, Sept. 7, 1988; CGD 95-072, 60 FR 50459, Sept. 29, 1995; CGD 93-055, 61 FR 13927, Mar. 28, 1996; CGD 96-041, 61 FR 50725, Sept. 27, 1996; CGD 97-057, 62 FR 51041, Sept. 30, 1997]

§ 2.75-5 Certificates of approval.

(a) The Assistant Commandant for Marine Safety and Environmental Protection or his delegate, will issue a certificate of approval to the manufacturer or party named therein and certify that such manufacturer or party has submitted satisfactory evidence that the item described therein complies with the applicable laws and regulations, which are outlined on the reverse side of the certificate.

(b) The approval shall be in effect for a period of 5 years from the date on the certificate of approval unless sooner canceled or suspended by proper authority, or otherwise specifically stated in the certificate.

[CGFR 65-50, 30 FR 16604, Dec. 30, 1965, as amended by CGD 82-063b, 48 FR 4781, Feb. 3, 1983; CGD 88-070, 53 FR 34533, Sept. 7, 1988; CGD 96-041, 61 FR 50725, Sept. 27, 1996; CGD 97-057, 62 FR 51041, Sept. 30, 1997]

46 CFR Ch. I (10-1-00 Edition)

§ 2.75-10 Procedures for obtaining approvals.

(a) The requirements for obtaining approvals of items covered by specifications and bearing official Coast Guard approval numbers are set forth in parts 159 through 164 of this chapter. For other items, the requirements are described in the regulations governing such items.

(b) Unless otherwise specified, correspondence concerning approvals should be addressed to the Commandant (G-MSE), U.S. Coast Guard, Washington, DC 20593-0001. When plans, drawings, test data, etc., are required to be submitted by the manufacturer, the material being transmitted with the application should be clearly identified.

[CGD 76-048, 44 FR 73043, Dec. 17, 1979, as amended by CGD 82-063b, 48 FR 4781, Feb. 3, 1983; CGD 88-070, 53 FR 34533, Sept. 7, 1988; CGD 95-072, 60 FR 50459, Sept. 29, 1995; CGD 96-041, 61 FR 50725, Sept. 27, 1996]

§ 2.75-15 Requirements and tests.

(a) Approved items described in certificates of approval are usually required to meet specific requirements and/or tests, prior to obtaining the approval. Additional factory tests to determine that proper uniformity and quality controls are followed during the manufacture of the specific items may be required. These requirements governing the manufacturer in particular are set forth in the regulations in this chapter or in specifications, copies of which may be obtained from the Commandant (G-MSE). If the requirements are met, a certificate of approval will be issued.

(b) When the specific item described in an application, together with accompanying drawings, plans, etc., does not meet applicable requirements or fails to meet specified tests, the applicant will be notified accordingly. The Coast Guard may suggest changes in order for the item to qualify and permit the issuance of an approval.

(c) For items not covered by specification requirements in parts 160 to 164, inclusive (subchapter Q—Specifications) of this chapter, the requirements in the navigation and vessel inspection laws, and applicable regulations in this chapter or in 33 CFR chapter I apply

Coast Guard, DOT

§ 2.75-50

and shall be met before approvals may be issued.

[CGFR 65-50, 30 FR 16604, Dec. 30, 1965, as amended by CGD 82-063b, 48 FR 4781, Feb. 3, 1983; CGD 88-070, 53 FR 34533, Sept. 7, 1988; CGD 95-072, 60 FR 50459, Sept. 29, 1995; CGD 96-041, 61 FR 50725, Sept. 27, 1996]

§ 2.75-25 Portable fire extinguishers.

(a) The portable fire extinguishers listed and labeled as *marine type* by a recognized laboratory, as provided in subpart 162.028 of part 162 of subchapter Q (Specifications) of this chapter, will be accepted as approved for use on merchant vessels, motorboats, etc., whenever required by the regulations in this chapter, and for use on artificial islands and fixed structures on the Outer Continental Shelf whenever required by the regulations in 33 CFR parts 140 to 146, inclusive.

(b) The procedures for manufacturers to follow and the requirements governing portable fire extinguishers to qualify being listed and labeled as *marine type* by a recognized laboratory are set forth in subpart 162.028 of part 162 of subchapter Q (Specifications) of this chapter.

(c) The procedures for a laboratory to qualify as a *recognized laboratory* and to be listed in § 162.028-5 of subchapter Q (Specifications) of this chapter are as follows:

(1) The laboratory shall submit an informal application in writing on its usual letterhead paper to the Commandant (G-M), United States Coast Guard, Washington, DC 20593, requesting recognition and listing, as a recognized laboratory.

(2) Accompanying the informal application, as identified enclosures, shall be:

(i) A certification that it is a laboratory which has been and is regularly engaged in the examination, testing, and evaluation of portable fire extinguishers.

(ii) A certification that it has an established factory inspection, listing, and labeling program, together with a complete description of it and how it works.

(iii) A description of its facilities used in the examination, testing, and evaluation of portable fire extinguishers, together with its name (if dif-

ferent from that of submitter), and location (city, street, and state).

(iv) A list of the names and home and office addresses of its principal officers and its managing directors (if any).

(v) A description of its special standards for listing and labeling portable fire extinguishers as *marine type*, as contemplated by the specification in subpart 162.028 of part 162 of subchapter Q (Specifications) of this chapter.

(3) If the Commandant finds that a laboratory qualifies as a *recognized laboratory*, and it is subject to Coast Guard jurisdiction, the approval and listing will be published in the FEDERAL REGISTER and will be in effect until suspended, canceled or terminated by proper authority. The failure of a recognized laboratory to maintain its established factory inspection, listing and labeling program as approved by the Commandant shall be cause for terminating a listing as a *recognized laboratory*.

[CGFR 65-50, 30 FR 16604, Dec. 30, 1965, as amended by CGD 82-063b, 48 FR 4781, Feb. 3, 1983]

§ 2.75-40 Suspension of approval.

(a) Whenever it is determined that a specific item is not in compliance with the applicable laws, rules, and regulations, and the requirements specified in the approval issued by the Coast Guard, the District Commander or the Officer in Charge, Marine Inspection, will immediately notify the holder of the approval wherein the specific item fails to meet applicable requirements. If the defects, deficiencies or variations in the item are deemed important, such officer is authorized and may immediately suspend the approval, may require the holder to surrender the certificate of approval (if any), and may direct the holder to cease claiming the defective items are Coast Guard approved, pending a final decision from the Commandant in the matter.

(b) The procedures for appealing the temporary suspension shall be those described in § 2.01-70.

§ 2.75-50 Withdrawals or terminations of approvals and appeals.

(a) The Commandant may withdraw approval for any item which is found

§ 2.75-60

not to be in compliance with the conditions of approval, found to be unsuitable for its intended purpose, or does not meet the requirements of applicable regulations.

(b) Approvals of equipment are terminated when the manufacturer is no longer in business, or when the item is no longer being manufactured, or when the approval expires.

(c) Any person directly affected by a decision to deny, withdraw, or terminate an approval may appeal the decision to Assistant Commandant for Marine Safety and Environmental Protection (G-M) as provided in §1.03-15 of this chapter.

[CGFR 65-50, 30 FR 16604, Dec. 30, 1965, as amended by CGD 93-055, 61 FR 13927, Mar. 28, 1996; CGD 96-041, 61 FR 50725, Sept. 27, 1996; CGD 97-057, 62 FR 51041, Sept. 30, 1997]

§ 2.75-60 Hazardous ships' stores.

Hazardous ships' stores, as defined in §147.3 of this chapter, must not be brought on board or used on any vessel unless they meet the requirements of part 147 of this chapter.

[CGD 84-044, 53 FR 7748, Mar. 10, 1988]

§ 2.75-70 Welding procedure and performance qualifications.

(a) Welding procedures and welder performance utilized in the fabrication of vessels and their various systems and components subject to Coast Guard inspection shall be qualified as required by the applicable subchapter. For applicable requirements see §§32.60-1(a) of subchapter D (Tank Vessels), §72.01-15 of subchapter H (Passenger Vessels), §92.01-10 of subchapter I (Cargo and Miscellaneous Vessels), or §190.01-10 of subchapter U (Oceanographic Vessels) of this chapter. See part 57 of subchapter F (Marine Engineering) for requirements for the welding of pressure piping, boilers, pressure vessels, and nonpressure vessel type tanks, and associated secondary barriers as defined in §38.05-4 of subchapter D (Tank Vessels) of this chapter.

[CGFR 68-82, 33 FR 18804, Dec. 18, 1968]

46 CFR Ch. I (10-1-00 Edition)

Subpart 2.85—Load Lines

§ 2.85-1 Assignment of load lines.

Most U.S. vessels, and foreign vessels in U.S. waters are required to have load line assignments in accordance with 46 U.S.C. Chapter 51. The load lines marks when placed on a vessel indicate the maximum draft to which such vessel can be lawfully submerged, in the various circumstances and seasons applicable to such vessel. See subchapter E (Load Lines) of this chapter for applicable details governing assignment and marking of load lines.

[CGD 95-028, 62 FR 51195, Sept. 30, 1997, as amended by USCG-1998-4442, 63 FR 52188, Sept. 30, 1998]

Subpart 2.90—Plans, Drawings or Blueprints

§ 2.90-1 General requirements.

(a) Drawings, blueprints or plans showing the details of construction of vessels subject to inspection or installations thereon are required to be submitted for approval in accordance with applicable regulations in this chapter, information as to which may be obtained at any local Marine Inspection Office.

(b) The requirements for passenger vessel construction are in parts 43-46, 70-78, of this chapter.

(c) The requirements for tank vessel construction are in parts 30-39, 43-45, of this chapter.

(d) The requirements for cargo and miscellaneous vessel construction are in parts 43-45, 90-97, of this chapter.

(e) The requirements for marine engineering installations or equipment are in parts 50-69 of this chapter.

(f) The requirements for electrical engineering installations or equipment are in parts 110-113 of this chapter.

(g) The requirements for items to be manufactured under specific approval by the Commandant are in parts 160-164 of this chapter.

(h) The requirements for vessels carrying certain bulk dangerous cargoes are in parts 148, 151, 153, and 154 of this chapter.

(i) The requirements for subdivision and stability plans and calculations are in part 170 of this chapter.

[CGFR 65-50, 30 FR 16604, Dec. 30, 1965, as amended by CGD 73-96, 42 FR 49203, Sept. 26, 1977; CGD 79-023, 48 FR 51006, Nov. 4, 1983]

Subpart 2.95—Retention of Records by the Public

§ 2.95-1 Certificates or documents issued by Coast Guard.

(a) Certificates or documents issued to the public, as required by laws, rules, or regulations, shall be retained for the applicable period of time, as follows:

(1) If the certificate or document specifies a definite period of time for which it is valid, it shall be retained for so long as it is valid unless it is required to be surrendered; or,

(2) If the certificate or document does not specify a definite period of time for which it is valid, it shall be retained for that period of time such certificate or document is required for operation of the vessel; or,

(3) If the certificate or document is evidence of a person's qualifications, it shall be retained for so long as it is valid unless it is required to be surrendered.

(b) Nothing in this section shall be construed as preventing the Coast Guard from canceling, suspending, or withdrawing any certificate or document issued at any time.

§ 2.95-5 Certificates or documents issued by others.

(a) Certificates or documents issued by other public agencies or private organizations, which are accepted as prima facie evidence of compliance with requirements administered by the Coast Guard, shall be retained for the applicable period of time as follows:

(1) If the certificate or document specifies a definite period of time for which it is valid, it shall be retained for so long as it is valid unless it is required to be surrendered; or

(2) If the certificate or document does not specify a definite period of time for which it is valid, it shall be retained for the period of time such cer-

tificate or document is required for operation of the vessel; or,

(3) If the certificate or documents is evidence of a person's qualifications, it shall be retained for so long as it is valid unless it is required to be surrendered.

§ 2.95-10 Equipment or material required to be approved.

(a) The manufacturer of any equipment or material, which must also be approved by or found satisfactory for use by the Commandant, shall keep the required drawings, plans, blueprints, specifications, production models (if any), qualification tests, and related correspondence containing evidence that the Coast Guard has found such equipment or material satisfactory, during the period of time the approval or listing is valid. Most of the specifications containing detailed descriptions of records required to be retained by the public are in parts 160 to 164, inclusive in subchapter Q (Specifications) of this chapter.

PART 3—DESIGNATION OF OCEANOGRAPHIC RESEARCH VESSELS

Subpart 3.01—Authority and Purpose

Sec.

3.01-1 Purpose of regulations.

Subpart 3.03—Application

3.03-1 Vessels subject to the requirements of this part.

Subpart 3.05—Definition of Terms Used in This Part

3.05-1 Letter of designation.

3.05-3 Oceanographic research vessel.

Subpart 3.10—Designation

3.10-1 Procedures for designating oceanographic research vessels.

3.10-5 Renewal of letter of designation.

3.10-10 Right of appeal.

AUTHORITY: 46 U.S.C. 2113, 3306; 49 CFR 1.46.

SOURCE: CGD 77-081, 46 FR 56202, Nov. 16, 1981, unless otherwise noted.

Subpart 3.01—Authority and Purpose

§ 3.01-1 Purpose of regulations.

The purpose of the regulations in this part is to establish standard procedures for the designation of certain vessels as oceanographic research vessels as defined in 46 U.S.C. 2101(18).

[CGD 77-081, 46 FR 56202, Nov. 16, 1981, as amended by CGD 95-028, 62 FR 51195, Sept. 30, 1997]

Subpart 3.03—Application

§ 3.03-1 Vessels subject to the requirements of this part.

The regulations in this subchapter are applicable to U.S. flag vessels desiring designation as oceanographic research vessels in accordance with 46 U.S.C. 2101(18).

[CGD 77-081, 46 FR 56202, Nov. 16, 1981, as amended by CGD 95-028, 62 FR 51195, Sept. 30, 1997]

Subpart 3.05—Definition of Terms Used in This Part

§ 3.05-1 Letter of designation.

A letter issued by an Officer in Charge, Marine Inspection, designating an uninspected vessel as an oceanographic research vessel.

§ 3.05-3 Oceanographic research vessel.

“An oceanographic research vessel is a vessel which the U.S. Coast Guard finds is employed exclusively in one or more of the following:

- (a) Oceanographic instruction;
- (b) Limnologic instruction;
- (c) Oceanographic research; or,
- (d) Limnologic research.”

Subpart 3.10—Designation

§ 3.10-1 Procedures for designating oceanographic research vessels.

(a) Upon written request by the owner, master, or agent of a vessel, a determination will be made by the Officer in Charge, Marine Inspection, of the zone in which the vessel is located, whether the vessel may be designated as an oceanographic research vessel.

(b) The request should contain sufficient information to allow the Officer in Charge, Marine Inspection, to make this determination. At a minimum, the following items must be submitted:

(1) A detailed description of the vessel, including its identification number, owner and charterer.

(2) A specific operating plan stating precisely the intended use of the vessel.

(3) Any additional information as may be requested by the Officer in Charge, Marine Inspection.

(c) If designation is granted, it shall be indicated as follows:

(1) For inspected vessels—indicated on the certificate of inspection, valid for its duration.

(2) For uninspected vessels—indicated by a letter of designation, which shall be maintained on board the vessel and remain in effect for two years from date of issuance.

(d) All designations shall remain valid for the period specified on the applicable document, provided all operating conditions remain unchanged from the date of designation.

(e) In the event of a change in operating conditions, the owner, master, or agent of the vessel shall advise the Officer in Charge, Marine Inspection who issued the designation. After reviewing the pertinent information concerning the operational changes, the Officer in Charge, Marine Inspection, shall determine if the vessel is still eligible to retain its designation as an oceanographic research vessel.

[CGD 77-081, 46 FR 56202, Nov. 16, 1981, as amended by CGD 95-028, 62 FR 51195, Sept. 30, 1997]

§ 3.10-5 Renewal of letter of designation.

At least 60 days prior to the expiration date of the letter of designation or certificate of inspection, a request for renewal must be submitted in the same manner as described in 3.10-1. However, if the request for renewal is submitted to the Officer in Charge, Marine Inspection, who made the initial determination and all operating conditions remain unchanged, the information required by § 3.10-1(b) need not be resubmitted with the request.

§ 3.10-10 Right of appeal.

Any person directly affected by a decision or action taken under this part, by or on behalf of the Coast Guard, may appeal therefrom in accordance with subpart 1.03 of this chapter.

[CGD 88-033, 54 FR 50379, Dec. 6, 1989]

PART 4—MARINE CASUALTIES AND INVESTIGATIONS**Subpart 4.01—Authority and Scope of Regulations**

Sec.

- 4.01-1 Scope of regulation.
- 4.01-3 Reporting exclusion.

Subpart 4.03—Definitions

- 4.03-1 Marine casualty or accident.
- 4.03-2 Serious marine incident.
- 4.03-4 Individual directly involved in a serious marine incident.
- 4.03-5 Medical facility.
- 4.03-6 Qualified medical personnel.
- 4.03-7 Chemical test.
- 4.03-10 Party in interest.
- 4.03-15 Commandant.
- 4.03-20 Coast Guard district.
- 4.03-25 District Commander.
- 4.03-30 Investigating officer.
- 4.03-35 Nuclear vessel.
- 4.03-40 Public vessels.
- 4.03-45 Marine employer.
- 4.03-50 Recreational vessel.
- 4.03-55 Law enforcement officer.

Subpart 4.04—Notice of Potential Vessel Casualty

- 4.04-1 Reports of potential vessel casualty.
- 4.04-3 Reports of lack of vessel communication.
- 4.04-5 Substance of reports.

Subpart 4.05—Notice of Marine Casualty and Voyage Records

- 4.05-1 Notice of marine casualty.
- 4.05-5 Substance of marine casualty notice.
- 4.05-10 Written report of marine casualty.
- 4.05-12 Alcohol or drug use by individuals directly involved in casualties.
- 4.05-15 Voyage records, retention of.
- 4.05-20 Report of accident to aid to navigation.
- 4.05-25 Reports when state of war exists.
- 4.05-30 Incidents involving hazardous materials.
- 4.05-35 Incidents involving nuclear vessels.
- 4.05-40 Alternate electronic means of reporting.

Subpart 4.06—Mandatory Chemical Testing Following Serious Marine Incidents Involving Vessels in Commercial Service

- 4.06-1 Responsibilities of the marine employer.
- 4.06-5 Responsibilities of individuals directly involved in serious marine incidents.
- 4.06-10 Required specimens.
- 4.06-20 Specimen collection requirements.
- 4.06-30 Specimen collection in incidents involving fatalities.
- 4.06-40 Specimen handling and shipping.
- 4.06-50 Specimen analysis and follow-up procedures.
- 4.06-60 Submission of reports and test results.

Subpart 4.07—Investigations

- 4.07-1 Commandant or District Commander to order investigation.
- 4.07-5 Investigating officers, powers of.
- 4.07-7 Opening statement.
- 4.07-10 Report of investigation.
- 4.07-15 Recommendations, action on.
- 4.07-20 Transfer of jurisdiction.
- 4.07-25 Testimony of witnesses in other districts, depositions.
- 4.07-30 Testimony of witnesses under oath.
- 4.07-35 Counsel for witnesses and parties in interest.
- 4.07-45 Foreign units of Coast Guard, investigation by.
- 4.07-55 Information to be furnished Marine Board of Investigation.

Subpart 4.09—Marine Board of Investigation

- 4.09-1 Commandant to designate.
- 4.09-5 Powers of Marine Board of Investigation.
- 4.09-10 Witnesses, payment of.
- 4.09-15 Time and place of investigation, notice of; rights of witnesses, etc.
- 4.09-17 Sessions to be public.
- 4.09-20 Record of proceedings.
- 4.09-25 U.S. Attorney to be notified.
- 4.09-30 Action on report.
- 4.09-35 Preferment of charges.

Subpart 4.11—Witnesses and Witness Fees

- 4.11-1 Employees of vessels controlled by Army or Navy as witnesses.
- 4.11-5 Coercion of witnesses.
- 4.11-10 Witness fees and allowances.

Subpart 4.12—Testimony by Interrogatories and Depositions

- 4.12-1 Application, procedure, and admissibility.

§ 4.01-1

Subpart 4.13—Availability of Records

4.13-1 Public availability of records.

Subpart 4.19—Construction of Regulations and Rules of Evidence

4.19-1 Construction of regulations.

4.19-5 Adherence to rules of evidence.

Subpart 4.21—Computation of Time

4.21-1 Computation of time.

Subpart 4.23—Evidence of Criminal Liability

4.23-1 Evidence of criminal liability.

Subpart 4.40—Coast Guard—National Transportation Safety Board Marine Casualty Investigations

4.40-1 Purpose.

4.40-3 Relationship to Coast Guard marine investigation regulations and procedures.

4.40-5 Definitions.

4.40-10 Preliminary investigation by the Coast Guard.

4.40-15 Marine casualty investigation by the Board.

4.40-20 Cause or probable cause determinations from Board investigation.

4.40-25 Coast Guard marine casualty investigation for the Board.

4.40-30 Procedures for Coast Guard investigation.

4.40-35 Records of the Coast Guard and the Board.

AUTHORITY: 33 U.S.C. 1231; 43 U.S.C. 1333; 46 U.S.C. 2103, 2306, 6101, 6301, 6305; 50 U.S.C. 198; 49 CFR 1.46. Authority for subpart 4.40: 49 U.S.C. 1903(a)(1)(E); 49 CFR 1.46.

SOURCE: CGD 74-119, 39 FR 33317, Sept. 17, 1974, unless otherwise noted.

Subpart 4.01—Authority and Scope of Regulations

§ 4.01-1 Scope of regulation.

The regulations in this part govern the reporting of marine casualties, the investigation of marine casualties and the submittal of reports designed to increase the likelihood of timely assistance to vessels in distress.

[CGD 85-015, 51 FR 19341, May 29, 1986]

§ 4.01-3 Reporting exclusion.

(a) Vessels subject to 33 CFR 173.51 are excluded from the requirements of subpart 4.05.

46 CFR Ch. I (10-1-00 Edition)

(b) Vessels which report diving accidents under 46 CFR 197.484 regarding deaths, or injuries which cause incapacitation for greater than 72 hours, are not required to give notice under § 4.05-1(a)(5) or § 4.05-1(a)(6).

(c) Vessels are excluded from the requirements of § 4.05-1(a)(5) and (a)(6) with respect to the death or injury of shipyard or harbor workers when such accidents are not the result of either a vessel casualty (e.g., collision) or a vessel equipment casualty (e.g., cargo boom failure) and are subject to the reporting requirements of Occupational Safety and Health Administration (OSHA) under 29 CFR 1904.

(d) Except as provided in subpart 4.40, public vessels are excluded from the requirements of this part.

[CGD 76-170, 45 FR 77441, Nov. 24, 1980; 46 FR 19235, Mar. 30, 1981, as amended by CGD 76-170, 47 FR 39684, Sept. 9, 1982; CGD 95-028, 62 FR 51195, Sept. 30, 1997; USCG-2000-7790, 65 FR 58458, Sept. 29, 2000]

Subpart 4.03—Definitions

§ 4.03-1 Marine casualty or accident.

(a) The term *marine casualty or accident* shall mean any casualty or accident involving any vessel other than public vessels if such casualty or accident occurs upon the navigable waters of the United States, its territories or possessions or any casualty or accident wherever such casualty or accident may occur involving any United States' vessel which is not a public vessel. (See § 4.03-40 for definition of *Public Vessel*.)

(b) The term *marine casualty or accident* includes any accidental grounding, or any occurrence involving a vessel which results in damage by or to the vessel, its apparel, gear, or cargo, or injury or loss of life of any person; and includes among other things, collisions, strandings, groundings, foundering, heavy weather damage, fires, explosions, failure of gear and equipment and any other damage which might affect or impair the seaworthiness of the vessel.

(c) The term *marine casualty or accident* also includes occurrences of loss of

Coast Guard, DOT

§ 4.03-20

life or injury to any person while diving from a vessel and using underwater breathing apparatus.

[CGD 74-119, 39 FR 33317, Sept. 17, 1974, as amended by CGD 76-170, 45 FR 77441, Nov. 24, 1980]

§ 4.03-2 Serious marine incident.

The term *serious marine incident* includes the following events involving a vessel in commercial service:

(a) Any marine casualty or accident as defined in § 4.03-1 which is required by § 4.05-1 to be reported to the Coast Guard and which results in any of the following:

(1) One or more deaths;

(2) An injury to a crewmember, passenger, or other person which requires professional medical treatment beyond first aid, and, in the case of a person employed on board a vessel in commercial service, which renders the individual unfit to perform routine vessel duties;

(3) Damage to property, as defined in § 4.05-1(a)(7) of this part, in excess of \$100,000;

(4) Actual or constructive total loss of any vessel subject to inspection under 46 U.S.C. 3301; or

(5) Actual or constructive total loss of any self-propelled vessel, not subject to inspection under 46 U.S.C. 3301, of 100 gross tons or more.

(b) A discharge of oil of 10,000 gallons or more into the navigable waters of the United States, as defined in 33 U.S.C. 1321, whether or not resulting from a marine casualty.

(c) A discharge of a reportable quantity of a hazardous substance into the navigable waters of the United States, or a release of a reportable quantity of a hazardous substance into the environment of the United States, whether or not resulting from a marine casualty.

[CGD 86-067, 53 FR 47077, Nov. 21, 1988, as amended by CGD 97-057, 62 FR 51041, Sept. 30, 1997]

§ 4.03-4 Individual directly involved in a serious marine incident.

The term *individual directly involved in a serious marine incident* is an individual whose order, action or failure to act is determined to be, or cannot be ruled out as, a causative factor in the

events leading to or causing a serious marine incident.

[CGD 86-067, 53 FR 47077, Nov. 21, 1988]

§ 4.03-5 Medical facility.

The term *medical facility* means an American hospital, clinic, physician's office, or laboratory, where blood and urine specimens can be collected according to recognized professional standards.

[CGD 86-067, 53 FR 47077, Nov. 21, 1988]

§ 4.03-6 Qualified medical personnel.

The term *qualified medical personnel* means a physician, physician's assistant, nurse, emergency medical technician, or other person authorized under State or Federal law or regulation to collect blood and urine specimens.

[CGD 86-067, 53 FR 47077, Nov. 21, 1988]

§ 4.03-7 Chemical test.

The term *chemical test* means a scientifically recognized test which analyzes an individual's breath, blood, urine, saliva, bodily fluids, or tissues for evidence of dangerous drug or alcohol use.

[CGD 86-067, 53 FR 47077, Nov. 21, 1988]

§ 4.03-10 Party in interest.

The term *party in interest* shall mean any person whom the Marine Board of Investigation or the investigating officer shall find to have a direct interest in the investigation conducted by it and shall include an owner, a charterer, or the agent of such owner or charterer of the vessel or vessels involved in the marine casualty or accident, and all licensed or certificated personnel whose conduct, whether or not involved in a marine casualty or accident is under investigation by the Board or investigating officer.

§ 4.03-15 Commandant.

The Commandant, U.S. Coast Guard, is that officer who acts as chief of the Coast Guard and is charged with the administration of the Coast Guard.

§ 4.03-20 Coast Guard district.

A Coast Guard district is one of the geographical areas whose boundaries are described in 33 CFR part 3.

§ 4.03-25

§ 4.03-25 District Commander.

The District Commander is the chief of a Coast Guard district and is charged with the administration of all Coast Guard responsibilities and activities within his respective district, except those functions of administrative law judges under the Administrative Procedure Act (60 Stat. 237, 5 U.S.C. 1001 *et seq.*) and activities of independent units of the Coast Guard, such as the Coast Guard Yard and the Coast Guard Academy.

§ 4.03-30 Investigating officer.

An investigating officer is an officer or employee of the Coast Guard designated by the Commandant, District Commander or the Officer in Charge, Marine Inspection, for the purpose of making investigations of marine casualties and accidents or other matters pertaining to the conduct of seamen. An Officer in Charge, Marine Inspection, is an investigating officer without further designation.

§ 4.03-35 Nuclear vessel.

The term *nuclear vessel* means any vessel in which power for propulsion, or for any other purpose, is derived from nuclear energy; or any vessel handling or processing substantial amounts of radioactive material other than as cargo.

[CGD 84-099, 52 FR 47534, Dec. 14, 1987]

§ 4.03-40 Public vessels.

Public vessel means a vessel that—

(a) Is owned, or demise chartered, and operated by the U.S. Government or a government of a foreign country, except a vessel owned or operated by the Department of Transportation or any corporation organized or controlled by the Department (except a vessel operated by the Coast Guard or Saint Lawrence Seaway Development Corporation); and

(b) Is not engaged in commercial service.

[CGD 95-028, 62 FR 51195, Sept. 30, 1997]

§ 4.03-45 Marine employer.

Marine employer means the owner, managing operator, charterer, agent,

46 CFR Ch. I (10-1-00 Edition)

master, or person in charge of a vessel other than a recreational vessel.

[CGD 84-099, 52 FR 47534, Dec. 14, 1987]

§ 4.03-50 Recreational vessel.

Recreational vessel means a vessel meeting the definition in 46 U.S.C. 2101(25) that is then being used only for pleasure.

[CGD 84-099, 52 FR 47534, Dec. 14, 1987]

§ 4.03-55 Law enforcement officer.

Law enforcement officer means a Coast Guard commissioned, warrant or petty officer; or any other law enforcement officer authorized to obtain a chemical test under Federal, State, or local law.

[CGD 84-099, 52 FR 47534, Dec. 14, 1987]

Subpart 4.04—Notice of Potential Vessel Casualty

SOURCE: CGD 85-015, 51 FR 19341, May 29, 1986, unless otherwise noted.

§ 4.04-1 Reports of potential vessel casualty.

A vessel owner, charterer, managing operator or agent shall immediately notify either of the following Coast Guard officers if there is reason to believe a vessel is lost or imperiled.

(a) The Coast Guard district rescue coordination center (RCC) cognizant over the area the vessel was last operating in; or

(b) The Coast Guard search and rescue authority nearest to where the vessel was last operating.

Reasons for belief that a vessel is in distress include, but are not limited to, lack of communication with or non-appearance of the vessel.

§ 4.04-3 Reports of lack of vessel communication.

The owner, charterer, managing operator or agent of a vessel that is required to report to the United States flag Merchant Vessel Location Filing System under the authority of section 212(A) of the Merchant Marine Act, 1936 (46 App. U.S.C. 1122a), shall immediately notify the Coast Guard if more than 48 hours have passed since receiving communication from the vessel. This notification shall be given to the

Coast Guard, DOT

§4.05-10

Coast Guard district RCC cognizant over the area the vessel was last operating in.

(Information collection requirements approved by the Office of Management and Budget under control number 2115-0551)

§ 4.04-5 Substance of reports.

The owner, charterer, managing operator or agent, notifying the Coast Guard under §4.04-1 or §4.04-3, shall:

(a) Provided the name and identification number of the vessel, the names of the individuals on board, and other information that may be requested by the Coast Guard (when providing the names of the individuals on board for a passenger vessel, the list of passengers need only meet the requirements of 46 U.S.C. 3502); and

(b) Submit written confirmation of that notice to the Coast Guard facility that the notice was given to within 24 hours.

(Information collection requirements approved by the Office of Management and Budget under control number 2115-0551)

Subpart 4.05—Notice of Marine Casualty and Voyage Records

§ 4.05-1 Notice of marine casualty.

(a) Immediately after the addressing of resultant safety concerns, the owner, agent, master, operator, or person in charge, shall notify the nearest Marine Safety Office, Marine Inspection Office or Coast Guard Group Office whenever a vessel is involved in a marine casualty consisting in—

(1) An unintended grounding, or an unintended strike of (allison with) a bridge;

(2) An intended grounding, or an intended strike of a bridge, that creates a hazard to navigation, the environment, or the safety of a vessel, or that meets any criterion of paragraphs (a) (3) through (7);

(3) A loss of main propulsion, primary steering, or any associated component or control system that reduces the maneuverability of the vessel;

(4) An occurrence materially and adversely affecting the vessel's seaworthiness or fitness for service or route, including but not limited to fire,

flooding, or failure of or damage to fixed fire-extinguishing systems, life-saving equipment, auxiliary power-generating equipment, or bilge-pumping systems;

(5) A loss of life;

(6) An injury that requires professional medical treatment (treatment beyond first aid) and, if the person is engaged or employed on board a vessel in commercial service, that renders the individual unfit to perform his or her routine duties; or

(7) An occurrence causing property-damage in excess of \$25,000, this damage including the cost of labor and material to restore the property to its condition before the occurrence, but not including the cost of salvage, cleaning, gas-freeing, drydocking, or demurrage.

(b) Notice given as required by 33 CFR 160.215 satisfies the requirement of this section if the marine casualty involves a hazardous condition as defined by 33 CFR 160.203.

[CGD 94-030, 59 FR 39471, Aug. 3, 1994]

§ 4.05-5 Substance of marine casualty notice.

The notice required in §4.05-1 must include the name and official number of the vessel involved, the name of the vessel's owner or agent, the nature and circumstances of the casualty, the locality in which it occurred, the nature and extent of injury to persons, and the damage to property.

[CGD 76-170, 45 FR 77441, Nov. 24, 1980]

§ 4.05-10 Written report of marine casualty.

(a) The owner, agent, master, operator, or person in charge shall, within five days, file a written report of any marine casualty required to be reported under §4.05-1. This written report is in addition to the immediate notice required by §4.05-1. This written report must be delivered to a Coast Guard Marine Safety Office or Marine Inspection Office. It must be provided on Form CG-2692 (Report of Marine Accident, Injury or Death), supplemented as necessary by appended Forms CG-2692A (Barge Addendum) and CG-2692B (Report of Required Chemical Drug and

§ 4.05-12

Alcohol Testing Following a Serious Marine Incident).

(b) If filed without delay after the occurrence of the marine casualty, the report required by paragraph (a) of this section suffices as the notice required by § 4.05-1(a).

[CGD 94-030, 63 FR 19192, Apr. 17, 1998]

§ 4.05-12 Alcohol or drug use by individuals directly involved in casualties.

(a) For each marine casualty required to be reported by § 4.05-10, the marine employer shall determine whether there is any evidence of alcohol or drug use by individuals directly involved in the casualty.

(b) The marine employer shall include in the written report, Form CG-2692, submitted for the casualty information which:

(1) Identifies those individuals for whom evidence of drug or alcohol use, or evidence of intoxication, has been obtained; and,

(2) Specifies the method used to obtain such evidence, such as personal observation of the individual, or by chemical testing of the individual.

(c) An entry shall be made in the official log book, if carried, pertaining to those individuals for whom evidence of intoxication is obtained. The individual must be informed of this entry and the entry must be witnessed by a second person.

(d) If an individual directly involved in a casualty refuses to submit to, or cooperate in, the administration of a timely chemical test, when directed by a law enforcement officer or by the marine employer, this fact shall be noted in the official log book, if carried, and in the written report (Form CG-2692), and shall be admissible as evidence in any administrative proceeding.

[CGD 84-099, 52 FR 47534, Dec. 14, 1987]

§ 4.05-15 Voyage records, retention of.

(a) The owner, agent, master, or person in charge of any vessel involved in a marine casualty shall retain such voyage records as are maintained by the vessel, such as both rough and smooth deck and engine room logs, bell books, navigation charts, navigation work books, compass deviation cards,

46 CFR Ch. I (10-1-00 Edition)

gyro records, stowage plans, records of draft, aids to mariners, night order books, radiograms sent and received, radio logs, crew and passenger lists, articles of shipment, official logs and other material which might be of assistance in investigating and determining the cause of the casualty. The owner, agent, master, other officer or person responsible for the custody thereof, shall make these records available upon request, to a duly authorized investigating officer, administrative law judge, officer or employee of the Coast Guard.

(b) The investigating officer may substitute photostatic copies of the voyage records referred to in paragraph (a) of this section when they have served their purpose and return the original records to the owner or owners thereof.

§ 4.05-20 Report of accident to aid to navigation.

Whenever a vessel collides with a buoy, or other aid to navigation under the jurisdiction of the Coast Guard, or is connected with any such collision, it shall be the duty of the person in charge of such vessel to report the accident to the nearest Officer in Charge, Marine Inspection. No report on Form CG-2692 is required unless one or more of the results listed in § 4.05-1 occur.

[CGD 74-119, 39 FR 33317, Sept. 17, 1974, as amended by CGD 88-070, 53 FR 34533, Sept. 7, 1988]

§ 4.05-25 Reports when state of war exists.

During the period when a state of war exists between the United States and any foreign nation, communications in regard to casualties or accidents shall be handled with caution and the reports shall not be made by radio or by telegram.

§ 4.05-30 Incidents involving hazardous materials.

When a casualty occurs involving hazardous materials, notification and a written report to the Department of Transportation may be required. See 49 CFR 171.15 and 171.16.

[CGD 76-170, 45 FR 77441, Nov. 24, 1980]

§ 4.05-35 Incidents involving nuclear vessels.

The master of any nuclear vessel shall immediately inform the Commandant in the event of any accident or casualty to the nuclear vessel which may lead to an environmental hazard. The master shall also immediately inform the competent governmental authority of the country in whose waters the vessel may be or whose waters the vessel approaches in a damaged condition.

[CGD 84-099, 52 FR 47534, Dec. 14, 1987]

§ 4.05-40 Alternate electronic means of reporting.

The Commandant may approve alternate electronic means of submitting notices and reports required under this subpart.

[USCG-1999-6216, 64 FR 53223, Oct. 1, 1999]

Subpart 4.06—Mandatory Chemical Testing Following Serious Marine Incidents Involving Vessels in Commercial Service

SOURCE: CGD 86-067, 53 FR 47078, Nov. 21, 1988, unless otherwise noted.

§ 4.06-1 Responsibilities of the marine employer.

(a) At the time of occurrence of a marine casualty, a discharge of oil into the navigable waters of the United States, a discharge of a hazardous substance into the navigable waters of the United States, or a release of a hazardous substance into the environment of the United States, the marine employer shall make a timely, good faith determination as to whether the occurrence currently is, or is likely to become, a serious marine incident.

(b) When a marine employer determines that a casualty or incident is, or is likely to become, a serious marine incident, the marine employer shall take all practicable steps to have each individual engaged or employed on board the vessel who is directly involved in the incident chemically tested for evidence of drug and alcohol use.

(c) The determination of which individuals are directly involved in a serious

marine incident is to be made by the marine employer. A law enforcement officer may determine that additional individuals are directly involved in the serious marine incident. In such cases, the marine employer shall take all practicable steps to have these individuals tested in accordance with paragraph (b) of this section.

(d) The requirements of this subpart shall not prevent vessel personnel who are required to be tested from performing duties in the aftermath of a serious marine incident when their performance is necessary for the preservation of life or property or the protection of the environment.

(e) The marine employer shall ensure that all individuals engaged or employed on board a vessel are fully indoctrinated in the requirements of this subpart, and that appropriate vessel personnel are trained as necessary in the practical applications of these requirements.

(f) Each marine employer shall implement the testing requirements of this subpart in accordance with the implementation schedule provided in 46 CFR 16.205 and 16.207.

§ 4.06-5 Responsibilities of individuals directly involved in serious marine incidents.

(a) Any individual engaged or employed on board a vessel who is determined to be directly involved in a serious marine incident shall provide blood, breath or urine specimens for chemical tests required by § 4.06-10 when directed to do so by the marine employer or a law enforcement officer.

(b) If the individual refuses to provide blood, breath or urine specimens, this refusal shall be noted on Form CG-2692B and in the vessel's official log book, if one is required.

(c) No individual may be forcibly compelled to provide specimens for chemical tests required by this part; however, refusal is considered a violation of regulation and could subject the individual to suspension and revocation proceedings under part 5 of this chapter and removal from any duties which directly affect the safety of the vessel's navigation or operations.

§ 4.06-10

§ 4.06-10 Required specimens.

Each individual required to submit to chemical testing shall, as soon as practicable, provide the following specimens for chemical testing:

(a) Urine specimens, collected in accordance with § 4.06-20 and part 16 of this chapter.

(b) Blood or breath specimens, or both, collected in accordance with § 4.06-20.

§ 4.06-20 Specimen collection requirements.

(a) All inspected vessels certificated for unrestricted ocean routes, and all inspected vessels certificated for restricted overseas routes, are required to have on board at all times a breath testing device capable of determining the presence of alcohol in a person's system. The breath testing device shall be used in accordance with procedures specified by the manufacturer.

(b) The marine employer shall ensure that urine specimen collection and shipping kits meeting the requirements of § 16.330 of this part are readily available for use following serious marine incidents. The specimen collection and shipping kits need not be maintained aboard each vessel if they can otherwise be readily obtained within 24 hours from the time of the occurrence of the serious marine incident.

(c) The marine employer shall ensure that specimens required by § 4.06-10 are collected as soon as practicable following the occurrence of a serious marine incident.

(d) When obtaining blood, breath, and urine specimens, the marine employer shall ensure that the collection process is supervised by either qualified collection personnel, the marine employer, a law enforcement officer, or the marine employer's representative.

(e) Chemical tests of an individual's breath for the presence of alcohol using a breath testing device may be conducted by any individual trained to conduct such tests. Blood specimens shall be taken only by qualified medical personnel.

§ 4.06-30 Specimen collection in incidents involving fatalities.

(a) When an individual engaged or employed on board a vessel dies as a re-

46 CFR Ch. I (10-1-00 Edition)

sult of a serious marine incident, blood and urine specimens must be obtained from the remains of the individual for chemical testing, if practicable to do so. The marine employer shall notify the appropriate local authority, such as the coroner or medical examiner, as soon as possible, of the fatality and of the requirements of this subpart. The marine employer shall provide the specimen collection and shipping kit and request that the local authority assist in obtaining the necessary specimens. When the custodian of the remains is a person other than the local authority, the marine employer shall request the custodian to cooperate in obtaining the specimens required under this part.

(b) If the local authority or custodian of the remains declines to cooperate in obtaining the necessary specimens, the marine employer shall provide an explanation of the circumstances on Form CG-2692B (Report of Required Chemical Drug and Alcohol Testing Following a Serious Marine Incident).

§ 4.06-40 Specimen handling and shipping.

(a) The marine employer shall ensure that blood specimens collected in accordance with §§ 4.06-20 and 4.06-30 are promptly shipped to a testing laboratory qualified to conduct tests on such specimens. A proper chain of custody must be maintained for each specimen from the time of collection through the authorized disposition of the specimen. Blood specimens must be shipped to the laboratory in a cooled condition by any means adequate to ensure delivery within twenty-four (24) hours of receipt by the carrier.

(b) The marine employer shall ensure that the urine specimen collection procedures of § 16.310 of this part and the chain of custody requirements of § 16.320 are complied with. The marine employer shall ensure that urine specimens required by §§ 4.06-20 and 4.06-30 are promptly shipped to a laboratory complying with the requirements of 49 CFR part 40. Urine specimens must be shipped by an expeditious means, but need not be shipped in a cooled condition for overnight delivery.

Coast Guard, DOT

§ 4.07-1

§ 4.06-50 Specimen analysis and follow-up procedures.

(a) Each laboratory will provide prompt analysis of specimens collected under this subpart, consistent with the need to develop all relevant information and to produce a complete analysis report.

(b) Reports shall be sent to the Medical Review Officer meeting the requirements of 49 CFR 40.33, as designated by the marine employer submitting the specimen for testing. Wherever a urinalysis report indicates the presence of a dangerous drug or drug metabolite, the Medical Review Officer shall review the report as required by 49 CFR 40.33 and submit his or her findings to the marine employer. Blood test reports indicating the presence of alcohol shall be similarly reviewed to determine if there is a legitimate medical explanation.

(c) Analysis results which indicate the presence of alcohol, dangerous drugs, or drug metabolites shall not be construed by themselves as constituting a finding that use of drugs or alcohol was the probable cause of a serious marine incident.

[CGD 86-067, 53 FR 47078, Nov. 21, 1988, as amended by CGD 90-053, 58 FR 31107, May 28, 1993]

§ 4.06-60 Submission of reports and test results.

(a) Whenever an individual engaged or employed on a vessel is identified as being directly involved in a serious marine incident, the marine employer shall complete Form CG-2692B (Report of Required Chemical Drug and Alcohol Testing Following a Serious Marine Incident).

(b) When the serious marine incident requires the submission of Form CG-2692 (Report of Marine Casualty, Injury or Death) to the Coast Guard in accordance with § 4.05-10, the report required by paragraph (a) of this section shall be appended to Form CG-2692.

(c) In incidents involving discharges of oil or hazardous substances as described in § 4.03-2 (b) and (c) of this part, when Form CG-2692 is not required to be submitted, the report required by paragraph (a) of this section shall be submitted to the Coast Guard Officer in Charge, Marine Inspection,

having jurisdiction over the location where the discharge occurred or nearest the port of first arrival following the discharge.

(d) Upon receipt of the report of chemical test results, the marine employer shall submit a copy of the test results for each person listed on the CG-2692B to the Coast Guard Officer in Charge, Marine Inspection to whom the CG-2692B was submitted.

(e) The Commandant may approve alternate electronic means of submitting reports and test results as required under paragraphs (a) through (d) of this section.

[CGD 86-067, 53 FR 47078, Nov. 21, 1988, as amended by CGD 97-057, 62 FR 51041, Sept. 30, 1997; USCG-1999-6216, 64 FR 53223, Oct. 1, 1999]

Subpart 4.07—Investigations

§ 4.07-1 Commandant or District Commander to order investigation.

(a) The Commandant or District Commander upon receipt of information of a marine casualty or accident, will immediately cause such investigation as may be necessary in accordance with the regulations in this part.

(b) The investigations of marine casualties and accidents and the determinations made are for the purpose of taking appropriate measures for promoting safety of life and property at sea, and are not intended to fix civil or criminal responsibility.

(c) The investigation will determine as closely as possible:

(1) The cause of the accident;

(2) Whether there is evidence that any failure of material (either physical or design) was involved or contributed to the casualty, so that proper recommendations for the prevention of the recurrence of similar casualties may be made;

(3) Whether there is evidence that any act of misconduct, inattention to duty, negligence or willful violation of the law on the part of any licensed or certificated person contributed to the casualty, so that appropriate proceedings against the license or certificate of such person may be recommended and taken under 46 U.S.C. 6301;

§ 4.07-5

(4) Whether there is evidence that any Coast Guard personnel or any representative or employee of any other government agency or any other person caused or contributed to the cause of the casualty; or,

(5) Whether the accident shall be further investigated by a Marine Board of Investigation in accordance with regulations in subpart 4.09.

[CGD 74-119, 39 FR 33317, Sept. 17, 1974, as amended by CGD 97-057, 62 FR 51041, Sept. 30, 1997]

§ 4.07-5 Investigating officers, powers of.

(a) An investigating officer investigates each marine casualty or accident reported under §§ 4.05-1 and 4.05-10.

(b) Such investigating officer shall have the power to administer oaths, subpoena witnesses, require persons having knowledge of the subject matter of the investigation to answer questionnaires and require the production of relevant books, papers, documents and other records.

(c) Attendance of witnesses or the production of books, papers, documents or any other evidence shall be compelled by a similar process as in the United States District Court.

[CGFR 65-50, 30 FR 17099, Dec. 30, 1965, as amended by CGD-104R, 37 FR 14234, July 18, 1972]

§ 4.07-7 Opening statement.

The investigating officer or the Chairman of a Marine Board of Investigation shall open the investigation by announcing the statutory authority for the proceeding and he shall advise parties in interest concerning their rights to be represented by counsel, to examine and cross-examine witnesses, and to call witnesses in their own behalf.

§ 4.07-10 Report of investigation.

(a) At the conclusion of the investigation the investigating officer shall submit to the Commandant via the Officer in Charge, Marine Inspection, and the District Commander, a full and complete report of the facts as determined by his investigation, together with his opinions and recommendations in the premises. The Officer in Charge, Marine Inspection, and the

46 CFR Ch. I (10-1-00 Edition)

District Commander shall forward the investigating officer's report to the Commandant with an endorsement stating:

(1) Approval or otherwise of the findings of fact, conclusions and recommendations;

(2) Any action taken with respect to the recommendations;

(3) Whether or not any action has been or will be taken under part 5 of this subchapter to suspend or revoke licenses or certificates; and,

(4) Whether or not violations of laws or regulations relating to vessels have been reported on Form CG-2636, report of violation of navigation laws.

(b) At the conclusion of the investigation, the investigating officer shall submit the report described in paragraph (a) of this section, to the Commandant via the Merchant Marine Detail Officer or the Officer in Charge, Marine Inspection, and the Commander, Coast Guard MIO Europe for a European port or Commander, Fourteenth Coast Guard for an Asian or Pacific port. The Merchant Marine Detail Officer or the Officer in Charge, Marine Inspection, and Commander, Coast Guard MIO Europe or Commander, Fourteenth Coast Guard District shall forward the investigating officer's report to the Commandant with the endorsement described in paragraphs (a) (1) through (4) of this section.

[CGD 74-119, 39 FR 33317, Sept. 17, 1974, as amended by CGD 75-196, 41 FR 18655, May 6, 1976; CGD 97-057, 62 FR 51042, Sept. 30, 1997]

§ 4.07-15 Recommendations, action on.

Where the recommendations of an investigating officer are such that their accomplishment is within the authority of the District Commander or any of the personnel under his command, immediate steps shall be taken to put them into effect and his forwarding endorsement shall so indicate.

§ 4.07-20 Transfer of jurisdiction.

When it appears to the District Commander that it is more advantageous to conduct an investigation in a district other than in the district where the casualty was first reported, that officer shall transfer the case to the

Coast Guard, DOT

§4.09-10

other district together with any information or material relative to the casualty he may have.

§4.07-25 Testimony of witnesses in other districts, depositions.

When witnesses are available in a district other than the district in which the investigation is being made, testimony or statements shall be taken from witnesses in the other districts by an investigating officer and promptly transmitted to the investigating officer conducting the investigation. Depositions may be taken in the manner prescribed by regulations in subpart 4.12.

§4.07-30 Testimony of witnesses under oath.

(a) Witnesses to marine casualties or accidents appearing before an investigating officer may be placed under oath and their testimony may be reduced to writing.

(b) Written statements and reports submitted as evidence by witnesses shall be sworn to before an officer authorized to administer oaths and such statements and/or reports shall be signed.

§4.07-35 Counsel for witnesses and parties in interest.

(a) All parties in interest shall be allowed to be represented by counsel, to examine and cross-examine witnesses and to call witnesses in their own behalf.

(b) Witnesses who are not parties in interest may be assisted by counsel for the purpose of advising such witnesses concerning their rights; however, such counsel will not be permitted to examine or cross-examine other witnesses or otherwise participate in the investigation.

§4.07-45 Foreign units of Coast Guard, investigation by.

Investigations of marine casualties conducted by foreign units of the Coast Guard shall be in accordance with the regulations in this part and all actions taken in connection with the investigations of such marine casualties entered in the official log(s) of the vessel(s) concerned.

§4.07-55 Information to be furnished Marine Board of Investigation.

When a Marine Board of Investigation is convened in accordance with §4.09-1, the investigating officer shall immediately furnish the board with all testimony, statements, reports, documents, papers, a list of witnesses including those whom he has examined, other material which he may have gathered, and a statement of any findings of fact which he may have determined. The preliminary investigation shall cease forthwith and the aforementioned material shall become a part of the Marine Board of Investigation's record.

Subpart 4.09—Marine Board of Investigation

§4.09-1 Commandant to designate.

If it appears that it would tend to promote safety of life and property at sea or would be in the public interest, the Commandant may designate a Marine Board of Investigation to conduct an investigation.

[CGD 76-170, 45 FR 77441, Nov. 24, 1980]

§4.09-5 Powers of Marine Board of Investigation.

Any Marine Board of Investigation so designated shall have the power to administer oaths, summon witnesses, require persons having knowledge of the subject matter of the investigation to answer questionnaires, and to require the production of relevant books, papers, documents or any other evidence. Attendance of witnesses or the production of books, papers, documents or any other evidence shall be compelled by a similar process as in the United States District Court. The chairman shall administer all necessary oaths to any witnesses summoned before said Board.

§4.09-10 Witnesses, payment of.

Any witness subpoenaed under §4.09-5 shall be paid such fees for his travel and attendance as shall be certified by the chairman of a Marine Board of Investigation or an investigating officer, in accordance with §4.11-10.

§ 4.09-15

§ 4.09-15 Time and place of investigation, notice of, rights of witnesses, etc.

Reasonable notice of the time and place of the investigation shall be given to any person whose conduct is or may be under investigation and to any other party in interest. All parties in interest shall be allowed to be represented by counsel, to cross-examine witnesses, and to call witnesses in their own behalf.

§ 4.09-17 Sessions to be public.

(a) All sessions of a Marine Board of Investigation for the purpose of obtaining evidence shall normally be open to the public, subject to the provision that the conduct of any person present shall not be allowed to interfere with the proper and orderly functioning of the Board. Sessions will not be open to the public when evidence of a classified nature or affecting national security is to be received.

§ 4.09-20 Record of proceedings.

The testimony of witnesses shall be transcribed and a complete record of the proceedings of a Marine Board of Investigation shall be kept. At the conclusion of the investigation a written report shall be made containing findings of fact, opinions, and recommendations to the Commandant for his consideration.

§ 4.09-25 U.S. Attorney to be notified.

The recorder of a Marine Board of Investigation shall notify the United States Attorney for the District in which the Marine Board of Investigation is being conducted of the nature of the casualty under investigation and time and place the investigation will be made.

§ 4.09-30 Action on report.

Upon approval of the report of a Marine Board of Investigation the Commandant will require to be placed into effect such recommendations as he may deem necessary for the better improvement and safety of life and property at sea.

46 CFR Ch. I (10-1-00 Edition)

§ 4.09-35 Preferment of charges.

(a) If in the course of an investigation by a Marine Board there appears probable cause for the preferment of charges against any licensed or certificated personnel, the Marine Board shall, either during or immediately following the investigation and before the witnesses have dispersed, apprise the District Commander of such evidence for possible action in accordance with part 5 of this subchapter, without waiting for the approval of the report by the Commandant. Such action or proceedings shall be independent and apart from any other action which may be later ordered by the Commandant or taken by other authorities.

Subpart 4.11—Witnesses and Witness Fees

§ 4.11-1 Employees of vessels controlled by Army or Navy as witnesses.

No officer, seaman, or other employee of any public vessel controlled by the Army or Navy (not including the Coast Guard) of the United States, shall be summoned or otherwise required to appear as a witness in connection with any investigation or other proceeding without the consent of the Government agency concerned.

§ 4.11-5 Coercion of witnesses.

Any attempt to coerce any witness or to induce him to testify falsely in connection with a shipping casualty, or to induce any witness to leave the jurisdiction of the United States, is punishable by a fine of \$5,000.00 or imprisonment for one year, or both such fine and imprisonment.

§ 4.11-10 Witness fees and allowances.

Witness fees and allowances are paid in accordance with 46 CFR 5.401.

[CGD 79-080, 45 FR 2046, Jan. 10, 1980, as amended by CGD 96-041, 61 FR 50726, Sept. 27, 1996]

Subpart 4.12—Testimony by Interrogatories and Depositions

§ 4.12-1 Application, procedure, and admissibility.

(a) Witnesses shall be examined orally, except that for good cause shown, testimony may be taken by deposition upon application of any party in interest or upon the initiative of the investigating officer or Marine Board of Investigation.

(b) Applications to take depositions shall be in writing setting forth the reasons why such deposition should be taken, the name and address of the witness, the matters concerning which it is expected the witness will testify, and the time and place proposed for the taking of the deposition. Such application shall be made to an investigating officer or the Marine Board of Investigation prior to or during the course of the proceedings.

(c) The investigating officer or Marine Board of Investigation, shall, upon receipt of the application, if good cause is shown, make and serve upon the parties an order which will specify the name of the witness whose deposition is to be taken, the name and place of the taking of such deposition and shall contain a designation of the officer before whom the witness is to testify. Such deposition may be taken before any officer authorized to administer oaths by the laws of the United States.

(d) The party desiring the deposition may submit a list of interrogatories to be propounded to the absent witness; then the opposite party after he has been allowed a reasonable time for this purpose, may submit a list of cross-interrogatories. If either party objects to any question of the adversary party, the matter shall be presented to the investigating officer or Marine Board of Investigation for a ruling. Upon agreement of the parties on a list of interrogatories and cross-interrogatories (if any) the investigating officer or Marine Board of Investigation may propound such additional questions as may be necessary to clarify the testimony given by the witness.

(e) The subpoena referred to in subpart F of this subchapter together with

the list of interrogatories and cross-interrogatories (if any) shall be forwarded to the officer designated to take such deposition. This officer will cause the subpoena to be served personally on the witness. After service the subpoena shall be endorsed and returned to the investigating officer or Marine Board of Investigation.

(f) When the deposition has been duly executed it shall be returned to the investigating officer or Marine Board of Investigation. As soon as practicable after the receipt of the deposition the investigating officer or Marine Board of Investigation shall present it to the parties for their examination. The investigating officer or Marine Board of Investigation shall rule on the admissibility of the deposition or any part thereof and of any objection offered by either party thereto.

[CGD 74-119, 39 FR 33317, Sept. 17, 1974, as amended by CGD 96-041, 61 FR 50726, Sept. 27, 1996]

Subpart 4.13—Availability of Records

§ 4.13-1 Public availability of records.

Coast Guard records are made available to the public in accordance with 49 CFR part 7.

[CGD 73-43R, 40 FR 13501, Mar. 27, 1975]

Subpart 4.19—Construction of Regulations and Rules of Evidence

§ 4.19-1 Construction of regulations.

The regulations in this part shall be liberally construed to insure just, speedy, and inexpensive determination of the issues presented.

§ 4.19-5 Adherence to rules of evidence.

As hearings under this part are administrative in character, strict adherence to the formal rules of evidence is not imperative. However, in the interest of orderly presentation of the facts of a case, the rules of evidence should be observed as closely as possible.

Subpart 4.21—Computation of Time

§ 4.21-1 Computation of time.

The time, within which any act, provided by the regulation in this subchapter, or an order of the Marine Board of Investigation is to be done, shall be computed by excluding the first day and including the last unless the last day is Sunday or a legal holiday, in which case the time shall extend to and include the next succeeding day that is not a Sunday or legal holiday: *Provided, however,* That where the time fixed by the regulations in this subchapter or an order of the Board is five days or less all intervening Sundays or legal holidays, other than Saturdays, shall be excluded.

Subpart 4.23—Evidence of Criminal Liability

§ 4.23-1 Evidence of criminal liability.

If as a result of any investigation or other proceeding conducted hereunder, evidence of criminal liability on the part of any licensed officer or certificated person or any other person is found, such evidence shall be referred to the U.S. Attorney General.

Subpart 4.40—Coast Guard—National Transportation Safety Board Marine Casualty Investigations

SOURCE: CGD 76-149, 42 FR 61200, Dec. 1, 1977, unless otherwise noted.

§ 4.40-1 Purpose.

This subpart prescribes the joint regulations of the National Transportation Safety Board and the Coast Guard for the investigation of marine casualties.

[CGD 82-034, 47 FR 45882, Oct. 14, 1982]

§ 4.40-3 Relationship to Coast Guard marine investigation regulations and procedures.

(a) The Coast Guard's responsibility to investigate marine casualties is not eliminated nor diminished by the regulations in this subpart.

(b) In those instances where the National Transportation Safety Board conducts an investigation in which the Coast Guard also has responsibility under 46 U.S.C. Chapter 63, the proceedings are conducted independently but so as to avoid duplication as much as possible.

[CGD 76-149, 42 FR 61200, Dec. 1, 1977, as amended by CGD 95-028, 62 FR 51195, Sept. 30, 1997]

§ 4.40-5 Definitions.

As used in this subpart:

(a) *Act* means title III of Public Law 93-633, the Independent Safety Board Act of 1974, (49 U.S.C. 1131).

(b) *Board* means the National Transportation Safety Board.

(c) *Chairman* means the Chairman of the National Transportation Safety Board.

(d) *Major marine casualty* means a casualty involving a vessel, other than a public vessel, that results in:

(1) The loss of six or more lives;

(2) The loss of a mechanically propelled vessel of 100 or more gross tons;

(3) Property damage initially estimated at \$500,000 or more; or

(4) Serious threat, as determined by the Commandant and concurred in by the Chairman, to life, property, or the environment by hazardous materials.

(e) *Public vessel* means a vessel owned by the United States, except a vessel to which the Act of October 25, 1919, c.82, (41 Stat. 305, 46 U.S.C. 363) applies.

(f) *Vessel of the United States* means a vessel:

(1) Documented or required to be documented under the laws of the United States;

(2) Owned in the United States; or

(3) Owned by a citizen or resident of the United States and not registered under a foreign flag.

[CGD 76-149, 42 FR 61200, Dec. 1, 1977, as amended by CGD 95-028, 62 FR 51195, Sept. 30, 1997]

§ 4.40-10 Preliminary investigation by the Coast Guard.

(a) The Coast Guard conducts the preliminary investigation of marine casualties.

(b) The Commandant determines from the preliminary investigation whether:

Coast Guard, DOT

§ 4.40-30

(1) The casualty is a major marine casualty; or

(2) The casualty involves a public and a non-public vessel and at least one fatality or \$75,000 in property damage; or

(3) The casualty involves a Coast Guard and a non-public vessel and at least one fatality or \$75,000 in property damage; or

(4) The casualty is a major marine casualty which involves significant safety issues relating to Coast Guard safety functions, e.g., search and rescue, aids to navigation, vessel traffic systems, commercial vessel safety, etc.

(c) The Commandant notifies the Board of a casualty described in paragraph (b) of this section.

[CGD 76-149, 42 FR 61200, Dec. 1, 1977, as amended by CGD 82-034, 47 FR 45882, Oct. 14, 1982]

§ 4.40-15 Marine casualty investigation by the Board.

(a) The Board may conduct an investigation under the Act of any major marine casualty or any casualty involving public and non-public vessels. Where the Board determines it will convene a hearing in connection with such an investigation, the Board's rules of practice for transportation accident hearings in 49 CFR part 845 shall apply.

(b) The Board shall conduct an investigation under the Act when:

(1) The casualty involves a Coast Guard and a non-public vessel and at least one fatality or \$75,000 in property damage; or

(2) The Commandant and the Board agree that the Board shall conduct the investigation, and the casualty involves a public and a non-public vessel and at least one fatality or \$75,000 in property damage; or

(3) The Commandant and the Board agree that the Board shall conduct the investigation, and the casualty is a major marine casualty which involves significant safety issues relating to Coast Guard safety functions.

[CGD 82-034, 47 FR 45882, Oct. 14, 1982]

§ 4.40-20 Cause or probable cause determinations from Board investigation.

After an investigation conducted by the Board under § 4.40-15, the Board de-

termines cause or probable cause and issues a report of that determination.

§ 4.40-25 Coast Guard marine casualty investigation for the Board.

(a) If the Board does not conduct an investigation under § 4.40-15 (a), (b) (2) or (3), the Coast Guard, at the request of the Board, may conduct an investigation under the Act unless there is an allegation of Federal Government misfeasance or nonfeasance.

(b) The Board will request the Coast Guard to conduct an investigation under paragraph (a) of this section within 48 hours of receiving notice under § 4.40-10(c).

(c) The Coast Guard will advise the Board within 24 hours of receipt of a request under paragraph (b) of this section whether the Coast Guard will conduct an investigation under the Act.

[CGD 82-034, 47 FR 45882, Oct. 14, 1982]

§ 4.40-30 Procedures for Coast Guard investigation.

(a) The Coast Guard conducts an investigation under § 4.40-25 using the procedures in 46 CFR 4.01-1 through 4.23-1.

(b) The Board may designate a person or persons to participate in every phase of an investigation, including on scene investigation, that is conducted under the provisions of subpart 4.40-25 of this part.

(c) Consistent with Coast Guard responsibility to direct the course of the investigation, the person or persons designated by the Board under paragraph (b) of this section may:

(1) Make recommendations about the scope of the investigations.

(2) Call and examine witnesses.

(3) Submit or request additional evidence.

(d) The Commandant provides a record of the proceedings to the Board of an investigation of a major marine casualty under paragraph (a) of this section.

(e) The Board, under the Act, makes its determination of the facts, conditions, circumstances, and the cause or probable cause of a major marine casualty using the record of the proceedings provided by the Commandant under paragraph (d) of this section, and

§ 4.40-35

any additional evidence the Board may acquire under its own authority.

(f) An investigation by the Coast Guard under this section is both an investigation under the Act and under 46 U.S.C. Chapter 63.

[CGD 76-149, 42 FR 61200, Dec. 1, 1977, as amended by CGD 95-028, 62 FR 51195, Sept. 30, 1997]

§ 4.40-35 Records of the Coast Guard and the Board.

(a) Records of the Coast Guard made under § 4.40-30 are available to the public under 49 CFR part 7.

(b) Records of the Board made under §§ 4.40-20 and 4.40-30 are available to the public under 49 CFR part 801.

PART 5—MARINE INVESTIGATION REGULATIONS—PERSONNEL ACTION

Subpart A—Purpose

Sec.

5.3 Purpose of regulations.

5.5 Purpose of administrative actions.

Subpart B—Definitions

5.15 Investigating Officer.

5.19 Administrative Law Judge.

5.27 Misconduct.

5.29 Negligence.

5.31 Incompetence.

5.33 Violation of law or regulation.

5.35 Conviction for a dangerous drug law violation, use of, or addiction to the use of dangerous drugs.

Subpart C—Statement of Policy and Interpretation

5.51 Construction of regulations.

5.55 Time limitations for service of a complaint.

5.57 Acting under authority of license, certificate or document.

5.59 Offenses for which revocation of licenses, certificates or documents is mandatory.

5.61 Acts or offenses for which revocation of licenses, certificates, or documents is sought.

5.65 Commandant's decisions in appeal or review cases.

5.67 Physician-patient privilege.

5.69 Evidence of criminal liability.

5.71 Maritime labor disputes.

Subpart D—Investigations

5.101 Conduct of investigations.

46 CFR Ch. I (10-1-00 Edition)

5.103 Powers of investigating officer.

5.105 Course of action available.

5.107 Service of complaints.

Subpart E—Deposit or Surrender of License, Certificate or Document

5.201 Voluntary deposits in event of mental or physical incompetence.

5.203 Voluntary surrender to avoid hearing.

5.205 Return or issuance of a license, certificate of registry, or merchant mariners document.

Subpart F—Subpoenas

5.301 Issuance of subpoenas.

5.303 Service of subpoenas on behalf of the respondent.

5.305 Quashing a subpoena.

5.307 Enforcement.

5.309 Proof of service

Subpart G—Witness Fees

5.401 Payment of witness fees and allowances.

Subpart H—Hearings

5.501 General.

5.521 Verification of license, certificate or document.

5.567 Order.

5.569 Selection of an appropriate order.

Subpart I [Reserved]

Subpart J—Appeals

5.701 Appeals in general.

5.707 Stay of effect of decision and order of Administrative Law Judge on appeal to the Commandant; temporary license, certificate, or document.

5.713 Appeals to the National Transportation Safety Board.

5.715 Stay of effect of Decision of the Commandant on Appeal: Temporary document and/or license pending appeal to National Transportation Safety Board.

Subpart K—Review of Administrative Law Judge's Decisions in Cases Where Charges Have Been Found Proved

5.801 Commandant's review.

5.803 Record for decision on review.

5.805 Action on review.

5.807 Commandant's Decision on Review.

Subpart L—Issuance of New Licenses, Certificates or Documents After Revocation or Surrender

5.901 Time limitations.

5.903 Application procedures.

Coast Guard, DOT

§ 5.35

5.905 Commandant's decision on application.

AUTHORITY: 46 U.S.C. 2103, 7101, 7301, 7701; 49 CFR 1.46.

SOURCE: CGD 82-002, 50 FR 32184, Aug. 9, 1985, unless otherwise noted.

Subpart A—Purpose

§ 5.3 Purpose of regulations.

The regulations in this part establish policies for administrative actions against mariners' licenses, certificates or documents issued by the Coast Guard.

[CGD 82-002, 50 FR 32184, Aug. 9, 1985, as amended by USCG-1998-3472, 64 FR 28075, May 24, 1999]

§ 5.5 Purpose of administrative actions.

The administrative actions against a license, certification or document are remedial and not penal in nature. These actions are intended to help maintain standards for competence and conduct essential to the promotion of safety at sea.

Subpart B—Definitions

§ 5.15 Investigating Officer.

An *investigating officer* is a Coast Guard official designated by the Commandant, District Commander, or the Officer In Charge, Marine Inspection, for the purpose of conducting investigations of marine casualties or matters pertaining to the conduct of persons issued a license, certificate or document by the Coast Guard. An Officer in Charge, Marine Inspection is an investigating officer without further designation.

§ 5.19 Administrative Law Judge.

(a) An *Administrative Law Judge* shall mean any person designated by the Commandant pursuant to the Administrative Procedure Act (5 U.S.C. 556(b)) for the purpose of conducting hearings arising under 46 U.S.C. 7703 or 7704.

(b) The Commandant has delegated to Administrative Law Judges the authority to admonish, suspend with or without probation or revoke a license, certificate or document issued to a per-

son by the Coast Guard under any navigation or shipping law.

§ 5.27 Misconduct.

Misconduct is human behavior which violates some formal, duly established rule. Such rules are found in, among other places, statutes, regulations, the common law, the general maritime law, a ship's regulation or order, or shipping articles and similar sources. It is an act which is forbidden or a failure to do that which is required.

§ 5.29 Negligence.

Negligence is the commission of an act which a reasonable and prudent person of the same station, under the same circumstances, would not commit, or the failure to perform an act which a reasonable and prudent person of the same station, under the same circumstances, would not fail to perform.

§ 5.31 Incompetence.

Incompetence is the inability on the part of a person to perform required duties, whether due to professional deficiencies, physical disability, mental incapacity, or any combination thereof.

§ 5.33 Violation of law or regulation.

Where the proceeding is based exclusively on that part of title 46 U.S.C. section 7703, which provides as a basis for suspension or revocation a violation or failure to comply with 46 U.S.C. subtitle II, a regulation prescribed under that subtitle, or any other law or regulation intended to promote marine safety or protect navigable waters, the complaint must state the specific statute or regulation by title and section number, and the particular manner in which it was allegedly violated.

[CGD 82-002, 50 FR 32184, Aug. 9, 1985, as amended by USCG-1998-3472, 64 FR 28075, May 24, 1999]

§ 5.35 Conviction for a dangerous drug law violation, use of, or addiction to the use of dangerous drugs.

Where the proceeding is based exclusively on the provisions of title 46, U.S.C. 7704, the complaint will allege

§ 5.51

conviction for a dangerous drug law violation or use of dangerous drugs or addiction to the use of dangerous drugs, depending upon the circumstances and will allege jurisdiction by stating the elements as required by title 46, U.S.C. 7704, and the approximate time and place of the offense.

[CGD 82-002, 50 FR 32184, Aug. 9, 1985, as amended by USCG-1998-3472, 64 FR 28075, May 24, 1999]

Subpart C—Statement of Policy and Interpretation

§ 5.51 Construction of regulations.

The regulations in this part shall be construed so as to obtain a just, speedy, and economical determination of the issues presented.

§ 5.55 Time limitations for service of a complaint.

(a) The time limitations for service of a complaint upon the holder of a license, certificate or document are as follows:

(1) When based exclusively on 46 U.S.C. 7704, service shall be within 10 years after the date of conviction, or at anytime if the person charged is a user of or addicted to the use of a dangerous drug.

(2) For one of the misconduct offenses specified in § 5.59(a) or § 5.61(a), service shall be within five years after commission of the offense alleged therein.

(3) For an act or offense not otherwise provided for, the service shall be within three years after the commission of the act or offense alleged therein.

(b) When computing the period of time specified in paragraphs (a) (2) and (3) of this section there shall be excluded any period or periods of time when the respondent could not attend a hearing or be served charges by reason of being outside of the United States or by reason of being in prison or hospitalized.

[CGD 82-002, 50 FR 32184, Aug. 9, 1985, as amended by USCG-1998-3472, 64 FR 28075, May 24, 1999]

46 CFR Ch. I (10-1-00 Edition)

§ 5.57 Acting under authority of license, certificate or document.

(a) A person employed in the service of a vessel is considered to be acting under the authority of a license, certificate or document when the holding of such license, certificate or document is:

- (1) Required by law or regulation; or
- (2) Required by an employer as a condition for employment.

(b) A person is considered to be acting under the authority of the license, certificate or document while engaged in official matters regarding the license, certificate or document. This includes, but is not limited to, such acts as applying for renewal of a license, taking examinations for upgrading or endorsements, requesting duplicate or replacement licenses, certificates or documents, or when appearing at a hearing under this part.

(c) A person does not cease to act under the authority of a license, certificate or document while on authorized or unauthorized shore leave from the vessel.

§ 5.59 Offenses for which revocation of licenses, certificates or documents is mandatory.

An Administrative Law Judge enters an order revoking a respondent's license, certificate or document when—

(a) A charge of misconduct for wrongful possession, use, sale, or association with dangerous drugs is found proved. In those cases involving marijuana, the Administrative Law Judge may enter an order less than revocation when satisfied that the use, possession or association, was the result of experimentation by the respondent and that the respondent has submitted satisfactory evidence that he or she is cured of such use and that the possession or association will not recur.

(b) The respondent has been a user of, or addicted to the use of, a dangerous drug, or has been convicted for a violation of the dangerous drug laws, whether or not further court action is pending, and such charge is found proved. A conviction becomes final when no issue of law or fact determinative of the respondent's guilt remains to be decided.

§ 5.61 Acts or offenses for which revocation of licenses, certificates, or documents is sought.

(a) An investigating officer seeks revocation of a respondent's license, certificate or document when one of the following acts or offenses is found proved:

- (1) Assault with a dangerous weapon.
- (2) Misconduct resulting in loss of life or serious injury.
- (3) Rape or sexual molestation.
- (4) Murder or attempted murder.
- (5) Mutiny.
- (6) Perversion.
- (7) Sabotage.
- (8) Smuggling of aliens.
- (9) Incompetence.
- (10) Interference with master, ship's officers, or government officials in performance of official duties.
- (11) Wrongful destruction of ship's property.

(b) An investigating officer may seek revocation of a respondent's license, certificate or document when the circumstances of an act or offense found proved or consideration of the respondent's prior record indicates that permitting such person to serve under the license, certificate or document would be clearly a threat to the safety of life or property, or detrimental to good discipline.

§ 5.65 Commandant's decisions in appeal or review cases.

The decisions of the Commandant in cases of appeal or review of decisions of Administrative Law Judges are officially noticed and the principles and policies enunciated therein are binding upon all Administrative Law Judges, unless they are modified or rejected by competent authority.

§ 5.67 Physician-patient privilege.

For the purpose of these proceedings, the physician-patient privilege does not exist between a physician and a respondent.

§ 5.69 Evidence of criminal liability.

Evidence of criminal liability discovered during an investigation or hearing conducted pursuant to this part will be referred to the Attorney General's local representative or other appro-

priate law enforcement authority having jurisdiction over the matter.

§ 5.71 Maritime labor disputes.

Under no circumstances will the Coast Guard exercise its authority for the purpose of favoring any party to a maritime labor controversy. However, if the situation affecting the safety of the vessel or persons on board is presented, the matter shall be thoroughly investigated and when a violation of existing statutes or regulations is indicated, appropriate action will be taken.

Subpart D—Investigations

§ 5.101 Conduct of investigations.

(a) Investigations may be initiated in any case in which it appears that there are reasonable grounds to believe that the holder of a license, certificate or document issued by the Coast Guard may have:

(1) Committed an act of incompetency, misconduct, or negligence while acting under the authority of a license, certificate or document;

(2) Violated or failed to comply with subtitle II of title 46, U.S.C., a regulation prescribed under this subtitle, or any other law or regulations intended to promote marine safety or to protect the navigable waters, while acting under the authority of a license, certificate or document;

(3) Been convicted of a dangerous drug law violation, or has been a user of, or addicted to the use of, a dangerous drug, so as to be subject to the provisions of 46 U.S.C. 7704.

(b) In order to promote full disclosure and facilitate determinations as to the cause of marine casualties, no admission made by a person during an investigation under this part or part 4 of this title may be used against that person in a proceeding under this part, except for impeachment.

§ 5.103 Powers of investigating officer.

During an investigation, the investigating officer may administer oaths, issue subpoenas in accordance with subpart F of this title, and require persons having knowledge of the subject matter of the investigation to answer questions.

§ 5.105

§ 5.105 Course of action available.

During an investigation, the investigating officer may take appropriate action as follows:

- (a) Issue complaint.
- (b) Accept voluntary surrender of a license, certificate or document.
- (c) Accept voluntary deposit of a license, certificate or document.
- (d) Refer the case to others for further action. The investigating officer may refer the case to the Commandant or to an Officer in Charge, Marine Inspection, at any port for completion of administrative action if an adequate basis for action is found and the person under investigation and/or witnesses are not locally available.
- (e) Give a written warning. The investigating officer may give a warning to any person holding a license, certificate or document. Refusal to accept the written warning will normally result in a withdrawal of the warning and the preferral of charges. An unrejected warning will become a part of the person's record.
- (f) Close the case.

[CGD 82-002, 50 FR 32184, Aug. 9, 1985, as amended by USCG-1998-3472, 64 FR 28075, May 24, 1999]

§ 5.107 Service of complaints.

(a) When the investigating officer determines that an S&R proceeding is appropriate, he or she shall prepare and serve a complaint in accordance with 33 CFR part 20.

(b) When the investigating officer serves the complaint, he or she shall also advise the respondent—

- (1) Of the nature of S&R proceedings and their possible results;
- (2) Of the right to be represented at the hearing by another person, who may, but need not, be a lawyer;
- (3) Of the right to obtain witnesses, records, and other evidence by subpoena; and
- (4) That failure or refusal to answer the complaint or to appear at the time, date, and place specified for the hearing may result in a finding of default, which will constitute an admission of the facts alleged in the complaint and the waiver of his or her right to a hearing.

[USCG-1998-3472, 64 FR 28075, May 24, 1999]

46 CFR Ch. I (10-1-00 Edition)

Subpart E—Deposit or Surrender of License, Certificate or Document

§ 5.201 Voluntary deposits in event of mental or physical incompetence.

(a) A holder may deposit a license, certificate, or document with the Coast Guard in any case where there is evidence of mental or physical incompetence. A voluntary deposit is accepted on the basis of a written agreement, the original of which will be given to the holder, which specifies the conditions upon which the Coast Guard will return the license, certificate, or document to the holder.

(b) Where the mental or physical incompetence of a holder of a license, certificate, or document is caused by use of or addiction to dangerous drugs, a voluntary deposit will only be accepted contingent on the following circumstances:

- (1) The holder is enrolled in a bona fide drug abuse rehabilitation program;
- (2) The holder's incompetence did not cause or contribute to a marine casualty;

(3) The incompetence was reported to the Coast Guard by the individual or any other person and was not discovered as a result of a Federal, State or local government investigation; and

(4) The holder has not voluntarily deposited or surrendered a license, certificate, or document, or had a license, certificate, or document revoked for a drug related offense on a prior occasion.

(c) Where the mental or physical incompetence of a holder of a license, certificate, or document is caused by use or addiction to alcohol, a voluntary deposit will only be accepted contingent on the following circumstances:

- (1) The holder is enrolled in a bona fide alcohol abuse rehabilitation program;
- (2) The holder's incompetence did not cause or contribute to a marine casualty; and

(3) The incompetence was reported to the Coast Guard by the individual or any other person and was not discovered as a result of a Federal, State, or local government investigation.

(d) Where the conditions of paragraphs (b) and (c) of this section are not met, the holder may only surrender

Coast Guard, DOT

such license, certificate, or document in accordance with § 5.203.

[CGD 84-099, 52 FR 47535, Dec. 14, 1987]

§ 5.203 Voluntary surrender to avoid hearing.

(a) Any holder may surrender a license, certificate or document to the Coast Guard in preference to appearing at a hearing.

(b) A holder voluntarily surrendering a license, certificate or document shall sign a written statement containing the stipulations that:

(1) The surrender is made voluntarily in preference to appearing at a hearing;

(2) All rights to the license, certificate or document surrendered are permanently relinquished; and,

(3) Any rights with respect to a hearing are waived.

(c) A voluntary surrender of a license, certificate or document to an investigating officer in preference to appearing at a hearing is not to be accepted by an investigating officer unless the investigating officer is convinced that the holder fully realizes the effect of such surrender.

§ 5.205 Return or issuance of a license, certificate of registry, or merchant mariners document.

(a) A person may request the return of a voluntarily deposited license, certificate, or document at any time, provided he or she can demonstrate a satisfactory rehabilitation or cure of the condition which caused the incompetence; has complied with any other conditions of the written agreement executed at the time of deposit; and complies with the physical and professional requirements for issuance of a license, certificate, or document.

(b) Where the voluntary deposit is based on incompetence due to drug abuse, the deposit agreement shall provide that the license, certificate, or document will not be returned until the person:

(1) Successfully completes a bona fide drug abuse rehabilitation program;

(2) Demonstrates complete non-association with dangerous drugs for a minimum of six months after completion of the rehabilitation program; and

(3) Is actively participating in a bona fide drug abuse monitoring program.

§ 5.303

(c) Where the voluntary deposit is based on incompetence due to alcohol abuse, the deposit agreement shall provide that the license, certificate, or document will not be returned until the person:

(1) Successfully completes a bona fide alcohol abuse rehabilitation program; and

(2) Is actively participating in a bona fide alcohol abuse monitoring program.

(d) The voluntary surrender of a license, certificate, or document is the equivalent of revocation of such papers. A holder who voluntarily surrenders a license, certificate, or document must comply with provisions of §§ 5.901 and 5.903 when applying for the issuance of a new license, certificate, or document.

[CGD 84-099, 52 FR 47535, Dec. 14, 1987]

Subpart F—Subpoenas

§ 5.301 Issuance of subpoenas.

(a) Every subpoena shall command the person to whom it is directed to appear at a specified time and place to give testimony or to produce books, papers, documents, or any other evidence, which shall be described with such particularity as necessary to identify what is desired.

(b) The investigating officer may issue subpoenas for the attendance of witnesses or for the production of books, papers, documents, or any other relevant evidence needed by the investigating officer or by the respondent.

(c) After charges have been served upon the respondent the Administrative Law Judge may, either on the Administrative Law Judge's own motion or the motion of the investigating officer or respondent, issue subpoenas for the attendance and the giving of testimony by witnesses or for the production of books, papers, documents, or any other relevant evidence.

§ 5.303 Service of subpoenas on behalf of the respondent.

Service of subpoenas issued on behalf of the respondent is the responsibility of the respondent. However, if the Administrative Law Judge finds that the respondent or respondent's counsel is physically unable to effect the service,

§ 5.305

despite diligent and bona fide attempts to do so, and if the Administrative Law Judge further finds that the existing impediment to the service of the subpoena is peculiarly within the authority of the Coast Guard to overcome, the Administrative Law Judge will have the subpoena delivered to an investigating officer participating in the case for the purpose of effecting service.

§ 5.305 Quashing a subpoena.

Any person subpoenaed to appear to produce evidence at a hearing may request that the subpoena be quashed or modified using the procedures in 33 CFR 20.609.

[USCG-1998-3472, 64 FR 28075, May 24, 1999]

§ 5.307 Enforcement.

Upon application and for good cause shown, or upon its own initiative, the Coast Guard will seek judicial enforcement of subpoenas issued by investigating officers or Administrative Law Judges. This is done by making application to the United States District Court, through the office of the appropriate U.S. Attorney, to issue an order compelling the attendance of, and/or giving of testimony by, witnesses, or for the production of books, papers, documents, or any other relevant evidence.

§ 5.309 Proof of service.

(a) The person serving a subpoena shall make a written statement setting forth the date, time and manner of service and shall return such report with or on a copy of the subpoena to the investigating officer or Administrative Law Judge who issued it. In case of failure to make service of a subpoena, the person assigned to serve such subpoena shall make a written statement setting forth the reasons the subpoena was not served. The statement should be placed on the subpoena or attached to it and returned to the investigating office or Administrative Law Judge who issued the subpoena.

(b) When service of a subpoena is made by certified mail with return receipt to be signed by the addressee only, the person mailing the subpoena shall make a written statement on a

46 CFR Ch. I (10-1-00 Edition)

copy of the subpoena or attached to it, setting forth the date, time and location of the post office where mailed, the post office number assigned thereto. If delivered, the receipt requested shall be returned, by the person receiving the receipt, to the investigating officer or Administrative Law Judge who issued the subpoena. In case the subpoena is not delivered, any information reported by the post office regarding non-delivery shall be given to the investigating officer or Administrative Law Judge who issued the subpoena.

Subpart G—Witness Fees

§ 5.401 Payment of witness fees and allowances.

(a) Duly subpoenaed witnesses, other than Federal government employees, may apply for payment of their attendance as witnesses at an investigation or hearing conducted pursuant to this part by submitting a request for payment (Standard Form 1157) accompanied by any necessary receipts.

(b) Fees and allowances will be paid as provided by 28 U.S.C. 1821, except that a person called to testify as an expert witness may be paid a higher fee to be fixed by the District Commander.

[CGD 82-002, 50 FR 32184, Aug. 9, 1985; 50 FR 35228, Aug. 30, 1985]

Subpart H—Hearings

§ 5.501 General.

A hearing concerning the suspension or revocation of a merchant mariner's license, certificate of registry, or document is a formal adjudication under the Administrative Procedure Act (APA) (5 U.S.C. 551, *et seq.*). It is presided over by, and conducted under the exclusive control of, an ALJ in accordance with applicable requirements in the APA, the rules in this part, and the rules of administrative practice at 33 CFR part 20. The ALJ shall regulate and conduct the hearing so as to bring out all the relevant and material facts and to ensure a fair and impartial hearing.

[USCG-1998-3472, 64 FR 28075, May 24, 1999]

§ 5.521 Verification of license, certificate or document.

(a) The Administrative Law Judge shall require the respondent to produce and present at the opening of the hearing, and on each day the hearing is in session thereafter, all valid licenses, certificates, and/or documents issued by the Coast Guard to the respondent. In the event that the respondent alleges that such license, certificate or document has been lost, misplaced, stolen, destroyed, or is otherwise beyond his ability to produce, the respondent shall execute a lost document affidavit (Form CG-4363). The Administrative Law Judge shall warn the respondent that a willful misstatement of any material item in such affidavit is punishable as a violation of a Federal criminal statute. (See 18 U.S.C. 1001).

(b) When a hearing is continued or delayed, the Administrative Law Judge returns the license, certificate, or document to the respondent: unless a prima facie case has been established that the respondent committed an act or offense which shows that the respondent's service on a vessel would constitute a definite danger to public health, interest or safety at sea.

[CGD82-002, 50 FR 32184, Aug. 9, 1985, as amended by CGD 97-057, 62 FR 51042, Sept. 30, 1997]

§ 5.567 Order.

(a) The Administrative Law Judge enters an order which recites the disposition of the case. When the finding is *not proved*, the Administrative Law Judge issues an order *dismissing* the proceeding with or without prejudice to refile. When the finding is *proved*, the Administrative Law Judge may order an *admonition*, *suspension* with or without probation, or *revocation*.

(b) The order is directed against all licenses, certificates or documents, except that in cases of negligence or professional incompetence, the order is made applicable to specific licenses, certificates or documents. If the Administrative Law Judge determines that the respondent is professionally incompetent in the grade of the license, certificate or document held, but is considered competent in a lower grade, the license, certificate or docu-

ment may be revoked and the issuance of one of a lower grade ordered.

(c) An order must specify whether the license, certificate or document affected is:

- (1) Revoked;
- (2) Suspended outright for a specified period after surrender;
- (3) Suspended for a specified period, but placed on probation for a specific period; or
- (4) Suspended outright for a specified period, followed by a specified period of suspension on probation.

(d) The order will normally state, *that the license, certificate or document is to be surrendered to the Coast Guard immediately*, if the order is one of revocation or includes a period of outright suspension. In cases involving special circumstances, the order may provide for surrender on a certain date.

(e) The time of any period of outright suspension ordered does not commence until the license, certificate or document is surrendered to the Coast Guard. The time of any period of suspension on probation begins at the end of any period of outright suspension or the effective date of the order if there is no outright suspension.

[CGD 82-002, 50 FR 32184, Aug. 9, 1985, as amended by USCG-1998-3472, 64 FR 28075, May 24, 1999]

§ 5.569 Selection of an appropriate order.

(a) This section addresses orders in a general manner. The selection of an appropriate order is the responsibility of the Administrative Law Judge, subject to appeal and review. The investigating officer and the respondent may suggest an order and present argument in support of this suggestion during the presentation of aggravating or mitigating evidence.

(b) Except for acts or offenses for which revocation is mandatory, factors which may affect the order include:

- (1) Remedial actions which have been undertaken independently by the respondent;
- (2) Prior record of the respondent, considering the period of time between prior acts and the act or offense for which presently charged is relevant; and

§ 5.701

(3) Evidence of mitigation or aggravation.

(c) After an order of revocation is entered, the respondent will be given an opportunity to present relevant material on the record for subsequent consideration by the special board convened in the event an application is filed in accordance with subpart L of this part.

(d) Table 5.569 is for the information and guidance of Administrative Law Judges and is intended to promote uniformity in orders rendered. This table should not affect the fair and impartial adjudication of each case on its individual facts and merits. The orders are expressed by a range, in months of outright suspension, considered appropriate for the particular act or offense prior to considering matters in mitigation or aggravation. For instance, without considering other factors, a period of two to four months outright suspension is considered appropriate for *failure to obey a master's written instructions*. An order within the range would not be considered excessive. Mitigating or aggravating factors may make an order greater or less than the given range appropriate. Orders for repeat offenders will ordinarily be greater than those specified.

TABLE 5.569—SUGGESTED RANGE OF AN APPROPRIATE ORDER

Type of offense	Range of order (in months)
Misconduct:	
Failure to obey master's/ship officer's order.	1–3.
Failure to comply with U.S. law or regulations.	1–3.
Possession of intoxicating liquor.	1–4.
Failure to obey master's written instruction.	2–4.
Improper performance of duties related to vessel safety.	2–5.
Failure to join vessel (required crew member).	2–6.
Violent acts against other persons (without injury).	2–6.
Failure to perform duties related to vessel safety.	3–6.
Theft	3–6.
Violent acts against other persons (injury).	4-Revocation.
Use, possession, or sale of dangerous drugs.	Revocation (Note: see § 5.59).
Negligence:	
Negligently performing duties related to vessel navigation.	2–6.

46 CFR Ch. I (10–1–00 Edition)

TABLE 5.569—SUGGESTED RANGE OF AN APPROPRIATE ORDER—Continued

Type of offense	Range of order (in months)
Negligently performing non-navigational duties related to vessel safety.	1–3.
Neglect of vessel navigation duties.	3–6.
Neglect of non-navigational safety related duties.	2–4.
Incompetence	The only proper order for a charge of incompetence found proved is revocation.
Violation of Regulation:	
Refusal to provide specimens for required chemical test..	12–24.
Dangerous drugs (46 U.S.C. 7704).	The only proper order for a charge under 46 U.S.C. 7704 found proved is revocation.

[CGD 82-002, 50 FR 32184, Aug. 9, 1985, as amended by CGD 86-067, 53 FR 47079, Nov. 21, 1989]

Subpart I [Reserved]

Subpart J—Appeals

§ 5.701 Appeals in general.

A party may appeal the decision of an ALJ under the procedures in subpart J of 33 CFR part 20. A party may appeal only the following issues:

(a) Whether each finding of fact rests on substantial evidence.

(b) Whether each conclusion of law accords with applicable law, precedent, and public policy.

(c) Whether the ALJ committed any abuses of discretion.

(d) The ALJ's denial of a motion for his or her disqualification.

[USCG-1998-3472, 64 FR 28075, May 24, 1999]

§ 5.707 Stay of effect of decision and order of Administrative Law Judge on appeal to the Commandant; temporary license, certificate, or document.

(a) A person who has appealed from a decision suspending outright or revoking a license, certificate or document, except for revocation resulting from an offense enumerated in § 5.59, may file a written request for a temporary license, certificate or document. This request must be submitted to the Administrative Law Judge who presided over the case, or to any Officer in Charge,

Coast Guard, DOT

§5.715

Marine Inspection for forwarding to the Administrative Law Judge.

(b) Action on the request is taken by the Administrative Law Judge unless the hearing transcript has been forwarded to the Commandant, in which case, the request is forwarded to the Commandant for final action.

(c) A determination as to the request will take into consideration whether the service of the individual is compatible with the requirements for safety at sea and consistent with applicable laws. If one of the offenses enumerated in §5.61(a) has been found proved, the continued service of the appellant will be presumed not compatible with safety at sea, subject to rebuttal by the appellant. A temporary document or license may be denied for that reason alone.

(d) All temporary documents will provide that they expire not more than six months after issuance or upon service of the Commandant's decision on appeal, whichever occurs first. If a temporary document expires before the Commandant's decision is rendered, it may be renewed, if authorized by the Commandant.

(e) If the request for a temporary document is denied by the Administrative Law Judge, the individual may appeal the denial, in writing, to the Commandant within 30 days after notification of such denial. Any decision by the Commandant to deny is the final agency action.

(f) Copies of the temporary documents issued become a part of the record on appeal.

§5.713 Appeals to the National Transportation Safety Board.

(a) The rules of procedure for appeals to the National Transportation Safety Board from decisions of the Commandant, U.S. Coast Guard, affirming orders of suspension or revocation of licenses, certificates, or documents are in 49 CFR part 825. These rules give the party adversely affected by the Commandant's decision 10 days after service upon him or his attorney of the Commandant's decision to file a notice of appeal with the Board.

(b) In all cases under this part which are appealed to the National Transportation

Safety Board under 49 CFR part 825, the Chief Counsel of the Coast Guard is designated as the representative of the Commandant for service of notices and appearances. Communications should be addressed to Commandant (G-L), U.S. Coast Guard, 2100 2nd St. SW., Washington, DC 20593.

(c) In cases before the National Transportation Safety Board the Chief Counsel of the Coast Guard may be represented by others designated *of counsel*.

§5.715 Stay of effect of Decision of the Commandant on Appeal: Temporary document and/or license pending appeal to National Transportation Safety Board.

(a) A Decision of the Commandant on Appeal affirming an order of revocation, except a revocation resulting from an offense enumerated under §5.59 or suspension that is not placed entirely on probation, which is appealed to the National Transportation Safety Board, may be stayed if, in the Commandant's opinion, the service of the appellant on board a vessel at that time or for the indefinite future would be compatible with the requirements of safety at sea and consistent with applicable laws. If one of the offenses enumerated in §5.61(a) has been found proved, the continued service of the appellant will be presumed not compatible with safety at sea, subject to rebuttal by the appellant; in cases of offenses under §5.61(a), a temporary document or license may be denied for that reason alone.

(b) A stay of the effect of the Decision of the Commandant on Appeal may be granted by the Commandant upon application by the respondent filed with the notice served on the Commandant under 49 CFR 825.5(b).

(c) An Officer in Charge, Marine Inspection, on presentation of an original stay order, issues a temporary document and/or license as specified in the stay order. This document is effective for not more than six months, renewable until such time as the National Transportation Safety Board has completed its review.

Subpart K—Review of Administrative Law Judge’s Decisions in Cases Where Charges Have Been Found Proved

§ 5.801 Commandant’s review.

Any decision of an Administrative Law Judge, in which there has been a finding of *proved*, may be called up for review by the Commandant without procedural formality.

§ 5.803 Record for decision on review.

The transcript of hearing, together with all papers and exhibits filed, shall constitute the record for consideration and review.

§ 5.805 Action on review.

(a) The Commandant may adopt in whole or in part the findings, conclusions, and basis therefor stated by the Administrative Law Judge, may make entirely new findings on the record, or may remand the case to the Administrative Law Judge for further proceedings.

(b) In no case will the review by the Commandant be followed by any order increasing the severity of the Administrative Law Judge’s original order.

(c) The Decision of the Commandant on Review, shall be the final agency action in the absence of a remand.

§ 5.807 Commandant’s Decision on Review.

The Commandant’s Decisions on Review are available for reading purposes at Coast Guard Headquarters, at Offices of District Commanders, Marine Safety Offices and Marine Inspection Offices. (See 33 CFR subpart 1.10.)

Subpart L—Issuance of New Licenses, Certificates or Documents After Revocation or Surrender

§ 5.901 Time limitations.

(a) Any person whose license, certificate or document has been revoked or surrendered for one or more of the offenses described in § 5.59 and § 5.61(a) may, three years after compliance with the Administrative Law Judge’s decision and order or the date of voluntary

surrender, apply for the issuance of a new license, certificate or document.

(b) The three year time period may be waived by the Commandant upon a showing by the individual that, since the occurrence upon which the revocation or surrender was based, the individual has demonstrated his good character in the community for a period exceeding three years.

(c) Any person whose license, certificate or document has been revoked or surrendered for one or more offenses which are not specifically described in § 5.59 or § 5.61(a) may, after one year, apply for the issuance of a new license, certificate or document.

(d) For a person whose license, certificate, or document has been revoked or surrendered for the wrongful simple possession or use of dangerous drugs, the three year time period may be waived by the Commandant upon a showing that the individual:

(1) Has successfully completed a bona fide drug abuse rehabilitation program;

(2) Has demonstrated complete non-association with dangerous drugs for a minimum of one year following completion of the rehabilitation program and;

(3) Is actively participating in a bona fide drug abuse monitoring program.

(e) For a person whose license, certificate or document has been revoked or surrendered for offenses related to alcohol abuse, the waiting period may be waived by the Commandant upon a showing that the individual has successfully completed a bona fide alcohol abuse rehabilitation program and is actively participating in a bona fide alcohol abuse monitoring program.

(f) The waivers specified under subparagraphs (d) or (e) of this section may only be granted once to each person.

[CGD 82–002, 50 FR 32184, Aug. 9, 1985, as amended by CGD 84–099, 52 FR 47535, Dec. 14, 1987]

§ 5.903 Application procedures.

(a) An application form for a new license, certificate or document may be obtained from any Officer in Charge, Marine Inspection.

(b) The completed application and letter must be addressed to the Commandant, U.S. Coast Guard, 2100 2nd

Coast Guard, DOT

§6.01

St. SW., Washington, DC 20593, and must be delivered in person to the nearest Officer in Charge, Marine Inspection.

(c) The letter is an informal request for the issuance of a new license, certificate or document and should include the following:

(1) A letter from each employer during the last three years attesting to the individual's work record;

(2) Information supportive of rehabilitation or cure when the license, certificate or document was revoked because of incompetency or association with dangerous drugs; and

(3) Any other information which may be helpful in arriving at a determination in the matter.

(d) The Officer in Charge, Marine Inspection, forwards the letter and application, together with an evaluation and recommendation, to the Commandant.

§5.905 Commandant's decision on application.

(a) The applicant's letter and application form, as well as the evaluation and recommendation, are referred to a special board appointed by the Commandant. The board examines all the material submitted with the application and such other information as may, in the judgment of the board, be considered appropriate. The board shall submit its findings and recommendation to the Commandant.

(b) The Commandant shall determine whether or not a new license, certificate or document will be issued. The applicant will be notified by letter of such determination.

PART 6—WAIVERS OF NAVIGATION AND VESSEL INSPECTION LAWS AND REGULATIONS¹

Sec.

6.01 Procedures for effecting individual waivers of navigation and vessel inspection laws and regulations.

6.04 Vessels requisitioned by the United States for emergency evacuation.

6.06 Vessels operated by or chartered to Military Sealift Command.

6.07 Chronological record of seaman's previous employment.

AUTHORITY: Act Dec. 27, 1950, Ch. 1155, secs. 1, 2, 64 Stat. 1120 (see 46 U.S.C. App. note prec. 1); 49 CFR 1.46.

§6.01 Procedures for effecting individual waivers of navigation and vessel inspection laws and regulations.

(a) It is hereby found necessary in the interest of national defense to waive compliance with the navigation and vessel inspection laws administered by the Coast Guard, as well as the regulations issued thereunder and published in 33 CFR chapter I or in this chapter, to the extent and in the manner and upon the terms and conditions as set forth in this section.

(b) An application requesting that a waiver be made effective with respect to a particular vessel may be made by any authorized representative of an agency of the United States Government or any other interested person (including the master, agent, or owner of the vessel involved). Except as provided in paragraph (d) of this section, the application shall be in writing. The application shall be delivered to the Coast Guard District Commander or to his designated representative at the port or place where the vessel is located. In the case of a vessel in any foreign port or place, the application shall be made to the designated representative of the Commandant at such port or place, or if the Coast Guard has not established facilities in such port or place, to the nearest designated representative of the Commandant at a port or place where such facilities have been established. Every application shall contain a statement of the particular provisions of law with respect to which waiver of compliance is requested, a certification that the waiver of compliance with such laws with respect to the vessel involved is necessary in the interest of national defense and, an outline of the facts upon which such certification is based. The Coast Guard District Commander (or his designated representative or the designated representative of the Commandant, as the case may be) shall promptly examine every application for the purpose of determining whether the necessity for prompt action is such as to require that the waiver be made effective by him without reference to

¹ This is also codified in 33 CFR part 19.

§ 6.04

the Commandant. In any case in which it appears to the Coast Guard officer concerned that reference of the application to the Commandant for action would not delay the sailing of the vessel or otherwise be contrary to the interest of national defense, the application shall be so referred. In all other cases such Coast Guard officer shall give immediate consideration to the application and if he reaches the conclusion that the urgency of the situation outweighs the marine hazard involved, then such waiver shall be made effective in regard to such vessel to the extent and under the circumstances specified by him.

(c) The Coast Guard officer making such a waiver effective pursuant to paragraph (b) of this section shall immediately prepare, in triplicate, an order setting forth the name of the vessel involved, the laws (also regulations, if any) with respect to which the waiver is effective, the extent to which compliance with such laws (also regulations, if any) is waived, and the period for which the waiver shall be effective. If practicable, one copy of this order shall be delivered to the master of the vessel involved before such vessel sails. In any case where the order is not delivered to the master, it shall be delivered to the owner, operator, or agent of the vessel without delay. One copy of the order shall be transmitted to the Commandant and the remaining copy kept on file.

(d) In any case of extreme urgency the application for a waiver may be made orally and if the Coast Guard District Commander (or his designated representative or the designated representative of the Commandant, as the case may be) reaches the conclusion referred to in paragraph (b) of this section, the waiver shall be made effective without further delay, subject to the condition that the application be reduced to writing and delivered within such period after the date of the oral request as the Coast Guard officer making the waiver effective shall specify in the order.

(e) No penalty shall be imposed because of failure to comply with any provision of law (or regulation, if any), the waiver of which has been made ef-

46 CFR Ch. I (10-1-00 Edition)

fective pursuant to the requirements in this section.

[CGFR 51-10, 16 FR 1959, Mar. 1, 1951. Redesignated by CGFR 69-123, 34 FR 19076, Dec. 2, 1969; CGD 96-041, 61 FR 50726, Sept. 27, 1996]

§ 6.04 Vessels requisitioned by the United States for emergency evacuation.

Pursuant to the request of the Acting Secretary of Defense, dated November 21, 1951, made under the provisions of section 1 of Public Law 891, 81st Congress, approved December 27, 1950, compliance with the provisions of the navigation and vessel inspection laws administered by the United States Coast Guard is hereby waived, as well as the regulations issued thereunder and published in 33 CFR chapter I or in this chapter, to the extent necessary to permit the operation of vessels which might be requisitioned by the United States for the purpose of emergency evacuation.

[CGFR 51-61, 16 FR 12792, Dec. 20, 1951. Redesignated by CGFR 69-123, 34 FR 19076, Dec. 2, 1969]

§ 6.06 Vessels operated by or chartered to Military Sealift Command.

(a) Pursuant to the request of the Deputy Secretary of Defense, dated August 6, 1958, and to the request of the Assistant Secretary of Defense, Installations and Logistics, dated May 23, 1964, made under the provisions of section 1 of Public Law 891, 81st Congress, approved December 27, 1950 (64 Stat. 1120; 46 U.S.C., note preceding section 1), and their findings that a waiver is necessary in the interest of national defense, compliance with the provisions of the navigation and vessel inspection laws administered by the United States Coast Guard, as well as the regulations issued thereunder and contained in 33 CFR chapter I, or in this chapter, is hereby waived to the extent and upon the terms and conditions as set forth in this section, in order to permit vessels operated by or chartered to the Military Sealift Command to carry out their assigned missions.

(b) An application requesting that this waiver be made effective with respect to a particular vessel may be

Coast Guard, DOT

§6.07

made by the Commander, Military Sealift Command, or any one of his duly designated representatives. Except as provided in paragraph (e) of this section, the application shall be in writing. The application shall be delivered to the Coast Guard District Commander or to his designated representative at the port or place where the vessel is located. In the case of a vessel in any foreign port or place, the application shall be made to the designated representative of the Commandant at such port or place, or if the Coast Guard has not established facilities in such port or place, to the nearest designated representative of the Commandant at a port or place where such facilities have been established, or to the Commandant (G-MOC), U.S. Coast Guard, Washington, DC 20593-0001. Every application shall:

(1) Describe the laws and/or regulations by appropriate references and/or subjects with respect to which the waiver of compliance is desired;

(2) Contain a certification that the waiver of compliance with such laws and/or regulations with respect to the vessel involved is necessary in the interest of national defense and is necessary for the Military Sea Transportation Service to carry out an assigned mission;

(3) The name and official number of the vessel involved (including the names of master, agent, and owner of the vessel involved); and,

(4) For how long the waiver is needed.

(c) The Coast Guard officer making the waiver in paragraph (a) of this section effective for a particular vessel shall immediately prepare, in quadruplicate, an order setting forth:

(1) The name and official number of the vessel involved;

(2) The laws and/or regulations with respect to which the waiver is effective;

(3) The extent to which compliance with such laws and/or regulations is waived; and,

(4) The period for which the waiver shall be effective.

(d) If practicable, one copy of this waiver order shall be delivered to the master of the vessel involved before such vessel sails. In any case where the waiver order is not delivered to the

master, it shall be delivered to the owner, operator, or agent of the vessel without delay. One copy of the waiver order shall be delivered to the Commander, Military Sealift Command, or his duly designated representative, who submitted the application. One copy of the waiver order shall be transmitted to the Commandant (G-MOC) and the remaining copy kept on file.

(e) In any case of extreme urgency, the application for a waiver order may be made orally and if the Coast Guard District Commander (or his designated representative, or the designated representative of the Commandant, or the Commandant, as the case may be), determines that the conditions in this section have been met, the waiver order shall be made effective without further delay, subject to the condition that the application be reduced to writing and delivered within such period after the date of the oral request as the Coast Guard officer making the waiver effective shall specify in the confirming written waiver order.

(f) No penalty shall be imposed because of failure to comply with any provision of law and/or regulation, the waiver of which has been made effective pursuant to the requirements of this section.

(g) This waiver order shall remain in effect until terminated by proper authority and notice of cancellation is published in the FEDERAL REGISTER.

[CGFR 64-86, 30 FR 89, Jan. 6, 1965. Redesignated by CGFR 69-123, 34 FR 19076, Dec. 2, 1969, and amended by CGD 88-070, 53 FR 34533, Sept. 7, 1988; CGD 88-070, 54 FR 3038, Jan. 23, 1989; CGD 95-072, 60 FR 50459, Sept. 29, 1995; CGD 96-041, 61 FR 50726, Sept. 27, 1996]

§6.07 Chronological record of seaman's previous employment.

(a) Compliance is hereby waived with regard to the provisions of 46 U.S.C. 10311(c), to the extent necessary to permit the Commandant of the United States Coast Guard to issue a chronological record of a seaman's previous employment on a single document, in lieu of making individual entry in a duplicate continuous discharge book or furnishing individual certificates of discharge.

(b) It is hereby found that the waiving of the provisions of 46 U.S.C.

Pt. 7

46 CFR Ch. I (10–1–00 Edition)

10311(c), is necessary in the interest of national defense.

[CGFR 51–9, 16 FR 1830, Feb. 27, 1951, as amended by CGFR 59–4a, 24 FR 3055, Apr. 21, 1959. Redesignated by CGFR 69–123, 34 FR 19076, Dec. 2, 1969, as amended by CGD 95–028, 62 FR 51195, Sept. 30, 1997]

PART 7—BOUNDARY LINES

GENERAL

Sec.

- 7.1 General purpose of boundary lines.
- 7.5 Rules for establishing boundary lines.

ATLANTIC COAST

- 7.10 Eastport, ME to Cape Ann, MA.
- 7.15 Massachusetts Bay, MA.
- 7.20 Nantucket Sound, Vineyard Sound, Buzzards Bay, Narragansett Bay, MA, Block Island Sound and easterly entrance to Long Island Sound, NY.
- 7.25 Montauk Point, NY to Atlantic Beach, NY.
- 7.30 New York Harbor, NY.
- 7.35 Sandy Hook, NJ to Cape May, NJ.
- 7.40 Delaware Bay and tributaries.
- 7.45 Cape Henlopen, DE to Cape Charles, VA.
- 7.50 Chesapeake Bay and tributaries.
- 7.55 Cape Henry, VA to Cape Fear, NC.
- 7.60 Cape Fear, NC to Sullivan's Island, SC.
- 7.65 Charleston Harbor, SC.
- 7.70 Folly Island, SC to Hilton Head Island, SC.
- 7.75 Savannah River/Tybee Roads.
- 7.80 Tybee Island, GA to St. Simons Island, GA.
- 7.85 St. Simons Island, GA to Little Talbot Island, FL.
- 7.90 St. Johns River, FL.
- 7.95 St. Johns Point, FL to Miami Beach, FL.
- 7.100 Florida Reefs and Keys from Miami, FL to Marquesas Keys, FL.

GULF COAST

- 7.105 Marquesas Keys, FL to Rio Grande, TX.

HAWAII

- 7.110 Mamala Bay, HI.

PACIFIC COAST

- 7.115 Santa Catalina Island, CA.
- 7.120 Mexican/United States border to Point Fermin, CA.
- 7.125 Point Vicente, CA to Point Conception, CA.
- 7.130 Point Conception, CA to Point Sur, CA.
- 7.135 Point Sur, CA to Cape Blanco, OR.
- 7.140 Cape Blanco, OR to Cape Flattery, WA.

- 7.145 Strait of Juan de Fuca, Haro Strait and Strait of Georgia, WA.

ALASKA

- 7.150 Canadian (BC) and United States (AK) Borders to Cape Spencer, AK.
- 7.155 Cape Spencer, AK to Cape St. Elias, AK.
- 7.160 Point Whittshed, AK to Aialik Cape, AK.
- 7.165 Kenai Peninsula, AK to Kodiak Island, AK.
- 7.170 Alaska Peninsula, AK to Aleutian Islands, AK.
- 7.175 Alaska Peninsula, AK to Nunivak, AK.
- 7.180 Kotzebue Sound, AK.

AUTHORITY: 14 U.S.C. 633; 33 U.S.C. 151; 49 CFR 1.46.

SOURCE: CGD 81–058, 50 FR 25230, June 18, 1985, unless otherwise noted.

GENERAL

§7.1 General purpose of boundary lines.

The lines in this part delineate the application of the following U.S. statutes: 33 U.S.C. 152 relating to the length of towing hawsers; 33 U.S.C. 1201 *et seq.*, the Vessel Bridge-to-Bridge Radiotelephone Act; 46 U.S.C. 5102(b)(6), which exempt from load line requirements certain vessels on domestic voyages; 46 U.S.C. 3301(6) requiring the inspection of seagoing barges which are defined in 46 U.S.C. 2101(32); 46 U.S.C. 3301(7) requiring the inspection of seagoing motor vessels which are defined in 46 U.S.C. 2101(33); 46 U.S.C. 3302(d) which exempts from inspection requirements certain vessels under 150 gross tons that operate within the waters of southeastern Alaska and the State of Washington; and 46 U.S.C. 8304, "Implementing the Officers' Competency Certificates Convention, 1936."

[CGD 81–058, 50 FR 25230, June 18, 1985, as amended by CGD 95–028, 62 FR 51195, Sept. 30, 1997; USCG–1998–4442, 63 FR 52188, Sept. 30, 1998]

§7.5 Rules for establishing boundary lines.

(a) For application of the Vessel Bridge-to-Bridge Radiotelephone Act, 33 U.S.C. 1201 *et seq.*, the line is 3 miles seaward of the baseline from which the territorial sea is measured.

(b) Barges of 100 gross tons and over operating on the sheltered waters of British Columbia as defined in the

Coast Guard, DOT

§ 7.35

United States-Canada treaty of 1933 (49 Stat. 2685, TS 869) are not required to be inspected as seagoing barges under 46 U.S.C. 3301.

(c) Except as otherwise described in this part, Boundary Lines are lines drawn following the general trend of the seaward, highwater shorelines and lines continuing the general trend of the seaward, highwater shorelines across entrances to small bays, inlets and rivers.

ATLANTIC COAST

§ 7.10 Eastport, ME to Cape Ann, MA.

(a) A line drawn from the easternmost extremity of Kendall Head to latitude 44°54'45" N. longitude 66°58'30" W.; thence to the range marker located in approximate position latitude 44°51'45" N. longitude 66°59" W.

(b) A line drawn from West Quoddy Head Light to latitude 44°48.5' N. longitude 66°56.4' W. (Sail Rock Lighted Whistle Buoy "1"); thence to latitude 44°37.5' N. longitude 67°09.8' W. (Little River Lighted Whistle Buoy "2LR"); thence to latitude 44°14.5' N. longitude 67°57.2' W. (Frenchman Bay Approach Lighted Whistle Buoy "FB"); thence to Mount Desert Light; thence to Matinicus Rock Light; thence to Monhegan Island Light; thence to latitude 43°31.6' N. longitude 70°05.5' W. (Portland Lighted Horn Buoy "P"); thence to Boon Island Light; thence to latitude 42°37.9' N. longitude 70°31.2' W. (Cape Ann Lighted Whistle Buoy "2").

§ 7.15 Massachusetts Bay, MA.

A line drawn from latitude 42°37.9' N. longitude 70°31.2' W. (Cape Ann Lighted Whistle Buoy "2") to latitude 42°22.7' N. longitude 70°47.0' W. (Boston Lighted Horn Buoy "B"); thence to Race Point Light.

§ 7.20 Nantucket Sound, Vineyard Sound, Buzzards Bay, Narragansett Bay, MA, Block Island Sound and easterly entrance to Long Island Sound, NY.

(a) A line drawn from Chatham Light to latitude 41°36.1' N. longitude 69°51.1' W. (Pollack Rip Entrance Lighted Horn Buoy "PR"); thence to latitude 41°26.0' N. longitude 69°46.2' W. (Great Round Shoal Channel Lighted Buoy "2"); thence to Sankaty Head Light.

(b) A line drawn from the westernmost extremity of Nantucket Island to the southwesternmost extremity of Wasque Point, Chappaquiddick Island.

(c) A line drawn from Gay Head Light to Block Island Southeast Light; thence to Montauk Point Light on the easterly end of Long Island.

§ 7.25 Montauk Point, NY to Atlantic Beach, NY.

(a) A line drawn from Shinnecock East Breakwater Light to Shinnecock West Breakwater Light.

(b) A line drawn from Moriches Inlet East Breakwater Light to Moriches Inlet West Breakwater Light.

(c) A line drawn from Fire Island Inlet Breakwater Light 348° true to the southernmost extremity of the spit of land at the western end of Oak Beach.

(d) A line drawn from Jones Inlet Light 322° true across the southwest tangent of the island on the north side of Jones Inlet to the shoreline.

§ 7.30 New York Harbor, NY.

A line drawn from East Rockaway Inlet Breakwater Light to Ambrose Light; thence to Highlands Light (north tower).

§ 7.35 Sandy Hook, NJ to Cape May, NJ.

(a) A line drawn from Shark River Inlet North Breakwater Light "2" to Shark River Inlet South Breakwater Light "1".

(b) A line drawn from Manasquan Inlet North Breakwater Light to Manasquan Inlet South Breakwater Light.

(c) A line drawn along the submerged Barnegat Inlet North Breakwater to Barnegat Inlet North Breakwater Light "2"; thence to Barnegat Inlet Light "5"; thence along the submerged Barnegat Inlet South Breakwater to shore.

(d) A line drawn from the seaward tangent of Long Beach Island to the seaward tangent of Pullen Island across Beach Haven and Little Egg Inlets.

(e) A line drawn from the seaward tangent of Pullen Island to the seaward tangent of Brigantine Island across Brigantine Inlet.

§ 7.40

(f) A line drawn from the seaward extremity of Absecon Inlet North Jetty to Atlantic City Light.

(g) A line drawn from the southernmost point of Longport at latitude 39°18.2' N. longitude 74°32.2' W. to the northeasternmost point of Ocean City at latitude 39°17.6' N. longitude 74°33.1' W. across Great Egg Harbor Inlet.

(h) A line drawn parallel with the general trend of the seaward, highwater shoreline across Corson Inlet.

(i) A line formed by the centerline of the Townsend Inlet Highway Bridge.

(j) A line formed by the shoreline of Seven Mile Beach and Hereford Inlet Light.

§ 7.40 Delaware Bay and tributaries.

A line drawn from Cape May Inlet East Jetty Light to latitude 38°55.8' N. longitude 74°51.4' W. (Cape May Harbor Inlet Lighted Bell Buoy "2CM"); thence to latitude 38°48.9' N. longitude 75°02.3' W. (Delaware Bay Entrance Channel Lighted Buoy "8"); thence to the northernmost extremity of Cape Henlopen.

§ 7.45 Cape Henlopen, DE to Cape Charles, VA.

(a) A line drawn from the easternmost extremity of Indian River Inlet North Jetty to latitude 38°36.5' N. longitude 75°02.8' W. (Indian River Inlet Lighted Gong Buoy "1"); thence to Indian River Inlet South Jetty Light.

(b) A line drawn from Ocean City Inlet Light "6" to latitude 38°19.4' N. longitude 75°05.0' W. (Ocean City Inlet Entrance Lighted Buoy "4"); thence to latitude 38°19.3' N. longitude 75°05.1' W. (Ocean City Inlet Entrance Lighted Buoy "5"); thence to the easternmost extremity of the south breakwater.

(c) A line drawn from Assateague Beach Tower Light to latitude 37°50.2' N. longitude 75°24.9' W. (Chincoteague Inlet Lighted Bell Buoy "CI"); thence to the tower charted at latitude 37°52.6' N. longitude 75°26.7' W.

(d) A line drawn from the southernmost extremity of Cedar Island to latitude 37°34.7' N. longitude 75°36.0' W. (Wachapreague Inlet Entrance Lighted Buoy "1"); thence due south to shore at Parramore Beach.

46 CFR Ch. I (10-1-00 Edition)

(e) A line drawn from the seaward tangent of Parramore Beach to the lookout tower on the northern end of Hog Island chartered in approximate position latitude 37°27.2' N. longitude 75°40.5' W.

§ 7.50 Chesapeake Bay and tributaries.

A line drawn from Cape Charles Light to latitude 36°56.8' N. longitude 75°55.1' W. (North Chesapeake Entrance Lighted Gong Buoy "NCD"); thence to latitude 36°54.8' N. longitude 75°55.6' W. (Chesapeake Bay Entrance Lighted Bell Buoy "CBC"); thence to latitude 36°55.0' N. longitude 75°58.0' W. (Cape Henry Buoy "1"); thence to Cape Henry Light.

§ 7.55 Cape Henry, VA to Cape Fear, NC.

(a) A line drawn from Rudee Inlet Jetty Light "2" to latitude 36°50' N. longitude 75°56.7' W.; thence to Rudee Inlet Jetty Light "1".

(b) A line drawn from Bodie Island Light to latitude 35°49.3' N. longitude 75°31.9' W. (Oregon Inlet Approach Lighted Whistle Buoy "OI"); thence to Oregon Inlet Radiobeacon.

(c) A line drawn from Hatteras Inlet Light 255° true to the eastern end of Ocracoke Island.

(d) A line drawn from the westernmost extremity of Ocracoke Island at latitude 35°04' N. longitude 76°00.8' W. to the northeasternmost extremity of Portsmouth Island at latitude 35°03.7' N. longitude 76°02.3' W.

(e) A line drawn across Drum Inlet parallel with the general trend of the seaward, highwater shoreline.

(f) A line drawn from the southernmost extremity of Cape Lookout to latitude 34°38.4' N. longitude 76°40.6' W. (Beaufort Inlet Lighted Bell Buoy "2BI"); thence to the seaward extremity of the Beaufort Inlet west jetty.

(g) A line drawn from the seaward extremity of Masonboro Inlet north jetty to latitude 34°10.3' N. longitude 77°48.0' W. (Masonboro Inlet Lighted Whistle Buoy "A"); thence to the beach in approximate position latitude 34°10' N. longitude 77°49.4' W.

§ 7.60 Cape Fear, NC to Sullivan's Island, SC.

(a) A line drawn from the southernmost extremity to Cape Fear to latitude 33°49.5' N. longitude 78°03.7' W. (Cape Fear River Entrance Lighted Bell Buoy "2CF"); thence to Oak Island Light.

(b) A line drawn from the southernmost extremity of Bird Island at approximate position latitude 33°51.2' N. longitude 78°32.6' W. to latitude 33°50.3' N. longitude 78°32.5' W. (Little River Inlet Entrance Lighted Whistle Buoy "2LR"); thence to the northeasternmost extremity of Waties Island at approximate position latitude 33°51.2' N. longitude 78°33.6' W.

(c) A line drawn from the seaward extremity of Murrells Inlet north jetty to latitude 33°31.5' N. longitude 79°01.6' W. (Murrells Inlet Lighted Bell Buoy "MI"); thence to Murrells Inlet South Jetty Light.

(d) A line drawn from Georgetown Light to latitude 33°11.6' N. longitude 79°05.4' W. (Winyah Bay Lighted Bell Buoy "2WB"); thence to the southernmost extremity of Sand Island.

§ 7.65 Charleston Harbor, SC.

A line drawn from Charleston Light on Sullivan's Island to latitude 32°40.7' N. longitude 79°42.9' W. (Charleston Lighted Whistle Buoy "2C"); thence to Folly Island Loran Tower (latitude 32°41.0' N. longitude 79°53.2' W.).

§ 7.70 Folly Island, SC to Hilton Head Island, SC.

(a) A line drawn from the southernmost extremity of Folly Island to latitude 32°35' N. longitude 79°58.2' W. (Stono Inlet Lighted Whistle Buoy "IS"); thence to Kiawah Island bearing approximately 307° true.

(b) A line drawn from the southernmost extremity of Kiawah Island to latitude 32°31' N. longitude 80°07.8' W. (North Edisto River Entrance Lighted Whistle Buoy "2NE"); thence to Botany Bay Island in approximate position latitude 32°33.1' N. longitude 80°12.7' W.

(c) A line drawn from the microwave antenna tower on Edisto Beach charted in approximate position latitude 32°29.3' N. longitude 80°19.2' W. across St. Helena Sound to the abandoned lighthouse tower on Hunting Island

charted in approximate position latitude 32°22.5' N. longitude 80°26.5' W.

(d) A line drawn from the abandoned lighthouse on Hunting Island in approximate position latitude 32°22.5' N. longitude 80°26.2' W. to latitude 32°18' N. longitude 80°25' W.; thence to the standpipe on Fripp Island in approximate position latitude 32°19' N. longitude 80°28.7' W.

(e) A line drawn from the westernmost extremity of Bull Point on Capers Island to latitude 32°04.8' N. longitude 80°34.9' W. (Port Royal Sound Lighted Whistle Buoy "2PR"); thence to the easternmost extremity of Hilton Head at latitude 32°13.2' N. longitude 80°40.1' W.

§ 7.75 Savannah River/Tybee Roads.

A line drawn from the southwesternmost extremity of Braddock Point to latitude 31°58.3' N. longitude 80°44.1' W. (Tybee Lighted Whistle Buoy "T"); thence to the southeasternmost extremity of Little Tybee Island bearing approximately 269° true.

§ 7.80 Tybee Island, GA to St. Simons Island, GA.

(a) A line drawn from the southernmost extremity of Savannah Beach on Tybee Island 255° true across Tybee Inlet to the shore of Little Tybee Island south of the entrance to Buck Hammock Creek.

(b) A line drawn from the southernmost extremity of Little Tybee Island at Beach Hammock to the easternmost extremity of Wassaw Island.

(c) A line drawn from Wassaw Island in approximate position latitude 31°52.5' N. longitude 80°58.5' W. to latitude 31°48.3' N. longitude 80°56.8' W. (Ossabaw Sound North Channel Buoy "OS"); thence to latitude 31°39.3' N. longitude 81°02.3' W. (St. Catherine's Sound Buoy "St. C."); thence to latitude 31°31.2' N. longitude 81°03.8' W. (Sapelo Sound Buoy "S"); thence to the easternmost extremity of Blackbeard Island at Northeast Point.

(d) A line drawn from the southernmost extremity of Blackbeard Island to latitude 31°19.4' N. longitude 81°11.5' W. (Doboy Sound Lighted Buoy "D"); thence to latitude 31°04.1' N. longitude 81°16.7' W. (St. Simons Lighted Whistle Buoy "ST S").

§ 7.85 St. Simons Island, GA to Little Talbot Island, FL.

(a) A line drawn from latitude 31°04.1' N. longitude 81°16.7' W. (St. Simons Lighted Whistle Buoy "ST S") to latitude 30°42.7' N. longitude 81°19.0' W. (St. Mary's Entrance Lighted Whistle Buoy "1"); thence to Amelia Island Light.

(b) A line drawn from the southernmost extremity of Amelia Island to latitude 30°29.4' N. longitude 81°22.9' W. (Nassau Sound Approach Buoy "6A"); thence to the northeasternmost extremity of Little Talbot Island.

§ 7.90 St. Johns River, FL.

A line drawn from the southeasternmost extremity of Little Talbot (Spike) Island to latitude 30°23.8' N. longitude 81°20.3' W. (St. Johns Lighted Whistle Buoy "2 STJ"); thence to St. Johns Light.

§ 7.95 St. Johns Point, FL to Miami Beach, FL.

(a) A line drawn from the seaward extremity of St. Augustine Inlet north jetty to latitude 29°55' N. longitude 81°15.3' W. (St. Augustine Lighted Whistle Buoy "ST. A."); thence to the seaward extremity of St. Augustine Inlet south jetty.

(b) A line formed by the centerline of the highway bridge over Matanzas Inlet.

(c) A line drawn from the seaward extremity of Ponce de Leon Inlet north jetty to latitude 29°04.7' N. longitude 80°54' W. (Ponce de Leon Inlet Lighted Bell Buoy "2"); thence to Ponce de Leon Inlet Approach Light.

(d) A line drawn from Canaveral Harbor Approach Channel Range Front Light to latitude 28°23.7' N. longitude 80°32.2' W. (Canaveral Bight Wreck Lighted Buoy "WR6"); thence to the radio tower on Canaveral Peninsula in approximate position latitude 28°22.9' N. longitude 80°36.6' W.

(e) A line drawn across the seaward extremity of the Sebastian Inlet Jetties.

(f) A line drawn from the seaward extremity of the Fort Pierce Inlet North Jetty to latitude 27°28.5' N. longitude 80°16.2' W. (Fort Pierce Inlet Lighted Whistle Buoy "2"); thence to the tank located in approximate position latitude 27°27.2' N. longitude 80°17.2' W.

(g) A line drawn from the seaward extremity of St. Lucie Inlet north jetty to latitude 27°10' N. longitude 80°08.4' W. (St. Lucie Inlet Entrance Lighted Whistle Buoy "2"); thence to Jupiter Island bearing approximately 180° true.

(h) A line drawn from the seaward extremity of Jupiter Inlet North Jetty to the northeast extremity of the concrete apron on the south side of Jupiter Inlet.

(i) A line drawn from the seaward extremity of Lake Worth Inlet North Jetty to latitude 26°46.4' N. longitude 80°01.5' W. (Lake Worth Inlet Lighted Bell Buoy "2LW"); thence to Lake Worth Inlet Lighted Buoy "3"; thence to the seaward extremity of Lake Worth Inlet South Jetty.

(j) A line drawn across the seaward extremity of the Boynton Inlet Jetties.

(k) A line drawn from Boca Raton Inlet North Jetty Light "2" to Boca Raton Inlet South Jetty Light "1".

(l) A line drawn from Hillsboro Inlet Light to Hillsboro Inlet Entrance Light "2"; thence to Hillsboro Inlet Entrance Light "1"; thence west to the shoreline.

(m) A line drawn from the tower located in approximate position latitude 26°06.9' N. longitude 80°06.4' W. to latitude 26°05.5' N. longitude 80°04.8' W. (Port Everglades Lighted Whistle Buoy "1"); thence to the signal tower located in approximate position latitude 26°05.5' N. longitude 80°06.5' W.

(n) A line drawn from the seaward extremity of Bakers Haulover Inlet north jetty 090° true to longitude 80°07.2' W.; thence to the seaward extremity of Bakers Haulover Inlet south jetty.

§ 7.100 Florida Reefs and Keys from Miami, FL to Marquesas Keys, FL.

(a) A line drawn from the tower located in approximate position latitude 25°46.7' N. longitude 80°08' W. to latitude 25°46.1' N. longitude 80°05.0' W. (Miami Lighted Whistle Buoy "M"); thence to Fowey Rocks Light (latitude 25°35.4' N. longitude 80°05.8' W.); thence to Pacific Reef Light (latitude 25°22.3' N. longitude 80°08.5' W.) thence to Carysfort Reef Light (latitude 25°13.3' N. longitude 80°12.7' W.); thence to Molasses Reef Light "10" (latitude 25°00.7' N. longitude 80°22.6' W.); thence to Alligator Reef Light (latitude 24°51.1' N.

Coast Guard, DOT

§ 7.125

longitude 80°37.1' W.); thence to Tennessee Reef Light (latitude 24°44.7' N. longitude 80°46.9' W.); thence to Sombrero Key Light (latitude 24°37.6' N. longitude 81°06.6' W.); thence to American Shoal Light (latitude 24°31.5' N. longitude 81°31.2' W.); thence to latitude 24°27.7' N. longitude 81°48.1' W. (Key West Entrance Lighted Whistle Buoy); thence to Cosgrove Shoal Light (latitude 24°27.5' N. longitude 82°11.2' W.); thence due north to a point 12 miles from the baseline from which the territorial sea is measured in approximate position latitude 24°47.5' N. longitude 82°11.2' W.

GULF COAST

§ 7.105 Marquesas Keys, FL to Rio Grande, TX.

(a) A line drawn from Marquesas Keys, Florida at approximate position latitude 24°47.5' N. longitude 82°11.2' W. along the 12-mile line which marks the seaward limits of the contiguous zone (as defined in 33 CFR part 2.05-15) to Rio Grande, Texas at approximate position latitude 25°58.6' N. longitude 96°55.5' W.

HAWAII

§ 7.110 Mamala Bay, HI.

A line drawn from Barbers Point Light to Diamond Head Light.

PACIFIC COAST

§ 7.115 Santa Catalina Island, CA.

(a) A line drawn from the northernmost point of Lion Head to the north tangent of Bird Rock Island; thence to the northernmost point of Blue Cavern Point.

(b) A line drawn from White Rock to the northernmost point of Abalone Point.

§ 7.120 Mexican/United States border to Point Fermin, CA.

(a) A line drawn from the southerly tower of the Coronado Hotel in approximate position latitude 32°40.8' N. longitude 117°10.6' W. to latitude 32°39.1' N. longitude 117°13.6' W. (San Diego Bay Channel Lighted Bell Buoy "5"); thence to Point Loma Light.

(b) A line drawn from Mission Bay South Jetty Light "2" to Mission Bay North Jetty Light "1".

(c) A line drawn from Oceanside South Jetty Light "4" to Oceanside Breakwater Light "3".

(d) A line drawn from Dana Point Jetty Light "6" to Dana Point Breakwater Light "5".

(e) A line drawn from Newport Bay East Jetty Light "4" to Newport Bay West Jetty Light "3".

(f) A line drawn from Anaheim Bay East Jetty Light "6" to Anaheim Bay West Jetty Light "5"; thence to Long Beach Breakwater East End Light "1". A line drawn from Long Beach Entrance Light "2" to Long Beach Light. A line drawn from Los Angeles Main Channel Entrance Light "2" to Los Angeles Light.

§ 7.125 Point Vicente, CA to Point Conception, CA.

(a) A line drawn from Redondo Beach East Jetty Light "2" to Redondo Beach West Jetty Light "3".

(b) A line drawn from Marina Del Rey Light "4" to Marina Del Rey Breakwater South Light "1". A line drawn from Marina Del Rey Breakwater North Light "2" to Marina Del Rey Light "3".

(c) A line drawn from Port Hueneme East Jetty Light "4" to Port Hueneme West Jetty Light "3".

(d) A line drawn from Channel Islands Harbor South Jetty Light "2" to Channel Islands Harbor Breakwater South Light "1". A line drawn from Channel Islands Harbor Breakwater North Light to Channel Islands Harbor North Jetty Light "5".

(e) A line drawn from Ventura Marina South Jetty Light "6" to Ventura Marina Breakwater South Light "3". A line drawn from Ventura Marina Breakwater North Light to Ventura Marina North Jetty Light "7".

(f) A line drawn from Santa Barbara Harbor Light "4" to latitude 34°24.1' N. longitude 119°40.7' W. (Santa Barbara Harbor Lighted Bell Buoy "1"); thence to Santa Barbara Harbor Breakwater Light.

§ 7.130

§ 7.130 Point Conception, CA to Point Sur, CA.

(a) A line drawn from the southernmost extremity of Fossil Point at longitude 120°43.5' W. to the seaward extremity of Whaler Island Breakwater.

(b) A line drawn from the outer end of Morro Bay Entrance East Breakwater to latitude 35°21.5' N. longitude 120°52.3' W. (Morro Bay Entrance Lighted Bell Buoy "1"); thence to Morro Bay West Breakwater Light.

§ 7.135 Point Sur, CA to Cape Blanco, OR.

(a) A line drawn from Monterey Harbor Light "6" to latitude 36°36.5' N. longitude 121°53.2' W. (Monterey Harbor Anchorage Buoy "A"); thence to the northernmost extremity of Monterey Municipal Wharf No. 2.

(b) A line drawn from seaward extremity of the pier located 0.3 mile south of Moss Landing Harbor Entrance to the seaward extremity of the Moss Landing Harbor North Breakwater.

(c) A line drawn from Santa Cruz Light to the southernmost projection of Soquel Point.

(d) A straight line drawn from Point Bonita Light across Golden Gate through Mile Rocks Light to the shore.

(e) A line drawn from the northwestern tip of Tomales Point to latitude 38°15.1' N. longitude 123°00.1' W. (Tomales Point Lighted Horn Buoy "2"); thence to latitude 38°17.2' N. longitude 123°02.3' W. (Bodega Harbor Approach Lighted Gong Buoy "BA"); thence to the southernmost extremity of Bodega Head.

(f) A line drawn from Humboldt Bay Entrance Light "4" to Humboldt Bay Entrance Light "3".

(g) A line drawn from Crescent City Outer Breakwater Light "5" to the southeasternmost extremity of Whaler Island at longitude 124°11' W.

§ 7.140 Cape Blanco, OR to Cape Flattery, WA.

(a) A line drawn from the seaward extremity of the Coos Bay South Jetty to latitude 43°21.9' N. longitude 124°21.7' W. (Coos Bay Entrance Lighted Bell Buoy "1"); thence to the seaward extremity of the Coos Bay North Jetty.

46 CFR Ch. I (10–1–00 Edition)

(b) A line drawn from the lookout tower located in approximate position latitude 46°13.6' N. longitude 124°00.7' W. to latitude 46°12.8' N. longitude 124°08.0' W. (Columbia River Entrance Lighted Whistle Buoy "2"); thence to latitude 46°14.5' N. longitude 124°09.5' W. (Columbia River Entrance Lighted Bell Buoy "1"); thence to North Head Light.

(c) A line drawn from latitude 46°52.8' N. longitude 124°12.6' W. (Grays Harbor Light to Grays Harbor Entrance Lighted Whistle Buoy "2"); thence to latitude 46°55.0' N. longitude 124°14.7' W. (Grays Harbor Entrance Lighted Whistle Buoy "3"); thence to Grays Harbor Bar Range Rear Light.

§ 7.145 Strait of Juan de Fuca, Haro Strait and Strait of Georgia WA.

(a) A line drawn from the northernmost point of Angeles Point to latitude 48°21.1' N. longitude 123°02.5' W. (Hein Bank Lighted Bell Buoy); thence to latitude 48°25.5' N. longitude 122°58.5' W. (Salmon Bank Lighted Gong Buoy "3"); thence to Cattle Point Light on San Juan Island.

(b) A line drawn from Lime Kiln Light to Kellett Bluff Light on Henry Island; thence to Turn Point Light on Stuart Island; thence to Skipjack Island Light; thence to latitude 48°46.6' N. longitude 122°53.4' W. (Clements Reef Bouy "2"); thence to International Boundary Range B Front Light.

ALASKA

§ 7.150 Canadian (BC) and United States (AK) Borders to Cape Spencer, AK.

(a) A line drawn from the northeasternmost extremity of Point Mansfield, Sitklan Island 040° true to the mainland.

(b) A line drawn from the southeasternmost extremity of Island Point, Sitklan Island to the southernmost extremity of Garnet Point, Kanagunut Island; thence to Lord Rock Light; thence to Barren Island Light; thence to Cape Chacon Light; thence to Cape Muzon Light.

(c) A line drawn from Point Cornwallis Light to Cape Bartolome Light; thence to Cape Edgecumbe Light; thence to the westernmost extremity of Cape Cross.

(d) A line drawn from Surge Bay Entrance Light to Cape Spencer Light.

§ 7.155 Cape Spencer, AK to Cape St. Elias, AK.

(a) A line drawn from the westernmost extremity of Harbor Point to the southernmost extremity of LaChaussee Spit at Lituya Bay.

(b) A line drawn from Ocean Cape Light to latitude 59°31.9' N. longitude 139°57.1' W. (Yakutat Bay Entrance Lighted Whistle Buoy "2"); thence to the southeasternmost extremity of Point Manby.

(c) A line drawn from the northernmost extremity of Point Riou to the easternmost extremity of Icy Cape.

§ 7.160 Point Whitshed, AK to Aialik Cape, AK.

(a) A line drawn from the southernmost extremity of Point Whitshed to the easternmost extremity of Hinchinbrook Island.

(b) A line drawn from Cape Hinchinbrook Light to Schooner Rock Light "1".

(c) A line drawn from the southwesternmost extremity of Montague Island to Point Elrington Light; thence to the southernmost extremity of Cape Puget.

(d) A line drawn from the southernmost extremity of Cape Resurrection to the Aialik Cape.

§ 7.165 Kenai Peninsula, AK to Kodiak Island, AK.

(a) A line drawn from the southernmost extremity of Kenai Peninsula at longitude 151°44.0' W. to East Amatuli Island Light; thence to the northwesternmost extremity of Shuyak Island at Party Cape; thence to the easternmost extremity of Cape Douglas.

(b) A line drawn from the southernmost extremity of Pillar Cape on Afognak Island to Spruce Cape Light; thence to the easternmost extremity of Long Island; thence to the northeasternmost extremity of Cape Chiniak.

(c) A line drawn from Cape Nunilak at latitude 58°09.7' N. to the northernmost extremity of Raspberry Island. A line drawn from the westernmost extremity of Raspberry Cape to the

northernmost extremity of Miners Point.

§ 7.170 Alaska Peninsula, AK to Aleutian Islands, AK.

(a) A line drawn from the southernmost extremity of Cape Kumlium to the westernmost extremity of Nakchamik Island; thence to the easternmost extremity of Castle Cape at Chignik Bay.

(b) A line drawn from Second Priest Rock to Ulakta Head Light at Iliuliuk Bay entrance.

(c) A line drawn from Arch Rock to the northernmost extremity of Devilfish Point at Captains Bay.

(d) A line drawn from the easternmost extremity of Lagoon Point to the northwesternmost extremity of Cape Kutuzof at Port Moller.

§ 7.175 Alaska Peninsula, AK to Nunivak, AK.

(a) A line drawn from the northernmost extremity of Goose Point at Egegik Bay to Protection Point.

(b) A line drawn from the westernmost extremity of Kulukak Point to the northernmost extremity of Round Island; thence to the southernmost extremity of Hagemeister Island; thence to the southernmost extremity of Cape Peirce; thence to the southernmost extremity of Cape Newenham.

(c) A line drawn from the church spire located in approximate position latitude 59°45' N. longitude 161°55' W. at the mouth of the Kanektok River to the southernmost extremity of Cape Avinof.

§ 7.180 Kotzebue Sound, AK.

A line drawn from Cape Espenberg Light to latitude 66°52' N. longitude 163°28' W.; and thence to Cape Krusenstern Light.

**PART 8—VESSEL INSPECTION
ALTERNATIVES**

Subpart A—General

Sec.

8.100 Definitions.

8.110 Incorporation by reference.

8.120 Reciprocity.

8.130 Agreement conditions.

§ 8.100

Subpart B—Recognition of a Classification Society

- 8.200 Purpose.
- 8.210 Applicability.
- 8.220 Recognition of a classification society.
- 8.230 Minimum standards for a recognized classification society.
- 8.240 Application for recognition.
- 8.250 Acceptance of standards and functions delegated under existing regulations.
- 8.260 Revocation of classification society recognition.

Subpart C—International Convention Certificate Issuance

- 8.300 Purpose.
- 8.310 Applicability.
- 8.320 Classification society authorization to issue international certificates.
- 8.330 Termination of classification society authority.

Subpart D—Alternate Compliance Program

- 8.400 Purpose.
- 8.410 Applicability.
- 8.420 Classification society authorization to participate in the Alternate Compliance Program.
- 8.430 U.S. Supplement to class rules.
- 8.440 Vessel enrollment in the Alternate Compliance Program.
- 8.450 Termination of classification society authority.

Subpart E—Streamlined Inspection Program

- 8.500 Purpose.
- 8.505 Scope and applicability.
- 8.510 Definitions.
- 8.515 Eligibility.
- 8.520 Application.
- 8.525 OCMI review and action.
- 8.530 Plan development and approval.
- 8.535 Training and operational evaluation.
- 8.540 Enrollment in SIP.
- 8.545 Scope of inspection for enrolled vessels.
- 8.550 Plan review and revisions.
- 8.555 Disenrollment.
- 8.560 Waiver.
- 8.565 Appeal.
- 8.570 Interim approval of prototype SIP company or vessel plans.

AUTHORITY: 46 U.S.C. 3103, 3306, 3316, 3703; 49 CFR 1.46.

SOURCE: CGD 95-010, 62 FR 67532, Dec. 24, 1997, unless otherwise noted.

46 CFR Ch. I (10-1-00 Edition)

Subpart A—General

§ 8.100 Definitions.

Authorized Classification Society means a recognized classification society that has been delegated the authority to conduct certain functions and certifications on behalf of the Coast Guard.

Class Rules means the standards developed and published by a classification society regarding the design, construction and certification of commercial vessels.

Classed means that a vessel meets the classification society requirements that embody the technical rules, regulations, standards, guidelines and associated surveys and inspections covering the design, construction and through-life compliance of a ship's structure and essential engineering and electrical systems.

Commandant means the Commandant of the Coast Guard.

Delegated Function means a function related to Coast Guard commercial vessel inspection which has been delegated to a classification society. Delegated functions may include issuance of international convention certificates and participation in the Alternate Compliance Program under this part.

Delegated Function Related to General Vessel Safety Assessment means issuance of the SOLAS Cargo Ship Safety Construction Certificate or issuance of the SOLAS Cargo Ship Safety Equipment Certificate.

Exclusive Surveyor means a person who is employed solely by a classification society and is authorized to conduct vessel surveys. Independent surveyors, hired on a case-by-case basis, or surveyors of another classification society are not considered exclusive surveyors for the performance of delegated functions on behalf of the Coast Guard.

Gross Tons means vessel tonnage measured in accordance with the International Convention on Tonnage Measurement of Ships, 1969. Vessels not measured by this convention must be measured in accordance with the method utilized by the flag state administration of that vessel.

Coast Guard, DOT

§ 8.120

MARPOL 73/78 means the Protocol of 1978 relating to the International Convention for the Prevention of Pollution from Ships, 1973, and includes the Convention which means the International Convention for the Prevention of Pollution from Ships, 1973, including Protocols I and II and Annexes I, II, and V thereto, including any modification or amendments to the Convention, Protocols or Annexes which have entered into force for the United States.

Officer in Charge, Marine Inspection (OCMI) means any person from the civilian or military branch of the Coast Guard designated as such by the Commandant and who, under the superintendence and direction of a Coast Guard District Commander, is in charge of an inspection zone for the performance of duties with respect to the inspection, enforcement, and administration of 46 U.S.C., Revised Statutes, and acts amendatory thereof or supplemental thereto, and rules and regulations thereunder.

Recognized Classification Society means the American Bureau of Shipping or other classification society recognized by the Commandant under this part.

SOLAS means International Convention for the Safety of Life at Sea, 1974, as amended.

§ 8.110 Incorporation by reference.

(a) Certain material is incorporated by reference into this subchapter with the approval of the Director of the Federal Register under 5 U.S.C. 552(a) and 1 CFR Part 51. To enforce any edition other than that specified in paragraph (b) of this section, the Coast Guard must publish notice of the change in the FEDERAL REGISTER and the material must be available to the public. All material is available for inspection at the Office of the Federal Register, 800 North Capitol St., NW., Suite 700, Washington, DC and at the U.S. Coast Guard, Office of Design and Engineering Standards, 2100 Second St., SW., Washington, DC 20593-0001, and is available from the sources listed in paragraph (b).

(b) The material incorporated by reference in this subchapter and the sections affected are as follows:

American Bureau of Shipping (ABS)—ABS Plaza, 16855 Northchase Drive, Houston, TX 77060.

Rules for Building and Classing Steel Vessels, 1996—31.01-3(b), 71.15-5(b), 91.15-5(b)

Rules for Building and Classing Steel Vessels, 1997—31.01-3(b), 71.15-5(b), 91.15-5(b)

Rules for Building and Classing Steel Vessels, 1998—31.01-3(b), 71.15-5(b), 91.15-5(b)

Rules for Building and Classing Mobile Offshore Drilling Units, 1998—107.205(b)

U. S. Supplement to ABS Rules for Steel Vessels for Vessels on International Voyages, 21 October 1996—31.01-3(b), 71.15-5(b), 91.15-5(b)

U.S. Supplement to ABS Rules for Steel Vessels for Vessels on International Voyages, 1 August 1997—31.01-3(b), 71.15-5(b), 91.15-5(b)

U.S. Supplement to ABS Rules for Mobile Offshore Drilling Units, 1 June 1998—107.205(b)

American National Standards Institute (ANSI)—11 West 42nd St., New York, NY 10036.

ANSI/ASQC Q9001—1994, Quality Assurance in Design, Development, Production and Servicing, 1994—8.230

Lloyd's Register of Shipping (LR)—100 Leadenhall Street, London EC3A 3BP.

Rules and Regulations for the Classification of Ships, 1998—31.01-3(b), 71.15-5(b), 91.15-5(b)

Lloyd's Register of Shipping Supplemental Requirements, 19 September 1998—31.01-3(b), 71.15-5(b), 91.15-5(b)

[CGD 95-010, 62 FR 67532, Dec. 24, 1997, as amended by USCG-1999-5004, 64 FR 30439, June 8, 1999; USCG-2000-7790, 65 FR 58458, Sept. 29, 2000]

§ 8.120 Reciprocity.

(a) The Commandant may delegate authority to a classification society that has its headquarters in a country other than the United States only to the extent that the flag state administration of that country delegates authority and provides access to the American Bureau of Shipping to inspect, certify and provide related services to vessels flagged by that country. The Commandant will determine reciprocity on a "case-by-case" basis.

(b) In order to demonstrate that the conditions described in paragraph (a) of this section are satisfied, a classification society must provide to the Coast Guard an affidavit, from the government of the country that the classification society is headquartered in, listing the authorities delegated by the flag state administration of that country to the American Bureau of Shipping, and

indicating any conditions related to the delegated authority.

(c) The Commandant will not consider an application for authorization to perform a delegated function submitted under this part until the conditions described in paragraph (a) of this section are satisfied. Where simultaneous authorization by a foreign government for ABS is involved, this requirement may be waived.

(d) The Commandant will not evaluate a classification society for recognition until the conditions described in paragraph (a) of this section are satisfied for at least one of the authorized delegations being sought. Where simultaneous recognition by a foreign government for ABS is involved, this requirement may be waived.

(e) The Commandant may make a delegation regarding load lines under 46 U.S.C. 5107 or measurement of vessels under 46 U.S.C. 14103 without regard to the conditions described in paragraph (a) of this section.

§ 8.130 Agreement conditions.

(a) Delegated functions performed by, and statutory certificates issued by, an authorized classification society will be accepted as functions performed by, or certificates issued by, the Coast Guard, provided that the classification society maintains compliance with all provisions of its agreement with the Commandant. Any agreement between the Commandant and a recognized classification society authorizing the performance of delegated functions will be written and will require the classification society to comply with each of the following:

(1) Issue any certificates related to a delegated function in the English language.

(2) Maintain a corporate office in the United States that has adequate resources and staff to support all delegated functions and to maintain required associated records.

(3) Maintain all records in the United States related to delegated functions conducted on behalf of the Coast Guard.

(4) Make available to appropriate Coast Guard representatives vessel status information and records, including outstanding vessel deficiencies or clas-

sification society recommendations, in the English language, on all vessels for which the classification society has performed any delegated function on behalf of the Coast Guard.

(5) Report to the Commandant (G-MOC) the names and official numbers of any vessels removed from class for which the classification society has performed any delegated function on behalf of the Coast Guard and include a description of the reason for the removal.

(6) Report to the Commandant (G-MOC) all port state detentions on all vessels for which the classification society has performed any delegated function on behalf of the Coast Guard when aware of such detention.

(7) Annually provide the Commandant (G-MOC) with its register of classed vessels.

(8) Ensure vessels meet all requirements for class of the accepting classification society prior to accepting vessels transferred from another classification society.

(9) Suspend class for vessels that are overdue for special renewal or annual survey.

(10) Attend any vessel for which the classification society has performed any delegated function on behalf of the Coast Guard at the request of the appropriate Coast Guard officials, without regard to the vessel's location—unless prohibited to do so under the laws of the United States, the laws of the jurisdiction in which the vessel is located, the classification society's home country domestic law, or where the classification society considers an unacceptable hazard to life and/or property exists.

(11) Honor appeal decisions made by the Commandant (G-MSE) or Commandant (G-MOC) on issues related to delegated functions.

(12) Apply U.S. flag administration interpretations, when they exist, to international conventions for which the classification society has been delegated authority to certificate or perform other functions on behalf of the Coast Guard.

(13) Obtain approval from the Commandant (G-MOC) prior to granting exemptions from the requirements of

Coast Guard, DOT

§ 8.220

international conventions, class rules, and the U.S. supplement to class rules.

(14) Make available to the Coast Guard all records, in the English language, related to equivalency determinations or approvals made in the course of delegated functions conducted on behalf of the Coast Guard.

(15) Report to the Coast Guard all information specified in the agreement at the specified frequency and to the specified Coast Guard office or official.

(16) Grant the Coast Guard access to all plans and documents, including reports on surveys, on the basis of which certificates are issued or endorsed by the classification society.

(17) Identify a liaison representative to the Coast Guard.

(18) Provide regulations, rules, instructions and report forms in the English language.

(19) Allow the Commandant (G-M) to participate in the development of class rules.

(20) Inform the Commandant (G-M) of all proposed changes to class rules.

(21) Provide the Commandant (G-M) the opportunity to comment on any proposed changes to class rules and to respond to the classification society's disposition of the comments made by the Coast Guard.

(22) Furnish information and required access to the Coast Guard to conduct oversight of the classification society's activities related to delegated functions conducted on behalf of the Coast Guard.

(23) Allow the Coast Guard to accompany them on internal and external quality audits and provide written results of such audits to appropriate Coast Guard representatives.

(24) Provide the Coast Guard access necessary to audit the authorized classification society to ensure that it continues to comply with the minimum standards for a recognized classification society.

(25) Use only exclusive surveyors of that classification society to accomplish all work done on behalf of, or under any delegation from, the Coast Guard. For tonnage-related measurement service only, however, classification societies may use part-time employees or independent contractors in place of exclusive surveyors.

(26) Allow its surveyors to participate in training with the Coast Guard regarding delegated functions.

(b) Amendments to an agreement between the Coast Guard and an authorized classification society will become effective only after consultation and written agreement between parties.

(c) Agreements may be terminated by one party only upon written notice to the other party. Termination will occur sixty days after written notice is given.

Subpart B—Recognition of a Classification Society

§ 8.200 Purpose.

This subpart establishes criteria and procedures for vessel classification societies to obtain recognition from the Coast Guard. This recognition is necessary in order for a classification society to become authorized to perform vessel inspection and certification functions delegated by the Coast Guard as described in this part.

§ 8.210 Applicability.

This subpart applies to all vessel classification societies seeking recognition by the Coast Guard.

§ 8.220 Recognition of a classification society.

(a) A classification society must be recognized by the Commandant before it may receive statutory authority delegated by the Coast Guard.

(b) In order to become recognized, a classification society must meet the requirements of § 8.230.

(c) A classification society found to meet the criteria for recognition will be notified in writing by the Commandant.

(d) If the Coast Guard determines that a classification society does not meet the criteria for recognition, the Coast Guard will provide the reason for this determination.

(e) A classification society may re-apply for recognition upon correction of the deficiencies identified by the Coast Guard.

§ 8.230

46 CFR Ch. I (10–1–00 Edition)

§ 8.230 Minimum standards for a recognized classification society.

(a) In order to receive recognition by the Coast Guard a classification society must:

(1) Establish that it has functioned as an international classification society for at least 30 years with its own class rules;

(2) Establish that it has a history of appropriate corrective actions in addressing vessel casualties and cases of nonconformity with class rules;

(3) Establish that it has a history of appropriate changes to class rules based on their application and the overall performance of its classed fleet;

(4) Have a total classed tonnage of at least 10 million gross tons;

(5) Have a classed fleet of at least 1,500 ocean-going vessels over 100 gross tons;

(6) Have a total classed tonnage of ocean-going vessels over 100 gross tons totaling no less than 8 million gross tons;

(7) Publish and maintain class rules in the English language for the design, construction and certification of ships and their associated essential engineering systems;

(8) Maintain written survey procedures in the English language;

(9) Have adequate resources, including research, technical, and managerial staff, to ensure appropriate updating and maintaining of class rules and procedures;

(10) Have adequate resources and geographical coverage to carry out all plan review and vessel survey activities associated with delegated functions as well as classification society requirements;

(11) Employ a minimum of 150 exclusive surveyors;

(12) Have adequate criteria for hiring and qualifying surveyors and technical staff;

(13) Have an adequate program for continued training of surveyors and technical staff;

(14) Have a corporate office in the United States that provides a continuous management and administrative presence;

(15) Maintain an internal quality system based on ANSI/ASQC Q9001 or an equivalent quality standard;

(16) Determine classed vessels comply with class rules, during appropriate surveys and inspection;

(17) Determine that attended vessels comply with all statutory requirements related to delegated functions, during appropriate surveys and inspection;

(18) Monitor all activities related to delegated functions for consistency and required end-results;

(19) Maintain and ensure compliance with a Code of Ethics that recognizes the inherent responsibility associated with delegation of authority;

(20) Not be under the financial control of shipowners or shipbuilders, or of others engaged commercially in the manufacture, equipping, repair or operation of ships;

(21) Not be financially dependent on a single commercial enterprise for its revenue;

(22) Not have any business interest in, or share of ownership of, any vessel in its classed fleet; and

(23) Not be involved in any activities which could result in a conflict of interest.

(b) Recognition may be granted after it is established that the classification society has an acceptable record of vessel detentions attributed to classification society performance under the Coast Guard Port State Control Program.

§ 8.240 Application for recognition.

(a) A classification society must apply for recognition in writing to the Commandant (G-MSE).

(b) An application must indicate which specific authority the classification society seeks to have delegated.

(c) Upon verification from the Coast Guard that the conditions of reciprocity have been met in accordance with § 8.120, the requesting classification society must submit documentation to establish that it meets the requirements of § 8.230.

§ 8.250 Acceptance of standards and functions delegated under existing regulations.

(a) Classification society class rules will only be accepted as equivalent to Coast Guard regulatory standards when that classification society has received

Coast Guard, DOT

§ 8.330

authorization to conduct a related delegated function.

(b) A recognized classification society may not conduct any delegated function under this title until it receives a separate written authorization from the Commandant to conduct that specific function.

§ 8.260 Revocation of classification society recognition.

A recognized classification society which fails to maintain the minimum standards established in this part will be reevaluated and its recognized status revoked if warranted.

Subpart C—International Convention Certificate Issuance

§ 8.300 Purpose.

This subpart establishes options for vessel owners and operators to obtain required international convention certification through means other than those prescribed elsewhere in this chapter.

§ 8.310 Applicability.

This subpart applies to:

(a) Recognized classification societies; and

(b) All U.S. flag vessels that are certificated for international voyages and are classed by a recognized classification society that is authorized by the Coast Guard to issue the applicable international certificate as specified in this subpart.

§ 8.320 Classification society authorization to issue international certificates.

(a) The Commandant may authorize a recognized classification society to issue certain international convention certificates. Authorization will be based on review of:

(1) Applicable class rules; and

(2) Applicable classification society procedures.

(b) The Coast Guard may delegate issuance of the following international convention certificates to a recognized classification society:

(1) International Load Line Certificate;

(2) International Tonnage Certificate (1969);

(3) SOLAS Cargo Ship Safety Construction Certificate;

(4) SOLAS Cargo Ship Safety Equipment Certificate;

(5) International Certificate of Fitness for the Carriage of Dangerous Chemicals in Bulk;

(6) International Certificate of Fitness for the Carriage of Liquefied Gases in Bulk;

(7) International Maritime Organization (IMO) Mobile Offshore Drilling Unit Safety Certificate;

(8) MARPOL 73/78 International Oil Pollution Prevention Certificate; and

(9) MARPOL 73/78 International Oil Pollution Prevention Certificate for the Carriage of Noxious Liquid Substances in Bulk.

(c) The Coast Guard will enter into a written agreement with a recognized classification society authorized to issue international convention certificates. This agreement will define the scope, terms, conditions and requirements of that delegation. Conditions of these agreements are presented in § 8.130.

§ 8.330 Termination of classification society authority.

(a) The Coast Guard may terminate an authorization agreement with a classification society if:

(1) The Commandant revokes the classification society's recognition, as specified in § 8.260; or

(2) The classification society fails to comply with the conditions of the authorization agreement as specified in § 8.130.

(b) In the event that a flag administration of a country changes conditions related to the authority that is delegated to ABS, the Commandant may modify or revoke the Coast Guard's authorization of that classification society that has its headquarters in that country.

(c) Certificates issued by a classification society which has had its authorization terminated will remain valid until the next classification society survey associated with that certificate is required or until the certificate expires, whichever occurs first.

Subpart D—Alternate Compliance Program

§ 8.400 Purpose.

This subpart establishes an alternative to subpart 2.01 of this chapter for certification of United States vessels.

§ 8.410 Applicability.

This subpart applies to:

(a) Recognized classification societies; and

(b) U.S. flag vessels that are certificated for international voyages and are classed by a recognized classification society that is authorized by the Coast Guard to participate in the Alternate Compliance Program (ACP) as specified in this subpart and whose vessel type is authorized to participate in the ACP per the applicable subchapter of 46 CFR chapter I.

§ 8.420 Classification society authorization to participate in the Alternate Compliance Program.

(a) The Commandant may authorize a recognized classification society to participate in the ACP. Authorization will be based on a satisfactory review of:

(1) Applicable class rules; and
(2) Applicable classification society procedures.

(b) Authorization for a recognized classification society to participate in the ACP will require development of a U.S. Supplement to the society's class rules that meets the requirements of § 8.430 of this part, which must be accepted by the Coast Guard.

(c) A recognized classification society will be eligible to receive authorization to participate in the ACP only after it has performed a delegated function related to general vessel safety assessment, as defined in § 8.100, for a two-year period.

(d) If, after this two-year period, the Coast Guard finds that the recognized classification society has not demonstrated the necessary satisfactory performance or lacks adequate experience, the recognized classification society will not be eligible to participate in the ACP. The Coast Guard will provide the reason for this determination to the recognized classification soci-

ety. A classification society may appeal the decision of the Coast Guard concerning recognition to the Commandant in writing in accordance with 46 CFR 1.03–15(h)(4).

(e) The Coast Guard will enter into a written agreement with a recognized classification society authorized to participate in the ACP. This agreement will define the scope, terms, conditions and requirements of the necessary delegation. Conditions of this agreement are presented in § 8.130.

§ 8.430 U.S. Supplement to class rules.

Prior to receiving authorization to participate in the ACP, a recognized classification society must prepare, and receive Commandant (G–MSE) approval of, a U.S. Supplement to the recognized classification society's class rules. This supplement must include all regulations applicable for issuance of a Certificate of Inspection (COI) which are not, in the opinion of the Commandant, adequately established by either the class rules of that classification society or applicable international regulations.

§ 8.440 Vessel enrollment in the Alternate Compliance Program.

(a) In place of compliance with other applicable provisions of this title, the owner or operator of a vessel subject to plan review and inspection under this subchapter for initial issuance or renewal of a COI may submit the vessel for classification, plan review and inspection by a recognized classification society authorized by the Coast Guard to determine compliance with applicable international treaties and agreements, the classification society's class rules, and the U.S. Supplement prepared by the classification society and accepted by the Coast Guard.

(b) A vessel owner or operator wishing to have a vessel inspected under paragraph (a) of this section shall submit an Application for Inspection of U.S. Vessel (CG–3752) to the cognizant OCMI, and indicate on the form that the inspection will be conducted by an authorized classification society under the ACP.

(c) Based on reports from an authorized classification society that a vessel complies with applicable international

treaties and agreements, the classification society's class rules, and the U.S. Supplement prepared by the classification society and accepted by the Coast Guard, the cognizant OCMI may issue a certificate of inspection to the vessel. If the OCMI declines to issue a certificate of inspection even though the reports made by the authorized classification society indicate that the vessel meets applicable standards, the vessel owner or operator may appeal the OCMI decision as provided in subpart 1.03 of this chapter.

(d) If reports from an authorized classification society indicate that a vessel does not comply with applicable international treaties and agreements, the classification society's class rules, and the U.S. Supplement prepared by the classification society and accepted by the Coast Guard, the cognizant OCMI may decline to issue a certificate of inspection. If the OCMI declines to issue a certificate of inspection, the vessel owner or operator may:

(1) Correct the reported deficiencies and make arrangements with the classification society for an additional inspection;

(2) Request inspection by the Coast Guard under other provisions of this subchapter; or

(3) Appeal via the authorized classification society to the Chief, Office of Compliance, Commandant (G-MOC), U.S. Coast Guard, 2100 Second St. SW., Washington, DC 20593-0001.

§ 8.450 Termination of classification society authority.

(a) The Coast Guard may terminate an authorization agreement with a classification society to participate in the Alternate Compliance Program if:

(1) The Commandant revokes the classification society's recognition, as specified in § 8.260; or

(2) The classification society fails to comply with the conditions of the authorization agreement as specified in § 8.130.

(b) In the event that a flag administration of a country changes conditions related to the authority that is delegated to ABS, the Commandant may modify or revoke the Coast Guard's authorization of that classification soci-

ety that has its headquarters in that country.

(c) Certificates issued by a classification society which has had its authorization to participate in the Alternate Compliance Program terminated will be subject to the provisions of § 8.330.

(d) Owners or operators of vessels enrolled in the ACP and classed by a classification society that has its authority to participate in the ACP terminated must:

(1) Change the classification society for the vessel to a classification society that is authorized to participate in the ACP; or

(2) Disenroll the vessel from the ACP.

(e) The Coast Guard will provide guidance to a vessel owner affected by the revocation of a classification society's authority to participate in the ACP. This will include notification of when the action required under paragraph (d) of this section must be completed.

Subpart E—Streamlined Inspection Program

SOURCE: 63 FR 44353, Aug. 18, 1998, unless otherwise noted.

§ 8.500 Purpose.

(a) This subpart establishes the Streamlined Inspection Program (SIP) which is a voluntary alternative inspection program for U.S. documented or registered vessels required to maintain a valid certificate of inspection (COI).

(b) This subpart sets out the eligibility and application requirements and the plan development and approval procedures for enrollment of companies and their vessels in the SIP.

§ 8.505 Scope and applicability.

(a) This subpart applies to U.S. documented or registered vessels that have a valid COI.

(b) A vessel enrolled in the SIP will be inspected in accordance with its approved Vessel Action Plan (VAP).

(c) The SIP includes all inspections required to renew and maintain a valid COI. The SIP does not include dry-dock examinations, unscheduled inspections related to vessel casualties, equipment

§ 8.510

repair or replacement, or vessel modifications. Those inspections will be conducted in accordance with the subparts applicable to the vessel.

§ 8.510 Definitions.

The following definitions apply to this subpart:

Civil penalty means a final assessment under the provisions of 33 CFR part 1, subpart 1.07 or part 20 of this chapter.

Coast Guard SIP Advisor means the Coast Guard marine inspector assigned by the Officer in Charge, Marine Inspection (OCMI), to assist in the development of an action plan.

Company means the owner of the vessel or any other organization or person, such as the manager or the bareboat charterer, who operates a vessel under the SIP.

Company Action Plan (CAP) means the document describing a company's organization, policies, and responsibilities required for participation in the SIP.

Company SIP Agent means the individual who is responsible for the Company Action Plan and the Vessel Action Plan development and implementation and who has the authority to bind the company to the terms of these plans.

Correction Report means a document which sets out specific vessel deficiencies and is used to record their correction by the company.

Documented deficiency means an incident documented in a Coast Guard record in which the condition of a vessel, its equipment, or its operation was not in compliance with Coast Guard regulations.

Examination Checklist means any document or form approved in the VAP, that may be used by company employees to record the periodic examinations required by the VAP.

Inspection Criteria References (ICR) means the individual pages in the VAP that list each item on the vessel required by regulation to be periodically inspected.

Inspection Schedule and Verification (ISV) means the document that lists the items to be inspected and the intervals for their inspection, and on which is recorded the completion of required

46 CFR Ch. I (10–1–00 Edition)

examinations and tests conducted by designated company employees.

Prototype SIP plan means the SIP plans developed for a company or vessel participating in a Coast Guard District or OCMI-endorsed SIP before August 18, 1998.

Reportable casualty means a marine casualty or accident required to be reported under 46 CFR part 4, subpart 4.05 of this chapter.

Streamlined Inspection Program (SIP) means the alternative inspection program set out in this subpart.

Vessel Action Plan (VAP) means the document that prescribes procedures for maintenance, examination, and inspection of a vessel enrolled in the SIP.

§ 8.515 Eligibility.

(a) The company must—

(1) Have owned or operated at least one U.S. documented or registered vessel for a minimum of 3 consecutive years before the SIP application date; and

(2) Have paid all civil penalties and user fees.

(b) Except as allowed by paragraph (c) of this section, each vessel must—

(1) Have been in operation with an eligible owner or operator for at least 3 consecutive years before the SIP application date;

(2) Have had no revocation of its COI during the 3 years before the SIP application date; and

(3) Have no documented deficiency for any of the following in the 3 years before the SIP application date:

(i) Any vessel operation inconsistent with the operating details specified on its COI.

(ii) Operating without the required amount of lifesaving appliances on board the vessel or with inoperable survival craft.

(iii) Operating without the required firefighting equipment on board the vessel or with an inoperable fire pump(s).

(iv) Unauthorized modifications to the vessel's approved systems or structure, such as fixed firefighting systems, pollution prevention arrangements, overcurrent protection devices, or watertight boundary arrangements.

(v) Operating without the required navigation equipment on board the vessel or with inoperable navigation equipment.

(c) A vessel constructed for, or acquired by, a company with one or more vessels enrolled in the SIP need not meet the requirement in paragraph (b)(1) of this section for enrollment in the SIP, provided that the vessel holds a valid COI issued by the OCMi where the vessel will principally operate.

§ 8.520 Application.

To apply for SIP enrollment, a company will submit an application, in writing, to the cognizant OCMi. The application must contain the following:

(a) A statement that the company and prospective vessel(s) meet the requirements of § 8.515.

(b) A summation of the company's current status in relation to § 8.530(a).

(c) The name and official number of the vessel(s) the company intends to enroll in the SIP.

(d) The name and contact information for the Company SIP Agent.

§ 8.525 OCMi review and action.

(a) The cognizant OCMi will review Coast Guard records for the 3 years before the SIP application date to verify the eligibility of the company and each vessel listed in the SIP application.

(b) If the company and one or more of its vessels meets the eligibility requirements contained in § 8.515, the cognizant OCMi will notify the company of its eligibility and assign a Coast Guard SIP Advisor.

(c) If, according to Coast Guard records, a company or vessel does not meet the eligibility requirements contained in § 8.515, the cognizant OCMi will notify the company in writing of its ineligibility stating each reason for not accepting the company or a vessel.

§ 8.530 Plan development and approval.

The Company SIP Agent will develop the CAP and VAP with guidance from the Coast Guard SIP Advisor for OCMi approval.

(a) *Company Action Plan.* The CAP shall include at least the following:

(1) A copy of the OCMi CAP approval letter (once the CAP is approved).

(2) An organization commitment statement.

(3) A company organization chart that includes the name(s) of the designated SIP support personnel who will be responsible for implementation and oversight of the approved CAP and VAP(s).

(4) A statement describing the responsibilities and authorities of personnel involved in the examination and maintenance of the vessel(s) for the company.

(5) A description of the method the company will use to integrate the applicable subpart regulations into its SIP and the method or system used to initiate corrective action.

(6) A description of the company's safety program.

(7) A description of the company's environmental protection program.

(8) A description of the company's training infrastructure, the method used to track and record training for individual employees, and the training required for the designated SIP support personnel to implement the CAP and the VAP.

(9) A master list of all SIP documents and ICRs that the company intends to use in its VAP(s).

(10) Appendices for each approved VAP.

(b) *Vessel Action Plan.* Each VAP shall include at least the following:

(1) A copy of the OCMi VAP approval letter (once the VAP is approved).

(2) A description of the method that will be used to integrate the VAP into the vessel's regular operations.

(3) Vessel-specific ICRs.

(4) Vessel-specific ISV forms.

(5) Vessel-specific examination checklists.

(6) Correction reports.

(c) *Plan Approval.* The Company SIP Agent will submit the CAP and each VAP to the cognizant OCMi for approval. Once approved, a copy of the VAP shall be kept on board the vessel.

§ 8.535 Training and operational evaluation.

When the CAP and VAP(s) have been approved by the cognizant OCMi, the company may begin training and operating under the plans. This evaluation phase includes the following:

§ 8.540

(a) The company shall provide the designated SIP support personnel with training as required by the CAP.

(b) The vessel must operate and be examined under the VAP for a period of at least 3 months.

(c) During the operational periods, the Coast Guard SIP Advisor will conduct an ongoing evaluation of the vessel's operation, the training records, and the ability of all designated persons to perform their assigned functions under the VAP. The Coast Guard SIP Advisor will report periodically to the cognizant OCMI and the Company SIP Agent on the vessel's performance, and make recommendations, if needed.

(d) Revisions recommended under paragraph (c) of this section, or any additional operational periods under a revised CAP or VAP as may be required by the cognizant OCMI must be completed prior to enrollment.

§ 8.540 Enrollment in SIP.

Upon successful completion of the training and evaluation phase, the Coast Guard SIP Advisor will recommend to the OCMI that the company or vessel be enrolled in the SIP. If the OCMI concurs with the recommendation, he or she will issue an enrollment letter and endorse the vessel's COI. Subsequent inspections covered under this subpart will be conducted in accordance with the approved VAP.

§ 8.545 Scope of inspection for enrolled vessels.

(a) A Coast Guard marine inspector will conduct required periodic and follow-on inspections necessary to ensure compliance with Coast Guard regulations.

(b) A Coast Guard marine inspector will conduct the inspections in paragraph (a) of this section in accordance with the procedures set out in the VAP. These inspections will normally include the following:

(1) *Administrative review.* This portion of the inspection consists of a review of prior Coast Guard SIP inspection forms, the contents of the VAP, and other certifications of equipment and vessel systems.

(2) *SIP performance review.* This portion of the inspection consists of a re-

46 CFR Ch. I (10-1-00 Edition)

view of vessel SIP documentation and records, review of the SIP procedures, and a company evaluation of their SIP.

(3) *Materiel review.* This portion of the inspection consists of a general examination of the vessel, witnessing the examination of selected items under the VAP by company designated SIP support personnel, inspection of selected items, and witnessing crew performance in drills.

(4) *Conclusion and recommendations.* This portion of the inspection contains the Coast Guard marine inspector's evaluation of regulatory compliance of the vessel under its VAP.

(c) A Coast Guard marine inspector may conduct any additional tests or examinations of vessel equipment or systems necessary to ensure compliance with Coast Guard regulations during an inspection covered in paragraph (a) of this section.

§ 8.550 Plan review and revisions.

(a) Mandatory reviews and revisions. The CAP and VAP(s) must be reviewed and revised as follows:

(1) Every 2 years after the plan approval date, the company shall review the CAP and update all information required by § 8.530.

(2) Every 5 years after the plan approval date, the Coast Guard SIP Advisor and the Company SIP Agent will review the VAP.

(3) If a reportable casualty occurs, the cognizant OCMI will review the portions of the VAP related to equipment, training, personnel, and systems involved in the casualty and determine whether revisions to the VAP are appropriate.

(4) When statutes or regulations change, the appropriate sections of the CAP and VAP(s) will be revised.

(b) *Discretionary reviews and revisions.* The CAP and VAP(s) may be reviewed and revised by the company at any time. The revisions must be submitted to the cognizant OCMI for approval.

§ 8.555 Disenrollment.

(a) *Voluntary disenrollment.* A company may request SIP disenrollment (which includes all of its vessels) or may request disenrollment of a specific vessel from the SIP by writing to the cognizant OCMI. The OCMI will then

Coast Guard, DOT

§9.1

issue a letter disenrolling the vessel or company. Disenrolled vessels will be inspected in accordance with the requirements of 46 CFR part 2, subpart 2.01 of this chapter.

(b) *Company disenrollment.* The OCMI may issue a letter disenrolling the company if the company no longer has at least one enrolled vessel or if the company fails to continue to meet the eligibility requirements in §8.515.

(c) *Vessel disenrollment.* The OCMI may issue a letter disenrolling a vessel if any one or more of the following occurs:

- (1) The sale of the vessel.
- (2) A finalized letter of warning or assessment of a civil penalty for—
 - (i) Operating outside the scope of the vessel's COI or Stability Letter;
 - (ii) Not reporting a personnel or material casualty required to be reported under 46 CFR part 4; or
 - (iii) A material deficiency listed in §8.515(b)(3).

§8.560 Waiver.

(a) A Coast Guard District Commander may waive any requirement of this subpart—

- (1) If good cause exists for granting a waiver; and
- (2) If the safety of the vessel and those on board will not be adversely affected.

(b) Requests for waiver of any requirement of this subpart must be submitted in writing to the cognizant OCMI for review before forwarding to the Coast Guard District Commander for action.

(c) A copy of each waiver granted under this section shall be maintained at all times in the VAP.

§8.565 Appeal.

A company may appeal any decision or action taken under this subpart in accordance with 46 CFR part 1, subpart 1.03 of this chapter.

§8.570 Interim approval of prototype SIP company or vessel plans.

(a) A company operating under an approved prototype SIP company or vessel plan must apply in writing by November 1, 1998, to the cognizant OCMI for approval to continue operating under the plans while revisions are de-

veloped to bring the prototype SIP company or vessel plan into conformance with this subpart. The OCMI may approve the request for a period of up to 3 years.

(b) A company that does not request approval as required by paragraph (a) of this section or does not obtain approval to continue operating under a prototype SIP company or vessel plan by February 1, 1999, may no longer operate under the plans and will be inspected in accordance with the requirements of 46 CFR part 2, subpart 2.01 of this chapter.

PART 9—EXTRA COMPENSATION FOR OVERTIME SERVICES

Sec.

- 9.1 Extra compensation; Coast Guard civilian personnel.
- 9.2 Payment although no actual service performed.
- 9.3 Overtime earnings not basis for overtime under Federal Employees Pay Act of 1945.
- 9.4 Waiting time; actual report for duties.
- 9.5 Night, Sunday, and holiday defined.
- 9.6 Rate for night service.
- 9.7 Rate for Sunday or holiday services.
- 9.8 Broken periods.
- 9.9 Two hours between broken periods.
- 9.10 Waiting time.
- 9.11 Proration of charges.
- 9.12 Travel status overtime.
- 9.13 Congressional appropriations necessary.
- 9.14 Assessment and collection of fees.
- 9.15 Application form.
- 9.16 Billing for services.
- 9.17 Protests.

AUTHORITY: 46 U.S.C. 2103; 49 CFR 1.46.

SOURCE: CGD 74-119, 39 FR 33336, Sept. 17, 1974, unless otherwise noted.

§9.1 Extra compensation; Coast Guard civilian personnel.

Civilians assigned to the duties formerly assigned to local inspectors and their assistants, prior to Reorganization Plan No. 3 of 1946 (3 CFR, 1946 Supp.), and customs officers and employees, while performing duties in connection with the inspection of vessels or their equipment, supplying or signing on or discharging crews of vessels, at night or on Sundays and holidays, shall receive extra compensation to be paid by the master, owner, or agent of the vessel to the local United

§9.2

46 CFR Ch. I (10–1–00 Edition)

States collector of customs or his representative. (See §9.16.)

[CGD 74–119, 39 FR 33336, Sept. 17, 1974, as amended by USCG–2000–7790, 65 FR 58458, Sept. 29, 2000]

§9.2 Payment although no actual service performed.

The rates of extra compensation are payable in cases where the services of officers or employees have been duly requested and the officers or employees have reported for duty, even though no actual service may be performed.

§9.3 Overtime earnings not basis for overtime under Federal Employees Pay Act of 1945.

Overtime, Sunday, and holiday services which are covered by payments under this part shall not also form a basis for overtime or extra pay under the Federal Employees Pay Act of 1945.

§9.4 Waiting time; actual report for duties.

Extra compensation for *waiting time* will not be allowed unless and until an officer or employee actually reports for duty.

§9.5 Night, Sunday, and holiday defined.

(a) For the purpose of this part the word *night* shall mean the time between 5 p.m. of any day and 8 a.m. of the following day.

(b) The term *holiday* shall mean only national legal public holidays, viz., January 1, February 22, May 30, July 4, the 1st Monday in September, November 11, the 4th Thursday in November, December 25, and such other days as may be declared legal public holidays by an act of Congress or by an Executive order of the President of the United States.

(c) The term *Sunday* shall include the first day of each calendar week.

§9.6 Rate for night service.

The rate of extra compensation for authorized overtime services performed at night on any week day is hereby fixed at one half the gross daily rate of regular pay of the employee who performs the services for each 2 hours of compensable time, any fraction of 2 hours amounting to at least one hour

to be counted as 2 hours. In computing the amount earned, each 2 hours is the time period for the purpose of computation, at least one hour means the minimum service in each period for which extra pay may be granted. If service continues beyond a 2 hour period, it must extend for at least one hour into the following 2 hour period to be entitled to extra pay for the second period. When the overtime extends beyond 5 p.m., payment of extra compensation from 5 p.m. for services consisting of at least one hour is authorized, even though such services may not actually begin until 7 p.m., 9 p.m., or later: *Provided*, That the officer rendering the service remained on duty from 5 p.m., in which case the time between 5 p.m., and the time of beginning the actual service shall be computed as waiting time; and where the actual services begin as late as 9 p.m., there should be an affirmative statement that the officer was required to remain on duty between 5 p.m. and 9 p.m., if a charge for waiting time is made. The maximum amount of extra compensation which may be paid an employee for services during one night shall not exceed two and one-half times the gross daily rate of his regular pay.

§9.7 Rate for Sunday or holiday services.

The rate of extra compensation for Sunday or holiday services is hereby fixed at twice the gross daily rate of regular pay of the employee who performs the service, for any and all services totaling an aggregate of not more than nine hours, with one hour for food and rest, during the 24 hours from midnight to midnight of the Sunday or holiday including actual waiting time and time required for travel between posts of duty but not including other time not spent at the post of duty. This rate shall apply regardless of the length of time served within the aggregate of the aforesaid 9 hours, whether it is served continuously or in broken periods, and whether it is served for one or more applicants. Services in excess of an aggregate of the aforesaid 9 hours performed during the 24 hours of a Sunday or holiday shall be compensated on the same basis as overtime

Coast Guard, DOT

§9.17

services performed at night on a week-day, the time between the completion of the aggregate of the aforesaid 9 hours and midnight being considered as the hours of a night. The maximum amount which may be paid an employee for services performed during the 24 hours of a Sunday or holiday shall not exceed four and one-half times the gross daily rate of his regular pay.

§9.8 Broken periods.

In computing extra compensation where the services rendered are in broken periods and less than 2 hours intervene between such broken periods the time served should be combined with the waiting time and computed as continuous service.

§9.9 Two hours between broken periods.

Where 2 hours or more intervene between broken periods, one-half day's extra pay will be allowed for each distinct 2-hour period or part of a 2-hour period, if waiting time and actual service rendered within each period consists of at least 1 hour.

§9.10 Waiting time.

The same construction should be given the act when charging for waiting time as governs the charge for services actually rendered. No charge should be made unless after having reported for duty the waiting time amounts to at least one hour.

§9.11 Proration of charges.

If services are performed for two or more applicants during one continuous tour of overtime duty, the charge for the extra compensation earned shall be prorated equitably according to the time attributable to the services performed for each applicant.

§9.12 Travel status overtime.

When employees are in travel status, overtime shall apply the same as at official station.

§9.13 Congressional appropriations necessary.

Payment of extra compensation for overtime services shall be subject to appropriations being made therefor by Congress.

§9.14 Assessment and collection of fees.

Assessment and collection of fees against steamship companies for overtime services shall be made even though the payment to employees for such services may not be made until funds are appropriated for that purpose.

§9.15 Application form.

An application on a form prescribed by the Commandant of the Coast Guard, shall be filed with the office being requested to furnish overtime services before such assignment can be made.

§9.16 Billing for services.

Overtime services shall be billed to the steamship companies on collection voucher provided for that purpose. Remittance shall be made by postal money order or certified check payable to the *Collector of Customs, Treasury Department* and forwarded to that officer at the port indicated on the voucher, who shall in turn deposit such remittance to a properly designated receipt account.

§9.17 Protests.

Protests against the exaction of extra compensation shall be forwarded to the Commandant of the Coast Guard.

INDEX

SUBCHAPTER A—PROCEDURES APPLICABLE TO THE PUBLIC

EDITORIAL NOTE: This listing is provided for informational purposes only. It is compiled and kept current by the U.S. Coast Guard, Department of Transportation.

Part, subpart, or section

A

Absentia	5.527(d)
Acceptance of standards and functions delegated under existing regulations.....	8.250
Acting under authority of license, certificate or document.....	5.57
Action on appeal	5.705
Action on Marine Board of Investigation report.....	4.09-30
Action on petition	5.605
Action on review.....	5.805
Acts or offenses for which revocation of licenses, certificates or documents is mandatory	5.61
Addiction.....	5.35
Adherence to rules of evidence	4.19-5
Admissibility of respondent's Coast Guard records prior to entry of findings and conclusions	5.549
Admission.....	5.63, 5.533
Administrative actions.....	5.5
Administrative Law Judge.....	5.1, 5.19
Administrative Law Judge's findings and conclusions	5.563
Aggravation.....	5.565
Aialik Cape, AK	7.160
Aid to navigation.....	4.05-20
Alaska	2.01-80, 7.150, 7.155, 7.160, 7.165, 7.170, 7.175, 7.180
Alcohol or drug use by individuals directly involved in casualties	4.05-12
Aleutian Islands, AK.....	7.170
Allision.....	4.05-1(a)(1)
Allowances, payment of.....	5.401
Alternative Compliance Program.....	8.400
Agreement conditions.....	8.130
Applicability.....	8.410
Classification society authorization to participate in the Program	8.420
Purpose	8.400
Termination of classification society authority	8.450
U.S. supplement to class rules.....	8.430
Vessel enrollment in the Program.....	8.440
American Bureau of Shipping (ABS)	8.110
American National Standards Institute (ANSI)	8.110
Analysis and follow-up procedures for specimen.....	4.06-50
Annual inspection fee for vessels.....	2.10-101
Answer	5.527
Appeal cases in general.....	5.701
Appeal cases remanded for further proceedings.....	5.709
Appeal from action on petition.....	5.607

46 CFR Ch. I (10–1–00 Edition)

Appeals; decisions or actions involving documentation of vessels	1.03-45
Appeals; decisions or actions involving documentation of a District Commander	1.03-25
Appeals; decisions or actions involving documentation of a recognized classification society acting on behalf of the Coast Guard.....	1.03-35
Appeals; decisions or actions involving documentation of an OCMI.....	1.03-20
Appeals; decisions or actions involving documentation of the Marine Safety Center	1.03-30
Appeals to the National Transportation Safety Board.....	5.713
Appearances.....	5.513
Applicability of fees	2.10-1
Application of regulations to vessel or tankships on an international voyage	2.01-8
Application of regulations to oceanographic research vessels subject to requirements	3.03-1
Application for recognition	8.240
Application form	9.15
Application procedures.....	5.903
Applications for inspections	2.01-1
Approvals.....	2.75-1
Certificates of approval	2.75-5
Hazardous ship's stores	2.75-60
Portable fire extinguishers	2.75-25
Procedures for obtaining.....	2.75-10
Requirements and tests.....	2.75-15
Suspension of approval.....	2.75-40
Welding procedures and performance qualifications.....	2.75-70
Withdrawals or termination of approvals and appeals.....	2.75-50
Argument.....	5.559
Army.....	4.11-1
Assault, with a dangerous weapon	5.61(a)(1)
Assessment and collection of fees	9.14
Assignment of loadlines	2.85
Atlantic Beach, NY	7.25
Atlantic Coast... 7.10, 7.15, 7.20, 7.25, 7.30, 7.35, 7.40, 7.45, 7.50, 7.55, 7.60, 7.65, 7.70, 7.75, 7.80, 7.85, 7.90, 7.95, 7.100	
Attorney General	5.69
Authority for regulations	3.01-3, 4.01, 5.1
Authorized classification society	8.100
Availability of records	4.13

B

Billing for services	9.16
Block Island Sound, RI	7.2
Blueprints	2.90
Board	4.40-5(b)
British Virgin Island	2.10-120(a)
Broken periods.....	9.8
Burden of proof	5.539
Buzzards Bay, MA	7.20

C

California.....	7.115, 7.120, 7.125, 7.130, 7.135
Canadian (BC)	7.150
Cape Ann, MA.....	7.10
Cape Blanco, OR	7.140
Cape Charles, VA.....	7.45

Subchapter A Index

Cape Fear, NC.....	7.60
Cape Flattery, WA.....	7.140
Cape Henlopen, DE.....	7.45
Cape Henry, VA.....	7.55
Cape May, NJ.....	7.35
Cape Spencer, Alaska.....	7.155
Cape St. Elias, AK.....	7.155
Cargo vessel.....	2.01-15(a)(3), 2.01-15(b)(3), 2.01-40
Cause or probable cause determinations from Board investigations.....	4.40-20
Certificates:	
Amending.....	2.01-5(c)
Applications.....	2.01-25(b)
Description.....	2.01-5(b)
Exempted vessel.....	2.01-25(e)
Foreign flag vessels.....	2.01-25(g)
Issuance of.....	2.01-5(a)
Issued to foreign vessels.....	2.01-6
Of approval.....	2.75-5
Of inspection.....	2.01-5
Or documents issued by Coast Guard or others.....	2.95-1, 2.95-5
Posting.....	2.01-25(f)
Certification of extracts from shipping articles, logbooks, etc.	5.543
Changes in vessel service.....	2.10-115
Chairman.....	4.40-5(c)
Charges.....	4.09-35, 5.23, 5.107
Charleston Harbor, SC.....	7.65
Chemical test.....	4.03-7
Chemical testing, mandatory, following serious marine incidents involv- ing vessels in commercial service.....	4.06
Chesapeake Bay and tributaries.....	7.50
Chief engineer's report.....	2.20-40
Chronological record of seaman's previous employment.....	6.07
Class rules.....	8.100
Classification society authorization to issue international certifi- cates.....	8.320
Classification society authorization to participate in the Alternative Compliance Program.....	8.420
Classes of vessels (including motorboats) examined or inspected and cer- tified.....	2.01-7
Coast Guard:	
Civilian personnel.....	9.1
District.....	4.03-20, 5.13
Marine casualty investigations for the Board.....	4.40-25
National Transportation Safety Board Marine Casualty Investiga- tions.....	4.40
Coercion of witnesses.....	4.11-5
Collection of specimens in incidents involving fatalities.....	4.06-30
Collection requirements.....	4.06-20
Collector of Customs, Treasury Department.....	9.16
Commandant... 1.01-10(a), 4.03-15, 4.07-1, 4.09-1, 5.11, 5.65, 5.711, 5.801, 5.807, 5.905, 8.100	
Commandant's decisions.....	5.541(a)(4)
Computation of time.....	4.21-1
Conduct of investigations.....	5.101
Congressional appropriations necessary.....	9.13
Construction of regulations.....	4.19-5, 5.51
Continuance of a hearing.....	5.511
Conviction for a dangerous drug law violation, use of, or addiction to the use of dangerous drugs.....	5.35

46 CFR Ch. I (10–1–00 Edition)

Corrections or amendments of charges and/or specifications	5.525
Counsel for witnesses and parties in interest.....	4.07-35
Course of action available	5.105

D

Dangerous drug.....	4.05-12, 5.35
Decision and order of the Administrative Law Judge on appeal to the Commandant.....	5.707
Decision of the Commandant on Appeal	5.715
Definitions	1.01-5, 1.03-10, 2.10-25 3.05, 4.03, 4.40-5, 8.100
Delaware Bay and tributaries	7.40
Delegated function.....	8.100
Delegated function related to general vessel safety assessment	8.100
Delegation of OCMI signature authority	2.01-30
Delivery of decision	5.571
Deposit or Surrender of License, Certificate or Document: Return or issuance of a license, certificate of registry, or merchant mariners document.....	5.205
Voluntary deposits	5.201
Voluntary surrender	5.203
Deposition.....	4.07-25, 5.553
Designation of Oceanographic Research Vessels: Application.....	3.03
Authority and Purpose.....	3.01
Authority for regulations.....	3.01-3
Definitions	3.05
Designation	3.10
Letter of designation.....	3.05-1
Oceanographic research vessel	3.05-3
Procedures for designating oceanographic research vessels.....	3.10-1
Purpose of regulations.....	3.01-1
Renewal of letter of designation.....	3.10-5
Right of appeal.....	3.10-10
Vessel subject to the requirements	3.03-1
Disqualification of Administrative Law Judge.....	5.507
District Commander.....	1.01-10(a), 4.03-25
Domestic vessels, inspection requirements.....	2.01-10
Drawings	2.90
Drill ship MODU.....	2.10-25

E

Eastport, ME.....	7.10
Employees of vessels controlled by Army or Navy as witnesses	4.11-1
Enforcement	5.307
Equipment or material required to be approved	2.95-10
Evidence	5.537, 5.565
Evidence of criminal liability	5.69
Excursion permit	2.01-45
Exemptions.....	2.10-5
Existing vessel	1.03-10(b)(2)(c)
Explosives	6.15
Extra compensation for overtime services: Application form.....	9.15
Assessment and collection fees	9.14
Billing for services	9.16
Broken periods.....	9.8
Congressional appropriation necessary.....	9.13

Subchapter A Index

Coast Guard civilian personnel.....	9.1
Night, Sunday, and holiday defined.....	9.5
Overtime earnings not basis for overtime under Federal Employees Pay Act of 1945.....	9.3
Payment although no actual service performed.....	9.2
Proration of charges.....	9.11
Protests.....	9.17
Rate for night service.....	9.6
Travel status overtime.....	9.12
Two hours between broken periods.....	9.9
Waiting time.....	9.10
Waiting time; actual report for duties.....	9.4

F

Failure of respondent to appear at hearing.....	5.515
Federal Employees Pay Act of 1945.....	9.3
Federal law.....	5.541(a)(1)
Fees.....	2.10
Annual inspection fee.....	2.10-101
Applicability.....	2.10-1
Changes in vessel service.....	2.10-115
Definitions.....	2.10-25
Exemptions.....	2.10-5
For examination of foreign mobile offshore drilling units.....	2.10-130
For examination of foreign tankships.....	2.10-125
Overseas inspection and examination fees.....	2.10-120
Penalties.....	2.10-135
Prepayment of annual vessel inspection fees.....	2.10-105
Waivers.....	2.10-10
Ferry.....	2.10-25
Fire prevention equipment.....	2.20-50
Fishing vessels.....	2.01-50
Florida.....	7.85, 7.90, 7.95
Florida Reefs and Keys.....	7.100
Folly Island, SC.....	7.70
Foreign Mobile Offshore Drilling Units.....	2.10-130
Foreign tankships.....	2.10-125
Foreign Units of Coast Guard, investigations by.....	4.07-45
Foreign vessel, inspection requirements.....	2.01-13
Freight barge.....	2.10-25
Freight ship.....	2.10-25
Freight vessel.....	2.10-25

G

General.....	1.03-15, 5.501
Flow of functions.....	1.01-25
Purpose of boundary lines.....	7.1
Requirements.....	2.10-20, 2.90-1
Georgia.....	7.75, 7.85
Governmental organizations.....	5.541(a)(3)
Gross tons.....	8.100
Gulf Coast.....	7.105

H

Handling and shipping, specimen.....	4.06-40
Haro Strait, WA.....	7.145

46 CFR Ch. I (10–1–00 Edition)

Hawaii.....	7.110
Hazardous materials, incidents involving.....	4.05-30
Hazardous ship's stores.....	2.75-60
Hearings:	
Administrative Law Judge's findings and conclusions.....	5.563
Admissibility of respondent's Coast Guard records prior to entry of findings and conclusions.....	5.549
Answer.....	5.527
Appearances.....	5.513
Argument.....	5.559
Burden of Proof.....	5.539
Certification of extracts from shipping articles, logbooks, etc.....	5.543
Continuance of a hearing.....	5.511
Corrections or amendments of charges and/or specifications.....	5.525
Delivery of decision.....	5.571
Disqualification of Administrative Law Judge.....	5.507
Evidence.....	5.537
Failure of respondent to appear at hearing.....	5.515
General.....	5.501
Medical examination of respondent.....	5.557
Modification of Administrative Law Judge's decision and order.....	5.577
Motions or objections.....	5.523
Notification of right of appeal.....	5.573
Official notice by Commandant and Administrative Law Judge.....	5.541
Opening statement by or on behalf of the respondent.....	5.531
Opening statement of investigating officer.....	5.529
Opening the hearing.....	5.509
Order.....	5.567
Presentation of case where there is an admission or no contest an- swer.....	5.533
Public access to hearings.....	5.505
Record of the hearing.....	5.503
Rights of respondent.....	5.519
Selection of an appropriate order.....	5.569
Submission of prior record and evidence in aggravation or mitiga- tion.....	5.565
Submission of proposed findings and conclusion.....	5.561
Testimony by deposition.....	5.553
Treatises.....	5.555
Use of judgement of conviction.....	5.547
Verification of license, certificate, or document.....	5.521
Witnesses.....	5.535
Witnesses excluded from hearing room.....	5.517
Hilton Head Island, SC.....	7.70
Holiday defined.....	9.5

I

Incidents involving hazardous materials.....	4.05-30
Incompetence.....	5.31, 5.61(a)(9)
Incorporated by reference.....	8.110
Individual directly involved in a serious marine incident.....	4.03-4
Industrial vessel.....	2.10-25
Information to be furnished Marine Board of Investigation.....	4.07-55
Initiating suspension and revocation proceedings.....	5.53
Inspections:	
Applications.....	2.01-1
Application of regulations to vessel or tankships on an international voyage.....	2.01-8

Subchapter A Index

Certificates issued to foreign vessels.....	2.01-6
Certificates of inspection	2.01-5
Classes of vessels (including motorboats) examined or inspected and certificated	2.01-7
Delegation of OCMI signature authority	2.01-30
Excursion permit	2.01-45
International Convention for Safety of Life at Sea, 1974	2.01-35
Notification of inspection.....	2.01-3
Overtime compensation	2.01-60
Passengers or persons in addition to crew on cargo or tank ves- sels	2.01-40
Persons other than crew on towing, oyster, or fishing steam ves- sels	2.01-50
Requirements for:	
Domestic vessels.....	2.01-10
Foreign vessels	2.01-13
Revocation of certificates of inspection	2.01-20
Right of appeal.....	2.01-70
Vessel inspections in Alaska.....	2.01-80
Vessel repairs	2.01-15
Interference with master, ship's officers, or government officials in per- formance of official duties.....	5.61(a)(10)
International Convention for Safety of Life at Sea, 1974	2.01-25
International voyage	2.01-8
Investigations	4.07
Commandant or District Commander to order investigation	4.7-1
Counsel for witnesses and parties in interest.....	4.07-35
Foreign Units of Coast Guard, investigations by	4.07-45
Information to be furnished Marine Board of Investigation	4.07-55
Investigating officers, powers of.....	4.07-5
Opening statement	4.07-7
Recommendations, action on	4.07-15
Report of investigation.....	4.07-10
Testimony of witnesses in other districts, depositions	4.07-25
Testimony of witnesses under oath.....	4.07-30
Transfer of jurisdiction.....	4.07-20
Investigating officer.....	4.03-30, 5.15
Issuance of subpoenas	5.301

J

Judgement	5.547
Judicial review.....	1.01-30
Jurisdiction.....	4.07-20

K

Kenai Peninsula, AK.....	7.165
Kodiak Island, AK.....	7.165
Kotzebue Sound, AK	7.180

L

Law enforcement officer	4.03-55
Letter of Compliance	2.10-125(a), 2.10-130(a)(b)
Letter of designation.....	3.05-1
License.....	5.57, 5.61, 5.205 5.521, 5.707, 5.715
Lifesaving equipment.....	2.20-50
Liquefied gas tankship.....	2.10-25

46 CFR Ch. I (10–1–00 Edition)

Little Talbot Island, FL.....	7.85
Load lines, assignment of	2.85, 2.85-1
Logbooks	5.543
Long Island Sound, NY.....	7.20

M

Major marine casualty	4.40-5(d)
Mamala Bay, HI.....	7.110
Mandatory chemical testing	4.06
Responsibilities of individuals involved in serious marine inci-	
dents.....	4.06-5
Responsibilities of the marine employer.....	4.06-1
Required specimens.....	4.06-10
Specimen analysis and follow-up procedures	4.06-50
Specimen collection in incidents involving fatalities.....	4.06-30
Specimen collection requirements.....	4.06-20
Specimen handling and shipping.....	4.06-40
Submission of reports and test results.....	4.06-60
Maritime labor disputes	5.71
Marine Board of Investigation	4.07-55, 4.09, 4.09-5
Marine casualty investigation by the Board.....	4.40-15
Marine casualty or accident	4.03-1, 4.05-1 4.05-5, 4.05-10
Marine employer.....	4.03-45, 4.06-1
Marine Safety Center.....	1.03-30
Marine type, portable fire extinguishers	2.75-25
MARPOL 73/78.....	8.100
Marquesas Keys, FL.....	7.100
Massachusetts Bay, MA	7.15
Medical examination of respondent	5.557
Medical facility	4.03-5
Medical personnel.....	4.03-6
Mental incompetence.....	5.201
Merchant mariners document	5.57, 5.205, 5.521
Merchant Vessel Location Filing System	4.04-3
Mexican border	7.120
Miami, FL.....	7.100
Mitigation.....	5.565
Military installations.....	6.15
Military Sealift Command	6.06
Minimum standards for a recognized classification society	8.230
Misconduct.....	5.27
Resulting in loss of life or serious injury.....	5.61(a)(2)
Mobile Offshore Drilling Units.....	2.10-25, 2.10-130
Modification of Administrative Law Judge's decision and order	5.577
Montauk Point, NY	
Motions of objections.....	5.523
Murder or attempted murder	5.61(a)(4)
Mutiny	5.61(a)(5)

N

Nantucket Sound	7.20
Narragansett Bay, MA	7.20
Nautical school vessel.....	2.10-25
Navy	4.11-1
Negligence.....	5.29
New vessel.....	1.03-10(b)
New York Harbor.....	7.30

Subchapter A Index

Night defined	9.5
No contest	5.63, 5.527, 5.529, 5.533
Non-profit organization	2.10-25
Notice of marine casualty	4.05-1
Alcohol or drug use by individuals directly involved in casualties	4.05-12
Incidents involving hazardous materials	4.05-30
Report of accident to aid to navigation.....	4.05-1
Reports when state of war exists	4.05-25
Substance of marine casualty notice.....	4.05-5
Voyage records, retention of.....	4.05-15
Written report of marine casualty.....	4.05-10
Notification of inspection.....	2.01-3
Notification of right to appeal.....	5.573
Nuclear vessel	4.03-35
Nunivak, AK	7.175

O

Oceanographic vessels	2.01-15(a)(6), 2.01-15(b)(6), 2.10-25
OCMI	1.03-20, 2.01-30
Officer in Charge, Marine Inspection (OCMI).....	8.100
Official notice by Commandant and Administrative Law Judge	5.541
Offshore supply vessel.....	2.10-25
OMB control numbers (assigned pursuant to the Paperwork Reduction Act)	1.01-35
Opening statement	4.07-7
Opening statement by or on behalf of the respondent	5.531
Opening statement of investigating officer	5.529
Opening the hearing.....	5.509
Order.....	5.567
Oregon.....	7.135, 7.140
Organization, Coast Guard Marine Safety:	
Districts.....	1.01-15
Headquarters.....	1.01-10
Overseas inspection and examination fees	2.10-120
Overtime compensation	2.01-60
Overtime earnings not basis for overtime under Federal Employees Pay Act of 1945	9.3
Oyster vessels.....	2.01-50

P

Pacific Coast.....	7.110
Paperwork Reduction Act.....	1.01-35
Party in interest	4.03-10, 4.07-35
Passenger barge	2.10-25
Passengers or persons in addition to crew on cargo or tank vessels.....	2.01-40
Passenger ship.....	2.10-25
Passenger vessels.....	2.01-15(a)(1), 2.01-15(b)(1), 2.10-25
Payment although no actual service performed	9.2
Payment of witness fees and allowances.....	4.09-10, 5.401
Penalties.....	2.10-135, 2.50, 2.50-1
Permits for commercial vessels handling explosives at military installations	6.15
Permits for excursion.....	2.01-45
Persons other than crew on towing, oyster, or fishing vessels.....	2.01-50
Perversion.....	5.61(a)(6)
Petition to reopen hearing.....	5.601
Physical incompetence	5.201

46 CFR Ch. I (10–1–00 Edition)

Physician-patient privilege.....	5.67
Plans, drawings, or blueprints.....	2.90
Point Conception, CA	7.125, 7.130
Point Fermin, CA	7.120
Point Sur, CA.....	7.130, 7.135
Point Vicente, CA.....	7.125
Point Whitshed, AK	7.160
Political subdivision	2.10-25
Portable fire extinguishers	2.75-25
Potential vessel casualty	4.04
Powers of:	
Investigating officer	5.103
Marine Board of Investigation.....	4.09-5
Preferment of charges.....	4.09-35
Preliminary investigation by Board	4.40-10
Preparations and service of charges and specifications.....	5.107
Prepayment of annual vessel inspection fees	2.10-105
Presentation of case (where there is an admission or no contest an- swer)	5.533
Prior record	5.565
Proceedings, record of.....	4.09-20
Procedures for appeal	5.703
Procedures for Coast Guard investigation	4.40-30
Procedures for designating oceanographic research vessels.....	3.10-1
Procedures for effecting individual waivers of navigation and vessel in- spection laws and regulations	6.01
Procedures for obtaining approvals	2.75-10
Procedures for submitting petition	5.603
Proof of service	5.309
Proration of charges.....	9.11
Proof, standard of.....	5.63
Protests.....	9.17
Public access to hearings.....	5.505
Public availability of records	4.13-1
Public nautical schoolships.....	2.01-15(a)(5), 2.01-15(b)(5)
Public vessel	2.10-25, 4.03-40, 4.40-5(e)

Q

Qualifications for construction personnel.....	2.75
Qualified medical personnel	4.03-6
Quashing a subpoena.....	5.305

R

Rate for night service	9.6
Rate for Sunday or holiday services	9.7
Reciprocity	8.120
Recognition of a classification society	8.220
Recognized classification society	1.03-10(a), 8.100
Recognized laboratory	2.75-25(c)(3)
Recommendations, action on.....	4.07-15
Record, availability of.....	4.13-1
Record of hearing.....	5.503
Record of proceedings	4.09-20
Record of the Coast Guard and the Board	4.40-35
Recreational vessels.....	4.03-50
Regulations, authority and scope.....	4.01
Rehabilitation program	5.205

Subchapter A Index

Relationship of the National Transportation Safety Board to the Coast Guard.....	4.40-3
Renewal of letter of designation.....	3.10-5
Repairs or alteration in lifesaving or fire protection equipment.....	2.20-50
Reporting exclusion.....	4.01-3
Report of accident to aid to navigation.....	4.05-20
Report of Chief engineer	2.20-40
Report of investigation.....	4.07-10
Report of lack of vessel communication	4.04-3
Report of potential vessel casualty	4.04-1
Reports and forms	2.20
Reports when state of war exists	4.05-25
Required specimens.....	4.06-10
Requirements and test, safety equipment.....	2.75-15
Rescue Coordination Center (RCC).....	4.04-1(a)
Respondent	5.303, 5.515, 5.519 5.531, 5.549, 5.557, 5.565
Responsibilities of individuals directly involved in serious marine incidents.....	4.06-5
Responsibilities of the marine employer.....	4.06-1
Retention of records by the public.....	2.95
Revocation	1.01-20, 2.01-20, 5.567
Revocation of a classification society recognition.....	8.260
Right of appeal	2.01-70, 3.10-10
Rights of the respondent.....	5.519
Rio Grande, TX.....	7.105
Rules for establishing boundary lines.....	7.5

S

Sabotage.....	5.61(a)(7)
Sailing school vessel	2.10-25
Sandy Hook, NJ	7.35
Santa Catalina Island, CA	7.115, 7.130
Savannah River	7.75
Scope of regulations	4.01-1
Sea-going towing vessel	2.10-25
Selection of an appropriate order	5.569
Self-elevating MODU	2.10-25
Semi-submersible MODU	2.10-25
Serious marine incident	4.03-2
Sessions to be public	4.09-17
Shipping articles.....	5.525, 5.543
Small passenger vessels.....	2.01-15(a)(2), 2.01-15(b)(2), 2.10-25
Smuggling of aliens.....	5.61(a)(8)
SOLAS	8.100
Specification	5.25
Specimen analysis and follow-up procedures	4.06-50
Specimen collection in incidents involving fatalities.....	4.60-30
Specimen collection requirements.....	4.06-20
Specimen handling and shipping.....	4.06-40
St. Johns Point, FL.....	7.95
St. Johns River, FL.....	7.90
St. Simons Island, GA.....	7.80, 7.85
Standard of proof	5.63
State	2.10-25
State law	5.541(a)(2)
Stay of effect of decision and order of Administrative Law Judge on appeal to the Commandant; temporary license, certificate, or document.....	5.707

46 CFR Ch. I (10–1–00 Edition)

Stay of effect of decision of the Commandant on Appeal; temporary document and/or license pending appeal to the National Transportation Safety Board	5.715
Strait of Georgia, WA	7.145
Strait of Juan de Fuca, WA	7.145
Submersible MODU	2.10-25
Submersible vessel	2.10-25
Submission of prior record and evidence in aggravation or mitigation	5.565
Submission of proposed findings and conclusions	5.561
Submission of reports and test results	4.06-60
Subpoenas enforcement	5.307
Subpoenas issuance of	5.301
Subpoenas proof of service	5.309
Subpoenas quashing	5.305
Subpoenas service of on behalf of the respondent	5.303
Substance of marine casualty notice	4.05-5
Substance of reports	4.04-5
Sullivans Island, SC	7.60
Sunday, defined	9.5
Surrender to avoid hearing	5.203
Suspension and revocation proceedings	1.01-20
Suspension of approval	2.75-40

T

Tank barge	2.10-25
Tankships	2.01-8, 2.01-15(a)(4), 2.01-15(b)(4) 2.10-25, 2.10-125
Tank vessel	2.10-25
Termination of classification society authority	8.430,
Testimony by deposition	4.12, 5.553
Testimony by interrogatories	4.12
Testimony of witnesses in other districts, depositions	4.07-25
Testimony under oath	4.07-30
Tests, for approval of safety equipment	2.75-15
Time and place of investigation, notice of; rights of witnesses, etc	4.09-15
Time limitations	5.901
Time limitations for service of charges and specifications	5.55
Transfer of jurisdiction	4.07-20
Travel status overtime	9.12
Treatises	5.555
Two hours between broken periods	9.9
Tybee Island, GA	7.80

U

United States border	7.120, 7.150
U.S. Attorney	4.09-25
U.S. supplement to class rules	8.430
Use of judgement of conviction	5.547
User fee anniversary date	2.10-25
User fees	Table 2.10-101

V

Verification of license, certificate or document	5.521
Vessel enrollment in Alternative Compliance Program	8.420
Vessel identification number (VIN)	2.10-25
Vessel inspections	2.01-80

Subchapter A Index

Vessel of the United States.....	4.40-5(f)
Vessel repairs.....	2.01-15
Vessels:	
Oceanographic research vessels.....	3.03-1
Operated by or chartered to Military Sealift Command	6.06
Requisitioned by the United States for emergency evacuation	6.04
Subject to the requirements; Vineyard Sound, MA.....	7.20
Violation of law or regulation.....	5.33
Voluntary deposits in event of mental or physical incompetence.....	5.201
Voluntary surrender to avoid hearing.....	5.203
Voyage records, retention of.....	4.05-15

W

Waiting time	9.10, 9.4
Waiting time; actual report for duties.....	9.4
Waivers	2.10-10
Waivers of navigation and vessel inspection laws.....	2.45
Authority for and limitations on issuance	2.45-1
Welding procedures and performance qualifications.....	2.75-70
Warning	5.105(e), 5.565
Withdrawals or terminations of approvals and appeals.....	2.75-50
Witnesses	5.535
Witnesses excluded from the hearing room	5.517
Witnesses fees.....	4.11, 4.11-10
Witnesses: payment of.....	4.09-10, 5.401
Written report of marine casualty	4.05-10
Wrongful destruction of ship's property	5.61(a)(11)

Y

Youth	2.10-25
-------------	---------

SUBCHAPTER B—MERCHANT MARINE OFFICERS AND SEAMEN

PART 10—LICENSING OF MARITIME PERSONNEL

Subpart A—General

Sec.

- 10.101 Purpose of regulations.
- 10.102 Incorporation by reference.
- 10.103 Definitions of terms used in this part.
- 10.105 Regional examination centers.
- 10.107 Paperwork approval.
- 10.109 Fees.
- 10.110 Fee payment procedures.
- 10.111 Penalties.
- 10.112 No-fee license for certain applicants.

Subpart B—General Requirements for All Licenses and Certificates of Registry

- 10.201 Eligibility for licenses and certificates of registry, general.
- 10.202 Issuance of licenses, certificates of registry, and STCW certificates or endorsements.
- 10.203 Quick reference table for license and certificate of registry requirements.
- 10.204 Right of appeal.
- 10.205 Requirements for original licenses, certificates of registry, and STCW certificates and endorsements.
- 10.207 Requirements for raises of grades of licenses.
- 10.209 Requirements for renewal of licenses, certificates of registry, and STCW certificates and endorsements.
- 10.211 Creditable service and equivalents for licensing purposes.
- 10.213 Sea service as a member of the Armed Forces of the United States and on vessels owned by the United States as qualifying experience.
- 10.215 Modification or removal of limitations.
- 10.217 Examination procedures and denial of licenses.
- 10.219 Issuance of duplicate license or certificate of registry.
- 10.221 Parting with license.
- 10.223 Suspension and revocation of licenses.

Subpart C—Training Schools With Approved Courses

- 10.301 Applicability.
- 10.302 Course approval.
- 10.303 General standards.
- 10.304 Substitution of training for required service, use of training-record books, and use of towing officer assessment records.

- 10.305 Radar-Observer certificates and qualifying courses.
- 10.306 Radar-Operation course and certificate.
- 10.307 Training schools with approved radar observer courses.
- 10.309 Coast Guard-accepted training other than approved courses.

Subpart D—Professional Requirements for Deck Officers' Licenses

- 10.401 Ocean and near coastal licenses.
- 10.402 Tonnage requirements for ocean or near coastal licenses for vessels of over 1600 gross tons.
- 10.403 Structure of deck licenses.
- 10.404 Service requirements for master of ocean or near coastal steam or motor vessels of any gross tons.
- 10.405 Service requirements for chief mate of ocean or near coastal steam or motor vessels of any gross tons.
- 10.406 Service requirements for second mate of ocean or near coastal steam or motor vessels of any gross tons.
- 10.407 Service requirements for third mate of ocean or near coastal steam or motor vessels of any gross tons.
- 10.410 Requirements for deck licenses for vessels of not more than 1600 gross tons.
- 10.412 Service requirements for master of ocean or near coastal steam or motor vessels of not more than 1600 gross tons.
- 10.414 Service requirements for mate of ocean steam or motor vessels of not more than 1600 gross tons.
- 10.416 Service requirements for mate of near coastal steam or motor vessels of not more than 1600 gross tons.
- 10.418 Service requirements for master of ocean or near coastal steam or motor vessels of not more than 500 gross tons.
- 10.420 Service requirements for mate of ocean steam or motor vessels of not more than 500 gross tons.
- 10.421 Service requirements for mate of near coastal steam or motor vessels of not more than 500 gross tons.
- 10.422 Tonnage limitations and qualifying requirements for licenses as master or mate of vessels of not more than 200 gross tons.
- 10.424 Service requirements for master of ocean steam or motor vessels of not more than 200 gross tons.
- 10.426 Service requirements for master of near coastal steam or motor vessels of not more than 200 gross tons.
- 10.427 Service requirements for mate of near coastal steam or motor vessels of not more than 200 gross tons.

Coast Guard, DOT

Pt. 10

- 10.428 Service requirements for master of near coastal steam or motor vessels of not more than 100 gross tons.
- 10.429 Service requirements for limited master of near coastal steam or motor vessels of not more than 100 gross tons.
- 10.430 Licenses for the Great Lakes and inland waters.
- 10.431 Tonnage requirements for Great Lakes and inland licenses for vessels of over 1600 gross tons.
- 10.433 Service requirements for master of Great Lakes and inland steam or motor vessels of any gross tons.
- 10.435 Service requirements for master of inland steam or motor vessels of any gross tons.
- 10.437 Service requirements for mate of Great Lakes and inland steam or motor vessels of any gross tons.
- 10.442 Service requirements for master of Great Lakes and inland steam or motor vessels of not more than 1600 gross tons.
- 10.444 Service requirements for mate of Great Lakes and inland steam or motor vessels of not more than 1600 gross tons.
- 10.446 Service requirements for master of Great Lakes and inland steam or motor vessels of not more than 500 gross tons.
- 10.448 Service requirements for mate of Great Lakes and inland steam or motor vessels of not more than 500 gross tons.
- 10.450 Tonnage limitations and qualifying requirements for licenses as master or mate of Great Lakes and inland vessels of not more than 200 gross tons.
- 10.452 Service requirements for master of Great Lakes and inland steam or motor vessels of not more than 200 gross tons.
- 10.454 Service requirements for mate of Great Lakes and inland steam or motor vessels of not more than 200 gross tons.
- 10.455 Service requirements for master of Great Lakes and inland steam or motor vessels of not more than 100 gross tons.
- 10.456 Service requirements for limited master of Great Lakes and inland steam or motor vessels of not more than 100 gross tons.
- 10.457 Service requirements for master of inland steam or motor vessels of not more than 100 gross tons.
- 10.459 Service requirements for master or mate of rivers.
- 10.462 Licenses for master or mate of uninspected fishing industry vessels.
- 10.463 General requirements for licenses for master, mate (pilot), and apprentice mate (steersman) of towing vessels.
- 10.464 Requirements for licenses as master of towing vessels.
- 10.465 Requirements for licenses as mate (pilot) of towing vessels.
- 10.466 Requirements for licenses as apprentice mate (steersman) of towing vessels.
- 10.467 Licenses for operator of uninspected passenger vessels.

- 10.468 Licenses for mobile offshore drilling units.
- 10.470 Licenses for offshore installation manager.
- 10.472 License for barge supervisor.
- 10.474 License for ballast control operator.
- 10.476 Acknowledgments of service and temporary licenses for mobile offshore drilling units.
- 10.480 Radar observer.
- 10.482 Assistance towing.
- 10.491 Licenses for service on offshore supply vessels.
- 10.493 Master (OSV).
- 10.495 Chief Mate (OSV).
- 10.497 Mate (OSV).

Subpart E—Professional Requirements for Engineer Officers' Licenses

- 10.501 Grade and type of engineer licenses issued.
- 10.502 Additional requirements for engineer licenses.
- 10.503 Horsepower limitations.
- 10.504 Application of deck service for limited engineer licenses.
- 10.505 Engineer license structure.
- 10.510 Service requirements for chief engineer of steam and/or motor vessels.
- 10.512 Service requirements for first assistant engineer of steam and/or motor vessels.
- 10.514 Service requirements for second assistant engineer of steam and/or motor vessels.
- 10.516 Service requirements for third assistant engineer of steam and/or motor vessels.
- 10.518 Service requirements for chief engineer (limited-oceans) of steam and/or motor vessels.
- 10.520 Service requirements for chief engineer (limited-near coastal) of steam and/or motor vessels.
- 10.522 Service requirements for assistant engineer (limited-oceans) of steam and/or motor vessels.
- 10.524 Service requirements for designated duty engineer of steam and/or motor vessels.
- 10.530 Licenses for engineers of uninspected fishing industry vessels.
- 10.540 Licenses for engineers of mobile offshore drilling units.
- 10.542 License for chief engineer (MODU).
- 10.544 License for assistant engineer (MODU).
- 10.551 Licenses for service on offshore supply vessels.
- 10.553 Chief Engineer (OSV).
- 10.555 Engineer (OSV).

Subpart F—Licensing of Radio Officers

- 10.601 Applicability.

§ 10.101

10.603 Requirements for radio officers' licenses, and STCW certificates or endorsements for GMDSS radio operators.

Subpart G—Professional Requirements for Pilot Licenses

- 10.701 Scope of pilot licenses and endorsements.
- 10.703 Service requirements.
- 10.705 Route familiarization requirements.
- 10.707 Examination requirements.
- 10.709 Annual physical examination requirements.
- 10.711 Tonnage requirements.
- 10.713 Requirements for maintaining current knowledge of waters to be navigated.

Subpart H—Registration of Staff Officers

- 10.801 Applicability.
- 10.803 Grades of certificates issued.
- 10.805 General requirements.
- 10.807 Experience requirements for registry.
- 10.809 Experience requirements for ratings endorsed on certificate of registry.
- 10.811 Expiration of existing certificates of registry.

Subpart I—Subjects of License Examinations and Practical Demonstrations of Competence

- 10.901 General provisions.
- 10.903 Licenses requiring examinations.
- 10.910 Subjects for deck licenses.
- 10.920 Subjects for MODU licenses.
- 10.950 Subjects for engineer licenses.

Subpart J—Ro-Ro Passenger Ships

- 10.1001 Purpose of regulations.
- 10.1003 Definition.
- 10.1005 General requirements for license-holders.

AUTHORITY: 14 U.S.C. 633; 31 U.S.C. 9701; 46 U.S.C. 2101, 2103, and 2110; 46 U.S.C. Chapter 71; 46 U.S.C 7502, 7505, and 7701; 49 CFR 1.45 and 1.46. Section 10.107 is also issued under the authority of 44 U.S.C. 3507.

SOURCE: CGD 81-059, 52 FR 38623, Oct. 16, 1987 (interim) and CGD 81-059, 54 FR 132, Jan. 4, 1989 (final), unless otherwise noted.

Subpart A—General

§ 10.101 Purpose of regulations.

(a) The purposes of the regulations in this part are to provide—

(1) A comprehensive means of determining the qualifications an applicant must possess to be eligible for a license as a deck officer, engineer, pilot, radio officer, or radio operator on merchant

46 CFR Ch. I (10-1-00 Edition)

vessels, or for a license to operate uninspected towing vessels or uninspected passenger vessels, or for a certificate of registry as a staff officer; and

(2) A means of determining that an applicant is competent to serve as a master, chief mate, officer in charge of a navigational watch, chief engineer officer, second engineer officer (first assistant engineer), officer in charge of an engineering watch, designated duty engineer, or radio operator, in accordance with the provisions of the International Convention on Standards of Training, Certification and Watchkeeping for Seafarers, 1978, as amended in 1995 (STCW), and other laws, and to receive the appropriate certificate or endorsement as required by STCW.

(b) With few exceptions, these regulations do not specify or restrict licenses to particular types of service such as tankships, freight vessels or passenger vessels. However, all licensed personnel shall become familiar with the relevant characteristics of each vessel prior to assuming their duties. As appropriate, these characteristics include but are not limited to: general arrangement of the vessel; maneuvering characteristics; proper operation of the installed navigation equipment; fire-fighting and lifesaving equipment; stability and loading characteristics; emergency duties; and main propulsion and auxiliary machinery, including steering gear systems and controls.

(c) The regulations in subpart C of this part prescribe the requirements applicable to—

(1) Each approved training course, if the training course is to be acceptable as a partial substitute for service or for a required examination, or as training required for a particular license or license endorsement; and

(2) All training and assessment associated with meeting the standards of competence established by STCW.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 95-062, 62 FR 34528, June 26, 1997]

§ 10.102 Incorporation by reference.

(a) Certain material is incorporated by reference into this part with the approval of the Director of the Federal

Coast Guard, DOT

§ 10.103

Register under 5 U.S.C. 552(a) and 1 CFR part 51. To enforce any edition other than that specified in paragraph (b) of this section, the Coast Guard must publish notice of change in the FEDERAL REGISTER and must ensure that the material is available to the public. All approved material is available for inspection at the Office of the Federal Register, 800 North Capitol Street NW., suite 700, Washington, DC, and at the U.S. Coast Guard, Office of Operating and Environmental Standards, 2100 Second Street SW., Washington, DC 20593-0001, and is available from the sources indicated in paragraph (b) of this section.

(b) The material approved for incorporation by reference in this part and the sections affected are as follows:

International Maritime Organization (IMO)

4 Albert Embankment, London, SE1 7SR, England.

STCW—International Convention on Standards of Training, Certification and Watchkeeping for Seafarers, 1978, as amended in 1995 (STCW Convention), and Seafarer's Training, Certification and Watchkeeping Code (STCW Code)—10.103; 10.205; 10.304; 10.603; 10.901; 10.903; 10.1005.

[CGD 95-062, 62 FR 34529, June 26, 1997, as amended by USCG-1999-6216, 64 FR 53223, Oct. 1, 1999]

§ 10.103 Definitions of terms used in this part.

Apprentice mate (steersman) of towing vessels means a mariner qualified to perform watchkeeping on the bridge, aboard a towing vessel, while in training under the direct supervision of a licensed master or mate (pilot) of towing vessels.

Approved means approved by the Coast Guard in accordance with § 10.302.

Approved training means training that is approved by the Coast Guard or meets the requirements of § 10.309.

Assistant engineer means a qualified officer in the engine department.

Assistance towing means towing a disabled vessel for consideration.

Ballast control operator (BCO) is a licensed officer restricted to service on MODUs. The duties involve the operation of the complex ballast system found on many MODUs. A ballast con-

trol operator, when assigned to a MODU, is the equivalent of a conventionally licensed mate.

Barge supervisor (BS) is a licensed officer restricted to service on MODUs. The duties involve support to the OIM in marine related matters including, but not limited to, maintaining watertight integrity, inspecting and maintaining mooring and towing components, and the maintenance of emergency and other marine related equipment. A barge supervisor, when assigned to a MODU is the equivalent of a conventionally licensed mate.

Boatswain means the leading seaman and immediate supervisor of unlicensed deck personnel who supervises the maintenance of deck gear.

Chief engineer means any person responsible for the mechanical propulsion of a vessel and who is the holder of a valid license as chief engineer.

Chief mate means the deck officer next in seniority to the master and upon whom the command of the vessel will fall in the event of the incapacity of the master.

Coast Guard-accepted means that the Coast Guard has officially acknowledged in writing that the material or process at issue meets the applicable requirements; that the Coast Guard has issued an official policy statement listing or describing the material or process as meeting the applicable requirements; or that an entity acting on behalf of the Coast Guard under a Memorandum of Agreement has determined that the material or process meets the applicable requirements.

Conviction means the applicant for a license or certificate of registry has been found guilty by judgment or plea by a court of record of the United States, the District of Columbia or any State or territory of the United States of a criminal felony or misdemeanor or of an offense described in section 205 of the National Driver Register Act of 1982 (49 U.S.C. 30304). Conviction of more than one offense at a single trial will be considered to be multiple convictions. If an applicant pleads guilty or no contest, is granted deferred adjudication, or is required by the court to attend classes, make contributions of

time or money, receive treatment, submit to any manner of probation or supervision, or forego appeal of a trial court's conviction, then the applicant will be considered to have received a conviction. A later expungement of the conviction will not negate a conviction unless it is proved to the OCMI that the expungement is based upon a showing that the court's earlier conviction was in error.

Day means, for the purpose of complying with the service requirements of this part, eight hours of watchstanding or day-working not to include overtime. On vessels where a 12 hour working day is authorized and practiced, such as on a six-on, six-off watch schedule, each work day may be creditable as one and one half days of service. On vessels of less than 100 gross tons, a day is considered as eight hours unless the Officer in Charge, Marine Inspection determines that the vessel's operating schedule makes this criteria inappropriate, in no case will this period be less than four hours.

Designated duty engineer means a qualified engineer, who may be the sole engineer on vessels with a periodically unattended engine room.

Designated examiner means a person who has been trained or instructed in techniques of training or assessment and is otherwise qualified to evaluate whether a candidate for a license, document, or endorsement has achieved the level of competence required to hold the license, document, or endorsement. This person may be designated by the Coast Guard or by a Coast Guard-approved or accepted program of training or assessment. A faculty member employed or instructing in a navigation or engineering course at the U.S. Merchant Marine Academy or at a State maritime academy operated in accordance with regulations in 46 CFR part 310 is qualified to serve as a designated examiner in his or her area(s) of specialization without individual evaluation by the Coast Guard.

Disabled vessel means a vessel that needs assistance, whether docked, moored, anchored, aground, adrift, or under way; but does not mean a barge or any other vessel not regularly operated under its own power.

Employment assigned to is the total period a person is assigned to work on MODUs, including time spent ashore as part of normal crew rotation.

Endorsement means a provision added to a license which alters its scope or application. An example of an endorsement is a tonnage limitation increase within a general tonnage category, a pilot license route addition, or a radar observer qualification.

Evaluation means processing an application, from the point of receipt to approval or rejection of the application, including review of all documents and records submitted with an application as well as those obtained from public records and databases.

Fails a chemical test for dangerous drugs means that the result of a chemical test conducted in accordance with 49 CFR part 40 is reported as "positive" for the presence of dangerous drugs or drug metabolites in an individual's system by a Medical Review Officer in accordance with that part.

First assistant engineer means the engineer officer next in seniority to the chief engineer and upon whom the responsibility for the mechanical propulsion of the vessel will fall in the event of the incapacity of the chief engineer.

Great Lakes means the Great Lakes and their connecting and tributary waters including the Calumet River as far as the Thomas J. O'Brien Lock and Controlling Works (between mile 326 and 327), the Chicago River as far as the east side of the Ashland Avenue Bridge (between mile 321 and 322), and the Saint Lawrence River as far east as the lower exit of Saint Lambert Lock.

Harbor assist means the use of a towing vessel during maneuvers to dock, undock, moor, or unmoor a vessel, or to escort a vessel with limited maneuverability.

Horsepower means, for the purpose of this part, the total maximum continuous shaft horsepower of all the vessel's main propulsion machinery.

Inland waters means the navigable waters of the United States shoreward of the Boundary Lines as described in 46 CFR part 7, excluding the Great Lakes and Western Rivers. For establishing credit for sea service, the waters of the Inside Passage between

Coast Guard, DOT

§ 10.103

Puget Sound and Cape Spencer, Alaska, are inland.

Lower level means a category of deck and engineer licenses established for assessment of fees. Lower level licenses are all licenses, other than those defined as upper level, for which the requirements are listed in subparts D, E, and G of this part.

Master means the officer having command of a vessel.

Mate means a qualified officer in the deck department other than the master.

Mobile offshore drilling unit (MODU) means a vessel capable of engaging in drilling operations for the exploration for or exploitation of subsea resources. MODU designs include:

(a) *Bottom bearing units* which include:

(1) *Self-elevating (or jack-up) units* with moveable, bottom bearing legs capable of raising the hull above the surface of the sea; and,

(2) *Submersible units* of ship shape, barge type or novel hull design, other than a self-elevating unit, intended for operating while bottom bearing.

(b) *Surface units* with a ship shape or barge type displacement hull of single or multiple hull construction intended for operating in a floating condition, including semi-submersibles and drillships.

Month means 30 days, for the purpose of complying with the service requirements of this part.

National Driver Register (NDR) means the nationwide repository of information on drivers maintained by the National Highway Traffic Safety Administration as provided under 49 U.S.C. Chapter 303.

NDR listed convictions means a conviction of any of the following motor vehicle-related offenses or comparable offenses:

(a) Operating a motor vehicle while under the influence of, or impaired by, alcohol or a controlled substance; or

(b) A traffic violation arising in connection with a fatal traffic accident, reckless driving, or racing on the highways.

Near coastal means ocean waters not more than 200 miles offshore.

Oceans means the waters seaward of the Boundary Lines as described in 46

CFR part 7. For the purposes of establishing sea service credit, the waters of the Inside Passage between Puget Sound and Cape Spencer, Alaska, are not considered oceans.

Officer in Charge, Marine Inspection (OCMI) for the purposes of part 10 means the officer or individual so designated at one of the locations of the regional examination centers listed in § 10.105.

Offshore installation manager (OIM) is a licensed officer restricted to service on MODUs. An assigned offshore installation manager is equivalent to a conventionally licensed master and is the person designated by the owner or operator to be in complete and ultimate command of the unit.

On location means that a mobile offshore drilling unit is bottom bearing or moored with anchors placed in the drilling configuration.

Operator means an individual licensed to operate certain uninspected vessels.

Orally assisted examination means a license examination as described in subpart I of this part verbally administered and documented by an examiner.

Original license means the first deck, engineer or radio officer license issued to any person by the Coast Guard.

Passes a chemical test for dangerous drugs means the result of a chemical test conducted in accordance with 49 CFR part 40 is reported as "negative" by a Medical Review Officer in accordance with that part.

Pilot of towing vessels means a qualified officer of towing vessels operating only on inland routes.

Practical demonstration means the performance of an activity under the direct observation of a designated examiner for the purpose of establishing that the performer is sufficiently proficient in a practical skill to meet a specified standard of competence or other objective criterion.

Qualified instructor means a person who has been trained or instructed in instructional techniques and is otherwise qualified to provide required training to candidates for licenses, documents, and endorsements. A faculty member employed at a State maritime academy or the U.S. Merchant Marine Academy operated in accordance with

§ 10.103

46 CFR Ch. I (10–1–00 Edition)

46 CFR part 310 and instructing in a navigation or engineering course is qualified to serve as a qualified instructor in his or her area(s) of specialization without individual evaluation by the Coast Guard.

Raise of grade means an increase in the level of authority and responsibility associated with a license.

Rivers means any river, canal, or other similar body of water designated by the Officer in Charge, Marine Inspection.

Senior company official means the president, vice president, vice president for personnel, personnel director, or similarly titled or responsible individual, or a lower level employee designated in writing by one of the aforementioned for the purpose of certifying employment and whose signature is on file at the REC at which application is made.

Service as when computing the required service for MODU licenses, is the time period, in days, a person is assigned to work on MODUs, excluding time spent ashore as part of crew rotation. A day, for the purposes of this definition, is a minimum of four hours, and no additional credit is received for periods served over eight hours.

Standard of competence means the level of proficiency to be achieved for the proper performance of duties on board vessels in accordance with national and international criteria.

STCW means the International Convention on Standards of Training, Certification and Watchkeeping for Seafarers, 1978, as amended in 1995.

STCW Code means the Seafarer's Training, Certification and Watchkeeping Code.

STCW endorsement means a certificate or endorsement issued in accordance with STCW. An STCW endorsement issued by the Officer in Charge, Marine Inspection (OCMI), will be valid only when accompanied by the appropriate U.S. license or document; and, if the license or document is revoked, then the associated STCW endorsement is no longer valid for any purpose. References to STCW placed on a U.S. license or merchant mariner's document will suffice as STCW endorsements for the mariner serving on a vessel operating exclusively on a domestic voyage

(i.e., to and from U.S. ports or places subject to U.S. jurisdiction).

Underway means that a mobile offshore drilling unit is not in an on location or laid up status. Underway includes that period of time when the MODU is deploying or recovering its mooring system.

Undocumented vessel means a vessel not required to have a document issued under the laws of the United States.

Upper level means a category of deck and engineer licenses established for assessment of fees. Upper level licenses are those licenses for which the requirements are listed in §§10.404 to 10.407 of subpart D of this part and §§10.510, 10.512, 10.514, and 10.516 of subpart E of this part.

Western Rivers means the Mississippi River, its tributaries, South Pass, and Southwest Pass, to the navigational demarcation lines dividing the high seas from harbors, rivers, and other inland waters of the United States, and the Port Allen-Morgan City Alternate Route, and that part of the Atchafalaya River above its junction with the Port Allen-Morgan City Alternate Route including the Old River and the Red River, and those waters specified in 33 CFR 89.25.

Year means 360 days, for the purpose of complying with the service requirements of this part.

[CGD 81-059 and CGD 81-059a, 52 FR 38623 and 38666, Oct. 16, 1987, as amended by CGD 87-017, 53 FR 18562, May 24, 1988; CGD 81-059, 54 FR 132, Jan. 4, 1989; CGD 81-059a, 55 FR 14798, Apr. 18, 1990; CGD 91-002, 58 FR 15237, Mar. 19, 1993; CGD 91-223, 60 FR 4524, Jan. 23, 1995; CGD 91-212, 60 FR 65483, Dec. 19, 1995; CGD 95-062, 62 FR 34529, June 26, 1997; USCG-1999-6224, 64 FR 63225, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63225, Nov. 19, 1999, §10.103 was amended by revising the definition of *Inland waters*; and adding the definitions of *Apprentice mate (steersman) of towing vessels*, *Approved training*, *Disabled vessel*, *Harbor assist*, and *Pilot of towing vessels*, in alphabetical order, effective Nov. 20, 2000. For the convenience of the user, the superseded text is set forth as follows:

§ 10.103 Definitions of terms used in this part.

* * * * *

Coast Guard, DOT

§ 10.109

Inland Waters means the navigable waters of the United States shoreward of the Boundary Lines as described in 46 CFR part 7, excluding the Great Lakes. For the purposes of establishing sea service credit, the waters of the Inside Passage between Puget Sound and Cape Spencer, Alaska, are considered as inland.

* * * * *

§ 10.105 Regional examination centers.

Licensing and certification functions are performed only by the Officer in Charge, Marine Inspection, at the following locations:

Boston, MA	Toledo, OH
New York, NY	San Pedro, CA
Baltimore, MD	San Francisco, CA
Charleston, SC	Portland, OR
Miami, FL	Seattle, WA
New Orleans, LA	Anchorage, AK
Houston, TX	Juneau, AK
Memphis, TN	Honolulu, HI
St. Louis, MO	

[CGD 81-059, 52 FR 38623, Oct. 16, 1987 and CGD 81-059, 54 FR 132, Jan. 4, 1989, as amended by USCG-2000-7790, 65 FR 58458, Sept. 29, 2000]

§ 10.107 Paperwork approval.

(a) This section lists the control numbers assigned by the Office of Management and Budget under the Paperwork Reduction Act of 1980 (Pub. L. 96-511) for the reporting and record keeping requirements in this part.

(b) The following control numbers have been assigned to the sections indicated:

(1) OMB 2115-0514—46 CFR 10.201, 10.202, 10.205, 10.207, 10.209, 10.470, 10.472, 10.474, 10.542, and 10.544.

(2) OMB 2115-0111—46 CFR 10.302, 10.303, 10.304, 10.480.

(3) OMB 2115-0624—46 CFR 10.304 and 10.309.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 133, Jan. 4, 1989; CGD 81-059a, 55 FR 14799, Apr. 18, 1990; CGD 95-062, 62 FR 34529, June 26, 1997]

§ 10.109 Fees.

Use table 10.109 to determine the fees that you must pay for license and certificate of registry activities in this part.

TABLE 10.109—FEES

If you apply for—	And you need—		
	Evaluation— then the fee is—	Examination— then the fee is—	Issuance—then the fee is—
License:			
Original:			
Upper level	\$100	\$110	\$45
Lower level	100	95	45
Raise of grade	100	45	45
Modification or removal of limitation or scope	50	45	45
Endorsement	50	45	45
Renewal	50	45	45
Renewal for continuity purposes	n/a	n/a	45
Reissue, Replacement, and Duplicate	n/a	n/a	¹ 45
Radio Officer License:			
Original	50	n/a	45
Endorsement	50	45	45
Renewal	50	n/a	45
Renewal for continuity purposes	n/a	n/a	45
Reissue, Replacement, and Duplicate	n/a	n/a	¹ 45
Certificate of Registry:			
Original (MMD holder)	90	n/a	45
Original (MMD applicant)	105	n/a	45
Renewal	50	n/a	45
Renewal for continuity purposes	n/a	n/a	45
Endorsement	n/a	n/a	45
Reissue, Replacement, and Duplicate	n/a	n/a	¹ 45
STCW Certification:			
Original	No fee	No fee	No fee.
Renewal	No fee	No fee	No fee.

¹ Duplicate for document lost as result of marine casualty—No Fee.

[USCG-1997-2799, 64 FR 42814, Aug. 5, 1999; 64 FR 53230, Oct. 1, 1999]

§ 10.110

46 CFR Ch. I (10–1–00 Edition)

§ 10.110 Fee payment procedures.

- (a) You may pay—
- (1) All fees required by this section when you submit your application; or
 - (2) A fee for each phase at the following times:
 - (i) An evaluation fee when you submit your application.
 - (ii) An examination fee before you take the first examination section.
 - (iii) An issuance fee before you receive your license or certificate of registry.
 - (b) If you take your examination someplace other than a Regional Examination Center (REC), you must pay the examination fee to the REC at least one week before your scheduled examination date.
 - (c) Unless the REC provides additional payment options, your fees may be paid as follows:
 - (1) Your fee payment must be for the exact amount.
 - (2) Make your check or money order payable to the U.S. Coast Guard, and write your social security number on the front of each check or money order.
 - (3) If you pay by mail, you must use either a check or money order.
 - (4) If you pay in person, you may pay with cash, check, or money order at Coast Guard units where Regional Examination Centers are located.
 - (d) Unless otherwise specified in this part, when two or more documents are processed on the same application—

(1) *Evaluation fees.* If a certificate of registry transaction is processed on the same application as a license transaction, only the license evaluation fee will be charged; and

(2) *Issuance fees.* A separate issuance fee will be charged for each document issued.

[USCG–1997–2799, 64 FR 42815, Aug. 5, 1999]

§ 10.111 Penalties.

- (a) Anyone who fails to pay a fee or charge established under this subpart is liable to the United States Government for a civil penalty of not more than \$5,000 for each violation.
- (b) The Coast Guard may assess additional charges to anyone to recover collection and enforcement costs associated with delinquent payments of, or failure to pay, a fee. Coast Guard li-

censing services may also be withheld from anyone pending payment of outstanding fees owed to the Coast Guard for services already provided by Regional Examination Centers.

[CGD 91–002, 58 FR 15237, Mar. 19, 1993]

§ 10.112 No-fee license for certain applicants.

(a) For the purpose of this section, a no-fee license applicant is a person who is a volunteer, or part-time or full-time employee of an organization which is:

- (1) Charitable in nature;
- (2) Not for profit; and
- (3) Youth oriented.

(b) An organization may submit a written request to Commandant (G-MOC), 2100 Second Street SW., Washington, DC 20593–0001 in order to be considered an eligible organization under the criteria set forth in paragraph (a) of this section. With the written request, the organization must provide evidence of its status as a youth oriented, not for profit, charitable organization.

NOTE: The following organizations are accepted by the Coast Guard as meeting the requirements of paragraph (a) of this section and need not submit evidence of their status: Boy Scouts of America, Sea Explorer Association, Girl Scouts of the United States of America, and Young Men's Christian Association of the United States of America.

(c) A letter from an organization determined eligible under paragraph (b) of this section must also accompany the person's license application to the Coast Guard. The letter must state that the purpose of the person's application is solely to further the conduct of the organization's maritime activities. The applicant then is eligible under this section to obtain a no-fee license if other requirements for the license are met.

(d) A marine license issued to a person under this section is endorsed restricting its use to vessels owned or operated by the sponsoring organization.

(e) The holder of a no-fee license issued under this section may have the restriction removed by paying the appropriate evaluation, examination, and

issuance fees that would have otherwise applied.

[CGD 91-002, 58 FR 15238, Mar. 19, 1993, as amended by CGD 95-072, 60 FR 50460, Sept. 29, 1995; CGD 96-041, 61 FR 50726, Sept. 27, 1996; CGD 97-057, 62 FR 51042, Sept. 30, 1997]

Subpart B—General Requirements for All Licenses and Certificates of Registry

§ 10.201 Eligibility for licenses and certificates of registry, general.

(a) Each applicant shall establish to the satisfaction of the OCMI that he or she possesses all of the qualifications necessary (such as age, experience, character references and recommendations, physical health or competence and test for dangerous drugs, citizenship, approved training, passage of a professional examination, as appropriate, and, when required by this part, a practical demonstration of skills) before the OCMI will issue a license or certificate of registry.

(b) No person who has been convicted by a court of record of a violation of the dangerous drug laws of the United States, the District of Columbia, or any State or territory of the United States is eligible for a license or certificate of registry, except as provided by the provisions of paragraph (h) of this section. No person who has ever been the user of, or addicted to the use of, a dangerous drug, or has ever been convicted of an offense described in section 205 of the National Driver Register Act of 1982 (49 U.S.C. 30304) due to the addiction or abuse of alcohol is eligible for a license or certificate of registry unless he or she furnishes satisfactory evidence of suitability for service in the merchant marine as provided in paragraph (j) of this section.

(c) Except as provided in § 10.464(i) of the part, an applicant for a license must demonstrate an ability to speak and understand English as found in the navigation rules, aids to navigation publications, emergency equipment instructions, machinery instructions, and radiotelephone communications instructions.

(d) An applicant for a license must meet the requirements for recent service specified in § 10.202(e).

(e) No license or certificate of registry may be issued to any person who is not a citizen of the United States with the exception of operator of uninspected passenger vessels limited to vessels not documented under the laws of the United States.

(f) Except as specified in this paragraph, no license or certificate of registry may be issued to a person who has not attained the age of 21 years.

(1) A license as master of near coastal, Great Lakes and inland, inland, or river vessels of 25-200 gross tons, third mate, third assistant engineer, mate of vessels of 200-1600 gross tons, ballast control operator, assistant engineer (MODU), assistant engineer of fishing industry vessels, mate (pilot) of towing vessels, radio officer, assistant engineer (limited-oceans), or designated duty engineer of vessels of not more than 4000 horsepower may be granted to an applicant who has reached the age of 19 years.

(2) A license as limited master of near coastal vessels of not more than 100 gross tons, limited master of Great Lakes and inland vessels of not more than 100 gross tons, mate of Great Lakes and inland vessels of 25-200 gross tons, mate of near coastal vessels of 25-200 gross tons, operator of uninspected passenger vessels, or designated duty engineer of vessels of not more than 1,000 horsepower, or apprentice mate (steersman) of towing vessels, may be granted to an applicant, otherwise qualified, who has reached the age of 18 years.

(g) Persons serving or intending to serve in the merchant marine service are recommended to take the earliest opportunity of ascertaining, through examination, whether their visual acuity, and color vision where required, are such as to qualify them for service in that profession. Any physical impairment or medical condition which would render an applicant incompetent to perform the ordinary duties of an officer at sea is cause for denial of a license.

(h) *Criminal Record Review.* The OCMI may review the criminal record of an applicant for the issuance of a license or certificate of registry issued as an

§ 10.201

46 CFR Ch. I (10–1–00 Edition)

original or reissued with a new expiration date. An applicant conducting simultaneous merchant mariner's credential transactions shall undergo only one criminal record check. Applicants must provide written disclosure of all prior convictions at the time of application.

(1) If the applicant is advised that a criminal record check is required by the OCMI, applicants shall provide their fingerprints at the time of application. The fingerprints will be used to determine whether the applicant has a record of a criminal conviction. An application may be disapproved if a criminal record review leads the OCMI to determine that the applicant's habits of life and character are such that the applicant cannot be entrusted with the duties and responsibilities of the license or certificate of registry for which application is made. If an application is disapproved, the OCMI will notify the applicant in writing of the reason(s) for disapproval and advise the applicant that the reconsideration and appeal procedures in §1.03 of this chapter apply. No examination will be given pending decision on appeal.

(2) The OCMI may use table 10.201(h) to evaluate applicants for licenses and certificates of registry who have criminal convictions. The table lists major categories of criminal activity and is not to be construed as an all-inclusive list. If an applicant is convicted of an offense that does not appear on the list, the OCMI will establish an appropriate assessment period using the list as a guide. The assessment period commences when an applicant is no longer incarcerated. The applicant must establish proof of the time incarcerated and periods of probation and parole to the satisfaction of the OCMI. The assessment period may include supervised or unsupervised probation or parole. A conviction for a drug offense more than 10 years prior to the date of application will not alone be grounds for denial.

(3) When an applicant has convictions for more than one offense, the minimum assessment period will be the longest minimum in table 10.201(h) and table 10.201(i) based upon the applicant's convictions; the maximum assessment period will be the longest

shown in table 10.201(h) and table 10.201(i) based upon the applicant's convictions.

(4) If a person with a criminal conviction applies for a license or certificate of registry before the minimum assessment period shown in table 10.201(h), or established by the OCMI under paragraph (h)(2) of this section has elapsed, then the applicant must provide evidence of suitability for service in the merchant marine. Factors which are evidence of suitability for service in the merchant marine are listed in paragraph (j) of this section. The OCMI will consider the applicant's evidence and may issue the license or certificate of registry in less than the listed minimum assessment period if the OCMI is satisfied that the applicant is suitable to hold the license or certificate of registry for which he or she has applied. If an applicant does not provide evidence of suitability for service in the merchant marine, then the application will be considered incomplete and will not be processed by the OCMI.

(5) If a person with a criminal conviction applies for a license or certificate of registry during the time between the minimum and maximum assessment periods shown in table 10.201(h) or established by the OCMI under paragraph (h)(2) of this section, the OCMI will consider the conviction and, unless there are offsetting factors, may grant the applicant the license or certificate of registry for which he or she has applied. Offsetting factors include multiple convictions, failure to comply with court orders (e.g., child support orders), previous failures at rehabilitation or reform, inability to maintain steady employment, or any connection between the crime and the safe operation of a vessel. If the OCMI considers the applicant unsuitable for service in the merchant marine at the time of application, the OCMI will disapprove the application.

(6) If a person with a criminal conviction applies for a license or certificate of registry after the maximum assessment period shown in table 10.201(h) or established by the OCMI under paragraph (h)(2) of this section has elapsed, then the OCMI will grant the applicant the license or certificate of registry for which he or she has applied unless the

Coast Guard, DOT

§ 10.201

OCMI has reason to believe the applicant is still unsuitable for service in the merchant marine. If the OCMI disapproves an application based upon a conviction older than the maximum assessment period, the OCMI will notify

the applicant in writing of the reason(s) for the disapproval. The OCMI will also inform the applicant, in writing, that the reconsideration and appeal procedures contained in §1.03 of this chapter apply.

TABLE 10.201(H)—GUIDELINES FOR EVALUATING APPLICANTS FOR LICENSES AND CERTIFICATES OF REGISTRY WHO HAVE CRIMINAL CONVICTIONS

Crime ¹	Assessment periods	
	Minimum	Maximum
Crimes Against Persons		
Homicide (intentional)	7 years	20 years.
Homicide (unintentional)	5 years	10 years.
Assault (aggravated)	5 years	10 years.
Assault (simple)	1 year	5 years.
Sexual Assault (rape, child molestation)	5 years	10 years.
Robbery	5 years	10 years.
Other crimes against persons ² .		
Crimes Against Property		
Burglary	3 years	10 years.
Larceny (embezzlement)	3 years	5 years.
Other crimes against property ² .		
Vehicular Crimes		
Conviction involving fatality	1 year	5 years.
Reckless Driving	1 year	2 years.
Racing on the Highways	1 year	2 years.
Other vehicular crimes ² .		
Crimes Against Public Safety		
Destruction of Property	5 years	10 years.
Other crimes against public safety ² .		
Crimes Involving National Security		
Terrorism, Acts of Sabotage, Espionage and related offenses	7 years	20 years.
Criminal Violations of Environmental Laws		
Criminal violations of environmental laws involving improper handling of pollutants or hazardous materials.	1 year	10 years.
Dangerous Drug Offenses^{3, 4, 5}		
Trafficking (sale, distribution, transfer)	5 years	10 years.
Dangerous drugs (Use or possession)	1 year	10 years.
Other dangerous drug convictions ⁶ .		

¹Conviction of attempt, solicitation, aiding and abetting, accessory after the fact, and conspiracy to commit the criminal conduct listed in this table carry the same minimum and maximum assessment periods provided in the table.

²Other crimes are to be reviewed by the OCMI to determine the minimum and maximum assessment periods depending on the nature of the crime.

³Applicable only to original applications for licenses or CORs. Any applicant who has ever been the user of, or addicted to the use of, a dangerous drug shall meet the requirements of paragraph (b) of this section. Note: Applicants for reissue of a license or COR with a new expiration date including a renewal or a raise of grade, who have been convicted of a dangerous drug offense while holding a license or COR, may have their applications withheld until appropriate action has been completed by the OCMI under the regulations which appear in 46 CFR part 5 governing administrative actions against merchant mariner credentials.

⁴The OCMI may consider dangerous drug convictions more than 10 years old only if there has been a dangerous drug conviction within the past 10 years.

⁵Applicants must demonstrate rehabilitation under paragraph (j) of this section, including applicants with dangerous drug use convictions more than ten years old.

⁶Other dangerous drug convictions are to be reviewed by the Officer in Charge, Marine Inspection on a case by case basis to determine the appropriate assessment periods depending on the nature of the offense.

(i) *National Driver Register*. A license or certificate of registry will not be issued as an original or reissued with a new expiration date unless the applicant consents to a check of the NDR for offenses described in section 205(a)(3) (A) or (B) of the NDR Act (i.e., operation of a motor vehicle while under the influence of, or impaired by, alcohol or a controlled substance; and any traffic violations arising in connection with a fatal traffic accident, reckless driving, or racing on the highways). The OCMI will not consider NDR listed civil convictions that are more than 3 years old from the date of request unless that information relates to the current suspension or revocation of the applicant's license to operate a motor vehicle. The OCMI may determine minimum and maximum assessment periods for NDR listed criminal convictions using table 10.201(h). An applicant conducting simultaneous merchant mariner's credential transactions is subject to only one NDR check.

(1) Any application may be disapproved if information from the NDR check leads the OCMI to determine that the applicant cannot be entrusted with the duties and responsibilities of the license or certificate of registry for which the application is made. If an application is disapproved, the OCMI will notify the applicant in writing of the reason(s) for disapproval and advise the application that the appeal procedures in § 1.03 of this chapter apply. No examination will be given pending decision on appeal.

(2) Prior to disapproving an application because of information received from the NDR, the OCMI will make the information available to the applicant for review and written comment. The

applicant may submit records from the applicable State concerning driving record and convictions to the Coast Guard Regional Examination Center (REC) processing the application. The REC will hold an application with NDR listed convictions pending the completion of the evaluation and delivery by the individual of the underlying State records.

(3) The guidelines in table 10.201(i) will be used by the OCMI in evaluating applicants for licenses and certificates of registry who have drug or alcohol related NDR listed convictions. Non-drug or alcohol related NDR listed convictions will be evaluated by the OCMI under table 10.201(h) as applicable.

(4) An applicant may request an NDR file check for *personal* use in accordance with the Federal Privacy Act of 1974 (Pub. L. 93-579) by contacting the NDR at the following address: National Driver Register, Nassif Building, 400 7th Street, SW., Washington, DC 20590.

(i) Applicants should request Form NDR-PRV or provide the following information on a notarized letter:

- (A) Full legal name;
- (B) Other names used;
- (C) Complete mailing address;
- (D) Driver license number;
- (E) Eye color;
- (F) Social security number;
- (G) Height;
- (H) Weight; and
- (I) Sex.

(ii) The NDR will respond to every valid inquiry including requests which produce no record(s) on the NDR file. Records can be made available, within a reasonable amount of time after the request, for personal inspection and copying during regular working hours at 7:45 a.m. to 4:15 p.m., each day except Federal holidays.

TABLE 10.201(i)—GUIDELINES FOR EVALUATING APPLICANTS FOR LICENSES AND CERTIFICATES OF REGISTRY WHO HAVE NDR MOTOR VEHICLE CONVICTIONS INVOLVING DANGEROUS DRUGS OR ALCOHOL ¹

No. of convictions	Date of conviction	Assessment period
1	Less than 1 year	1 year from date of conviction.
1	More than 1, less than 3 years ...	Application will be processed, unless suspension or revocation ² is still in effect. Applicant will be advised that additional conviction(s) may jeopardize merchant mariner credentials.
1	More than 3 years old	Not necessary unless suspension or revocation is still in effect.

TABLE 10.201(i)—GUIDELINES FOR EVALUATING APPLICANTS FOR LICENSES AND CERTIFICATES OF REGISTRY WHO HAVE NDR MOTOR VEHICLE CONVICTIONS INVOLVING DANGEROUS DRUGS OR ALCOHOL¹—Continued

No. of convictions	Date of conviction	Assessment period
2 or more	Any less than 3 years old	1 year since last conviction and at least 3 years from 2nd most recent conviction, unless suspension or revocation is still in effect.
2 or more	All more than 3 years old	Application will be processed unless suspension or revocation is still in effect.

¹ Any applicant who has ever been the user of, or addicted to the use of, a dangerous drug shall meet the requirements of paragraph (b) of this section.

² Suspension or revocation, when referred to in table 10.201(i), means a State suspension or revocation of a motor vehicle operator's license.

(j) If an applicant has one or more alcohol or dangerous drug related criminal or NDR listed convictions; if the applicant has ever been the user of, or addicted to the use of, a dangerous drug; or if the applicant applies before the minimum assessment period for his or her conviction has elapsed; the OCMI may consider the following factors, as applicable, in assessing the applicant's suitability to hold a license or certificate of registry. This list is intended as a guide for the OCMI. The OCMI may consider other factors which he or she judges appropriate to a particular applicant, such as:

(1) Proof of completion of an accredited alcohol- or drug-abuse rehabilitation program.

(2) Active membership in a rehabilitation or counseling group, such as Alcoholics Anonymous or Narcotics Anonymous.

(3) Character references from persons who can attest to the applicant's sobriety, reliability, and suitability for employment in the merchant marine including parole or probation officers.

(4) Steady employment.

(5) Successful completion of all conditions of parole or probation.

[CGD 81-059 and CGD 81-059a, 52 FR 38623 and 38666, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 133, Jan. 4, 1989; CGD 81-059a, 55 FR 14799, Apr. 18, 1990; CGD 91-223, 60 FR 4524, Jan. 23, 1995; CGD 91-212, 60 FR 65484, Dec. 19, 1995; CGD 95-062, 62 FR 34529, June 26, 1997; USCG-1999-6224, 64 FR 63225, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63225, Nov. 19, 1999, § 10.201 was amended in paragraph (f)(1), by removing the words "second-class operator of uninspected towing vessel" and adding, in their place, the words "mate (pilot) of towing vessels"; and, in paragraph (f)(2), by removing the words "designated duty engineer of vessels of not more

than 1,000 horsepower, may be granted to an applicant who has reached the age of 18 years" and adding, in their place, the words "designated duty engineer of vessels of not more than 1,000 horsepower, or apprentice mate (steersman) of towing vessels, may be granted to an applicant, otherwise qualified, who has reached the age of 18 years", effective Nov. 20, 2000.

§ 10.202 Issuance of licenses, certificates of registry, and STCW certificates or endorsements.

(a) Applications for original licenses, original certificates of registry, raises of grade, extensions of route, or endorsements must be current and up-to-date with respect to service and the physical examination, as appropriate. Physical examinations and approved applications are valid for 12 months.

(b) Any person who is found qualified under the requirements set forth in this part is issued an appropriate license or certificate of registry valid for a term of 5 years from date of issuance. Any license or certificate of registry which is renewed or upgraded prior to its expiration date automatically becomes void upon issuance of the replacement license or certificate of registry.

(c) A license or certificate of registry is not valid until signed by the applicant and the OCMI (or the OCMI's designated representative).

(d) Every person who receives an original license or certificate of registry shall take an oath before a designated Coast Guard official that he or she will faithfully and honestly, according to his or her best skill and judgment, without concealment or reservation, perform all the duties required by law and obey all lawful orders of superior officers. Such an oath

remains binding for all subsequent licenses or certificates of registry issued to that person unless specifically renounced in writing.

(e) The applicant for any original license, endorsement, or raise of grade of license must have at least three months' qualifying service on vessels of appropriate tonnage or horsepower within the three years immediately preceding the date of application.

(f) Any applicant whose uncorrected vision exceeds 20/40 in either eye for deck licenses or 20/50 in either eye for engineer, radio officer, offshore installation manager, barge supervisor, or ballast control operator licenses may not serve under the authority of the license unless corrective lenses are worn and spare lenses are carried on board a vessel while serving. (Not applicable to staff officers).

(g) If an Officer in Charge, Marine Inspection, refuses to grant an applicant the license or certificate of registry for which applied, the OCMI will furnish the applicant, if requested, a written statement setting forth the cause of denial.

(h) The Officer in Charge, Marine Inspection, may modify the service and examination requirements in this part to satisfy the unique qualification requirements of an applicant. The Officer in Charge, Marine Inspection, may also lower the age requirement for operator of uninspected passenger vessels license applicants. The authority granted by a license will be restricted on its face to reflect any modifications made under the authority of this paragraph. Such restrictions shall not be removed without the approval of the OCMI issuing the license.

(i) To obtain an original issuance or a renewal of a license or a certificate of registry, a raise in grade of a license, or a higher grade of certificate of registry each applicant shall produce evidence of having passed a chemical test for dangerous drugs or of qualifying for an exception from testing in §16.220 of this subchapter. An applicant who fails a chemical test for dangerous drugs will not be issued a license or certificate of registry.

(j) When an original license is issued, renewed, upgraded, or otherwise modified, the OCMI will determine whether the holder of the license needs to hold an STCW certificate or endorsement for service on a seagoing vessel and then, if the holder is qualified, will issue the appropriate certificate or endorsement. The OCMI will also issue an STCW certificate or endorsement at other times, if circumstances so require and if the holder of the license is qualified to hold the certificate or endorsement.

(k) Notwithstanding §10.205 (l), (m), (n), (o), and (p), §10.304, and §10.901, each mariner found qualified to hold any of the following licenses will also be entitled to hold an STCW certificate or endorsement corresponding to the service or other limitations on the license, because the vessels concerned are not subject to further obligation under STCW, on account of their special operating conditions as small vessels engaged in domestic voyages:

(1) Master's, mate's, or engineer's license for service on small passenger vessels that are subject to subchapter T or K of title 46, Code of Federal Regulations (CFR), and that operate beyond the boundary line.

(2) Master's, mate's, or engineer's license for service on seagoing vessels of less than 200 gross register tons (GRT), other than passenger vessels subject to subchapter H of title 46, CFR.

(l) Neither any person serving on any of the following vessels, nor any owner or operator of any of these vessels, need hold STCW certificates or endorsements, because they are exempt from application of STCW:

(1) Uninspected passenger vessels as defined in 46 U.S.C. 2101(42).

(2) Fishing vessels as defined in 46 U.S.C. 2101(11)(a).

(3) Fishing vessels used as fish-tender vessels as defined in 46 U.S.C. 2101(11)(c).

(4) Barges as defined in 46 U.S.C. 2101(2), including non-self-propelled mobile offshore-drilling units.

(5) Vessels operating exclusively on the Great Lakes or the inland waters of

Coast Guard, DOT

§ 10.203

the U.S. in the straits of Juan de Fuca inside passage.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 53 FR 133, Jan. 4, 1989; CGD 91-211, 59 FR 49297, Sept. 27, 1994; CGD 91-223, 60 FR 4524, Jan. 23, 1995; CGD 95-062, 62 FR 34529, June 26, 1997; CGD 95-062, 62 FR 40140, July 25, 1997; CGD 95-062, 62 FR 40281, July 28, 1997; CGD 95-028, 62 FR 51195, Sept. 30, 1997]

§ 10.203 Quick reference table for license and certificate of registry requirements.

Table 10.203 provides a guide to the requirements for various licenses and certificates of registry. Provisions in the reference section are controlling.

TABLE 10.203

License category	Minimum age	Citizenship requirement	Physical required	Experience requirements	Recommendations and character check	Firefighting certificate	Professional exam requirements	Recency of Service	First aid and CPR requirements
Masters/mates and operators of uninspected passenger vessels (original license)	21; 10.201(f); Note: exceptions.	Yes, 10.201(e); Note: exception.	Yes, 10.205(d); Note: (d)(2).	Yes, 10.205(e); subpart D.	Yes, 10.205(f)	Yes, 10.205(g); Note: exceptions.	Yes, 10.205(i), 10.910; Note: 10.903(b).	Yes, 3 months past 36 months, 10.202(e).	Yes, in 10.205(h).
Engineers (original license)	21; 10.201(f); Note: exceptions.	Yes	Yes, 10.205(d); Note: (d)(3).	10.205(e); subpart E.	Yes, 10.205(f);	Yes, 10.205(g)	Yes, 10.205(i) 10.950.	Yes, 3 months in past 36 months, 10.202(e).	Yes, 10.205(h).
All raises of grade	21; 10.201(f); Note: exceptions.	Yes	10.207(e); Note: (e)(1).	10.207(c); subparts D & E.	N/A	Yes, Note: 10.207(f).	10.207(d), 10.910, 10.920, 10.950.	Yes, 3 months in past 36 months, 10.202(e).	N/A.
License renewals	N/A	Yes	10.209(d)	10.209(c)	N/A	N/A	10.209(c)	10.209(c)	N/A.
COR renewals	N/A	Yes	No	10.209(c)(5)	N/A	N/A	N/A	N/A	N/A.
Pilot	21	Yes	Yes, 10.709	10.703, 10.706(a), 10.715.	Yes, 10.205(f)	N/A	10.707, 10.910	Yes, 10.703, 10.705(e), 10.713.	Yes, 10.205(h).
Uninspected fishing industry vessels.	21; 10.201(f); Note: exceptions.	Yes	Yes, 10.205(d); Note: (d)(2) or (d)(3).	Deck: 10.462, Eng: 10.530, 10.205(f).	Yes, 10.205(f)	Yes, 10.205(g)	Yes, 10.205(i), 10.910, 10.950(oral).	Yes, 3 months in past 36 months, 10.202(e).	Yes, 10.205(h).
Towing vessels	Master of towing vessels; 21; mate (pilot) of towing vessels; 19; apprentice mate (steersman); 18.	Yes	Yes, 10.205(d); Note: (d)(2).	10.464	Yes, 10.205(f)	Yes, 10.205(g) oceans.	Yes, 10.205(i), 10.910.	Yes, 3 months in past 36 months, 10.202(e).	Yes, 10.205(h).
Radio officer	19	Yes	Yes, 10.205(d); Note: (d)(3).	10.603	Yes, 10.205(f)	N/A	N/A	N/A	Yes, 10.205(h).
Staff officer	21	Yes	No	10.807	Yes, 10.205(f)	N/A	N/A	N/A	N/A.
Offshore installation manager, barge supervisor, ballast control operator.	21; 10.201(f); Note: exceptions.	Yes	Yes, 10.205(d); Note: (d)(3).	Deck: 10.468, Eng: 10.540.	Yes, 10.205(f)	Yes, 10.205(g)	Yes, 10.205(i), 10.920.	Yes, 3 months in past 36 months, 10.202(e).	Yes, 10.205(h).

[CGD 91-211, 59 FR 49297, Sept. 27, 1994; CGD 91-211, 59 FR 50964, Oct. 6, 1994, as amended by USCG-1999-6224, 64 FR 63225, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63225, Nov. 19, 1999, § 10.203, was amended in Table 10.203, in column one, by removing the word "Uninspected" from before the words "towing vessels" and capitalizing the first letter in the word "towing"; and, in column two, by removing the words "Operator: 21; 2/c operator: 19" from the license category just amended to read "Towing vessels" and adding, in their place, the words "Master of towing vessels: 21; mate (pilot) of towing vessels: 19; apprentice mate (steersman): 18", effective Nov. 20, 1999.

§ 10.204 Right of appeal.

Any person directly affected by a decision or action taken under this part, by or on behalf of the Coast Guard, may appeal therefrom in accordance with subpart 1.03 of this chapter.

[CGD 88-033, 54 FR 50379, Dec. 6, 1989]

§ 10.205 Requirements for original licenses, certificates of registry, and STCW certificates and endorsements.

(a) *General.* The applicant for an original license or certificate of registry shall present satisfactory documentary evidence of eligibility in respect to the requirements of this section. Each applicant shall make written application on a Coast Guard furnished form and, unless exempted under § 10.112, submit the evaluation fee set out in table 10.109 in § 10.109.

(b) *Minimum age.* The applicant shall present satisfactory proof of age as prescribed in § 10.201(f). This evidence may be any of the items submitted to establish citizenship.

(c) *Citizenship.* (1) The OCMI may reject any evidence of citizenship that is not believed to be authentic. Acceptable evidence of citizenship may be an original or certified copy of the following:

- (i) Birth certificate or birth registration.
- (ii) Certificate of naturalization (original must be presented; photocopies are unlawful).
- (iii) Baptismal certificate or parish record recorded within one year after birth.
- (iv) Statement of a practicing physician certifying attendance at the birth

and who possesses a record showing the date and location at which it occurred.

(v) State Department passport.

(vi) A merchant mariner's document issued by the Coast Guard which shows the holder as a United States citizen.

(vii) Delayed certificate of birth issued under a state seal in the absence of any collateral facts indicating fraud in its procurement.

(viii) Certificate of Citizenship issued by the United States Immigration and Naturalization Service.

(2) If none of the requirements set forth in paragraphs (c)(1)(i) through (c)(1)(viii) of this section can be met by the applicant, the individual shall make a statement to that effect, and may submit data of the following character for consideration:

(i) Report of the Census Bureau showing the earliest available record of age or birth. Request for such information should be addressed to the Personal Census Service Branch, Bureau of the Census, Pittsburgh, KS 66762. In making such request, the use of Form BC-600, Application for Search of Census Records, furnished by the Bureau is required.

(ii) Affidavits of parents, relative, or two or more responsible citizens of the United States stating citizenship.

(iii) School records, immigration records, or insurance policies.

(d) *Physical examination.* (1) All applicants for an original license must pass an examination given by a licensed physician or a licensed physician assistant and present to the OCMI a completed Coast Guard physical examination form, or the equivalent, executed by the physician. This form must provide information on the applicant's acuity of vision, color sense, and general physical condition. This examination must have been completed prior to submission of the application and not more than 12 months prior to issuance of the license. (Physical examinations are not required for staff officers.)

(2) For an original license as master, mate, pilot, or operator, the applicant must have vision correctable to at least 20/40 in each eye and uncorrected vision of at least 20/200 in each eye. The

color sense must be determined to be satisfactory when tested by any of the following methods, without the use of color sensing lenses:

- (i) Pseudoisochromatic Plates (Dvorine, 2nd Edition; AOC; revised edition or AOC-HRR; Ishihara 16-, 24-, or 38-plate editions).
- (ii) Eldridge—Green Color Perception Lantern.
- (iii) Farnsworth Lantern.
- (iv) Keystone Orthoscope.
- (v) Keystone Telebinocular.
- (vi) SAMCTT (School of Aviation Medicine Color Threshold Tester).
- (vii) Titmus Optical Vision Tester.
- (viii) Williams Lantern.

(3) For an original license as engineer, radio officer, offshore installation manager, barge supervisor or ballast control operator, the applicant must have correctable vision of at least 20/50 in each eye and uncorrected vision of at least 20/200 in each eye. Applicants need only to have the ability to distinguish the colors red, green, blue and yellow.

(4) Where an applicant does not possess the vision, hearing, or general physical condition necessary, the OCMI, after consultation with the examining physician or physician's assistant, may recommend a waiver to the Commandant if extenuating circumstances warrant special consideration. Applicants may submit to the OCMI, additional correspondence, records and reports in support of this request. In this regard, recommendations from agencies of the Federal Government operating government vessels, as well as owners and operators of private vessels, made in behalf of their employees, will be given full consideration. Waivers are not normally granted to an applicant whose corrected vision in the better eye is not at least 20/40 for deck licenses or 20/50 for engineer licenses.

(e) *Experience or training.* (1) All applicants for original licenses and certificates of registry shall present to the OCMI, letters, discharges, or other documents certifying the amount and character of their experience and the names, tonnage and horsepower of the vessels on which acquired. The OCMI must be satisfied as to the authenticity and acceptability of all evidence of ex-

perience or training presented. Certificates of discharge are returned to the applicant. The OCMI shall note on the application that service represented by these documents has been verified. All other documentary evidence of service, or authentic copies thereof, are filed with the application. A license is not considered as satisfactory evidence of any qualifying experience.

(2) No original license or certificate of registry may be issued to any naturalized citizen on less experience in any grade or capacity than would have been required of a citizen of the United States by birth.

(3) Experience and service acquired on foreign vessels is creditable for establishing eligibility for an original license, subject to evaluation by the OCMI to determine that it is a fair and reasonable equivalent to service acquired on merchant vessels of the United States, with respect to grade, tonnage, horsepower, waters, and operating conditions. An applicant who has obtained qualifying experience on foreign vessels shall submit satisfactory documentary evidence of such service (including any necessary translation into English) in the forms prescribed by paragraph (e)(1) of this section.

(4) No applicant for an original license who is a naturalized citizen, and who has obtained experience on foreign vessels, will be given an original license in a grade higher than that upon which he or she has actually served while acting under the authority of a foreign license.

(f) *Character check and references.* (1) Each applicant for an original license shall submit written recommendations concerning the applicant's suitability for duty from a master and two other licensed officers of vessels on which the applicant has served. For a license as engineer or as pilot, at least one of the recommendations must be from the chief engineer or licensed pilot, respectively, of a vessel on which the applicant has served. For a license as engineer where service was obtained on vessels not carrying a licensed engineer and for a license as master or mate (pilot) of towing vessels, the recommendations may be by recent marine employers with at least one recommendation from a master, operator,

or person in charge of a vessel upon which the applicant has served. For a license as offshore installation manager, barge supervisor, or ballast control operator, at least one recommendation must be from an offshore installation manager of a unit on which the applicant has served. Where an applicant qualifies for a license through an approved training school, one of the character references must be an official of that school. For a license for which no commercial experience may be required, such as: Master or mate 25-200 gross tons, operator of uninspected passenger vessels, radio officer or certificate of registry, the applicant may have the written recommendations of three persons who have knowledge of the applicant's suitability for duty.

(2) The OCMI may review the criminal record check of each applicant for an original license or certificate of registry according to the procedures set forth in § 10.201(h).

(3) A person may apply for an original license, or license of a different type, while on probation as a result of administrative action under part 5 of this chapter. The offense for which the applicant was placed on probation will be considered in determining his or her fitness to hold the license applied for. A license issued to an applicant on probation will be subject to the same probationary conditions as were imposed against the applicant's other license or mariner's document. An applicant may not take an examination for a license during any period when a suspension without probation or a revocation is effective against the applicant's currently held license or mariner's document, or while an appeal from these actions is pending.

(4) In the event a license or certificate of registry has already been issued when information about the applicant's habits of life and character is brought to the attention of the OCMI, if such information warrants the belief that the applicant cannot be entrusted with the duties and responsibilities of the license or certificate of registry issued, or if such information indicates that the application for the license or certificate of registry was false or incomplete, the OCMI may notify the holder

in writing that the license or certificate of registry is considered null and void, direct the holder to return it to the OCMI, and advise the holder that, upon return of the license or certificate of registry, the appeal procedures of § 10.204 of this part apply.

(g) *Firefighting certificate.* Applicants for the licenses in the following categories must present a certificate of completion from a firefighting course of instruction which has been approved by the Commandant. The course must meet both the basic and advanced sections of the International Maritime Organization's (IMO) Resolution A.437 (XI) *Training of Crews in Firefighting*. The course must have been completed within five years before the date of application for the license requested.

(1) Master's license for service on vessels of 200 gross tons or less in ocean service.

(2) All master or mate's licenses for over 200 gross tons.

(3) All licenses for master or mate (pilot), except apprentice mate (steersman), for towing vessels on oceans.

(4) All licenses on mobile offshore drilling units.

(5) All engineer's licenses.

(h) *First aid and cardiopulmonary resuscitation (CPR) course certificates.* All applicants for an original license or certificate of registry, except as provided in §§ 10.429, 10.456, and 10.466 of this part, must present to the OCMI:

(1) A certificate indicating completion of a first aid course within the past 12 months from:

(i) The American National Red Cross *Standard First Aid and Emergency Care* or *Multi-media Standard First Aid* course;

(ii) A Coast Guard approved first aid training course; or,

(iii) A course the OCMI determines meets or exceeds the standards of the American Red Cross courses; and,

(2) A currently valid certificate of completion of a CPR course from:

(i) The American National Red Cross;

(ii) The American Heart Association;

(iii) A Coast Guard approved CPR training course; or,

(iv) A course the OCMI determines meets or exceeds the standards of the

American Red Cross or American Heart Association courses.

(i) *Professional Examination.* (1) When the OCMI finds the applicant's experience and training to be satisfactory and the applicant is eligible in all other respects, the OCMI will authorize the examination in accordance with the following requirements:

(i) Any applicant for a deck or engineer license limited to vessels not exceeding 500 gross tons, or a license limited to uninspected fishing-industry vessels, may request an oral-assisted examination in lieu of any written or other textual examination. If there are textual questions that the applicant has difficulty reading and understanding, the OCMI will offer the oral-assisted examination. Each license based on an oral-assisted examination is limited to the specific route and type of vessel upon which the applicant obtained the majority of service.

(ii) The general instructions for administration of examinations and the lists of subjects for all licenses appear in Subpart I of this part. The OCMI will place in the applicant's file a record indicating the subjects covered.

(2) When the license application of any person has been approved, the applicant should take the required examination as soon as practicable. If the applicant cannot be examined without delay at the office where the application is made, the applicant may request that the examination be given at another office.

(3) The qualification requirements for *radar observer* are contained in § 10.480.

(4) An examination is not required for a license as radio officer or a certificate of registry.

(j) *Chemical testing for dangerous drugs.* To obtain a license or certificate of registry each applicant shall produce evidence of having passed a chemical test for dangerous drugs or of qualifying for an exception from testing in § 16.220 of this subchapter. An applicant who fails a chemical test for dangerous drugs will not be issued a license or certificate of registry.

(k) *National Driver Register.* Each applicant for an original license or certificate of registry shall consent to an NDR check under § 10.201(i).

(l) *Basic safety training or instruction.* After January 31, 1997, except as provided in § 10.202, an STCW certificate or endorsement valid for any period on or after February 1, 2002, will be issued only when the candidate provides evidence of having achieved or, if training has been completed, having maintained the minimum standards of competence for the following 4 areas of basic safety within the previous 5 years upon assessment of a practical demonstration of skills and abilities:

(1) Personal survival techniques as set out in table A-VI/1-1 of the STCW Code.

(2) Fire prevention and fire-fighting as set out in table A-VI/1-2 of the STCW Code.

(3) Elementary first aid as set out in table A-VI/1-3 of the STCW Code.

(4) Personal safety and social responsibilities as set out in table A-VI/1-4 of the STCW Code.

(m) *Competence in the use of Automatic Radar-Plotting Aids (ARPA).* (1) Subject to paragraph (m)(2) of this section, and except as otherwise provided in § 10.202, each candidate for an STCW certificate or endorsement as master or mate, to be valid on or after February 1, 2002, for service on vessels in ocean or near-coastal service, shall present a certificate of completion from an approved course or from accepted training on an ARPA simulator. The course or training must be sufficient to establish that the applicant is competent to maintain safe navigation through the proper use of ARPA, by correctly interpreting and analyzing the information obtained from that device and taking into account both the limitations of the equipment and the prevailing circumstances and conditions. The simulator used in the course or training must meet or exceed the performance standards established under STCW Regulation 1/12 of the 1995 Amendments.

(2) Training and assessment in the use of ARPA are not required for mariners serving exclusively on vessels not fitted with ARPA. However, when any mariner so serving has not completed it, his or her STCW certificate or endorsement will be endorsed to indicate this limitation.

Coast Guard, DOT

§ 10.207

(n) *Certificate for operator of radio in the Global Maritime Distress and Safety System (GMDSS).* (1) Subject to paragraph (n)(2) of this section, and except as otherwise provided by § 10.202, each candidate for an STCW certificate or endorsement as master or mate, to be valid on or after February 1, 2002, for service in vessels in ocean or near-coastal service, shall present—

(i) A certificate for operator of radio in the GMDSS issued by the Federal Communication Commission (FCC); and

(ii) A certificate of completion from a Coast Guard-approved or accepted course for operator of radio in the GMDSS or from another approved or accepted program of training and assessment covering the same areas of competence. The course or program must be sufficient to establish that the applicant is competent to perform radio duties on a vessel participating in the GMDSS and meets the standard of competence under STCW Regulation IV/2.

(2) Paragraph (n)(1) of this section does not apply to a candidate intending to serve only as a pilot, or intending to serve only on vessels not required to comply with the provisions of the GMDSS in Chapter IV of the Convention for the Safety of Life at Sea, 1974, as amended (SOLAS).

(3) Each candidate presenting a certificate described in paragraph (n)(1) of this section may have his or her STCW certificate suitably endorsed with his or her GMDSS qualification.

(o) *Procedures for bridge team work.* Except as otherwise provided by § 10.202, each candidate for an STCW certificate or endorsement as master or mate, to be valid on or after February 1, 2002, for service on vessels in ocean or near-coastal service, shall present sufficient documentary proof that he or she understands and can effectively apply procedures for bridge team work as an essential aspect of maintaining a safe navigational watch, taking into account the principles of bridge-resource management enumerated in Section B-VIII/2 of the STCW Code.

(p) *Practical demonstration of skills.* Each candidate for an original license shall successfully complete any practical demonstrations required under

this part and appropriate to the particular license concerned, to prove that he or she is sufficiently proficient in skills required under subpart I of this part. The OCMI must be satisfied as to the authenticity and acceptability of all evidence that each candidate has successfully completed the demonstrations required under this part in the presence of a designated examiner. The OCMI will place in the file of each candidate a written or electronic record of the skills required, the results of the practical demonstrations, and the identification of the designated examiner in whose presence the requirements were fulfilled.

[CGD 81-059 and CGD 81-059a, 52 FR 38623 and 38666, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 133, Jan. 4, 1989; CGD 81-059a, 55 FR 14799, Apr. 18, 1990; CGD 91-002, 58 FR 15238, Mar. 19, 1993; CGD 91-223, 60 FR 4524, Jan. 23, 1995; CGD 91-212, 60 FR 65486, Dec. 19, 1995; CGD 94-029, 61 FR 47063, Sept. 6, 1996; CGD 95-062, 62 FR 34530, June 26, 1997; CGD 95-062, 62 FR 40281, July 28, 1997; USCG-1997-2799, 64 FR 42815, Aug. 5, 1999; USCG-1999-6224, 64 FR 63225, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63225, Nov. 19, 1999, § 10.205, was amended in paragraph (f)(1) by removing the words “operator of uninspected towing vessels” and adding, in their place, the words “master or mate (pilot) of towing vessels”; and revising paragraph (g)(3), effective Nov. 20, 2000. For the convenience of the user, the superseded text is set forth as follows:

§ 10.205 Requirements for original licenses, certificates of registry, and STCW certificates and endorsements.

* * * * *

(g) * * *

(3) All operators of uninspected towing vessels, oceans (domestic trade).

* * * * *

§ 10.207 Requirements for raises of grades of licenses.

(a) *General.* Before any person is issued a raise of grade of license, the applicant shall present satisfactory documentary evidence of eligibility. Each applicant shall make written application on a Coast Guard furnished form and, unless exempted under § 10.112, submit the evaluation fee set out in table 10.109 in § 10.109.

(b) *Surrendering old license.* Upon the issuance of a new license for raise of grade, the applicant shall surrender the old license to the OCMI. If requested, the old license is returned to the applicant after cancellation.

(c) *Age, experience, training, and assessment.* (1) Each applicant for a raise of grade of license shall establish that he or she possesses the age, experience, and training necessary, and has been examined and otherwise assessed as may be required by this part to establish competence to hold the particular license requested, before he or she is entitled to a raise in grade of license.

(2) Applicants for raise of grade of license shall present to the OCMI at a Regional Examination Center, letters, discharges, or other official documents certifying to the amount and character of their experience and the names of the vessels on which acquired. Certificates of discharge are returned to the applicant after review by the OCMI. All other documentary evidence of service, or copies thereof, are filed with the application.

(3) Sea service acquired prior to the issuance of the license held is generally not accepted as any part of the service required for raise of grade of that license. However, service acquired prior to issuance of a license will be accepted for certain crossovers, endorsements or increases in scope of a license, as appropriate. In the limited tonnage categories for deck licenses, total accumulated service is a necessary criterion for most raises in grade; service acquired prior to the issuance of such licenses will, therefore, be accepted.

(4) No raise of grade of license may be issued to any naturalized citizen on less experience in any grade than would have been required of a citizen of the United States by birth.

(5) Experience and service acquired on foreign vessels while holding a valid U. S. license is creditable for establishing eligibility for a raise of grade, subject to evaluation by the OCMI to determine that it is a fair and reasonable equivalent to service acquired on merchant vessels of the United States, with respect to grade, tonnage, horsepower, waters and operating conditions. An applicant who has obtained the qualifying experience on foreign

vessels shall submit satisfactory documentary evidence of such service (including any necessary translations into English) in the forms prescribed by paragraph (c)(2) of this section.

(6) An applicant remains eligible for a raise of grade of license while on probation as a result of action under part 5 of this chapter. A raise of grade of license issued to a person on probation will be subject to the same probationary conditions imposed against the applicant's other certificates or licenses. The offense for which he or she was placed on probation will be considered on the merits of the case in determining fitness to hold the license applied for. No applicant will be examined for a raise of grade of license during any period when a suspension without probation or a revocation imposed under part 5 of this chapter is effective against the applicant's license or certificate or while an appeal from these actions is pending.

(d) *Professional Examination.* (1)(i) When the OCMI finds an applicant's experience and training for raise of grade to be satisfactory and the applicant is eligible in all other respects, the OCMI will authorize the examination. Oral-assisted examinations may be administered in accordance with §10.205(i)(1). The OCMI will place in the applicant's file a record indicating the subjects covered.

(ii) The general instructions for administration of examinations and the lists of subjects for all licenses appear in Subpart I of this part.

(2) The qualification requirements for *radar observer* are contained in §10.480.

(e) *Physical requirements.* (1) An applicant for raise of grade of a license who has not had a physical examination for an original license or renewal of license within three years must submit a certification by a licensed physician or physician assistant that he or she is in good health and has no physical impairment or medical condition which would render him or her incompetent to perform the ordinary duties of the license applied for.

(2) If the OCMI has reason to believe that an applicant for raise of grade of license suffers from some physical impairment or medical condition which

would render the applicant incompetent to perform the ordinary duties of that license, the applicant may be required to submit the results of an examination by a licensed physician or physician assistant that meets the requirements for an original license.

(3) An applicant who has lost the sight of one eye may obtain a raise of grade of license, provided that the applicant is qualified in all other respects and that the visual acuity in the one remaining eye passes the test required under § 10.205(d).

(f) *Firefighting certificate.* Applicants for raise of grade of license who have not previously met the requirements in § 10.205(g), must do so.

(g) *Chemical testing for dangerous drugs.* To obtain a raise of grade of a license each applicant shall produce evidence of having passed a chemical test for dangerous drugs or of qualifying for an exception from testing in § 16.220 of this subchapter.

(h) *Criminal Record Review.* Each applicant for a raise of grade may be required to submit to a criminal record check under § 10.201(h).

(i) *National Driver Register.* Each applicant for a raise of grade of a license shall consent to an NDR check under § 10.201(i) if the license is reissued with a new expiration date.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 134, Jan. 4, 1989; CGD 91-002, 58 FR 15238, Mar. 19, 1993; CGD 91-223, 60 FR 4524, Jan. 23, 1995; CGD 91-212, 60 FR 65486, Dec. 19, 1995; CGD 94-029, 61 FR 47063, Sept. 6, 1996; CDG 95-062, 62 FR 34530, June 26, 1997; USCG-1997-2799, 64 FR 42815, Aug. 5, 1999]

§ 10.209 Requirements for renewal of licenses, certificates of registry, and STCW certificates and endorsements.

(a) *General.* Except as provided in paragraph (g) of this section, an applicant for renewal of a license or certificate of registry shall establish possession of all of the necessary qualifications before the license or certificate of registry is issued.

(1) Each application must be on a Coast Guard furnished form and be accompanied by the evaluation fee set out in table 10.109 in § 10.109. An approved application is valid for 12 months.

(2) The applicant may apply in person at any Regional Examination Center listed in § 10.105 or may renew the license or certificate of registry by mail under paragraph (e)(3) of this section.

(3) The applicant shall submit the original or a photocopy of the license or certificate of registry to be renewed. A photocopy will include the back and all attachments. If requested, the old license or certificate of registry will be returned to the applicant.

(b) *Fitness.* No license or certificate of registry will be renewed if it has been suspended without probation or revoked as a result of action under part 5 of this chapter, or facts that would render a renewal improper have come to the attention of the Coast Guard.

(c) *Professional requirements.* (1) In order to renew a license as master, mate, engineer, pilot, or operator, the applicant shall:

(i) Present evidence of at least 1 year of sea service during the past 5 years;

(ii) Pass a comprehensive, open-book exercise covering the general subject matter contained in appropriate sections of subpart I of this part;

(iii) Complete an approved refresher training course; or

(iv) Present evidence of employment in a position closely related to the operation, construction or repair of vessels (either deck or engineer as appropriate) for at least 3 years during the past 5 years. An applicant for a deck license with this type of employment must also demonstrate knowledge on an applicable Rules of the Road exercise.

(2) The qualification requirements for renewal of *radar observer* endorsement are in § 10.480.

(3) Additional qualification requirements for renewal of a license as pilot are contained in § 10.713.

(4) An applicant for renewal of a radio officer's license shall, in addition to meeting the requirements of paragraphs (a) and (b) of this section, present a currently valid license as first- or second-class radiotelegraph operator issued by the Federal Communications Commission. This license will be returned to the applicant.

(5) An applicant for renewal of a medical doctor or professional nurse certificate of registry shall, in addition to

meeting the requirements of paragraphs (a) and (b) of this section, present evidence that he or she holds a currently valid appropriate license as physician, surgeon, or registered nurse issued under the authority of a state or territory of the United States, the Commonwealth of Puerto Rico, or the District of Columbia.

(6) Except as provided by paragraph (c)(7) of this section, an applicant for renewal of a license as master or mate (pilot) of towing vessels shall submit satisfactory evidence, predating the application by not more than 1 year, of satisfying the requirements of paragraph (c)(1)(i) or (ii) of this section, or those of paragraph (c)(1)(iv) of this section except the exercise; and of either—

(i) Completing a practical demonstration of maneuvering and handling a towing vessel before a designated examiner; or

(ii) Submitting documentation in the form of a towing officers' assessment record that lists training, drills, and experience during the license's validity in which an operator's proficiency is assessed over time.

(7) An applicant for renewal of a license as master or mate (pilot) of towing vessels whose most recent license was suspended or revoked by an administrative law judge for incompetence shall complete the practical demonstration rather than submit the towing officers' assessment record under paragraph (c)(6)(i) of this section.

(d) *Physical requirements.* (1) An applicant for renewal of a license shall submit a certification by a licensed physician or physician assistant that he or she is in good health and has no physical impairment or medical condition which would render him or her incompetent to perform the ordinary duties of that license. This certification must address visual acuity and hearing in addition to general physical condition and must have been completed within 12 months of the date of application.

(2) If the OCMI has reason to believe that an applicant for renewal of a license suffers from some physical impairment or medical condition which would render the applicant incompetent to perform the ordinary duties of that license, the applicant may be required to submit the results of an ex-

amination by a licensed physician or physician assistant that meets the requirements for original license.

(3) An applicant who has lost the sight of one eye may obtain a renewal of license, provided that the applicant is qualified in all other respects and that the visual acuity in the one remaining eye passes the test required under § 10.205(d).

(4) Physical examinations are not required for renewal of certificates of registry.

(e) *Special circumstances—(1) Period of grace.* Except as provided herein, a license may not be renewed more than 12 months after it has expired. To obtain a reissuance of the license, an applicant must comply with the requirements of paragraph (f) of this section. When an applicant's license expires during a time of service with the Armed Forces and there is no reasonable opportunity for renewal, including by mail, this period may be extended. The period of military service following the date of license expiration which precluded renewal may be added to the 12 month period of grace. The 12 month period of grace, and any extension, do not affect the expiration date of the license. A license is not valid for use after the expiration date.

(2) *Renewal in advance.* A license or certificate of registry may not be renewed more than 12 months before expiration unless it is being renewed in conjunction with a merchant mariner's document which is either due for renewal or being endorsed, or unless the OCMI is satisfied that special circumstances exist to justify renewal.

(3) *Renewal by mail.* (i) Applications for renewal by mail of licenses or certificates of registry may be sent to the Coast Guard office that issued the license or certificate of registry or holds the applicant's file. The following documents must be submitted:

(A) A properly completed application on a Coast Guard furnished form and the evaluation fee required by table 10.109 in § 10.109.

(B) The expired license or certificate of registry to be renewed; or, if it has not expired, a photocopy of the license or certificate, including the back and all attachments.

(C) A certification from a licensed physician or physician assistant in accordance with paragraph (d) of this section for the renewal of a license.

(D) If the applicant desires to renew a license with a radar observer endorsement, either the radar observer certificate or a certified copy.

(E) Evidence of, or acceptable substitute for, sea service for the renewal of a license.

(F) For a certificate of registry as a medical doctor or professional nurse, evidence that he or she holds a currently valid, appropriate license as physician, surgeon, or registered nurse, issued under the authority of a state or territory of the United States, the Commonwealth of Puerto Rico, or the District of Columbia.

(ii) The open-book exercise, if required, may be administered through the mail.

(iii) Upon receipt of the renewed license or certificate of registry, the applicant shall sign it in order to validate the license or certificate.

(4) *Concurrent renewal of licenses, certificates of registry, and merchant mariner's documents.* An applicant for concurrent renewal of more than one merchant mariner credential shall satisfy the individual renewal requirements and pay the applicable fees required by the tables in §§ 10.109 and 12.02-18 of this chapter for each license, certificate of registry, or merchant mariner's document being renewed.

(f) *Reissuance of expired license or certificate of registry.* (1) Whenever an applicant applies for reissuance of a license more than 12 months after expiration, in lieu of the requirements of paragraph (c) of this section, the applicant shall demonstrate continued professional knowledge by completing a course approved for this purpose, or by passing the complete examination for that license. The examination may be oral-assisted if the expired license was awarded on an oral exam. The fees listed in table 10.109 in § 10.109 apply to these examinations. In the case of an expired radio officer's license, the license may be issued upon presentation of a valid first- or second-class radiotelegraph operator license issued by the Federal Communications Commission.

(2) A certificate of registry that has been expired for more than 12 months shall be renewed in the same way as a current certificate of registry. There are no additional requirements for reissuing certificates of registry that have been expired for more than 12 months.

(g) *Inactive license renewal.* (1) Applicants for renewal of licenses who are unwilling or otherwise unable to meet the requirements of paragraphs (c) or (d) of this section may renew their licenses, with the following restrictive endorsement placed on the back of the license: "License renewed for continuity purposes only; service under the authority of this license is prohibited." Holders of licenses with this *continuity endorsement* may have the prohibition rescinded at any time by satisfying the renewal requirements in paragraphs (c), (d), and (h) of this section.

(2) Applications for renewal of a license with the continuity endorsement must include:

(i) The license to be renewed, or, if it is unexpired, a photocopy of the license including the back and all attachments; and,

(ii) A signed statement from the applicant attesting to an awareness of the restriction to be placed on the renewed license, and of the requirements for rescinding the continuity endorsement.

(h) *Chemical testing for dangerous drugs.* Except for applicants requesting an inactive license renewal under paragraph (g) of this section, each applicant for the renewal of a license or of a certificate of registry shall produce evidence of having passed a chemical test for dangerous drugs or of qualifying for an exception from testing in § 16.220 of this subchapter. An applicant who fails a chemical test for dangerous drugs will not be issued a license or certificate of registry.

(i) Each applicant for a renewal may be required to consent to a criminal record check under § 10.201(h).

(j) Each applicant for renewal of a license or certificate of registry shall consent to an NDR check under § 10.201(i).

(k) Except as otherwise provided by § 10.202, each candidate for a renewal of

§ 10.211

an STCW certificate or endorsement as master, mate, operator, or engineer, to be valid on or after February 1, 2002, for service on any vessel in ocean or near-coastal service, shall meet the applicable requirements of paragraphs (l), (m), (n), and (o) in §10.205 and shall meet the requirements of Section A-VI/2, paragraph 1 to 4 of the STCW Code.

[CGD 91-211, 59 FR 49299, Sept. 27, 1994, as amended by CGD 91-223, 60 FR 4525, Jan. 23, 1995; CGD 91-212, 60 FR 65486, Dec. 19, 1995; CGD 95-062, 62 FR 34531, June 26, 1997; CGD 95-062, 62 FR 40281, July 28, 1997; USCG-1997-2799, 64 FR 42815, Aug. 5, 1999; USCG-1999-6224, 64 FR 63225, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63225, Nov. 19, 1999, §10.209 was amended by adding paragraphs (c)(6) and (7), effective Nov. 20, 2000.

§ 10.211 Creditable service and equivalents for licensing purposes.

(a) Sea service may be documented for licensing purposes in various forms such as certificates of discharge, pilotage service and billing forms, and letters or other official documents from marine companies signed by appropriate officials or licensed masters. For service on vessels of under 200 gross tons, owners of vessels may attest to their own service; however, those who do not own a vessel must obtain letters or other evidence from licensed personnel or the owners of the vessels listed. The documentary evidence produced by the applicant must contain the amount and nature (e.g. chief mate, assistant engineer, etc.) of the applicant's experience, the vessel name, gross tonnage, shaft horsepower and official numbers, the routes upon which the experience was acquired, and approximate dates of service.

(b) Port engineer, shipyard superintendent experience, instructor service, or similar related service may be creditable for a maximum of six months of service for raise of grade of an engineer or deck license, as appropriate, using the following:

(1) Port engineer or shipyard superintendent experience is creditable on a three-for-one basis for a raise of grade. (Twelve months of experience equals four months of creditable service.)

(2) Service as a bona fide instructor at a school of navigation or marine en-

46 CFR Ch. I (10-1-00 Edition)

gineering is creditable on a two-for-one basis for a raise of grade. (Twelve months of experience equals six months of creditable service).

(c) Service on mobile offshore drilling units is creditable for raise of grade of license. Evidence of one year's service as mate or equivalent while holding a license as third mate, or as engineering officer of the watch or equivalent while holding a license as third assistant engineer, is acceptable for a raise of grade to second mate or second assistant engineer, respectively; however, any subsequent raises of grade of unlimited, nonrestricted licenses must include a minimum of six months of service on conventional vessels.

(d) Service on a Dual Mode Integrated Tug Barge (ITB) unit is creditable for original or raise of grade of any deck licenses. Service on a Dual Mode ITB with an aggregate tonnage of over 1600 gross tons is creditable on a two-for-one basis (two days experience equals one day of creditable service) for up to 50 percent of the total service on vessels over 1600 gross tons required for an unlimited license. The remaining required service on vessels of over 1600 gross tons must be obtained on conventional vessels or Push Mode ITBs.

(e) Other experience in a marine related area, other than at sea, or sea service performed on unique vessels, will be evaluated by the OCMI and forwarded to the Commandant for a determination of equivalence to traditional service.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 135, Jan. 4, 1989]

§ 10.213 Sea service as a member of the Armed Forces of the United States and on vessels owned by the United States as qualifying experience.

(a) Sea service as a member of the Armed Forces of the United States will be accepted as qualifying experience for an original, raise of grade, or increase in scope of all licenses. In most cases, military sea service will have been performed upon ocean waters; however, inland service, as may be the case on smaller vessels, will be credited in the same manner as conventional

evaluations. The applicant must submit an official transcript of sea service as verification of the service claimed when the application is submitted. The applicant must also provide the Officer in Charge, Marine Inspection other necessary information as to tonnage, routes, horsepower, percentage of time underway, and assigned duties upon the vessels which he or she served. Such service will be evaluated by the OCMi and forwarded to the Commandant for a determination of its equivalence to sea service acquired on merchant vessels and the appropriate grade, class, and limit of license for which the applicant is eligible. Normally, 60 percent of the total time on board is considered equivalent underway service; however, the periods of operation of each vessel may be evaluated separately. In order to be eligible for a master's or chief engineer's unlimited license, the applicant must have acquired military service in the capacity of commanding officer or engineer officer, respectively.

(b) Service in deck ratings on military vessels such as seaman apprentice, seaman, boatswain's mate, quartermaster, or radarman are considered deck service for licensing purposes. Service in other ratings may be considered if the applicant establishes that his or her duties required a watchstanding presence on or about the bridge of a vessel. Service in engineer ratings on military vessels such as fireman apprentice, fireman, engineman, machinists, mate, machinery technician or boiler tender are considered engineer service for licensing purposes. There are also other ratings such as electrician, hull technician, or damage controlman which may be credited when the applicant establishes that his or her duties required watchstanding duties in an operating engine room.

(c) In addition to underway service, members of the Armed Forces may obtain creditable service for periods of assignment to vessels at times other than underway, such as in port, at anchor, or in training. Normally, a 25% factor is applied to these time periods. This experience can be equated with

general shipboard familiarity, training, ship's business, and other related duties.

(d) Sea service obtained on submarines is creditable, as if it were surface vessel service, for deck and engineer licenses under the provision of paragraph (a) of this section. For application to deck licenses, submarine service may be creditable if at least 25 percent of all service submitted for the license was obtained on surface vessels (e.g. If four years' total service were submitted for an original license, at least one year must have been obtained on surface craft in order for the submarine service to be eligible for evaluation).

(e) Service gained in a civilian capacity as commanding officer, master, mate, engineer, or pilot, etc., of any vessel owned and operated by the United States, in any service, in which a license as master, mate, engineer, or pilot was not required at the time of such service, is evaluated by the OCMi and forwarded to the Commandant for a determination of equivalence.

§ 10.215 Modification or removal of limitations.

(a) If an Officer in Charge, Marine Inspection, is satisfied by the documentary evidence submitted that an applicant is entitled by experience, training, and knowledge to an endorsement or increase in the scope of any license held, any limitations which were previously placed upon the license by that OCMi may be changed. Such an increase in scope may include horsepower or tonnage limitations, or geographic route restrictions.

(b) An OCMi may not change a limitation on any license which that office did not place thereon before full information regarding the reason for the limitation is obtained from the OCMi responsible for the limitation.

(c) No limitation on any license may be changed before the applicant has made up any deficiency in the experience prescribed for the license or endorsement desired and passed any necessary examination.

§ 10.217

46 CFR Ch. I (10–1–00 Edition)

§ 10.217 Examination procedures and denial of licenses.

(a)(1) The examinations for all deck and engineer unlimited licenses are administered at periodic intervals. The examination fee set out in table 10.109 in § 10.109 must be paid before the applicant may take the first examination section. If an applicant fails three or more sections of the examination, a complete reexamination must be taken, but may be taken during any of the scheduled exam periods. On the subsequent exam, if the applicant again fails three or more sections, at least 3 months must lapse before another complete examination is attempted, and a new examination fee is required. If an applicant fails one or two sections of an examination, the applicant may be retested twice on these sections during the next 3 months. If the applicant does not successfully complete these sections within the 3 month period, complete reexamination must be taken after a lapse of at least 3 months from the date of the last retest, and a new examination fee is required. The 3 month retest period may be extended by the OCMI if the applicant presents discharges documenting sea time which prevented the taking of a retest during the 3 month period. The retest period may not be extended beyond 7 months from the initial examination.

(2) The scheduling of all other deck and engineer license examinations will be at the discretion of the OCMI. The examination fee set out in table 10.109 in § 10.109 must be paid before the applicant may take the first examination section. In the event of a failure, the applicant may be retested twice whenever the examination can be rescheduled with the OCMI. The applicant must be examined in all of the unsatisfactory sections of the preceding examination. If the applicant does not successfully complete all parts of the examination during a 3-month period from the initial test date, a complete reexamination must be taken after a lapse of at least 2 months from the date of the last retest, and a new examination fee is required.

(b) If the OCMI refuses to grant an applicant the license for which applied due to failing to pass a required exam-

ination, the applicant is furnished a written statement setting forth the portions of the examination which must be retaken and the date by which the examination must be completed.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 135, Jan. 4, 1989; CGD 91-002, 58 FR 15238, Mar. 19, 1993; CGD 94-029, 61 FR 47064, Sept. 6, 1996; USCG-1997-2799, 64 FR 42815, Aug. 5, 1999]

§ 10.219 Issuance of duplicate license or certificate of registry.

(a) Whenever a person to whom a license or certificate of registry has been issued loses the license or certificate, that person shall report the loss to any OCMI. A duplicate license or certificate may be issued by an OCMI listed in the note following § 1.05(b) of this part after receiving an application with an affidavit describing the circumstances of the loss from the applicant and verification of the license or certificate record from the Regional Examination Center where it was issued or from the Commandant. The duplicate will be prepared in the same format and wording as the license or certificate being replaced. A duplicate license is issued for the unexpired term of the lost license. Duplicate licenses and certificates of registry bear the following statement: "This license (or certificate) replaces License (or Certificate) Number ____ issued at ____ on the above date."

(b) If a person loses a license or certificate of registry by shipwreck or other casualty, a reissue of that license or certificate or registry will be supplied free of charge. Other casualties include any damage to a ship caused by collision, explosion, tornado, wreck, flooding, beaching, grounding, or fire.

(c) If a person loses a license or certificate of registry otherwise than by shipwreck or other casualty and applies for a reissue, the appropriate fee set out in table 10.109 in § 10.109 is required.

[CGD 81-059, 54 FR 135, Jan. 4, 1989; as amended by CGD 91-002, 58 FR 15238, Mar. 19, 1993; USCG-1997-2799, 64 FR 42815, Aug. 5, 1999]

§ 10.221 Parting with license.

The holder of a license shall not voluntarily part with it or place it beyond his or her personal control by pledging

or depositing it with any other person for any purpose. If the holder violates this section, he or she may be proceeded against in accordance with the provisions of part 5 of this chapter, looking to a suspension or revocation of the license.

§ 10.223 Suspension and revocation of licenses.

(a) When the license of any individual is revoked, it is no longer valid for any purpose and any license of the same type subsequently requested must be applied for as an original license, except as to number of issue.

(b) No person whose license is suspended without probation or has been revoked may be issued another license without approval of the Commandant.

(c) When a license which is about to expire is suspended, the renewal of such license will be withheld until expiration of the period of suspension.

Subpart C—Training Schools with Approved Courses

§ 10.301 Applicability.

This subpart prescribes the general requirements applicable to all approved courses which may be accepted in lieu of service experience or examination required by the Coast Guard, or which satisfy course completion requirements.

§ 10.302 Course approval.

(a) The Coast Guard approves courses satisfying regulatory requirements and those that substitute for a Coast Guard examination or a portion of a sea service requirement. The owner or operator of a training school desiring to have a course approved by the Coast Guard shall submit a written request to the Commanding Officer, National Maritime Center, NMC-4B, 4200 Wilson Boulevard, Suite 510, Arlington, VA 22203-1804, that contains:

(1) A list of the curriculum including a description of and the number of classroom hours required in each subject;

(2) A description of the facility and equipment;

(3) A list of instructors including the experience, background, and the qualifications of each; and

(4) Specify the Coast Guard training requirements the course is intended to satisfy.

(b) The Coast Guard notifies each applicant in writing whether or not an approval is granted. If a request for approval is denied, the Coast Guard informs the applicant the reasons for the denial and describes what corrections are required for an approval.

(c) Unless sooner surrendered, suspended or withdrawn, an approval for a course at a training school that meets Coast Guard standards expires 24 months after the month in which it is issued, when the school closes, when the school gives notice that it will no longer offer the course, or on the date of any change in the ownership of the school for which it was issued, whichever occurs first.

(d) If the owner or operator of a training school desires to have a course approval renewed, they shall submit a written request to the address listed in paragraph (a) of this section. For the request to be approved, the Coast Guard must be satisfied that the content and quality of instruction remain satisfactory. Unless sooner surrendered, suspended or withdrawn, a renewal of the approval expires 60 months after the month it is issued, when the school closes, when the school gives notice that it will no longer offer the course, or on the date of any change in ownership of the school for which it is issued, whichever occurs first.

(e) *Suspension of approval.* If the Coast Guard determines that a specific course does not comply with the provisions of 46 CFR parts 10, 12, 13 or 15, or the requirements specified in the course approval; or substantially deviates from the course curriculum package as submitted for approval; or if the course is being presented in a manner that is insufficient to achieve learning objectives; the cognizant OCMI may suspend the approval, may require the holder to surrender the certificate of approval, if any, and may direct the holder to cease claiming the course is Coast Guard approved. The Cognizant OCMI will notify the approval holder in writing of its intention to suspend the

§ 10.303

46 CFR Ch. I (10–1–00 Edition)

approval and the reasons for suspension. If the approval holder fails to correct the reasons for suspension, the course will be suspended and the matter referred to the Commanding Officer, National Maritime Center. The Commanding Officer, National Maritime Center, will notify the approval holder that the specific course fails to meet applicable requirements, and explain how those deficiencies can be corrected. The Commanding Officer, National Maritime Center, may grant the approval holder up to 60 days in which to correct the deficiencies.

(f) *Withdrawal of approval.* (1) The Commanding Officer, National Maritime Center, may withdraw approval for any course when the approval holder fails to correct the deficiency(ies) of a suspended course within a time period allowed under paragraph (e) of this section.

(2) The Commanding Officer, National Maritime Center, may withdraw approval of any or all courses by an approval holder upon a determination that the approval holder has demonstrated a pattern or history of:

- (i) Failing to comply with the applicable regulations or the requirements of course approvals;
- (ii) Substantial deviations from their approved course curricula; or
- (iii) Presenting courses in a manner that is insufficient to achieve learning objectives.

(g) *Appeals of suspension or withdrawal of approval.* Anyone directly affected by a decision to suspend or withdraw an approval may appeal the decision to the Commandant via the Commanding Officer, National Maritime Center, as provided in §1.03–45 of this chapter.

[CGD 81–059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 95–072, 60 FR 50460, Sept. 29, 1995; USCG–1998–4442, 63 FR 52189, Sept. 30, 1998; USCG–1998–3824, 64 FR 4984, Feb. 2, 1999]

§ 10.303 General standards.

Each school with an approved course must:

- (a) Have a well maintained facility that accommodates the students in a safe and comfortable environment conducive to learning.
- (b) Have visual aids for realism, including simulators where appropriate, which are modern and well maintained

and sufficient for the number of students to be accommodated.

(c) Give appropriate written or practical examinations in the course material to each student of such a degree of difficulty that a student who successfully completes them could reasonably assume that he or she would pass, on the first attempt, an examination prepared by the Coast Guard based upon knowledge requirements of the position or endorsement for which the student is being trained.

(d) Keep for at least one year after the end of each student's enrollment:

(1) Each written examination, or in the case of a practical test, a report of such test; and

(2) A record of each student's classroom attendance.

(e) Not change its approved curriculum unless approved, in writing, after the request for change has been submitted in writing to the Commanding Officer, National Maritime Center (NMC–4B).

(f) At any time the Officer in Charge, Marine Inspection shall direct, allow the Coast Guard to:

(1) Inspect its facilities, equipment, and records, including scholastic records;

(2) Conduct interviews and surveys of students to aid in course evaluation and improvement;

(3) Assign personnel to observe or participate in the course of instruction; and

(4) Supervise or administer the required examinations or practical demonstrations.

[CGD 81–059, 52 FR 38623, Oct. 16, 1987 and CGD 81–059, 54 FR 132, Jan. 4, 1989, as amended by CGD 95–072, 60 FR 50460, Sept. 29, 1995; USCG–1998–4442, 63 FR 52189, Sept. 30, 1998; USCG–1998–3824, 64 FR 4984, Feb. 2, 1999]

§ 10.304 Substitution of training for required service, use of training-record books, and use of towing-officer assessment records.

(a) Satisfactory completion of certain training courses approved by the Commandant may be substituted for a portion of the required service for many deck and engineer licenses and for qualified ratings of unlicensed personnel. The list of all currently approved courses of instruction including the equivalent service and applicable

licenses and ratings is maintained by Commanding Officer, National Maritime Center, NMC-4B. Satisfactory completion of an approved training course may be substituted for not more than two-thirds of the required service on deck or in the engine department for deck or engineer licenses, respectively, and for qualified ratings.

(b) Service time gained at an approved training course does not satisfy recent service requirements nor does training on a simulator; however, any underway service at an approved course may be used for this purpose. An applicant who had met the recent service requirement before entering school will not be penalized by attending the approved training course.

(c) Training obtained prior to receiving a license may not be used for subsequent raises of grade.

(d) Simulator training in combination with a Coast Guard approved training course may be submitted to the Commanding Officer, National Maritime Center, for evaluation and determination of equivalency to required sea service. Simulator training cannot be substituted for recency requirements, but may substitute for a maximum of 25 percent of the required service for any license transaction.

(e) Except as provided in § 10.202, when a candidate both applies for an STCW certificate or endorsement as an officer in charge of a navigational watch, on the basis of training or sea service commencing on or after August 1, 1998, and uses completion of approved training to substitute for required service, then not less than 1 year of the remaining service must be part of approved training that meets the appropriate requirements of Chapter II of STCW and the requirements of subpart C of this part. The training of a candidate must be documented in a Coast Guard-accepted training-record book.

(f) Except as provided in § 10.202, each candidate who applies for an STCW certificate or endorsement as an officer in charge of an engineering watch or as a designated duty engineer on the basis of training or sea service commencing on or after August 1, 1998, for service on seagoing vessels, shall complete on-board training as part of approved training that meets the appropriate re-

quirements of Chapter III of STCW and the requirements of subpart C of this part. The training must be documented in a Coast Guard-accepted training-record book.

(g) The training-record book referred to in paragraphs (e) and (f) of this section must contain at least the following:

(1) The identity of the candidate.

(2) The tasks to be performed or the skills to be demonstrated, with reference to the standards of competence set forth in the tables of the appropriate sections in part A of the STCW Code.

(3) The criteria to be used in determining that the tasks or skills have been performed properly, again with reference to the standards of competence set forth in the tables of the appropriate sections in part A of the STCW Code.

(4) A place for a qualified instructor to indicate by his or her initials that the candidate has received training in the proper performance of the task or skill.

(5) A place for a designated examiner to indicate by his or her initials that the candidate has successfully completed a practical demonstration and has proved competent in the task or skill under the criteria, when assessment of competence is to be documented in the record books.

(6) The identity of each qualified instructor, including any Coast Guard license or document held, and the instructor's signature.

(7) The identity of each designated examiner, when any assessment of competence is recorded, including any Coast Guard license or document held, and the examiner's signature confirming that his or her initials certify that he or she has witnessed the practical demonstration of a particular task or skill by the candidate.

(h) Each applicant for a license as master or mate (pilot) of towing vessels, and each master or mate of self-propelled vessels of greater than 200 gross tons seeking an endorsement for towing vessels, shall complete a towing officers' assessment record that contains at least the following:

§ 10.305

46 CFR Ch. I (10-1-00 Edition)

(1) Identification of the candidate, including full name, home address, photograph or photo-image, and personal signature.

(2) Objectives of the training and assessment.

(3) Tasks to perform or skills to demonstrate.

(4) Criteria to use in determining that the tasks or skills have been performed properly.

(5) A place for a qualified instructor to indicate by his or her initials that the candidate has received training in the proper performance of the tasks or skills.

(6) A place for a designated examiner to indicate by his or her initials that the candidate has successfully completed a practical demonstration and has proved competent in the task or skill under the criteria.

(7) Identification of each qualified instructor by full name, home address, employer, job title, ship name or business address, number of any Coast Guard license or document held, and personal signature.

(8) Identification of each designated examiner by full name, home address, employer, job title, ship name or business address, number of any Coast Guard license or document held, and personal signature confirming that his or her initials certify that he or she has witnessed the practical demonstration of a particular task or skill by the candidate.

(i) The training-record book referred to in paragraphs (e) and (f) of this section may be maintained electronically, if the electronic record meets Coast Guard-accepted standards for accuracy, integrity, and availability.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 135, Jan. 4, 1989; CGD 95-072, 60 FR 50460, Sept. 29, 1995; CGD 95-062, 62 FR 34531, June 26, 1997; USCG-1998-4442, 63 FR 52189, Sept. 30, 1998; USCG-1999-6224, 64 FR 63225, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63225, Nov. 19, 1999, § 10.304, was amended by redesignating paragraph (h) as (i), and add new paragraph (h), effective Nov. 20, 2000.

§ 10.305 Radar-Observer certificates and qualifying courses.

(a) A student who takes an approved course of training, which includes pass-

ing both a radar-theory examination and a practical demonstration on a simulator, and who meets the requirements of this section is entitled to an appropriate Radar-Observer certificate—

(1) In a form prescribed by the school and acceptable to the Coast Guard; and

(2) Signed by the head of the school.

(b) The following Radar-Observer certificates are issued under this section:

(1) Radar Observer (Unlimited).

(2) Radar Observer (Inland Waters and Gulf-Intracoastal Waterway [GIWW]).

(3) Radar Observer (Rivers).

(4) Radar Observer (Unlimited: Renewal).

(5) Radar Observer (Inland Waters and GIWW: Renewal).

(6) Radar Observer (Rivers: Renewal).

(c) A school with an approved Radar-Observer course may issue a certificate listed in paragraph (b) of this section after the student has successfully completed the appropriate curriculum as follows:

(1) Radar Observer (Unlimited). Classroom instruction—including demonstration and practical exercises using simulators—and examination, in the following subjects:

(i) Fundamentals of radar:

(A) How radar works.

(B) Factors affecting the performance and accuracy of marine radar.

(C) Purposes and functions of the main components that constitute a typical marine-radar system.

(ii) Operation and use of radar:

(A) Purpose and adjustment of controls.

(B) Detection of malfunctions, false and indirect echoes, and other radar phenomena.

(C) Effects of sea return, weather, and other environmental conditions.

(D) Limitations of radar resulting from design factors.

(E) Safety precautions associated with use and maintenance of marine radar.

(F) Measurement of ranges and bearings.

(G) Effect of size, shape, composition, and distance of vessels and terrestrial targets on echo.

(iii) Interpretation and analysis of radar information:

(A) Radar navigation (including visual techniques)—determining positions, and detecting changes in the relative motion, of other vessels.

(B) Collision-avoidance, including visual techniques, appropriate to the circumstances and the equipment in use.

(C) Determining the course and speed of another vessel.

(D) Determining the time and distance of closest point of approach of a crossing, meeting, overtaking, or overtaken vessel.

(E) Detecting changes of course or speed of another vessel after its initial course and speed have been established.

(F) Applying the Navigational Rules, Chapters 30 and 34 of Title 33 U.S. Code [Commandant Instruction M16672.2C, as amended, or equivalent], and other factors to consider when determining changes of course or speed of a vessel to prevent collisions on the basis of radar observation.

(G) Use of radar in maintaining situational awareness.

(iv) Plotting (by any graphically-correct method):

(A) Principles and methods of plotting relative and true motion.

(B) Practical-plotting problems.

(2) Radar Observer (Inland Waters and GIWW). Classroom instruction—with emphasis on situations and problems encountered on inland waters and the GIWW, including demonstration and practical exercises using simulators—and examination, in the following subjects:

(i) Fundamentals of radar:

(A) How radar works.

(B) Factors affecting the performance and accuracy of marine radar.

(C) Purpose and functions of the main components that constitute a typical marine-radar system.

(ii) Operation and use of radar:

(A) Purpose and adjustment of controls.

(B) Detection of malfunctions, false and indirect echoes, and other radar phenomena.

(C) Effects of sea return, weather, and other environmental conditions.

(D) Limitations of radar resulting from design factors.

(E) Safety precautions associated with use and maintenance of marine radar.

(F) Measurement of ranges and bearings.

(G) Effect of size, shape, composition, and distance of vessels and terrestrial targets on echo.

(iii) Interpretation and analysis of radar information:

(A) Radar navigation (including visual techniques)—determining positions, and detecting changes in the relative motion, of other vessels.

(B) Collision-avoidance, including visual techniques, appropriate to the circumstances and the equipment in use.

(C) Determining the course and speed of another vessel.

(D) Determining the time and distance of closest point of approach of a crossing, meeting, overtaking, or overtaken vessel.

(E) Detecting changes of course or speed of another vessel after its initial course and speed have been established.

(F) Applying the Navigational Rules, and other factors to consider when determining changes of course or speed of a vessel to prevent collisions on the basis of radar observation.

(G) Use of radar in maintaining situational awareness.

(3) Radar Observer (Rivers). Classroom instruction—with emphasis on situations and problems encountered on rivers, including demonstration and practical exercises using simulators—and examination, in the following subjects:

(i) Fundamentals of radar:

(A) How radar works.

(B) Factors affecting the performance and accuracy of marine radar.

(C) Purpose and functions of the main components that constitute a typical marine-radar system.

(ii) Operation and use of radar:

(A) Purpose and adjustment of controls.

(B) Detection of malfunctions, false and indirect echoes, and other radar phenomena.

(C) Effects of sea return, weather, and other environmental conditions.

(D) Limitations of radar resulting from design factors.

(E) Safety precautions associated with use and maintenance of marine radar.

(F) Measurement of ranges and bearings, recognizing limited use of radar bearings in curving, narrow channels.

(G) Effect of size, shape, composition, and distance of vessels and terrestrial targets on echo.

(iii) Interpretation and analysis of radar information:

(A) Radar navigation (including visual techniques)—determining positions, and detecting changes in the relative motion, of other vessels.

(B) Collision-avoidance, including visual techniques, appropriate to the circumstances and the equipment in use.

(C) Applying the Navigational Rules, and other factors to consider when determining changes of course or speed of a vessel to prevent collisions on the basis of radar observation.

(D) Use of radar in maintaining situational awareness.

(4) Radar Observer (Unlimited: Renewal). Classroom instruction—including demonstration and practical exercises using simulators—and examination, in the following subjects:

(i) Interpretation and analysis of radar information:

(A) Radar navigation (including visual techniques)—determining positions, and detecting changes in the relative motion, of other vessels.

(B) Collision-avoidance, including visual techniques, appropriate to the circumstances and the equipment in use.

(C) Determining the course and speed of another vessel.

(D) Determining the time and distance of closest point of approach of a crossing, meeting, overtaking, or overtaken vessel.

(E) Detecting changes of course or speed of another vessel after its initial course and speed have been established.

(F) Applying the Navigational Rules, and other factors to consider when determining changes of course or speed of a vessel to prevent collisions on the basis of radar observation.

(G) Use of radar in maintaining situational awareness.

(ii) Plotting (by any graphically-correct method):

(A) Principles and methods of plotting relative and true motion.

(B) Practical-plotting problems.

(5) Radar Observer (Inland Waters and GIWW: Renewal). Classroom instruction—including demonstration and practical exercises using simulators—and examination, in the interpretation and analysis of radar information, including:

(i) Radar navigation (including visual techniques—determining positions, and detecting changes in the relative motion, of other vessels.

(ii) Collision-avoidance, including visual techniques, appropriate to the circumstances and the equipment in use.

(iii) Determining the course and speed of another vessel.

(iv) Determining the time and distance of closest point of approach of a crossing, meeting, overtaking, or overtaken vessel.

(v) Detecting changes of course or speed of another vessel after its initial course and speed have been established.

(vi) Applying the Navigational Rules, and other factors to consider when determining changes of course or speed of a vessel to prevent collisions on the basis of radar observation.

(vii) Use of radar in maintaining situational awareness.

(6) Radar Observer (Rivers: Renewal). Classroom instruction—including demonstration and practical exercises using simulators—and examination, in the interpretation and analysis of radar information, including:

(i) Radar navigation (including visual techniques)—determining positions, and detecting changes in the relative motion, of other vessels.

(ii) Collision-avoidance, including visual techniques, appropriate to the circumstances and the equipment in use.

(iii) Applying the Navigational Rules, and other factors to consider when determining changes of course or speed of a vessel to prevent collisions on the basis of radar observation.

(iv) Use of radar in maintaining situational awareness.

[CGD 94-041, 62 FR 11303, Mar. 11, 1997]

§ 10.306 Radar-Operation course and certificate.

(a) A certificate of training from a Radar-Operation course may, as provided by 46 CFR 15.815(c)(2), suffice instead of a Radar-Observer endorsement. It is valid until the holder's license is renewed or upgraded, or expires, whichever occurs first.

(b) Each Radar-Operation course must contain at least 4 hours of instruction on the following subjects:

- (1) Fundamentals of radar:
 - (i) How radar works.
 - (ii) Factors affecting the performance and accuracy of marine radar.
 - (iii) Purpose and functions of the main components that constitute a typical marine-radar system.
- (2) Operation and use of radar:
 - (i) Purpose and adjustment of controls.
 - (ii) Detection of malfunctions, false and indirect echoes, and other radar phenomena.
 - (iii) Effects of sea return, weather, and other environmental conditions.
 - (iv) Limitations of radar resulting from design factors.
 - (v) Safety precautions associated with use and maintenance of marine radar.
 - (vi) Measurement of ranges and bearings.
 - (vii) Effect of size, shape, composition, and distance of vessels and terrestrial targets on echo.
- (3) Interpretation and analysis of radar information:
 - (i) Radar navigation—determining the position and direction of movements of a vessel.
 - (ii) Collision-avoidance, including visual techniques, appropriate to the circumstances and the equipment in use.
 - (iii) Applying the Navigational Rules, Chapters 30 and 34 of Title 33 U.S. Code [Commandant Instruction M16672.2C or equivalent, as amended], and other factors to consider when determining changes of course or speed of a vessel to prevent collisions on the basis of radar observation.
- (c) Each Radar-Operation course must be conducted by a person who possesses the knowledge and skills taught in the course, with at least one

year of experience in their practical application, except that—

(1) A marine instructor or company official may substitute a currently valid certificate from an approved Radar-Observer course (Unlimited, or Inland Waters and GIWW) for the one year of experience; and

(2) An instructor of any approved Radar-Observer course may teach a Radar-Operation course without further seagoing experience.

(d) When a holder of the Radar-Operation certificate seeks a Radar-Observer endorsement, he or she is an applicant for an original endorsement rather than for renewal of an endorsement.

[CGD 94-041, 62 FR 11304, Mar. 11, 1997]

§ 10.307 Training schools with approved radar observer courses.

The Commanding Officer, National Maritime Center, NMC-4B, 4200 Wilson Boulevard, Suite 510, Arlington, VA 22203-1804 maintains the list of approved schools and specific courses. This information is available upon request by writing the aforementioned address or calling (703) 235-1300.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987 and CGD 81-059, 54 FR 132, Jan. 4, 1989, as amended by CGD 95-072, 60 FR 50460, Sept. 29, 1995; USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

§ 10.309 Coast Guard-accepted training other than approved courses.

(a) When the training and assessment of competence required by this part are not subject to Coast Guard approval under § 10.302, but are used to qualify to hold an STCW certificate or endorsement for service on or after February 1, 2002, such training and assessment must meet the following requirements:

(1) The training and assessment must have written, clearly defined objectives that emphasize specific knowledge, skills, and abilities, and that include criteria to be used in establishing a student's successful achievement of the training objectives.

(2) The training must be set out in a written syllabus that conforms to a Coast Guard-accepted outline for such training and includes—

- (i) The sequence of subjects to be covered;

(ii) The number of hours to be devoted to instruction in relevant areas of knowledge;

(iii) The identity and professional qualifications of the instructor(s) to be conducting the training or providing instruction;

(iv) The identification of other media or facilities to be used in conducting training; and

(v) Measurements at appropriate intervals of each candidate's progress toward acquisition of the specific knowledge, skills, and abilities stated in the training objectives.

(3) Except as provided in paragraph (a)(4) of this section, documentary evidence must be readily available to establish that all instructors—

(i) Have experience, training, or instruction in effective instructional techniques;

(ii) Are qualified in the task for which the training is being conducted; and

(iii) Hold the level of license, endorsement, or other professional credential required of those who would apply on board a vessel the relevant level of knowledge, skills, and abilities described in the training objectives.

(4) Neither a specialist in a particular field of nonmaritime education, such as mathematics or first aid, nor a person with at least 3 years of service as a member of the Armed Forces of the United States, specializing in the field in which he or she is to conduct training, need hold a maritime license or document to conduct training in that field.

(5) A simulator may be used in training if—

(i) The simulator meets applicable performance standards;

(ii) The instructor has gained practical operational experience on the particular type of simulator being used; and

(iii) The instructor has received appropriate guidance in instructional techniques involving the use of simulators.

(6) Essential equipment and instructional materials must afford all students adequate opportunity to participate in exercises and acquire practice in performing required skills.

(7) A process for routinely assessing the effectiveness of the instructors, including the use of confidential evaluations by students, is in place.

(8) Documentary evidence is readily available to establish that any evaluation of whether a student is competent in accordance with standards, methods, and criteria set out in part A of the STCW Code is conducted by a designated examiner who has experience, training, or instruction in assessment techniques.

(9) Records of the student's performance are maintained for at least 1 year by the offeror of the training and assessment.

(10) To ensure that the training is meeting its objectives, and the requirements of paragraphs (a)(1) through (9) of this section, the offeror must either—

(i) Be regulated as a maritime academy or marine academy pursuant to 46 CFR part 310; or

(ii) Monitor the training in accordance with a Coast Guard-accepted QSS, which must include the following features:

(A) The training must be provisionally certified, on the basis of an initial independent evaluation conducted under a Coast Guard-accepted QSS, as being capable of meeting its objective.

(B) The training must be periodically monitored in accordance with the schedule stipulated under the Coast Guard-accepted QSS.

(C) Each person conducting the initial evaluation or the subsequent periodic monitoring of the training shall be knowledgeable about the subjects being evaluated or monitored and about the national and international requirements that apply to the training, and shall not himself or herself be involved in the training and assessment of students.

(D) Each person evaluating or monitoring the training shall have access to all appropriate documents and facilities, and shall have opportunities both to observe all appropriate activities and to conduct confidential interviews when necessary.

(E) Arrangements must be such as to ensure that no person evaluating or monitoring the training is penalized or rewarded, directly or indirectly, by the

Coast Guard, DOT

§ 10.401

sponsor of the training for making any particular observations or for reaching any particular conclusions.

(11) Each person conducting the initial evaluation under paragraph (a)(10)(ii)(A) of this section or the periodic monitoring of the training under paragraph (a)(10)(ii)(B) of this section shall communicate his or her conclusions to the Commanding Officer, National Maritime Center, NMC-4B, 4200 Wilson Boulevard, suite 510, Arlington, VA 22203-1804, within 1 month of the completion of the evaluation or the monitoring.

(12) Each offeror of the training shall let the Coast Guard or someone authorized by the Coast Guard observe the records of a student's performance and records otherwise relating to paragraphs (a)(1) through (10) of this section.

(b) The Coast Guard will maintain a list of training each of whose offerors submits a certificate, initially not less than 45 calendar days before offering training under this section, and annually thereafter, signed by the offeror or its authorized representatives, stating that the training fully complies with requirements of this section, and identifying the Coast Guard-accepted QSS being used for independent monitoring. Training programs on this list will offer the training necessary for licenses and STCW endorsements under this part. The Coast Guard will update this list periodically and make it available to members of the public on request.

(c) If the Coast Guard determines, on the basis of observations or conclusions either of its own or of someone authorized by it to monitor the training, that particular training does not satisfy one or more of the conditions described in paragraph (a) of this section—

(1) The Coast Guard will so notify the offeror of the training by letter, enclosing a report of the observations and conclusions;

(2) The offeror may, within a period specified in the notice, either appeal the observations or conclusions to the Commandant (G-MOC) or bring the training into compliance; and

(3) If the appeal is denied—or the deficiency is not corrected in the allotted time, or within any additional period judged by the Coast Guard to be appro-

priate, considering progress toward compliance—the Coast Guard will remove the training from the list maintained under paragraph (b) of this section until it can verify full compliance; and it may deny applications for licenses for STCW endorsement based in whole or in part on training not on the list, until additional training or assessment is documented.

[CGD 95-062, 62 FR 34531, June 26, 1997, as amended by USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

Subpart D—Professional Requirements for Deck Officers' Licenses

§ 10.401 Ocean and near coastal licenses.

(a) Any license issued for service as master or mate on ocean waters qualifies the licensee to serve in the same grade on any waters, subject to the limitations of the license, without additional endorsement.

(b) A license issued for service as master or mate on near coastal waters qualifies the licensee to serve in the same grade on near coastal, Great Lakes, and inland waters, subject to the limitations of the license, without additional endorsement.

(c) Near coastal licenses of any gross tons require the same number of years of service as the ocean unlimited licenses. The primary differences in these licenses are the nature of the service and the professional examination as explained in subpart I of this part.

(d) A licensee having a master or mate near coastal license obtained with ocean service may have the license endorsed for ocean service by completing the appropriate examination deficiencies, provided that the additional service requirements of paragraph (e) of this section do not apply.

(e) Master or third mate near coastal unlimited licenses may be obtained by completing the prescribed examination in subpart I of this part and satisfying the requirements of paragraph (g) while holding a license as unlimited master or mate, respectively, upon Great Lakes and inland waters. To have a near coastal unlimited license obtained in this manner endorsed for

§ 10.402

ocean service, the licensee must obtain 12 months of service as a deck watch officer or higher on ocean waters on vessels of 1600 gross tons or over, in addition to completing the examination topics.

(f) Masters and mates licenses for service on vessels of over 200 gross tons may be endorsed for sail or auxiliary sail as appropriate. The applicant must present the equivalent total qualifying service required for conventional licenses including at least one year of deck experience on that specific type of vessel. For example, for a license as master of vessels of not more than 1600 gross tons endorsed for auxiliary sail, the applicant must meet the total experience requirements for the conventional license, including time as mate, and the proper tonnage experience, including at least one year of deck service on appropriately sized auxiliary sail vessels. For license endorsement for service on vessels of 200 gross tons or less see individual license requirements.

(g) In order to obtain a master or mate license with a tonnage limit above 200 gross tons, or a license for 200 gross tons or less with an ocean route, whether an original, raise in grade, or increase in the scope of license authority to a higher tonnage category, the applicant must successfully complete the following training and examination requirements:

- (1) Approved firefighting course;
- (2) Approved radar observer course; and,
- (3) Qualification as an able seaman unlimited or able seaman limited (able seaman special or able seaman offshore supply vessels satisfy the able seaman requirement for licenses permitting service on vessels of 1600 gross tons and less).

(h) Each applicant for a deck license which authorizes service on vessels above 1600 gross tons on ocean or near coastal waters, whether original or raise of grade, must pass a practical signaling examination (flashing light). A license applicant who fails in practical signaling, but passes every other part of the examination, may be issued a license with a 1600 gross ton limitation. The tonnage limitation can be re-

46 CFR Ch. I (10-1-00 Edition)

moved upon successful completion of the signaling examination.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 135, Jan. 4, 1989]

§ 10.402 Tonnage requirements for ocean or near coastal licenses for vessels of over 1600 gross tons.

(a) To qualify for an ocean or near coastal license for vessels of any gross tons, all the required experience must be obtained on vessels of over 200 gross tons. At least one-half of the required experience must be obtained on vessels of over 1600 gross tons.

(b) If the applicant for an original or raise of grade of a license as master or mate does not have the service on vessels over 1600 gross tons required by paragraph (a) of this section, or is qualifying for third mate under the provisions of paragraph §10.407(c) of this subpart, a tonnage limitation is placed on the license based on the applicant's qualifying experience. The license is limited to the maximum tonnage on which at least 25 percent of the required experience was obtained, or 150 percent of the maximum tonnage on which at least 50 percent of the service was obtained, whichever is higher. Limitations are in multiples of 1000 gross tons, using the next higher figure when an intermediate tonnage is calculated. When the calculated limitation equals or exceeds 10,000 gross tons, the applicant is issued an unlimited tonnage license.

(c) Tonnage limitations imposed under paragraph (b) of this section may be raised or removed in the following manner:

(1) When the applicant has six months of service on vessels of over 1600 gross tons in the highest grade licensed, all tonnage limitations are removed.

(2) When the applicant has a total of six months of service on vessels of over 1600 gross tons in any licensed capacity other than the highest grade for which licensed, all tonnage limitations for the grade in which the service is performed are removed and the next higher grade license is raised to the tonnage of the vessel on which the majority of the service was performed. The total cumulative service before and

Coast Guard, DOT

§ 10.403

after issuance of the limited license may be considered in removing all tonnage limitations.

(3) When the applicant has 12 months of service as able seaman on vessels over 1600 gross tons while holding a license as third mate, all tonnage limitations on the third mate's license are removed.

(d) Individuals holding licenses as master or mate of vessels of not more than 1600 gross tons, not more than 500 gross tons, or not more than 25-200 gross tons are prohibited from using


the provisions of paragraph (c) of this section to increase the tonnages of their licenses.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 135, Jan. 4, 1989]

§ 10.403 Structure of deck licenses.

The following diagram illustrates the deck license structure, including cross over points. The section numbers on the diagram refer to the specific requirements applicable.

Figure 10.403 STRUCTURE OF DECK LICENSES

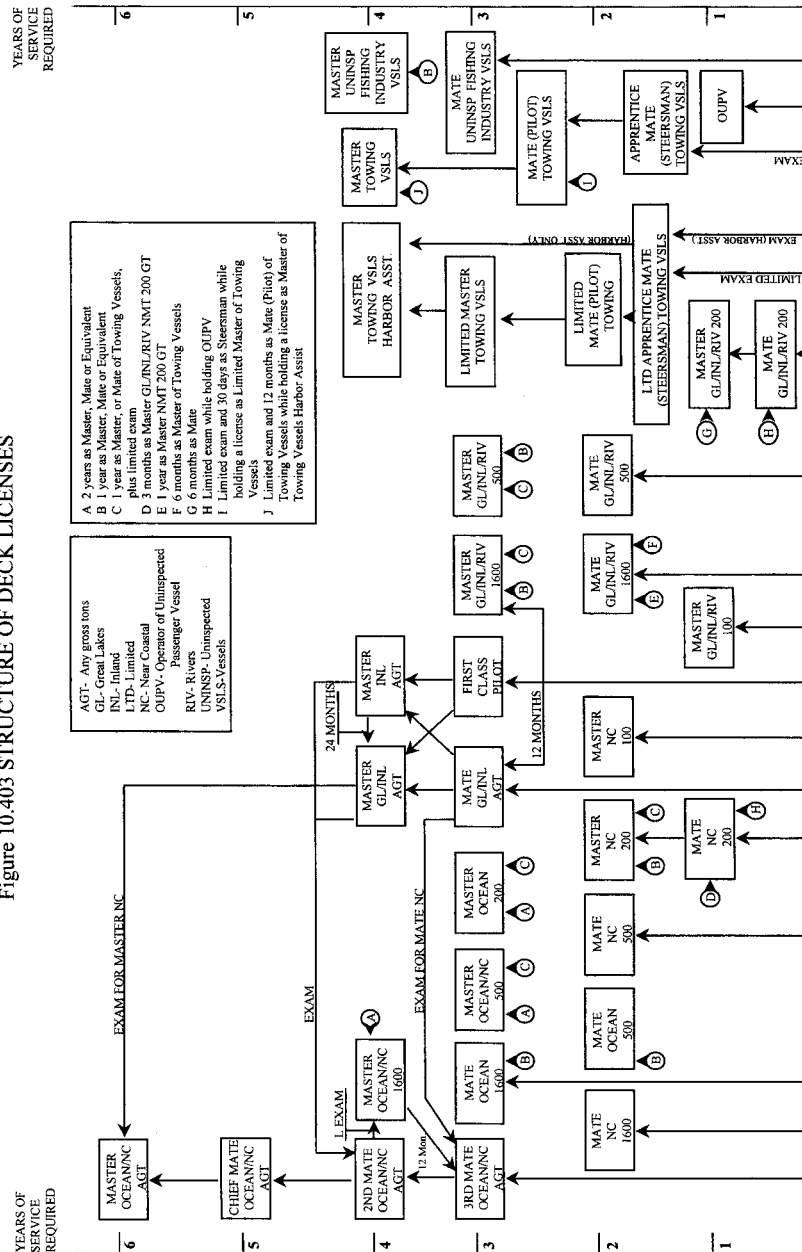


[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 136, Jan. 4, 1989; USCG-1999-6224, 64 FR 63226, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, ed by revising Figure 10.403, effective Nov. 20, 64 FR 63226, Nov. 19, 1999, § 10.403, was amend-

2000. For the convenience of the user, the superseded text is set forth as follows:

§ 10.403 Structure of deck licenses.

FIGURE 10.403 DECK LICENSE STRUCTURE

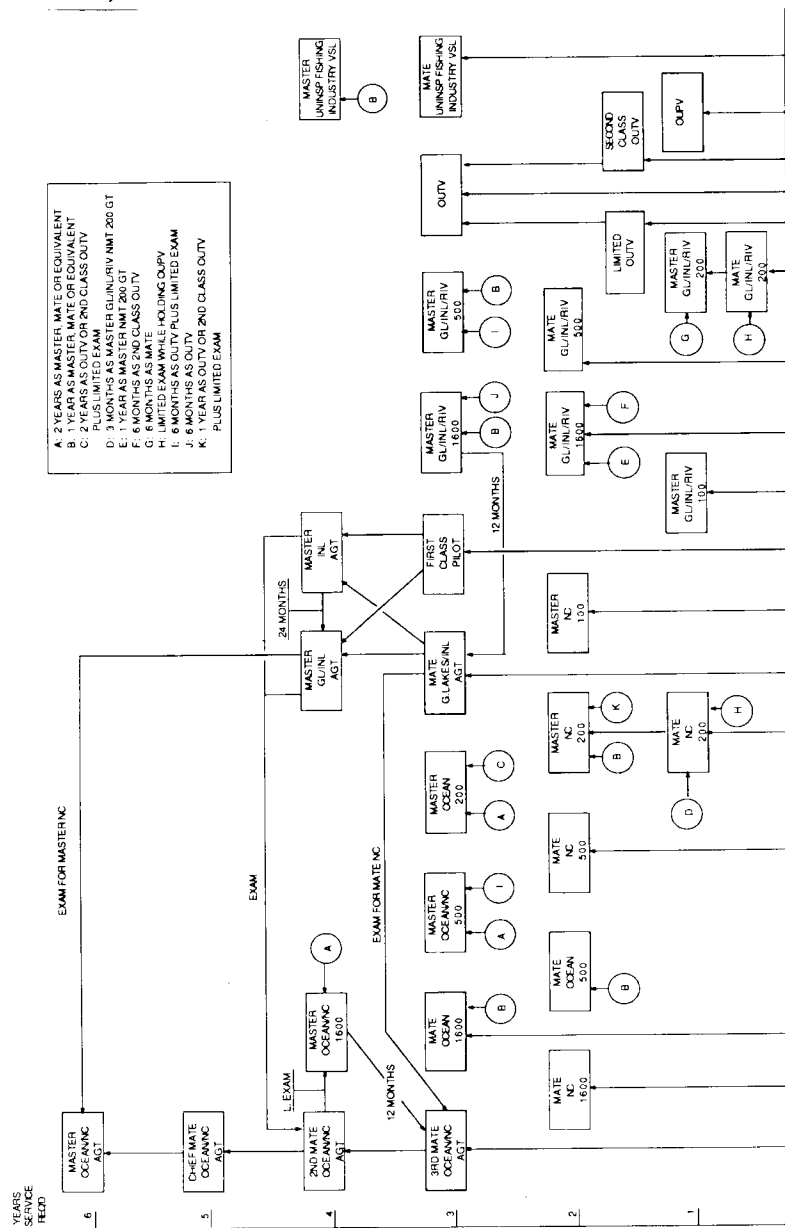

§ 10.404

§ 10.404 Service requirements for master of ocean or near coastal steam or motor vessels of any gross tons.

The minimum service required to qualify an applicant for license as master of ocean or near coastal steam or motor vessels of any gross tons is:

(a) One year of service as chief mate on ocean steam or motor vessels; or,

(b) One year of service on ocean steam or motor vessels while holding a license as chief mate of ocean steam or motor vessels as follows:

(1) A minimum of six months of service as chief mate; and,

(2) Service as officer in charge of a navigational watch accepted on a two-for-one basis (12 months as second or third mate equals six months of creditable service).

§ 10.405 Service requirements for chief mate of ocean or near coastal steam or motor vessels of any gross tons.

The minimum service required to qualify an applicant for license as chief mate of ocean or near coastal steam or motor vessels of any gross tons is one year of service as officer in charge of a navigational watch on ocean steam or motor vessels while holding a license as second mate.

§ 10.406 Service requirements for second mate of ocean or near coastal steam or motor vessels of any gross tons.

The minimum service required to qualify an applicant for license as second mate of ocean or near coastal steam or motor vessels of any gross tons is:

(a) One year of service as officer in charge of a navigational watch on ocean steam or motor vessels while holding a license as third mate; or,

(b) While holding a license as third mate of ocean steam or motor vessels of any gross tons, 12 months of service on deck as follows:

(1) A minimum of six months service as officer in charge of a deck watch on ocean steam or motor vessels; in combination with,

(2) Service on ocean steam or motor vessels as boatswain, able seaman, or quartermaster while holding a certificate as able seaman, which may be accepted on a two-for-one basis to a maximum allowable substitution of six months (12 months of experience equals 6 months of creditable service); or,

46 CFR Ch. I (10–1–00 Edition)

imum allowable substitution of six months (12 months of experience equals 6 months of creditable service); or,

(c) A licensed master of Great Lakes and inland steam or motor vessels of any gross tons or master of inland steam or motor vessels of any gross tons, may obtain a license as second mate of ocean or near coastal steam or motor vessels of any gross tons by completing the prescribed examination in subpart I of this part.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 138, Jan. 4, 1989]

§ 10.407 Service requirements for third mate of ocean or near coastal steam or motor vessels of any gross tons.

(a) The minimum service or training required to qualify an applicant for license as third mate of ocean or near coastal steam or motor vessels of any gross tons is:

(1) Three years of service in the deck department on ocean steam or motor vessels, six months of which shall have been as able seaman, boatswain, or quartermaster, while holding a certificate as able seaman. Experience gained in the engine department on vessels of appropriate tonnage may be creditable for up to three months of the service requirements for this license; or,

(2) Graduation from:

(i) The U.S. Merchant Marine Academy (deck curriculum);

(ii) The U.S. Coast Guard Academy and qualification as an underway officer in charge of a navigational watch;

(iii) The U.S. Naval Academy and qualification as an underway officer in charge of a navigational watch; or,

(iv) The deck class of a maritime academy approved by and conducted under rules prescribed by the Maritime Administrator and listed in part 310 of this title, except the deck class of the Great Lakes Maritime Academy; or,

(3) Satisfactory completion of a three year apprentice mate training program approved by the Commandant.

(b) Graduation from the deck class of the Great Lakes Maritime Academy will qualify the graduate to be examined for a license as third mate near coastal steam or motor vessels of any gross tons.

Coast Guard, DOT

§ 10.414

(c) While holding a license as master of ocean or near coastal steam or motor vessels of not more than 1,600 gross tons, one year of service as master on vessels of over 200 gross tons operating on ocean or near coastal waters will qualify the applicant for a license as third mate of ocean or near coastal steam or motor vessels of any gross tons.

§ 10.410 Requirements for deck licenses for vessels of not more than 1600 gross tons.

(a) Licenses as master and mate of vessels of not more than 1600 gross tons are issued in the following tonnage categories:

- (1) Not more than 1,600 gross tons;
- (2) Not more than 500 gross tons; or,
- (3) Between 25–200 gross tons in 50 ton increments and with appropriate mode of propulsion such as steam or motor, sail, or auxiliary sail.

(b) Experience gained in the engine department on vessels of appropriate tonnage may be creditable for up to 25 percent of the service requirements for any mate license in this category.

(c) A license in this category obtained with an orally-assisted examination will be limited to 500 gross tons. In order to raise that tonnage limit to 1,600 gross tons, the written examination and service requirements must be satisfied.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 138, Jan. 4, 1989]

§ 10.412 Service requirements for master of ocean or near coastal steam or motor vessels of not more than 1600 gross tons.

The minimum service required to qualify an applicant for a license as master of ocean or near coastal steam or motor vessels of not more than 1600 gross tons is:

(a) Four years total service on ocean or near coastal waters. Service on Great Lakes and inland waters may substitute for up to two years of the required service. Two years of the required service must have been on vessels of over 100 gross tons. Two years of the required service must have been as a master, mate, or equivalent supervisory position while holding a license

as master, mate, or operator of uninspected passenger vessels. One year of the service as master, mate, or equivalent supervisory position must have been on vessels of over 100 gross tons; or,

(b) An applicant holding a license as chief mate or second mate of ocean or near coastal steam or motor vessels of over 1600 gross tons is eligible for this license upon completion of a limited examination.

[CGD 81-059, 54 FR 138, Jan. 4, 1989, as amended by USCG-1999-6224, 64 FR 63228, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63228, Nov. 19, 1999, § 10.412, was amended in paragraph (a) by removing the words "operator of uninspected towing vessels," effective Nov. 20, 2000.

§ 10.414 Service requirements for mate of ocean steam or motor vessels of not more than 1600 gross tons.

The minimum service required to qualify an applicant for a license as mate of ocean steam or motor vessels of not more than 1600 gross tons is:

(a) Three years total service in the deck department of ocean or near coastal steam or motor, sail, or auxiliary sail vessels. Service on Great Lakes and inland waters may substitute for up to 18 months of the required service. One year of the required service must have been on vessels of over 100 gross tons. One year of the required service must have been as a master, mate, or equivalent supervisory position while holding a license as master, mate, or operator of uninspected passenger vessels. Six months of the required service as master, mate, or equivalent supervisory position must have been on vessels of over 100 gross tons; or,

(b) Three years total service in the deck department on ocean or near coastal steam or motor, sail, or auxiliary sail vessels of over 200 gross tons. Six months of the required service must have been as able seaman.

[CGD 81-059, 54 FR 138, Jan. 4, 1989, as amended by USCG-1999-6224, 64 FR 63228, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63228, Nov. 19, 1999, § 10.414, was amended in paragraph (a) by removing the words

§ 10.416

“operator of uninspected towing vessels,”, effective Nov. 20, 2000.

§ 10.416 Service requirements for mate of near coastal steam or motor vessels of not more than 1600 gross tons.

The minimum service required to qualify an applicant for a license as mate of near coastal steam or motor vessels of not more than 1600 gross tons is two years total service in the deck department of ocean or near coastal steam or motor, sail, or auxiliary sail vessels. Service on Great Lakes and inland waters may substitute for up to one year of the required service. One year of the required service must have been on vessels of over 100 gross tons. Six months of the required service must have been as able seaman, boatswain, quartermaster, or equivalent position on vessels of over 100 gross tons while holding a certificate as able seaman.

[CGD 81-059, 54 FR 138, Jan. 4, 1989]

§ 10.418 Service requirements for master of ocean or near coastal steam or motor vessels of not more than 500 gross tons.

The minimum service required to qualify an applicant for a license as master of ocean or near coastal steam or motor vessels of not more than 500 gross tons is:

(a) Three years total service on ocean or near coastal waters. Service on Great Lakes and inland waters may substitute for up to 18 months of the required service. Two years of the required service must have been as a master, mate, or equivalent supervisory position while holding a license as master, mate, or operator of uninspected passenger vessels. One year of the required service as master, mate, or equivalent supervisory position must have been on vessels of over 50 gross tons.

(b) The holder of a license as master or mate (pilot) of towing vessels authorizing service on oceans or near-coastal routes is eligible for a license as master of ocean or near-coastal steam or motor vessels of not more than 500 gross tons after both 1 year of service as master or mate of towing vessels on oceans or near-coastal

46 CFR Ch. I (10-1-00 Edition)

routes and completion of a limited examination.

[CGD 81-059, 54 FR 138, Jan. 4, 1989, as amended by USCG-1999-6224, 64 FR 63228, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63228, Nov. 19, 1999, § 10.418, was amended by revising paragraph (b), effective Nov. 20, 2000. For the convenience of the user, the superseded text is set forth as follows:

§ 10.418 Service requirements for master of ocean or near-coastal steam or motor vessels of not more than 500 gross tons.

* * * * *

(b) An applicant holding a license as operator of uninspected towing vessels authorizing service on ocean or near coastal waters is eligible for this license after six months of service as operator of uninspected towing vessels on ocean or near coastal waters and completion of a limited examination. This requires three and one-half years of service. Two years of this service must have been served while holding a license as operator, second-class operator, or mate.

* * * * *

§ 10.420 Service requirements for mate of ocean steam or motor vessels of not more than 500 gross tons.

The minimum service required to qualify an applicant for a license as mate of ocean steam and motor vessels of not more than 500 gross tons is two years total service in the deck department of ocean or near coastal steam or motor, sail, or auxiliary sail vessels. Service on Great Lakes and inland waters may substitute for up to one year of the required service. One year of the required service must have been as a master, mate, or equivalent supervisory position while holding a license as master, mate, or operator of uninspected passenger vessels. Six months of the required service as master, mate, or equivalent supervisory position must have been on vessels of over 50 gross tons.

[CGD 81-059, 54 FR 138, Jan. 4, 1989, as amended by USCG-1999-6224, 64 FR 63228, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63228, Nov. 19, 1999, § 10.420, was amended by removing the words “operator of uninspected towing vessels,”, effective Nov. 20, 2000.

§ 10.421 Service requirements for mate of near coastal steam or motor vessels of not more than 500 gross tons.

The minimum service required to qualify an applicant for a license as mate of near coastal steam or motor vessels of not more than 500 gross tons is two years total service in the deck department of ocean or near coastal steam or motor, sail, or auxiliary sail vessels. Service on Great Lakes and inland waters may substitute for up to one year of the required service. One year of the required service must have been on vessels of over 50 gross tons. Three months of the required service must have been as able seaman, boatswain, quartermaster, or equivalent position on vessels of over 50 gross tons while holding a certificate as able seaman.

[CGD 81-059, 54 FR 138, Jan. 4, 1989]

§ 10.422 Tonnage limitations and qualifying requirements for licenses as master or mate of vessels of not more than 200 gross tons.

(a) Except as noted in paragraph (e), all licenses issued for master or mate of vessels of not more than 200 gross tons are issued in 50 gross ton increments based on the applicant's qualifying experience. The license is limited to the maximum tonnage on which at least 25 percent of the required experience was obtained, or 150 percent of the maximum tonnage on which at least 50 percent of the service was obtained, whichever is higher. Limitations are in multiples of 50 gross tons using the next higher figure when an intermediate tonnage is calculated.

(b) The tonnage limitation on these licenses may be raised upon completion of:

(1) At least 45 days of additional service on deck on a vessel of a higher tonnage for a tonnage increase on a mate's license; or,

(2) At least 90 days of additional service on deck on a vessel of a higher tonnage for a tonnage increase on a master's license; or,

(3) Additional service, which, when combined with all previously accumulated service, will qualify the applicant for a higher tonnage license under the basic formula; or,

(4) Six months additional service in the deck department on vessels within the highest tonnage increment on the license. In this case, the tonnage limitation may be raised one increment.

(c) When the service is obtained on vessels upon which licensed personnel are not required, the OCMI must be satisfied that the nature of this qualifying service (i.e., size of vessel, route, equipment, etc.) is a reasonable equivalent to the duties performed on vessels which are required to engage licensed individuals.

(d) Service gained in the engineroom on vessels of not more than 200 gross tons may be creditable for up to 25 percent of the deck service requirements for mate.

(e) When the qualifying service is obtained upon vessels of five gross tons or less, the license will be limited to vessels of not more than 25 gross tons.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 139, Jan. 4, 1989]

§ 10.424 Service requirements for master of ocean steam or motor vessels of not more than 200 gross tons.

(a) The minimum service required to qualify an applicant for a license as master of ocean steam or motor vessels of not more than 200 gross tons is:

(1) Three years total service on ocean or near coastal waters. Service on Great Lakes and inland waters may substitute for up to 18 months of the required service. Two years of the required service must have been as master, mate, or equivalent supervisory position while holding a license as master, as mate, or as operator of uninspected passenger vessels; or,

(2) Two years total service as a licensed master or mate of ocean or near-coastal towing vessels. Completion of a limited examination is also required.

(b) In order to obtain an endorsement on this license for sail or auxiliary sail vessels, the applicant must submit evidence of 12 months of service on sail or auxiliary sail vessels. The required 12 months of service may have been obtained prior to issuance of the master's license.

(c) In addition to any required examination, the applicant must comply

§ 10.426

with the requirements listed in § 10.401(g) of this subpart.

[CGD 81-059, 54 FR 139, Jan. 4, 1989, as amended by USCG-1999-6224, 64 FR 63228, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63228, Nov. 19, 1999, § 10.424 was amended in paragraph (a)(2) by removing the words "operator or second-class operator of ocean or near-coastal uninspected towing vessels" and adding, in their place, the words "master or mate of ocean or near-coastal towing vessels", effective Nov. 20, 2000.

§ 10.426 Service requirements for master of near coastal steam or motor vessels of not more than 200 gross tons.

(a) The minimum service required to qualify an applicant for a license as master of near coastal steam or motor vessels of not more than 200 gross tons is:

(1) Two years total service on ocean or near coastal waters. Service on Great Lakes and inland waters may substitute for up to one year of the required service. One year of the required service must have been as a master, mate, or equivalent supervisory position while holding a license as master, as mate, or as operator of uninspected passenger vessels; or,

(2) One year of total service as licensed master or mate of towing vessels on oceans or near-coastal routes. Completion of a limited examination is also required.

(b) In order to obtain an endorsement on this license for sail or auxiliary sail vessels, the applicant must submit evidence of 12 months of service on sail or auxiliary sail vessels. The required 12 months of service may have been obtained prior to issuance of the master's license.

[CGD 81-059, 54 FR 139, Jan. 4, 1989, as amended by USCG-1999-6224, 64 FR 63228, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63228, Nov. 19, 1999, § 10.426, was amended by revising paragraph (a)(2), effective Nov. 20, 2000. For the convenience of user, the superseded text is set forth as follows:

§ 10.426 Service requirements for master of near-coastal steam or motor vessels of not more than 200 gross tons.

(a) * * *

46 CFR Ch. I (10-1-00 Edition)

(2) One year of total service as a licensed operator or second-class operator of ocean or near coastal uninspected towing vessels. Completion of a limited examination is also required.

* * * * *

§ 10.427 Service requirements for mate of near coastal steam or motor vessels of not more than 200 gross tons.

(a) The minimum service required to qualify an applicant for license as mate of near coastal steam or motor vessels of not more than 200 gross tons is:

(1) Twelve months total service in the deck department of ocean or near coastal steam or motor, sail, or auxiliary sail vessels. Service on Great Lakes and inland waters may substitute for up to six months of the required service; or,

(2) Three months of service in the deck department of steam or motor vessels operating on ocean, near coastal, Great Lakes or inland waters while holding a license as master of inland steam or motor, sail or auxiliary sail vessels of not more than 200 gross tons.

(b) The holder of a license as operator of uninspected passenger vessels with a near coastal route endorsement may obtain this license by successfully completing an examination on rules and regulations for small passenger vessels.

(c) In order to obtain an endorsement on this license for sail or auxiliary sail vessels, the applicant must submit evidence of six months of deck service on sail or auxiliary sail vessels.

(d) A license as master of near coastal steam or motor vessels may be endorsed as mate of sail or auxiliary sail vessels upon presentation of three months of service on sail or auxiliary sail vessels.

(e) In order to obtain a tonnage endorsement of over 100 gross tons, the applicant must complete the additional examination topics indicated in subpart I of this part.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987. Redesignated and amended by CGD 81-059, 54 FR 139, Jan. 4, 1989]

Coast Guard, DOT

§ 10.431

§ 10.428 Service requirements for master of near coastal steam or motor vessels of not more than 100 gross tons.

(a) The minimum service required to qualify an applicant for a license as master of near coastal steam or motor vessels of not more than 100 gross tons is two years total service in the deck department of steam or motor, sail, or auxiliary sail vessels on ocean or near coastal waters. Service on Great Lakes and inland waters may substitute for up to one year of the required service.

(b) In order to obtain an endorsement on this license for sail or auxiliary sail vessels, the applicant must submit evidence of 12 months of service on sail or auxiliary sail vessels. The required 12 months of service may have been obtained prior to issuance of the license.

[CGD 81-059, 54 FR 139, Jan. 4, 1989]

§ 10.429 Service requirements for limited master of near coastal steam or motor vessels of not more than 100 gross tons.

(a) Limited masters' licenses for near coastal vessels of not more than 100 gross tons may be issued to applicants to be employed by organizations such as yacht clubs, marinas, formal camps and educational institutions. A license issued under this section is limited to the specific activity and the locality of the yacht club, marina or camp. In order to obtain this restricted license, an applicant must:

(1) Have four months of service on any waters in the operation of the type of vessel for which the license is requested;

(2) Satisfactorily complete a safe boating course approved by the National Association of State Boating Law Administrators, or a safe boating course conducted by the U.S. Power Squadron or the American Red Cross, or a Coast Guard approved course. This course must have been completed within five years before the date of application; and,

(3) Pass a limited examination appropriate for the activity to be conducted and the route authorized.

(b) The first aid and cardiopulmonary resuscitation (CPR) course certificates

required by § 10.205(h) of this part will only be required when, in the opinion of the OCMI, the geographic area over which service is authorized precludes obtaining medical services within a reasonable time.

(c) In order to obtain an endorsement on this license for sail or auxiliary sail vessels, the applicant must submit evidence of four months of service on sail or auxiliary sail vessels. The required four months of service may have been obtained prior to issuance of the license.

[CGD 81-059, 54 FR 139, Jan. 4, 1989, as amended by USCG-2000-7790, 65 FR 58458, Sept. 29, 2000]

§ 10.430 Licenses for the Great Lakes and inland waters.

Any license issued for service on the Great Lakes and inland waters is valid on all of the inland waters of the United States as defined in this part. Any license issued for service on inland waters is valid for the inland waters of the United States, excluding the Great Lakes. Licenses with either a Great Lakes and inland or an inland route are valid for service on the sheltered waters of the Inside Passage between Puget Sound and Cape Spencer, Alaska. As these licenses authorize service on waters seaward of the International Regulations for Preventing Collisions at Sea (COLREGS) demarcation line as defined in 33 CFR part 80, the applicant must complete an examination on the COLREGS or the license must be endorsed with an exclusion from such waters.

[CGD 81-059, 54 FR 139, Jan. 4, 1989]

§ 10.431 Tonnage requirements for Great Lakes and inland licenses for vessels of over 1600 gross tons.

(a) All required experience for Great Lakes and inland unlimited licenses must be obtained on vessels of over 200 gross tons. At least one-half of the required experience must be obtained on vessels of 1600 gross tons or over.

(b) Tonnage limitations may be imposed on these licenses in accordance with § 10.402 (b) and (c).

§ 10.433

§ 10.433 Service requirements for master of Great Lakes and inland steam or motor vessels of any gross tons.

The minimum service required to qualify an applicant for license as master of Great Lakes and inland steam or motor vessels of any gross tons is:

(a) One year of service as mate or first class pilot while acting in the capacity of first mate of Great Lakes steam or motor vessels of more than 1600 gross tons; or,

(b) Two years of service as master of inland (excluding the Great Lakes) steam or motor vessels of more than 1600 gross tons; or,

(c) One year of service upon Great Lakes waters while holding a license as mate or first class pilot of Great Lakes and inland steam or motor vessels of more than 1600 gross tons. A minimum of six months of this service must have been in the capacity of first mate. Service as second mate is accepted for the remainder on a two-for-one basis to a maximum of six months (12 months of service equals six months of creditable service).

§ 10.435 Service requirements for master of inland steam or motor vessels of any gross tons.

The minimum service required to qualify an applicant for license as master of inland (excluding the Great Lakes) steam or motor vessels of any gross tons is:

(a) One year of service as first class pilot (of other than canal and small lakes routes) or mate of Great Lakes or inland steam or motor vessels of more than 1,600 gross tons; or,

(b) Two years of service as wheelsman or quartermaster while holding a mate/first class pilot license.

§ 10.437 Service requirements for mate of Great Lakes and inland steam or motor vessels of any gross tons.

(a) The minimum service required to qualify an applicant for license as mate of Great Lakes and inland steam or motor vessels of any gross tons is:

(1) Three years of service in the deck department of steam or motor vessels, at least three months of which must have been on vessels on inland waters and at least six months of which must have been as able seaman, inland mate,

46 CFR Ch. I (10–1–00 Edition)

boatswain, wheelsman, quartermaster, or equivalent position;

(2) Graduation from the deck class of the Great Lakes Maritime Academy; or,

(3) While holding a license as master of Great Lakes and inland steam or motor vessels of not more than 1600 gross tons, one year service as master on vessels of over 200 gross tons.

(b) Service gained in the engine department on vessels of appropriate tonnage may be creditable for up to six months of the service requirements under paragraph (a)(1) of this section.

§ 10.442 Service requirements for master of Great Lakes and inland steam or motor vessels of not more than 1600 gross tons.

The minimum service required to qualify an applicant for a license as master of Great Lakes and inland steam or motor vessels of not more than 1600 gross tons is:

(a) Three years total service on vessels. Eighteen months of the required service must have been on vessels of over 100 gross tons. One year of the required service must have been as a master, mate, or equivalent supervisory position on vessels of over 100 gross tons while holding a license as master, as mate, or as operator of master of towing vessels; or,

(b) Six months of service as operator on vessels of over 100 gross tons while holding a license as operator of master of towing vessels.

[CGD 81-059, 54 FR 140, Jan. 4, 1989, as amended by USCG-1999-6224, 64 FR 63228, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63228, Nov. 19, 1999, § 10.442, was amended in paragraphs (a) and (b), by removing the words “operator of uninspected towing vessels” and by adding, in their places, the words “master of towing vessels”, effective Nov. 20, 2000.

§ 10.444 Service requirements for mate of Great Lakes and inland steam or motor vessels of not more than 1600 gross tons.

The minimum service required to qualify an applicant for license as mate of Great Lakes and inland steam or motor vessels of not more than 1600 gross tons is:

Coast Guard, DOT

§ 10.450

(a) Two years total service in the deck department of steam or motor, sail, or auxiliary sail vessels. One year of the required service must have been on vessels of over 100 gross tons. Six months of the required service must have been as able seaman, boatswain, quartermaster, or equivalent position on vessels of over 100 gross tons while holding a certificate as able seaman; or,

(b) One year total service as master of steam or motor, sail, or auxiliary sail vessels, or operator of uninspected passenger vessels, of over 50 gross tons while holding a license as master steam or motor, sail, or auxiliary sail vessels of not more than 200 gross tons or operator of uninspected passenger vessels; or,

(c) Six months total service as mate (pilot) of towing vessels on vessels of over 100 gross tons.

[CGD 81-059, 54 FR 140, Jan. 4, 1989, as amended by USCG-1999-6224, 64 FR 63228, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63228, Nov. 19, 1999, § 10.444, was amended in paragraph (c) by removing the words "second-class operator of uninspected towing vessels" and adding, in their place, the words "mate (pilot) of towing vessels", effective Nov. 20, 2000.

§ 10.446 Service requirements for master of Great Lakes and inland steam or motor vessels of not more than 500 gross tons.

The minimum service required to qualify an applicant for a license as master of Great Lakes and inland steam or motor vessels of not more than 500 gross tons is:

(a) Three years total service on vessels. One year of the required service must have been as a master, mate, or equivalent supervisory position on vessels of over 50 gross tons while holding a license as master, as mate, or as operator of uninspected passenger vessels.

(b) An applicant holding a license as master of ocean, near coastal, or Great Lakes and inland towing vessels is eligible for this license after six months of service as master of towing vessels and completion of a limited examination. This requires three and one-half years of service. Two years of this service must have been served while hold-

ing a license as master or mate (pilot) of towing vessels, or mate.

[CGD 81-059, 54 FR 140, Jan. 4, 1989, as amended by USCG-1999-6224, 64 FR 63228, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63228, Nov. 19, 1999, § 10.446, was amended in paragraph (b), in the first sentence, by removing the word "operator" wherever it appears and adding, in its place, the word "master" and by removing the word "uninspected" wherever it appears; and in the third sentence, by removing the words "operator or second-class operator of uninspected" and adding, in their place, the words "master or mate (pilot) of", effective Nov. 20, 2000.

§ 10.448 Service requirements for mate of Great Lakes and inland steam or motor vessels of not more than 500 gross tons.

The minimum service required to qualify an applicant for a license as mate of Great Lakes and inland steam or motor vessels of not more than 500 gross tons is two years total service in the deck department of steam or motor, sail, or auxiliary sail vessels. One year of the required service must have been on vessels of over 50 gross tons. Three months of the required service must have been as able seaman, boatswain, quartermaster, or equivalent position on vessels of over 50 gross tons while holding a certificate as able seaman.

[CGD 81-059, 54 FR 140, Jan. 4, 1989]

§ 10.450 Tonnage limitations and qualifying requirements for licenses as master or mate of Great Lakes and inland vessels of not more than 200 gross tons.

(a) Except as noted in subparagraph (d), all licenses issued for master or mate of vessels of not more than 200 gross tons are issued in 50 ton increments based on the applicants qualifying experience in accordance with the provisions of § 10.422. See the tonnage and qualifying service discussion in § 10.422 for further clarification.

(b) Service gained in the engineroom on vessels of not more than 200 gross tons may be creditable for up to 25 percent of the deck service requirements for mate.

(c) When the service is obtained on vessels upon which licensed personnel

§ 10.452

are not required, the OCMI must be satisfied that the nature of this qualifying service (i.e., size of vessel, route, equipment, etc.) is a reasonable equivalent to the duties performed on vessels which are required to engage licensed individuals.

(d) When the qualifying service is obtained upon vessels of five gross tons or less, the license will be limited to vessels of not more than 25 gross tons.

§ 10.452 Service requirements for master of Great Lakes and inland steam or motor vessels of not more than 200 gross tons.

(a) The minimum service required to qualify an applicant for a license as master of Great Lakes and inland steam or motor vessels of not more than 200 gross tons is one year of service on vessels. Six months of the required service must have been as master, mate, or equivalent supervisory position while holding a license as master, mate, master or mate (pilot) of towing vessels, or operator of uninspected passenger vessels. To obtain authority to serve on the Great Lakes, three months of the required service must have been on Great Lakes waters, otherwise the license will be limited to the inland waters of the United States (excluding the Great Lakes).

(b) In order to obtain an endorsement on this license for sail or auxiliary sail vessels, the applicant must have six months of service on sail or auxiliary sail vessels. The required six months of service may have been obtained prior to issuance of the master's license.

[CGD 81-059, 54 FR 140, Jan. 4, 1989, as amended by USCG-1999-6224, 64 FR 63228, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63228, Nov. 19, 1999, § 10.452, was amended in paragraph (a) by removing the words "operator or second-class operator of uninspected towing vessels" and adding, in their place, the words "master or mate (pilot) of towing vessels", effective Nov. 20, 2000.

§ 10.454 Service requirements for mate of Great Lakes and inland steam or motor vessels of not more than 200 gross tons.

(a) The minimum service required to qualify an applicant for a license as

46 CFR Ch. I (10-1-00 Edition)

mate of Great Lakes and inland steam or motor vessels of not more than 200 gross tons is six months of service in the deck department of steam or motor, sail, or auxiliary sail vessels. To obtain authority to serve on the Great Lakes, three months of the required service must have been on Great Lakes waters, otherwise the license will be limited to the inland waters of the United States (excluding the Great Lakes).

(b) In order to obtain an endorsement on this license for sail or auxiliary sail vessels, the applicant must submit evidence of three months of service on sail or auxiliary sail vessels.

(c) A license as master of steam or motor vessels may be endorsed as mate of sail or auxiliary sail vessels upon presentation of three months service on sail or auxiliary sail vessels.

(d) The holder of a license as operator of inland uninspected passenger vessels may obtain this license by successfully completing an examination on rules and regulations for small passenger vessels. To obtain authority to serve on the Great Lakes, three months of the required service must have been on Great Lakes waters, otherwise the license will be limited to the inland waters of the United States (excluding the Great Lakes).

(e) In order to obtain a tonnage endorsement of over 100 gross tons, the applicant must complete the additional examination topics indicated in subpart I of this part.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 140, Jan. 4, 1989]

§ 10.455 Service requirements for master of Great Lakes and inland steam or motor vessels of not more than 100 gross tons.

(a) The minimum service required to qualify an applicant for a license as master of Great Lakes and inland steam or motor vessels of not more than 100 gross tons is one year of total service in the deck department of steam or motor, sail, or auxiliary sail vessels. To obtain authority to serve on the Great Lakes, three months of the required service must have been on

Coast Guard, DOT

§ 10.462

Great Lakes waters, otherwise the license will be limited to the inland waters of the United States (excluding the Great Lakes).

(b) In order to obtain an endorsement on this license for sail or auxiliary sail vessels, the applicant must submit evidence of six months of service on sail or auxiliary sail vessels. The required six months of service may have been obtained prior to issuance of the license.

[CGD 81-059, 54 FR 140, Jan. 4, 1989]

§ 10.456 Service requirements for limited master of Great Lakes and inland steam or motor vessels of not more than 100 gross tons.

Limited masters' licenses for vessels of not more than 100 gross tons upon Great Lakes and inland waters may be issued to applicants to be employed by organizations such as formal camps, educational institutions, yacht clubs, and marinas with reduced service requirements. A license issued under this paragraph is limited to the specific activity and the locality of the camp, yacht club or marina. In order to obtain this restricted license, an applicant must:

(a) Have four months of service in the operation of the type of vessel for which the license is requested; and,

(b) Satisfactorily complete a safe boating course approved by the National Association of State Boating Law Administrators, a public education course conducted by the U.S. Power Squadron or the American Red Cross, or a Coast Guard approved course. This course must have been completed within five years before the date of application; and,

(c) Pass a limited examination appropriate for the activity to be conducted and the route authorized.

(d) The first aid and cardiopulmonary resuscitation (CPR) course certificates required by § 10.205(h) of this part will only be required when, in the opinion of the OCMI, the geographic area over which service is authorized precludes obtaining medical services within a reasonable time.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987. Redesignated and amended by CGD 81-059, 54 FR 140, Jan. 4, 1989; USCG-2000-7790, 65 FR 58458, Sept. 29, 2000]

§ 10.457 Service requirements for master of inland steam or motor vessels of not more than 100 gross tons.

(a) An applicant for a license as master of inland steam or motor vessels of not more than 100 gross tons must present one year of service on any waters. In order to raise the tonnage limitation over 100 gross tons, the examination topics indicated in subpart I of this part must be completed in addition to satisfying the experience requirements of § 10.452(a).

(b) In order to obtain an endorsement on this license for sail or auxiliary sail vessels, the applicant must submit evidence of six months of service on sail or auxiliary sail vessels. The required six months of service may have been obtained prior to issuance of the license.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987. Redesignated and amended by CGD 81-059, 54 FR 141, Jan. 4, 1989]

§ 10.459 Service requirements for master or mate of rivers.

(a) An applicant for a license as master of river steam or motor vessels of any gross tons must meet the same service requirements as master of inland steam or motor vessels of any gross tons.

(b) An applicant for a license as master or mate of river steam or motor vessels, with a limitation of 25-1600 gross tons, must meet the same service requirements as those required by this subpart for the corresponding tonnage Great Lakes and inland steam or motor license. Service on the Great Lakes is not, however, required.

[CGD 81-059, 54 FR 141, Jan. 4, 1989]

§ 10.462 Licenses for master or mate of uninspected fishing industry vessels.

(a) This section applies to licenses for masters and mates of all vessels, however propelled, navigating the high seas, which are documented to engage in the fishing industry, with the exception of:

- (1) Wooden ships of primitive build;
- (2) Unrigged vessels; and,
- (3) Vessels of less than 200 gross tons.

(b) Licenses as master or mate of uninspected fishing industry vessels

are issued for either ocean or near coastal routes, depending on the examination completed. To qualify for an uninspected fishing industry vessel license, the applicant must satisfy the training and examination requirements of § 10.401(g) of this subpart.

(c) An applicant for a license as master of uninspected fishing industry vessels must have four years of total service on ocean or near coastal routes. Service on Great Lakes or inland waters may substitute for up to two years of the required service. One year of the required service must have been as licensed master, as unlicensed master, or as licensed mate or equivalent supervisory position while holding a license as master, mate, master or mate (pilot) of towing vessels, or operator of uninspected passenger vessels.

(1) To qualify for a license of not more than 500 gross tons, at least two years of the required service, including the one year as master, mate or equivalent, must have been on vessels of over 50 gross tons.

(2) To qualify for a license of not more than 1600 gross tons, at least two years of the required service, including the one year as master, mate or equivalent, must have been on vessels of over 100 gross tons.

(3) To qualify for a license of over 1600 gross tons, but not more than 5000 gross tons, the vessel tonnage upon which the four years of required service was obtained will be used to compute the tonnage. The license is limited to the maximum tonnage on which at least 25 percent of the required service was obtained, or 150 percent of the maximum tonnage on which at least 50 percent of the service was obtained, whichever is higher. Limitations are in multiples of 1000 gross tons, using the next higher figure when an intermediate tonnage is calculated. A license as master of uninspected fishing industry vessels authorizing service on vessels over 1600 gross tons also requires one year as master, mate or equivalent on vessels over 100 gross tons.

(4) The tonnage limitation on this license may be raised using one of the following methods, but cannot exceed 5000 gross tons. Limitations are in multiples of 1000 gross tons, using the next

higher figure when an intermediate tonnage is calculated.

(i) Three months service as master on a vessel results in a limitation in that capacity equal to the tonnage of that vessel rounded up to the next multiple of 1000 gross tons;

(ii) Six months service as master on a vessel results in a limitation in that capacity equal to 150% of the tonnage of that vessel;

(iii) Six months service as master on vessels over 1600 gross tons results in raising the limitation to 5000 gross tons;

(iv) Six months service as mate on vessels over 1600 gross tons results in raising the limitation for master to the tonnage on which at least 50 percent of the service was obtained;

(v) Two years service as a deckhand on a vessel while holding a license as master results in a limitation on the master's license equal to 150% of the tonnage of that vessel up to 5000 gross tons; or,

(vi) One year of service as deckhand on a vessel while holding a license as master results in a limitation on the master's license equal to the tonnage of that vessel.

(d) An applicant for a license as mate of uninspected fishing industry vessels must have three years of total service on ocean or near coastal routes. Service on Great Lakes or inland waters may substitute for up to 18 months of the required service.

(1) To qualify for a license of not more than 500 gross tons, at least one year of the required service must have been on vessels of over 50 gross tons.

(2) To qualify for a license of not more than 1600 gross tons, at least one year of the required service must have been on vessels of over 100 gross tons.

(3) To qualify for a license of over 1600 gross tons, but not more than 5000 gross tons, the vessel tonnage upon which the three years of required service was obtained will be used to compute the tonnage. The license is limited to the maximum tonnage on which at least 25 percent of the required service was obtained, or 150 percent of the maximum tonnage on which at least 50 percent of the service was obtained, whichever is higher. Limitations are in multiples of 1000 gross tons, using the

Coast Guard, DOT

§ 10.464

next higher figure when an intermediate tonnage is calculated.

(4) The tonnage limitation on this license may be raised using one of the following methods, but cannot exceed 5000 gross tons. Limitations are in multiples of 1000 gross tons, using the next higher figure when an intermediate tonnage is calculated.

(i) Three months service as mate on a vessel results in a limitation in that capacity equal to the tonnage of that vessel rounded up to the next multiple of 1000 gross tons;

(ii) Six months service as mate on a vessel results in a limitation in that capacity equal to 150% of the tonnage of that vessel;

(iii) Six months service as mate on vessels over 1600 gross tons results in raising the limitation to 5000 gross tons;

(iv) One year of service as deckhand on vessels over 1600 gross tons while holding a license as mate, results in raising the limitation on the mate's license to 5000 gross tons;

(v) Two years service as a deckhand on a vessel while holding a license as mate results in a limitation on the mate's license equal to 150% of the tonnage of that vessel up to 5000 gross tons; or,

(vi) One year of service as deckhand on a vessel while holding a license as mate results in a limitation on the mate's license equal to the tonnage of that vessel.

(e) Applicants may request an oral examination on the subjects listed in subpart I of this part.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 141, Jan. 4, 1989; USCG-1999-6224, 64 FR 63228, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63228, Nov. 19, 1999, §10.462 was amended in paragraph (c), by removing the words "operator of uninspected towing vessels" and adding, in their place, the words "master or mate (pilot) of towing vessels", effective Nov. 20, 2000.

§ 10.463 General requirements for licenses for master, mate (pilot), and apprentice mate (steersman) of towing vessels.

(a) The Coast Guard issues the following licenses:

(1) Master of towing vessels.

(2) Master of towing vessels, harbor assist.

(3) Master of towing vessels, limited.

(4) Mate (pilot) of towing vessels.

(5) Mate (pilot) of towing vessels, limited.

(6) Apprentice mate (steersman).

(7) Apprentice mate (steersman), harbor assist.

(8) Apprentice mate (steersman), limited.

(b) A master license means a license to operate a towing vessel not restricted to harbor assist and not restricted to a local area designated by the OCMI. This also applies to a mate (pilot) license.

(c) For this section, *limited* means a license to operate a towing vessel of less than 200 gross tons limited to a local area designated by the OCMI.

[USCG-1999-6224, 64 FR 63228, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63228, Nov. 19, 1999, §10.463 was added, effective Nov. 20, 2000.

§ 10.464 Requirements for licenses as master of towing vessels.

(a) If you would like to obtain a license as master of towing vessels endorsed with a route listed in column 1 of Table 10.464-1, then you must complete the service requirements indicated in columns 2 through 5. If you would like to upgrade your license as master of towing vessels (harbor assist), then you must complete the service requirements listed in columns 6 through 9. You may serve on the subordinate routes listed in column 10 if you complete the observation and training required in column 11.

TABLE 10.464-1--REQUIREMENTS FOR LICENSE AS MASTER OF TOWING VESSELS

1 ROUTE ENDORSED	2 TOTAL SERVICE ¹	3 TOS ² ON TV AS MATE (PILOT)	4 TOS ² ON TV AS MATE NOT AS HARBOR ASSIST	5 TOS ² ON PARTICULAR ROUTE	6 TOS ² AS MATE (PILOT) WHILE HOLDING MASTER (HARBOR ASSIST)	7 TOS ² ON PARTICULAR ROUTE	8 TOAR ⁵	9 PASSED APPROPRIATE ROUTE EXAMINATION ³	10 SUB- ORDINATE ROUTE AUTHORIZED	11 DAYS OF OBSERVATION AND TRAINING REQUIRED ⁴
(1) OCEANS (O)	48	18 of 48	12 of 18	3 of 18	12	3 of 12	YES	YES	NC, GL-I, R WR LLA	30 90 30
(2) NEAR- COASTAL (NC)	48	18 of 48	12 of 18	3 of 18	12	3 of 12	YES	YES	GL-I, R WR LLA	30 90 30
(3) GREAT LAKES- INLAND (GL-I)	48	18 of 48	12 of 18	3 of 18	12	3 of 12	YES	YES	R WR LLA	30 90 30
(4) RIVERS (R)	48	18 of 48	12 of 18	3 of 18	12	3 of 12	YES	YES	WR LLA	90 30
(5) WESTERN RIVERS (WR)	48	18 of 48	12 of 18	3 of 18	12	3 of 12	YES	YES	LLA	30

- 1 Service is in months.
- 2 TOS is time of service.
- 3 The COPP determines the appropriate route examination for the desired endorsement.
- 4 If you hold a license as master of towing vessels you may have a restricted endorsement, as mate (pilot) for a route not included in the current endorsements on which you have no operating experience, placed on your license after passing an examination for that route. Upon completion of 90 days of experience on that route, you may have the endorsement removed. This is instead of the requirement listed in this column.
- 5 TOAR is training officers' assessment record.

(b) If you would like to obtain a license as master of towing vessels (harbor assist) endorsed with a route listed in column 1 of Table 10.464-2, then you

must complete the service requirements indicated in columns 2 through

Coast Guard, DOT

§ 10.464

5. If you would like to upgrade your license as master of towing vessels (limited), then you must complete the service requirements listed in columns 6 and 7, and either 8, 9, or 10. You may

serve on the subordinate routes listed in column 11 if you complete the observation and training required in column 12.

TABLE 10.464-2--REQUIREMENTS FOR LICENSE AS MASTER OF TOWING VESSELS (HARBOR ASSIST)

1 ROUTE ENDORSED	2 TOTAL SERVICE ¹	3 TOS ² ON TV AS APPRENTICE MATE	4 TOS ² ON TV AS APPRENTICE MATE CONDUCTING HARBOR ASSIST	5 TOS ² ON PARTICULAR ROUTE	6 TOS ² ON TV CONDUCTING HARBOR ASSIST WHILE LICENSED AS MASTER (LIMITED)	7 TOS ² ON PARTICULAR ROUTE	8 COURSE	9 TOAR ³	10 30 DAYS OF OBSERVATION AND TRAINING AND PASSED A LIMITED EXAMINATION	11 SUB- ORDINATE ROUTE AUTH'D	12 DAYS OF OBSER- VATION AND TRAINING REQ'D
(1) GREAT LAKES- INLAND (GL-I)	48	30 of 48	18 of 30	18 of 30	12	3 of 12	YES	YES	YES	R WR LLA	30 90 30
(2) RIVERS (R)	48	30 of 48	18 of 30	18 of 30	12	3 of 12	YES	YES	YES	WR LLA	90 30
(3) WESTERN RIVERS (WR)	48	30 of 48	18 of 30	18 of 30	12	3 of 12	YES	YES	YES	LLA	30
(4) LIMITED LOCAL AREA (LLA)	48	30 of 48	18 of 30	18 of 30	12	3 of 12	YES	YES	YES		

¹ Service is in months.

² TOS is time of service.

³ TOAR is training officers' assessment record.

(c) If you would like to obtain a license requirements listed in Table 10.464-3, then you must complete the serv-

TABLE 10.464-3.—REQUIREMENTS FOR LICENSE AS MASTER OF TOWING VESSELS (LIMITED)

¹ Route endorsement	² Total service ¹	³ TOS ² on T/V as limited mate (pilot)	⁴ TOS ² on particular route
LIMITED LOCAL AREA (LLA)	36	12 of 36	3 of 12.

¹ Service is in months.² TOS is time of service.

(d) The Coast Guard restricts licenses as master of towing vessels for oceans and near-coastal routes by the gross tonnage of the towing vessels on which the experience was acquired by 200, 500, 1,600 gross tons, per §§ 10.424, 10.418, and 10.412 of this part, respectively.

(e) Before you serve as master of towing vessels on the Western rivers, you must possess 90 days of observation and training and have your license endorsed for Western Rivers.

(f) Each company must maintain evidence that every vessel it operates is under the direction and control of a licensed mariner with appropriate experience, including 30 days of observation and training on the intended route other than Western Rivers.

(g) If you hold a license as master of self-propelled vessels of greater than 200 gross tons and first-class pilot then you may obtain an endorsement for towing vessels (restricted to the service presented) if you—

(1) Have 30 days of training and observation on towing vessels on each of the routes for which the endorsement is sought, except as noted in paragraph (e) of this section;

(2) Submit a towing officers' assessment record described in § 10.304(h) that exhibits evidence of assessment of practical demonstration of skills; and

(3) Pass an examination.

[USCG-1999-6224, 64 FR 63228, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63228, Nov. 19, 1999, § 10.464 was revised, effective Nov. 20, 2000. For the convenience of the user, the superseded text is set forth as follows:

§ 10.464 Licenses for operator of uninspected towing vessels.

(a) Licenses are issued as operator or second-class operator of uninspected towing vessels. These licenses do not authorize service aboard uninspected towing vessels on a foreign voyage nor on those of more than 200 gross tons in ocean or near coastal service.

(b) Licenses as operator and second-class operator of uninspected towing vessels are endorsed for operation on one or more of the following geographic areas:

- (1) Oceans (domestic trade) waters;
- (2) Near coastal waters;
- (3) Great Lakes and inland waters;
- (4) Western rivers; or,
- (5) A limited local area designated by the

Officer in Charge, Marine Inspection.

(c) For a license as operator of uninspected towing vessels, an applicant must have one of the following:

(1) Three years of service including the following:

(i) Two years on deck of a vessel of 26 feet or over in length;

(ii) One year on deck on a towing vessel, with at least six months of training or duty in the wheelhouse of the towing vessel; and,

(iii) Three months of service in each particular geographic area for which application is made; or,

(2) Three years of service on towing vessels including the following:

(i) One year on deck, with at least six months of training or duty in the wheelhouse of the towing vessel; and,

(ii) Three months of service in each particular geographic area for which application is made; or,

(3) For a license endorsed for a limited local area, 18 months service on deck on a towings vessel within the local area, including at least three months of training or duty in the Wheelhouse of the towing vessel.

(d) For a license as second-class operator of uninspected towing vessels, an applicant must have:

(1) At least 18 months of service on deck, including 12 months on towing vessels. The service must include at least three months of training or duty in the wheelhouse of towing vessels and three months of service in each particular geographic area for which endorsement for the license is requested; or,

(2) At least six months of service on towing vessels while holding a merchant mariner's document endorsed as *able seaman unlimited*, *able seaman limited*, or *able seaman special*. The service must include three months in each particular geographic area for which an endorsement is requested, and either two months of training or duty in the wheelhouse or one month training or duty in the

§ 10.465

wheelhouse combined with successful completion of a towboat operator course of training approved by the Commanding Officer, National Maritime Center under subpart C.

(e) In order to obtain an operator or second-class operator license for ocean (domestic trade) waters, whether an original, raise in grade, or increase in scope, the applicant must complete the following training and examination requirements:

- (1) Approved firefighting course;
- (2) Approved radar observer course; and,
- (3) Qualification as able seaman unlimited, able seaman limited, able seaman special, or able seaman offshore supply vessels.

(f) The examination for a license as operator of uninspected towing vessels endorsed for a local limited area is modified by deleting inappropriate questions.

(g) A person holding a license as second-class operator of uninspected towing vessels who is 21 years old and possesses the service required in paragraph (c) of this section may be issued a license as operator without further examination.

(h) A person holding a license as operator of uninspected towing vessels may have that license endorsed as second-class operator for a geographic area on which he or she has no operating experience, upon passing an examination for that area. Upon completion of three months of experience in that geographic area, the second-class restriction may be removed.

(i) An applicant for a license as operator or second-class operator of uninspected towing

46 CFR Ch. I (10–1–00 Edition)

vessels who intends to serve only in the vicinity of Puerto Rico, and who speaks Spanish only, may be issued a license restricted to the navigable waters of the United States in the vicinity of Puerto Rico.

[CGD 81–059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81–059, 54 FR 142, Jan. 4, 1989; CGD 95–072, 60 FR 50460, Sept. 29, 1995; USCG–1998–4442, 63 FR 52189, Sept. 30, 1998]

§ 10.465 Requirements for licenses as mate (pilot) of towing vessels.

(a) If you would like to obtain a license as mate (pilot) of towing vessels endorsed with a route listed in column 1 of Table 10.465–1, then you must complete the service requirements indicated in columns 2 through 4 and either 5 or 6. If you hold a license as master of towing vessels (harbor assist or limited) and would like to upgrade it to mate (pilot), then you must complete the requirements in column 7. If you hold a license as mate (pilot)(limited) and would like to upgrade it to mate (pilot), then you must complete the requirements in columns 2 through 6 and pass a limited examination. You may serve on the subordinate routes listed in column 8 if you complete the observation and training required in column 9.

TABLE 10.465-1--REQUIREMENTS FOR LICENSE AS MATE (PILOT⁵) OF TOWING VESSELS

1 ROUTE ENDORSED	2 TOTAL SERVICE 1	3 TOS ² ON TV AS APPRENTICE MATE (STEERSMAN)	4 TOS ² ON PARTICULAR ROUTE	5 COURSE	6 TOAR ³	7 30 DAYS OF OBSERVATION AND TRAINING WHILE HOLDING MASTER (HARBOR ASSISTANT OR LIMITED) AND PASS A LIMITED EXAMINATION	8 SUBORDINATE ROUTE AUTHORIZED	9 DAYS OF OBSER- VATION AND TRAINING REQUIRED ⁴
(1) OCEANS (O)	30	12 of 30	3 of 12	YES	YES	YES	NC, GL-I, R WR LLA	30 90 30
(2) NEAR-COASTAL (NC)	30	12 of 30	3 of 12	YES	YES	YES	GL-I, R WR LLA	30 90 30
(3) GREAT LAKES- INLAND (GL-I)	30	12 of 30	3 of 12	YES	YES	YES	R WR LLA	30 90 30
(4) RIVERS (R)	30	12 of 30	3 of 12	YES	YES	YES	WR LLA	90 30
(5) WESTERN RIVERS (WR)	30	12 of 30	3 of 12	YES	YES	YES	LLA	30

1 Service is in months.

2 TOS is time of service.

3 TOAR is training officers' assessment record.

4 If you hold a license as mate (pilot) of towing vessels you may obtain a restricted endorsement as apprentice mate (steersman). This endorsement will go on your license after you pass an examination for a route that is not included in the current endorsements and on which you have no operating experience. Upon completion of 3 months of experience on that route, you may have the restricted endorsement removed. This is instead of the requirement listed in this column.

5 For all inland routes, as well as Western Rivers, the license as pilot of towing vessels is equivalent to that as mate of towing vessels. All qualifications and equivalencies are the same.

(b) The Coast Guard restricts licenses as mate (pilot) of towing vessels for oceans and near-coastal routes by the gross tonnage of the towing vessels on

which the experience was acquired-by 200, 500, 1,600 gross tons, under §§ 10.424, 10.418, and 10.412 of this part, respectively.

§ 10.466

46 CFR Ch. I (10–1–00 Edition)

(c) Before you serve as mate (pilot) of towing vessels on the Western Rivers, you must possess 90 days of observation and training and have your license endorsed for Western Rivers.

(d) Each company must maintain evidence that every vessel it operates is under the direction and control of a licensed mariner with appropriate expe-

rience, including 30 days of observation and training on the intended route other than Western Rivers.

(e) If you would like to obtain a license as mate (pilot) of towing vessels (limited), then you must complete the service requirements listed in Table 10.465–2.

TABLE 10.465–2.—REQUIREMENTS FOR LICENSE AS MATE (PILOT) OF TOWING VESSELS (LIMITED)

¹ Route endorsement	² Total service ¹	³ TOS ² on T/V as apprentice mate (steerman)	⁴ Certificate of course completion—training officers' assessment record
LIMITED LOCAL AREA (LLA)	24	6 of 24	Either.

¹ Service is in months.

² TOS is time of service.

(f) If you hold a license as mate of self-propelled vessels of greater than 200 gross tons and one as first-class pilot then you may obtain an endorsement for towing vessels (restricted to the service presented) if you—

(1) Have 30 days of training and observation on towing vessels on each of the routes for which you seek the endorsement, except as noted in paragraph (c) of this section;

(2) Submit a towing officers' assessment record described in § 10.304(h) that exhibits evidence of assessment of practical demonstration of skills; and

(3) Pass an examination.

(g) An approved training course for mate (pilot) of towing vessels must include formal instruction and practical demonstration of proficiency either on board a towing vessel or at a shoreside training facility before a designated examiner, and must cover—

(1) Shipboard management and training;

- (2) Seamanship;
- (3) Navigation;
- (4) Watchkeeping;
- (5) Radar;
- (6) Meteorology;
- (7) Maneuvering and handling of towing vessels;
- (8) Engine-room basics; and
- (9) Emergency procedures.

[USCG–1999–6224, 64 FR 63232, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG–1999–6224, 64 FR 63232, Nov. 19, 1999, § 10.465 was added, effective Nov. 20, 2000.

§ 10.466 Requirements for licenses as apprentice mate (steersman) of towing vessels.

(a) If you would like to obtain a license as apprentice mate (steersman) of towing vessels listed in column 1 endorsed with a route listed in column 2 of Table 10.466–1, then you must complete the service requirements indicated in columns 3 through 6.

TABLE 10.466-1.—REQUIREMENTS FOR LICENSE AS APPRENTICE MATE (STEERSMAN⁴) OF TOWING VESSELS

¹ License type	² Route endorsed	³ Total service ¹	⁴ TOS ² on T/V	⁵ TOS ² on particular route	⁶ Pass examination ³
(1) APPRENTICE MATE (STEERSMAN)	OCEANS (O)	18	12 of 18	3 of 18	Yes.
	NEAR-COASTAL (NC)	18	12 of 18	3 of 18	Yes.
	GREAT LAKES-INLAND (GL-I)	18	12 of 18	3 of 18	Yes.
	RIVERS (R)	18	12 of 18	3 of 18	Yes.
(2) APPRENTICE MATE (STEERSMAN) (HARBOR ASSIST.)	WESTERN RIVERS (WR)	18	12 of 18	3 of 18	Yes.
(3) APPRENTICE MATE (STEERSMAN) (LIMITED) ⁴	NOT APPLICABLE	18	12 of 18	3 of 18	Yes.
	NOT APPLICABLE	18	12 of 18	3 of 18	Yes.

¹ Service is in months.² TOS is time of service.³ The examination for apprentice mate is specified in subpart I of this part. The examination for apprentice mate (limited) is a limited examination.⁴ For all inland routes, as well as Western Rivers, the license as steersman is equivalent to that as apprentice mate. All qualifications and equivalencies are the same.

§ 10.467

46 CFR Ch. I (10–1–00 Edition)

(b) If you hold a license as apprentice mate (steersman) of towing vessels you may obtain a restricted endorsement as limited apprentice mate (steersman). This endorsement will go on your license after you pass an examination for a route that is not included in the current endorsements and on which you have no operating experience. Upon completion of 3 months of experience on that route, you may have the restricted endorsement removed.

[USCG–1999–6224, 64 FR 63234, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG–1999–6224, 64 FR 63234, Nov. 19, 1999, § 10.466 was added, effective Nov. 20, 2000.

§ 10.467 Licenses for operators of uninspected passenger vessels.

(a) This section applies to all applicants for the license to operate an uninspected vessel of less than 100 gross tons, equipped with propulsion machinery of any type, carrying six or less passengers.

(b) Operator of uninspected passenger vessels licenses issued for ocean waters will be limited to near coastal waters not more than 100 miles offshore. Licenses issued for inland waters will include all inland waters, except Great Lakes. Licenses may be issued for a particular local area under paragraph (f) of this section.

(c) For a license as operator of an uninspected passenger vessel with a near coastal endorsement, an applicant must have a minimum of 12 months experience in the operation of vessels, including at least three months service on vessels operating on ocean or near coastal waters.

(d) For a license as operator of an uninspected passenger vessel with a Great Lakes and inland waters endorsement, an applicant must have 12 months service on Great Lakes or inland waters, including at least three months service operating vessels on Great Lakes waters.

(e) For a license as operator of an uninspected passenger vessel with an inland endorsement, an applicant must have a minimum of 12 months experience in the operation of vessels.

(f) An operator of uninspected passenger vessels license, limited on its face to undocumented vessels, may be

issued to a person who is not a citizen of the United States.

(g) Limited operator of uninspected passenger vessel licenses may be issued to applicants to be employed by organizations such as formal camps, yacht clubs, educational institutions, and marinas. A license issued under this paragraph will be limited to the specific activity and the locality of the camp, yacht club, or marina. In order to obtain this restricted license, an applicant must:

(1) Have three months service in the operation of the type of vessel for which the license is requested; and,

(2) Satisfactorily complete a safe boating course approved by the National Association of State Boating Law Administrators, or those public education courses conducted by the U.S. Power Squadron or the American National Red Cross or a Coast Guard approved course; and,

(3) Pass a limited examination appropriate for the activity to be conducted and the route authorized.

(4) The first aid and cardiopulmonary resuscitation (CPR) course certificates required by § 10.205(h) of this part will only be required when, in the opinion of the OCMI, the geographic area over which service is authorized precludes obtaining medical services within a reasonable time.

(h) An applicant for a license as operator of uninspected passenger vessels who intends to serve only in the vicinity of Puerto Rico, and who speaks Spanish only, may be issued a license restricted to the navigable waters of the United States in the vicinity of Puerto Rico.

[CGD 81–059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81–059, 54 FR 142, Jan. 4, 1989. Redesignated by USCG–1999–6224, 64 FR 63234, Nov. 19, 1999, as amended by USCG–2000–7790, 65 FR 58458, Sept. 29, 2000]

EFFECTIVE DATE NOTE: By USCG–1999–6224, 64 FR 63234, Nov. 19, 1999, § 10.466 was redesignated as § 10.467, effective Nov. 20, 2000.

§ 10.468 Licenses for mobile offshore drilling units.

Licenses for service on mobile offshore drilling units (MODUs) authorize service on units of any gross tons upon ocean waters while on location or while underway, as restricted on the license,

Coast Guard, DOT

§ 10.470

except when moving independently under their own power.

[CGD 81-059a, 55 FR 14799, Apr. 18, 1990]

§ 10.470 Licenses for offshore installation manager.

(a) Licenses as offshore installation manager (OIM) are endorsed as:

- (1) OIM Unrestricted;
- (2) OIM Surface Units on Location;
- (3) OIM Surface Units Underway;
- (4) OIM Bottom Bearing Units on Location; or
- (5) OIM Bottom Bearing Units Underway.

(b) To qualify for a license or endorsement as OIM Unrestricted, an applicant must:

(1) Present evidence of the following experience:

(i) Four years of employment assigned to MODUs including at least one year of service as driller, assistant driller, toolpusher, assistant toolpusher, barge supervisor, mechanical supervisor, electrician, crane operator, ballast control operator or equivalent supervisory position on MODUs, with a minimum of 14 days of that supervisory service on surface units; or

(ii) A degree from a program in engineering or engineering technology which is accredited by the Accreditation Board for Engineering and Technology (ABET). Commanding Officer, National Maritime Center will give consideration to accepting education credentials from programs having other than ABET accreditation. An applicant qualifying through a degree program must also have at least 168 days of service as driller, assistant driller, toolpusher, assistant toolpusher, barge supervisor, mechanical supervisor, electrician, crane operator, ballast control operator, or equivalent supervisory position on MODUs, with a minimum of 14 days of that supervisory service on surface units;

(2) Present evidence of training course completion as follows:

(i) A certificate from a Coast Guard approved stability course approved for an OIM Unrestricted license or endorsement;

(ii) A certificate from a Coast Guard approved survival suit and survival craft training course;

(iii) A certificate from a U.S. Minerals Management Service approved blowout prevention and well control training program for the driller, toolpusher, or operator representative position;

(iv) A certificate from a firefighting training course as required by § 10.205(g) of this part; and

(3) Provide a recommendation signed by a senior company official which:

(i) Provides a description of the applicant's experience and qualifications;

(ii) Certifies that the individual has successfully directed, while under the supervision of an experienced rig mover, two rig moves each of surface units and of bottom bearing units; and

(iii) Certifies that one of the rig moves required under paragraph (b)(3)(ii) of this section was completed within one year preceding date of application.

(c) An applicant for an endorsement as OIM Unrestricted who holds an unlimited license as master or chief mate must satisfy the requirements in paragraphs (b)(2) and (b)(3) of this section and have at least 84 days of service on surface units and at least 28 days of service on bottom bearing units.

(d) To qualify for a license or endorsement as OIM Surface Units on Location, and applicant must:

(1) Present evidence of the following experience:

(i) Four years of employment assigned to MODUs including at least one year of service as driller, assistant driller, toolpusher, assistant toolpusher, barge supervisor, mechanical supervisor, electrician, crane operator, ballast control operator or equivalent supervisory position on MODUs, with a minimum of 14 days of that supervisory service on surface units; or

(ii) A degree from a program in engineering or engineering technology which is accredited by the Accreditation Board for Engineering and Technology (ABET). Commanding Officer, National Maritime Center will give consideration to accepting education credentials from programs having other than ABET accreditation. An applicant qualifying through a degree program must also have at least 168 days of service as driller, assistant driller, toolpusher, assistant

§ 10.470

46 CFR Ch. I (10–1–00 Edition)

toolpusher, barge supervisor, mechanical supervisor, electrician, crane operator, ballast control operator or equivalent supervisory position of MODUs, with a minimum of 14 days of that supervisory service on surface units; and

(2) Present evidence of training course completion as follows:

(i) A certificate from a Coast Guard approved stability course approved for an OIM Surface Units license or endorsement;

(ii) A certificate from a Coast Guard approved survival suit and survival craft training course;

(iii) A certificate from a U.S. Minerals Management Service approved blowout prevention and well control training program for the driller, toolpusher, or operator representative position; and

(iv) A certificate from a firefighting training course as required by § 10.205(g) of this part.

(e) An applicant for an endorsement as OIM Surface Units on Location who holds an unlimited license as master or chief mate must satisfy the requirements of paragraph (d)(2) of this section and have at least 84 days of service on surface units.

(f) To qualify for a license as OIM Surface Units Underway, an applicant must:

(1) Provide the following:

(i) Evidence of the experience described in paragraph (d)(1) of this section and a recommendation signed by a senior company official which:

(A) Provides a description of the applicant's experience and qualifications;

(B) Certifies that the individual has successfully directed, while under the supervision of an experienced rig mover, three rig moves of surface units; and

(C) Certifies that one of the rig moves required under paragraph (f)(1)(i)(B) of this section was completed within one year preceding date of application; or

(ii) A recommendation signed by a senior company official which:

(A) Provides a description of the applicant's experience and company qualifications program completed;

(B) Certifies that the applicant has witnessed ten rig moves either as an

observer in training or as a rig mover under supervision;

(C) Certifies that the individual has successfully directed, while under the supervision of an experienced rig mover, five rig moves of surface units; and

(D) Certifies that one of the rig moves required under paragraph (f)(1)(ii)(C) of this section was completed within one year preceding date of application; and

(2) Present evidence of training course completion as follows:

(i) A certificate from a Coast Guard approved stability course approved for an OIM Surface Units license or endorsement;

(ii) A certificate from a Coast Guard approved survival suit and survival craft training course; and

(iii) A certificate from a firefighting training course as required by § 10.205(g) of this part.

(g) An applicant for endorsement as OIM Surface Units Underway who holds an unlimited license as master or chief mate must satisfy the requirements in paragraph (f)(2) of this section and provide a company recommendation signed by a senior company official which:

(1) Provides a description of the applicant's experience and qualifications;

(2) Certifies that the individual has successfully directed, while under the supervision of an experienced rig mover, three rig moves on surface units; and

(3) Certifies that one of the rig moves required under paragraph (g)(2) of this section was completed within one year preceding date of application.

(h) To qualify for a license or endorsement as OIM Bottom Bearing Units on Location, an applicant must:

(1) Present evidence of the following experience:

(i) Four years of employment assigned to MODUs including at least one year of service as driller, assistant driller, toolpusher, assistant toolpusher, barge supervisor, mechanical supervisor, electrician, crane operator, ballast control operator or equivalent supervisory position on MODUs; or

(ii) A degree from a program in engineering or engineering technology

Coast Guard, DOT

§ 10.472

which is accredited by the Accreditation Board for Engineering and Technology (ABET). Commanding Officer, National Maritime Center will give consideration to accepting education credentials from programs having other than ABET accreditation. An applicant qualifying through a degree program must also have at least 168 days of service as driller, assistant driller, toolpusher, assistant toolpusher, barge supervisor, mechanical supervisor, electrician, crane operator, ballast control operator or equivalent supervisory position on MODUs; and

(2) Present evidence of training course completion as follows:

(i) A certificate from a Coast Guard approved survival suit and survival craft training course;

(ii) A certificate from a U.S. Minerals Management Service approved blowout prevention and well control training program for the driller, toolpusher, or operator representative position; and

(iii) A certificate from a firefighting training course as required by § 10.205(g) of this part.

(i) An applicant for an endorsement as OIM Bottom Bearing Units on Location who holds an unlimited license as master or chief mate must satisfy paragraph (h)(2) of this section and have at least 28 days of service on bottom bearing units.

(j) To qualify for a license or endorsement as OIM Bottom Bearing Units Underway, an applicant must:

(1) Provide the following:

(i) Evidence of the experience described in paragraph (h)(1) of this section with a recommendation signed by a senior company official which:

(A) Provides a description of the applicant's experience and qualifications;

(B) Certifies that the individual has successfully directed, while under the supervision of an experienced rig mover, three rig moves of bottom bearing units; and

(C) Certifies that one of the rig moves required under paragraph (j)(1)(i)(B) of this section was completed within one year preceding date of application; or

(ii) A recommendation signed by a senior company official which:

(A) Provides a description of the applicant's experience and company qualifications program completed;

(B) Certifies that the applicant has witnessed ten rig moves either as an observer in training or as a rig mover under supervision;

(C) Certifies that the individual has successfully directed, while under the supervision of an experienced rig mover, five rig moves of bottom bearing units; and

(D) Certifies that one of the rig moves required under paragraph (j)(1)(ii)(C) of this section was completed within one year preceding date of application; and

(2) Present evidence of training course completion as follows:

(i) A certificate from a Coast Guard approved stability course approved for OIM Bottom Bearing Units license or endorsement;

(ii) A certificate from a Coast Guard approved survival suit and survival craft training course; and

(iii) A certificate from a firefighting training course as required by § 10.205(g) of this part;

(k) An applicant for endorsement as OIM Bottom Bearing Units Underway who holds an unlimited license as master or chief mate must satisfy the requirements in paragraph (j)(2) of this section and provide a company recommendation signed by a senior company official which:

(1) Provides a description of the applicant's experience and qualifications;

(2) Certifies that the individual has successfully directed, while under the supervision of an experienced rig mover, three rig moves of bottom bearing units; and

(3) Certifies that one of the rig moves required under paragraph (k)(2) of this section was completed within one year preceding date of application.

[CGD 81-059a, 55 FR 14799, Apr. 18, 1990, as amended by CGD 95-072, 60 FR 50460, Sept. 29, 1995; CGD 95-028, 62 FR 51195, Sept. 30, 1997; USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

§ 10.472 License for barge supervisor.

(a) To qualify for a license or endorsement as barge supervisor (BS), an applicant must:

(1) Present evidence of the following experience:

§ 10.474

46 CFR Ch. I (10–1–00 Edition)

(i) Three years of employment assigned to MODUs including at least 168 days of service as driller, assistant driller, toolpusher, assistant tool pusher, mechanic, electrician, crane operator, subsea specialist, ballast control operator or equivalent supervisory position on MODUs. At least 84 days of that service shall have been as a ballast control operator or barge supervisor trainee; or

(ii) A degree from a program in engineering or engineering technology which is accredited by the Accreditation Board for Engineering and Technology (ABET). Commanding Officer, National Maritime Center will give consideration to accepting education credentials from programs having other than ABET accreditation. An applicant qualifying through a degree program must also have at least 168 days of service as driller, assistant driller, toolpusher, assistant toolpusher, mechanic, electrician, crane operator, subsea specialist, ballast control operator or equivalent supervisory position on MODUs. At least 84 days of that service shall have been as a ballast control operator or barge supervisor trainee; and

(2) Present evidence of training course completion as follows:

(i) A certificate from a Coast Guard approved stability course approved for a barge supervisor license or endorsement;

(ii) A certificate from a Coast Guard approved survival suit and survival craft training course; and

(iii) A certificate from a firefighting training course as required by § 10.205(g) of this part.

(b) An applicant for an endorsement as BS who holds an unlimited license as master or mate must satisfy the requirements in paragraph (a)(2) of this section and have at least 84 days of service as ballast control operator or barge supervisor trainee.

[CGD 81–059a, 55 FR 14801, Apr. 18, 1990, as amended by CGD 95–072, 60 FR 50460, Sept. 29, 1995; CGD 95–028, 62 FR 51195, Sept. 30, 1997; USCG–1998–4442, 63 FR 52189, Sept. 30, 1998]

§ 10.474 License for ballast control operator.

(a) To qualify for a license or endorsement as ballast control operator (BCO), an applicant must:

(1) Present evidence of the following experience:

(i) One year of employment assigned to MODUs including at least 28 days of service as a trainee under the supervision of a licensed ballast control operator; or

(ii) A degree from a program in engineering or engineering technology which is accredited by the Accreditation Board for Engineering and Technology (ABET). Commanding Officer, National Maritime Center will give consideration to accepting education credentials from programs having other than ABET accreditation. An applicant qualifying through a degree program must also have at least 28 days of service as a trainee under the supervision of a licensed ballast control operator; and

(2) Present evidence of training course completion as follows:

(i) A certificate from a Coast Guard approved stability course approved for a barge supervisor or ballast control operator license or endorsement;

(ii) A certificate from a Coast Guard approved survival suit and survival craft training course; and

(iii) A certificate from a firefighting training course as required by § 10.205(g) of this part.

(b) An applicant for an endorsement as BCO who holds an unlimited license as master, mate, chief engineer, or assistant engineer must satisfy the requirements in paragraph (a)(2) of this section and have at least 28 days of service as a trainee under the supervision of a licensed ballast control operator.

[CGD 81–059a, 55 FR 14801, Apr. 18, 1990, as amended by CGD 95–072, 60 FR 50460, Sept. 29, 1995; CGD 95–028, 62 FR 51196, Sept. 30, 1997; USDA–1998–4442, 63 FR 52189, Sept. 30, 1998]

§ 10.476 Acknowledgments of service and temporary licenses for mobile offshore drilling units.

(a) Prior to January 1, 1991, unlicensed individuals who served in positions on MODUs equivalent to OIM,

BS, or BCO may make application for a Coast Guard acknowledgment of service or a temporary license, both of which authorize a continuation of service in that position. To be eligible, these individuals must have served in that position between July 1, 1987 and June 30, 1990, and meet the following requirements:

(1) Coast Guard acknowledgment of service.

(i) To obtain a Coast Guard acknowledgment of service, the applicant must provide a letter from a senior company official of the company worked for. This letter must provide:

- (A) Name of vessel(s) served on;
- (B) MODU license which the individual's position is equivalent to; and
- (C) Period of service.

(ii) The Coast Guard acknowledgment of service is valid for one year and is not renewable.

(2) Temporary license.

(i) To obtain a temporary license, the applicant must:

(A) Provide a letter from a senior company official of the company worked for. This letter must provide:

- (1) Name of vessel(s) served on;
- (2) MODU license which the individual's position is equivalent to; and
- (3) Period of service; and

(B) Provide evidence of 120 days of service in a position equivalent to the license endorsement sought.

(i) a temporary license is valid for five years and is not renewable.

(b) Acknowledgments or temporary licenses obtained using the provisions of this section will restrict service authority to vessels operated by the company which has certified service.

[CGD 81-059a, 55 FR 14802, Apr. 18, 1990]

§ 10.480 Radar observer.

(a) This section contains the requirements that an applicant must meet to qualify as a radar observer. (Part 15 of this chapter specifies who must qualify as a radar observer.)

(b) If an applicant meets the requirements of this section, one of the following Radar-Observer endorsements will be added to his or her deck officer's license:

- (1) Radar Observer (Unlimited).
- (2) Radar Observer (Inland Waters and GIWW).

(3) Radar Observer (Rivers).

(c) Endorsement as Radar Observer (Unlimited) is valid on all waters. Endorsement as Radar Observer (Inland Waters and GIWW) is valid only for those waters other than the Great Lakes covered by the Inland Navigational Rules. Endorsement as Radar Observer (Rivers) is valid only on any river, canal, or similar body of water designated by the OCMI, but not beyond the boundary line.

(d) Except as provided by paragraphs (e) and (f) of this section, each applicant for a Radar-Observer endorsement or for renewal of an endorsement must complete the appropriate course approved by the Coast Guard, receive the appropriate certificate of training, and present the certificate to the OCMI.

(e) An applicant who possesses a Radar-Observer endorsement, resides in a remote geographic area, and can substantiate to the satisfaction of the OCMI that the applicant's absence will disrupt normal movement of commerce, or that the applicant cannot attend an approved Radar-Observer renewal course, may have his or her endorsement renewed upon successful completion of an examination administered by the Coast Guard, or by a third party acceptable to the Coast Guard.

(f) Except as provided by paragraph (k) of this section, a Radar-Observer endorsement issued under this section is valid for 5 years after the month of issuance of the certificate of training from a course approved by the Coast Guard. It is not terminated by the issuance of a new license during these 5 years.

(g) The month and year of the expiration of the Radar-Observer endorsement are printed on the license.

(h) A Radar-Observer endorsement may be renewed at any time.

(i) An applicant for renewal of a license that does not need a Radar-Observer endorsement may renew the license without meeting the requirements for the endorsement.

(j) An applicant seeking to raise the grade of a license or increase its scope, where the increased grade or scope requires a Radar-Observer certificate, may use an expired certificate to fulfill that requirement.

§ 10.482

(k) The renewal date of a Radar-Observer endorsement may be extended beyond the normal 5-year duration to coincide with the renewal date of the license to which it pertains. This extension may not exceed 2 years and will be necessary only once, to synchronize the two renewal dates.

[CGD 94-041, 62 FR 11305, Mar. 11, 1997]

§ 10.482 Assistance towing.

(a) This section contains the requirements to qualify for an endorsement authorizing an applicant to engage in assistance towing. The endorsement applies to all licenses except those for master and mate (pilot) of towing vessels and those for master or mate authorizing service on inspected vessels over 200 gross tons. Holders of any of these licenses may engage in assistance towing within the scope of the licenses and without the endorsement.

(b) An applicant for an assistance towing endorsement shall pass a written examination demonstrating his or her knowledge of assistance towing safety, equipment, and procedures.

(c) An assistance towing endorsement on a license as master, mate, or operator authorizes the holder to engage in assistance towing on any vessel within the scope of the license.

(d) The period of validity of the endorsement is the same as the license on which it is endorsed, and it may be renewed with the license.

[CGD 87-017, 53 FR 18562, May 24, 1988, as amended by USCG-1999-6224, 64 FR 63235, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63235, Nov. 19, 1999, § 10.482 was amended by revising paragraph (a), effective Nov. 20, 2000. For the convenience of the user, the superseded text is set forth as follows:

§ 10.482 Assistance towing.

(a) This section contains the requirements to qualify for an endorsement authorizing an individual to engage in assistance towing. The endorsement is applicable to all licenses except operator of uninspected towing vessels and master or mate licenses authorizing service on inspected vessels over 200 gross tons. Holders of these licenses are authorized to engage in assistance towing without endorsement on any vessel within the scope of the license.

* * * * *

46 CFR Ch. I (10-1-00 Edition)

§ 10.491 Licenses for service on off-shore supply vessels.

Each license for service on offshore supply vessels (OSVs) authorizes service on OSVs as defined in 46 U.S.C. 2101(19) and as interpreted under 46 U.S.C. 14104(b), subject to any restrictions placed on the license.

[CGD 95-062, 62 FR 34532, June 26, 1997]

§ 10.493 Master (OSV).

(a) Except as provided by paragraph (b) of this section, to qualify for a license as Master (OSV), an applicant shall present evidence that he or she meets the appropriate requirements of STCW Regulation II/2.

(b) The OCMI may exempt an applicant from meeting any requirement under STCW Regulation II/2 that the OCMI determines to be inappropriate or unnecessary for service on an OSV, or that the applicant meets under the equivalency provisions of Article IX of STCW.

[CGD 95-062, 62 FR 34532, June 26, 1997]

§ 10.495 Chief Mate (OSV).

(a) Except as provided by paragraph (b) of this section, to qualify for a license as Chief Mate (OSV), an applicant shall present evidence that he or she meets the appropriate requirements of STCW Regulation II/2.

(b) The OCMI may exempt an applicant from meeting any requirement under STCW Regulation II/2 that the OCMI determines to be inappropriate or unnecessary for service on an OSV, or that the applicant meets under the equivalency provisions of Article IX of STCW.

[CGD 95-062, 62 FR 34532, June 26, 1997]

§ 10.497 Mate (OSV).

(a) Except as provided by paragraph (b) of this section, to qualify for a license as Mate (OSV), an applicant shall present evidence that he or she meets the appropriate requirements of STCW Regulation II/1.

(b) The OCMI may exempt an applicant from meeting any requirement under STCW Regulation II/1 that the OCMI determines to be inappropriate or unnecessary for service on an OSV, or that the applicant meets under the

Coast Guard, DOT

§ 10.503

equivalency provisions of Article IX of STCW.

[CGD 95-062, 62 FR 34532, June 26, 1997]

Subpart E—Professional Requirements for Engineer Officers' Licenses

§ 10.501 Grade and type of engineer licenses issued.

(a) Licenses are issued in the grades of:

- (1) Chief engineer;
- (2) First assistant engineer;
- (3) Second assistant engineer;
- (4) Third assistant engineer;
- (5) Chief engineer (limited);
- (6) Assistant engineer (limited);
- (7) Designated duty engineer;
- (8) Chief engineer uninspected fishing industry vessels; and,

(9) Assistant engineer uninspected fishing industry vessels.

(b) Engineer licenses issued in the grades of chief engineer (limited) and assistant engineer (limited) of steam and/or motor vessels allow the holder to serve within any horsepower limitations on vessels of any gross tons on inland waters and of not more than 1600 gross tons in ocean, near coastal or Great Lakes service in the following manner:

(1) Assistant engineer (limited—oceans) may serve on ocean waters;

(2) Chief engineer (limited—near coastal) may serve on near coastal waters; and,

(3) Chief engineer (limited-oceans) may serve on ocean waters.

(c) Engineer licenses issued in the grades of designated duty engineer of steam and/or motor vessels allow the holder to serve within stated horsepower limitations on vessels of not more than 500 gross tons in the following manner:

(1) Designated duty engineers limited to vessels of not more than 1000 horsepower or 4000 horsepower may serve only on near coastal or inland waters;

(2) Designated duty engineers with no horsepower limitations may serve on any waters.

(d) Engineer licenses are endorsed to authorize service on either steam or motor vessels or may be endorsed for both modes of propulsion.

(e) A person holding an engineer license which is restricted to near coastal waters may serve within the limitations of the license upon near coastal, Great Lakes, and inland waters.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 142, Jan. 4, 1989]

§ 10.502 Additional requirements for engineer licenses.

(a) For all original and raise of grade of engineer licenses, at least one-third of the minimum service requirements must have been obtained on the particular mode of propulsion for which applied.

(b) If a licensed applicant desires to obtain an endorsement on an engineer license in the other propulsion mode (steam or motor), the following alternative methods, while holding a license in that grade, are acceptable:

(1) Four months of service as an observer in the same licensed capacity on vessels of the other propulsion mode;

(2) Four months of service as a licensed officer at a lower license level on vessels of the other propulsion mode;

(3) Six months of service as oiler, watertender, or junior engineer on vessels of the other propulsion mode; or,

(4) Completion of a Coast Guard approved training course for this endorsement.

(c) Applicants for an original, raise in grade, or increase in the scope, of an engineer license, other than an increase in horsepower limitation, who have not previously done so must meet the requirements of § 10.205(g) of this part.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 142, Jan. 4, 1989]

§ 10.503 Horsepower limitations.

(a) Engineer licenses of all grades and types may be subject to horsepower limitations. Other than as provided in § 10.524 for the designated duty engineer license, the horsepower limitation placed on a license is based on the applicant's qualifying experience considering the total shaft horsepower of each vessel on which the applicant has served.

§ 10.504

46 CFR Ch. I (10–1–00 Edition)

(b) When an applicant for an original or raise of grade of an engineer license, other than a designated duty engineer license, has not obtained at least 50 percent of the required qualifying experience on vessels of 4,000 or more horsepower, a horsepower limitation is placed on the license based on the applicant's qualifying experience. The license is limited to the maximum horsepower on which at least 25 percent of the required experience was obtained, or 150 percent of the maximum horsepower on which at least 50 percent of the service was obtained, whichever is higher. Limitations are in multiples of 1000 horsepower, using the next higher figure when an intermediate horsepower is calculated. When the limitation as calculated equals or exceeds 10,000 horsepower, an unlimited horsepower license is issued.

(c) The following service on vessels of 4,000 horsepower or over will be considered qualifying for the raising or removing of horsepower limitations placed on engineer licenses:

(1) Six months of service in the highest grade licensed: removal of all horsepower limitations.

(2) Six months of service in any licensed capacity other than the highest grade for which licensed: Removal of all horsepower limitations for the grade in which service is performed and raise the next higher grade license to the horsepower of the vessel on which service was performed. The total cumulative service before and after issuance of the limited license may be consid-

ered in removing all horsepower limitations.

(3) Twelve months of service as oiler or junior engineer while holding a license as third assistant engineer or assistant engineer (limited-oceans): removal of all horsepower limitations on third assistant engineer or assistant engineer's (limited-oceans) license.

(4) Six months of service as oiler or junior engineer while holding a license as second assistant engineer: removal of all horsepower limitations on third assistant engineer's license.

(d) Raising or removing horsepower limitations based on service required by paragraph (c) of this section may be granted without further written examination providing the Officer in Charge, Marine Inspection who issued the applicant's license, considers further examination unnecessary.

§ 10.504 Application of deck service for limited engineer licenses.


Service gained in the deck department on vessels of appropriate tonnage may substitute for up to 25 percent or 6 months, whichever is less, of the service requirement for a license as chief engineer (limited), assistant engineer (limited), or designated duty engineer.

[CGD 81-059, 54 FR 142, Jan. 4, 1989]

§ 10.505 Engineer license structure.

The following diagram illustrates the engineering license structure including cross over points. The section numbers on the diagram refer to the specific requirements applicable.

FIGURE 10.505 ENGINEER LICENSE STRUCTURE

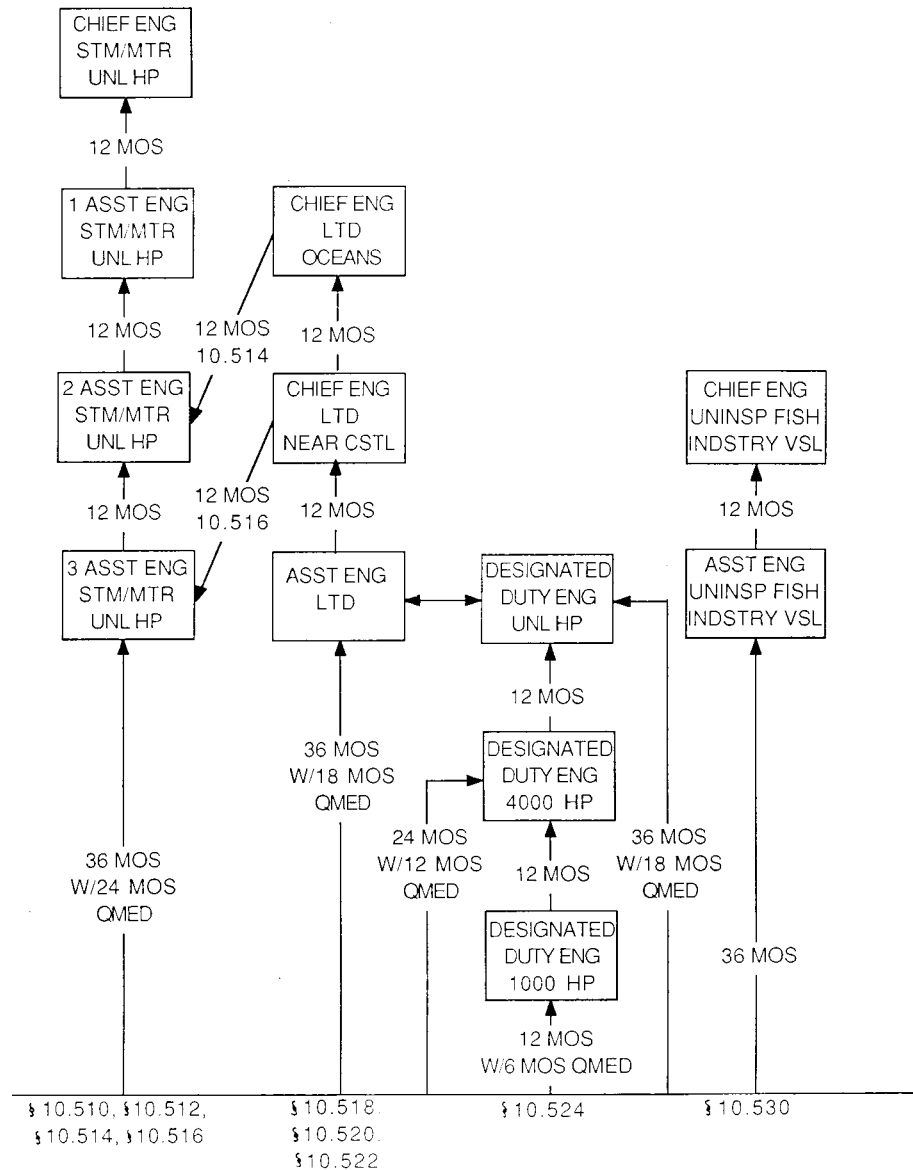

[CGD 81-059, 52 FR 38623, Oct. 16, 1987. Redesignated and amended by CGD 81-059, 54 FR 142, Jan. 4, 1989]

§ 10.510

46 CFR Ch. I (10–1–00 Edition)

§ 10.510 Service requirements for chief engineer of steam and/or motor vessels.

The minimum service required to qualify an applicant for license as chief engineer of steam and/or motor vessels is:

- (a) One year of service as first assistant engineer; or,
- (b) One year of service while holding a license as first assistant engineer. A minimum of six months of this service must have been as first assistant engineer. Service as an assistant engineer is accepted on a two-for-one basis to a maximum of six months (12 months of service as a second or third assistant engineer equals six months of creditable service).

§ 10.512 Service requirements for first assistant engineer of steam and/or motor vessels.

The minimum service required to qualify an applicant for license as first assistant engineer of steam and/or motor vessels is one year of service as an assistant engineer, while holding a license as second assistant engineer.

§ 10.514 Service requirements for second assistant engineer of steam and/or motor vessels.

The minimum service required to qualify an applicant for license as second assistant engineer of steam and/or motor vessels is:

- (a) One year of service as an assistant engineer, while holding a license as third assistant engineer; or,
- (b) One year of service while holding a license as third assistant engineer which includes:
 - (1) A minimum of six months of service as third assistant engineer; and,
 - (2) Additional service as a qualified member of the engine department, calculated on a two-for-one basis; or,
 - (c) One year of service as chief engineer (limited-oceans) of steam or motor vessels, and completing the appropriate examination described in subpart I of this part.

§ 10.516 Service requirements for third assistant engineer of steam and/or motor vessels.

- (a) The minimum service required to qualify an applicant for license as third

assistant engineer of steam and/or motor vessels is:

- (1) Three years of service in the engineroom of vessels, two years of which must have been as a qualified member of the engine department;
- (2) Three years of service as an apprentice to the machinist trade engaged in the construction or repair of marine, locomotive, or stationary engines, together with one year service in the engineroom as oiler, watertender, or junior engineer;
- (3) Graduation from:
 - (i) The U.S. Merchant Marine Academy (engineering curriculum);
 - (ii) The U.S. Coast Guard Academy and completion of an on-board engineer officer qualification program required by the service;
 - (iii) The U.S. Naval Academy and completion of an on-board engineer officer qualification program required by the service;
 - (iv) The engineering class of a Maritime Academy approved by and conducted under the rules prescribed by the Maritime Administrator and listed in part 310 of this title;
- (4) Graduation from the marine engineering course of a school of technology accredited by the Accreditation Board for Engineering and Technology, together with three months of service in the engine department of steam or motor vessels;
- (5) Graduation from the mechanical or electrical engineering course of a school of technology accredited by the Accreditation Board for Engineering and Technology, together with six months of service in the engine department of steam or motor vessels;
- (6) Satisfactory completion of a three-year apprentice engineers training program approved by the Commanding Officer, National Maritime Center; or,
- (7) One year of service as chief engineer (limited-near coastal) of steam or motor vessels and completing the appropriate examination described in subpart I of this part.
 - (b) Experience gained in the deck department on vessels of 100 gross tons or over can be credited for up to three

Coast Guard, DOT

§ 10.530

months of the service requirements under paragraph (a)(1) of this section.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987 and CGD 81-059, 54 FR 132, Jan. 4, 1989, as amended by CGD 95-072, 60 FR 50460, Sept. 29, 1995; USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

§ 10.518 Service requirements for chief engineer (limited-oceans) of steam and/or motor vessels.

The minimum service required to qualify an applicant for license as chief engineer (limited-oceans) of steam and/or motor vessels is five years total service in the engineroom of vessels. Two years of this service must have been as a licensed engineer. Thirty months of the service must have been as a qualified member of the engine department or equivalent supervisory position.

§ 10.520 Service requirements for chief engineer (limited-near coastal) of steam and/or motor vessels.

The minimum service required to qualify an applicant for license as chief engineer (limited-near coastal) of steam and/or motor vessels is four years total service in the engineroom of vessels. One year of this service must have been as a licensed engineer. Two years of the service must have been as a qualified member of the engine department or equivalent supervisory position.

§ 10.522 Service requirements for assistant engineer (limited-oceans) of steam and/or motor vessels.

The minimum service required to qualify an applicant for license as assistant engineer (limited-oceans) of steam and/or motor vessels is three years of service in the engineroom of vessels. Eighteen months of this service must have been as a qualified member of the engine department or equivalent supervisory position.

§ 10.524 Service requirements for designated duty engineer of steam and/or motor vessels.

(a) Designated duty engineer licenses are issued in three levels of horsepower limitations dependent upon the total service of the applicant and completion of appropriate examination. These licenses are limited to vessels of not

more than 500 gross tons on certain waters as specified in § 10.501.

(b) The service requirements for licenses as designated duty engineer are:

(1) For designated duty engineer of steam and/or motor vessels of any horsepower, the applicant must have three years of service in the engineroom. Eighteen months of this service must have been as a qualified member of the engine department or equivalent supervisory position.

(2) For designated duty engineer of steam and/or motor vessels of not more than 4,000 horsepower, the applicant must have two years of service in the engineroom. One year of this service must have been as a qualified member of the engine department or equivalent supervisory position.

(3) For designated duty engineer of steam and/or motor vessels of not more than 1,000 horsepower, the applicant must have one year of service in the engineroom. Six months of this service must have been as a qualified member of the engine department or equivalent supervisory position.

§ 10.530 Licenses for engineers of uninspected fishing industry vessels.

(a) This section applies to licenses for chief and assistant engineers of all vessels, however propelled, navigating the high seas, which are documented to engage in the fishing industry, with the exception of:

- (1) Wooden ships of primitive build;
- (2) Unrigged vessels; and,
- (3) Vessels of less than 200 gross tons.

(b) Licenses as chief engineer and assistant engineer of uninspected fishing industry vessels are issued for ocean waters and with horsepower limitations in accordance with the provisions of § 10.503.

(c) For a license as chief engineer, the applicant must have served four years in the engineroom of vessels. One year of this service must have been as a licensed assistant engineer or equivalent supervisory position.

(d) For a license as assistant engineer, an applicant must have served three years in the engineroom of vessels.

§ 10.540

(e) Two-thirds of the service required under this section must have been on motor vessels.

(f) Applicants may request an orally assisted examination on the subjects listed in subpart I of this part.

§ 10.540 Licenses for engineers of mobile offshore drilling units.

Licenses as chief engineer (MODU) or assistant engineer (MODU) authorize service on certain self-propelled or non-self-propelled units of any horsepower where authorized by the vessel's certificate of inspection.

[CGD 81-059a, 55 FR 14802, Apr. 18, 1990]

§ 10.542 License for chief engineer (MODU).

To qualify for a license as chief engineer (MODU) an applicant must:

(a) Present evidence of the following experience:

(1) Six years of employment assigned to MODUs including three years of employment as mechanic, motorman, subsea engineer, electrician, barge engineer, toolpusher, unit superintendent, crane operator or equivalent. Eighteen months of that employment must have been assigned to self-propelled or propulsion assisted units; or

(2) Two years of employment assigned to MODUs as an assistant engineer (MODU). Twelve months of that employment must have been assigned to self-propelled or propulsion assisted units; and

(b) Present evidence of completion of a firefighting training course as required by § 10.205(g) of this part.

(c) If an applicant successfully completes a modified examination and possesses the total required sea service for a license as chief engineer (MODU), but does not possess the required sea service on board self-propelled or propulsion assisted units, the OCMi may issue the applicant a license limited to non-self-propelled units. The OCMi may remove the limitation upon presentation of satisfactory evidence of the required self-propelled sea service and completion of any additional required examination.

[CGD 81-059a, 55 FR 14802, Apr. 18, 1990, as amended by CGD 81-059a, 59 FR 10756, Mar. 8, 1994]

46 CFR Ch. I (10-1-00 Edition)

§ 10.544 License for assistant engineer (MODU).

To qualify for a license as assistant engineer (MODU) an applicant must:

(a) Present evidence of the following experience:

(1) Three years of employment assigned to MODUs including 18 months of employment as mechanic, motorman, subsea engineer, electrician, barge engineer, toolpusher, unit superintendent, crane operator or equivalent. Nine months of that employment must have been assigned to self-propelled or propulsion assisted units;

(2) Three years of employment in the machinist trade engaged in the construction or repair of diesel engines and one year of employment assigned to MODUs in the capacity of mechanic, motorman, oiler, or equivalent. Nine months of that employment must have been assigned to self-propelled or propulsion assisted units; or

(3) A degree from a program in marine, mechanical, or electrical engineering technology which is accredited by the Accreditation Board for Engineering and Technology (ABET). Commanding Officer, National Maritime Center will give consideration to accepting education credentials from programs having other than ABET accreditation. An applicant qualifying through a degree program must also have at least six months of employment in any of the capacities listed in paragraph (a)(1) of this section aboard self-propelled or propulsion assisted units; and

(b) Present evidence of completion of a firefighting training course as required by § 10.205(g) of this part.

(c) If an applicant successfully completes a modified examination and possesses the total required sea service for a license as an assistant engineer (MODU), but does not possess the required sea service on board self-propelled or propulsion assisted units, the OCMi may issue the applicant a license limited to non-self-propelled units. The OCMi may remove the limitation upon presentation of the satisfactory evidence of the required self-propelled sea

Coast Guard, DOT

§ 10.603

service and completion of any additional required examination.

[CGD 81-059a, 55 FR 14802, Apr. 18, 1990, as amended by CGD 81-059a, 59 FR 10756, Mar. 8, 1994; CGD 95-072, 60 FR 50460, Sept. 29, 1995; USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

§ 10.551 Licenses for service on off-shore supply vessels.

Each license for service on OSVs as Chief Engineer (OSV) or Engineer (OSV) authorizes service on OSVs as defined in 46 U.S.C. 2101(19) and as interpreted under 46 U.S.C. 14104(b), subject to any restrictions placed on the license.

[CGD 95-062, 62 FR 34532, June 26, 1997; CGD 95-062, 62 FR 40140, July 25, 1997]

§ 10.553 Chief Engineer (OSV).

(a) Except as provided by paragraph (b) of this section, to qualify for a license as Chief engineer (OSV), an applicant shall present evidence that he or she meets the appropriate requirements of STCW Regulation III/2.

(b) The OCMi may exempt an applicant from meeting any requirement under STCW Regulation III/2 that the OCMi determines to be inappropriate or unnecessary for service on an OSV, or that the applicant meets under the equivalency provisions of Article IX of STCW.

[CGD 95-062, 62 FR 34532, June 26, 1997]

§ 10.555 Engineer (OSV).

(a) Except as provided by paragraph (b) of this section, to qualify for a license as Engineer (OSV), an applicant shall present evidence that he or she meets the appropriate requirements of STCW Regulation III/1.

(b) The OCMi may exempt an applicant from meeting any requirement under STCW Regulation III/1 that the OCMi determines to be inappropriate or unnecessary for service on an OSV, or that the applicant meets under the equivalency provisions of Article IX of STCW.

[CGD 95-062, 62 FR 34533, June 26, 1997]

Subpart F—Licensing of Radio Officers

§ 10.601 Applicability.

This subpart provides for the licensing of radio officers for employment on vessels, and for the issue of STCW certificates or endorsements for those qualified to serve as radio operators on vessels subject to the provisions on the Global Maritime Distress and Safety System (GMDSS) of Chapter IV of SOLAS.

[CGD 95-062, 62 FR 34533, June 26, 1997]

§ 10.603 Requirements for radio officers' licenses, and STCW certificates or endorsements for GMDSS radio operators.

(a) Each applicant for an original license or renewal of license shall present a current first or second class radiotelegraph operator license issued by the Federal Communications Commission. The applicant shall enter on the license application form the number, class, and date of issuance of his or her Federal Communications Commission license.

(b) An applicant for license as radio officer shall apply for a merchant mariner's document under part 12. This document will be endorsed *See License as Radio Officer*.

(c) Each applicant who furnishes evidence that he or she meets the standard of competence set out in STCW Regulation IV/2, including the competence to transmit and receive information using subsystems of GMDSS, to fulfill the functional requirements of GMDSS, and to provide radio services in emergencies is entitled to hold an STCW certificate suitably endorsed for performing duties associated with GMDSS.

(d) Evidence required by paragraph (c) of this section must include a certificate—

(1) For operator of radio in the GMDSS issued by the Federal Communications Commission (FCC); and

(2) Of completion from a Coast Guard-approved course for operator of radio in the GMDSS, or other approved

§ 10.701

programs of training and assessment covering the same areas of competence.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 95-062, 62 FR 34533, June 26, 1997; USCG-1999-6216, 64 FR 53223, Oct. 1, 1999]

Subpart G—Professional Requirements for Pilot Licenses

SOURCE: CGD 81-059b, 52 FR 38659, Oct. 16, 1987 unless otherwise noted.

§ 10.701 Scope of pilot licenses and endorsements.

(a) An applicant for a license as first class pilot need not hold any other license issued under this part. An individual holding a license as master, mate, or master or mate (pilot) of towing vessels may apply for an endorsement as first class pilot for a specific route or routes in lieu of applying for a first class pilot's license.

(b) The issuance of a license or endorsement as first class pilot to an individual qualifies that individual to serve as pilot over the route(s) specified on the license, subject to any limitations imposed under paragraph (c) of this section.

(c) The Officer in Charge, Marine Inspection, issuing a license or endorsement as first class pilot, imposes appropriate limitations commensurate with the experience of the applicant, with respect to class or type of vessel, tonnage, route, and waters.

(d) A license issued for service as a master, mate, or operator of uninspected towing vessels authorizes service as a pilot under the provisions of § 15.812 of this subchapter. Therefore, first class pilot endorsements will not be issued with tonnage limitations of 1600 gross tons or less.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 144, Jan. 4, 1989; USCG-1999-6224, 64 FR 63235, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63235, Nov. 19, 1999, § 10.701, paragraph (a) was amended by removing the words "operator of uninspected towing vessels" and adding, in their place, the words "master or mate (pilot) of towing vessels", effective Nov. 20, 2000.

46 CFR Ch. I (10-1-00 Edition)

§ 10.703 Service requirements.

(a) The minimum service required to qualify an applicant for a license as first class pilot, or for an endorsement as first class pilot on a license as master, mate, or master or mate (pilot) of towing vessels, is predicated upon the nature of the waters for which pilotage is desired.

(1) *General routes (routes not restricted to rivers, canals and small lakes).* The applicant must have at least 36 months service in the deck department of steam or motor vessels navigating on oceans, coastwise, Great Lakes, or bays, sounds, and lakes other than the Great Lakes, as follows:

(i) 18 months of the 36 months service must be as quartermaster, wheelsman, able seaman, apprentice pilot, or in an equivalent capacity, standing regular watches at the wheel or in the pilot-house as part of routine duties.

(ii) At least 12 months of the 18 months service required in paragraph (a)(1)(i) of this section must be on vessels operating on the class of waters for which pilotage is desired.

(2) *River routes.* The applicant must have at least 36 months service in the deck department of any vessel including at least 12 months service on vessels operating on the waters of rivers while the applicant is serving in the capacity of quartermaster, wheelsman, apprentice pilot, or deckhand who stands watches at the wheel as part of routine duties.

(3) *Canal and small lakes routes.* The applicant must have at least 24 months service in the deck department of any vessel including at least 8 months service on vessels operating on canals or small lakes.

(b) A graduate of the Great Lakes Maritime Academy in the deck class meets the service requirements of this section for a license as first class pilot on the Great Lakes.

(c) Completion of a course of pilot training approved by the Commanding Officer, National Maritime Center, under subpart C of this part may be substituted for a portion of the service requirements of this section in accordance with § 10.304. Additionally, round trips made during this training may apply toward the route familiarization requirements of § 10.705. An individual

using substituted service must have at least nine months of shipboard service.

(d) An individual holding a license as master or mate of inspected steam or motor vessels of over 1,600 gross tons meets the service requirements of this section for an endorsement as first class pilot.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 144, Jan. 4, 1989; CGD 95-072, 60 FR 50460, Sept. 29, 1995; USCG-1998-4442, 63 FR 52189, Sept. 30, 1998; USCG-1999-6224, 64 FR 63235, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63235, Nov. 19, 1999, § 10.703, paragraph (a) was amended by removing the words "operator of uninspected towing vessels" and adding, in their place, the words "master or mate (pilot) of towing vessels", effective Nov. 20, 2000.

§ 10.705 Route familiarization requirements.

(a) The Officer in Charge, Marine Inspection having jurisdiction determines, within the range limitations specified in this section, the number of round trips required to qualify an applicant for a particular route, considering the following:

- (1) The geographic configuration of the waterway;
- (2) The type and size of vessels using the waterway;
- (3) The abundance or absence of aids to navigation;
- (4) The background lighting effects;
- (5) The known hazards involved, including waterway obstructions or constrictions such as bridges, narrow channels, or sharp turns; and,
- (6) Any other factors unique to the route that the OCMI deems appropriate.

(b) An applicant for an original license as first class pilot shall furnish evidence of having completed a minimum number of round trips, while serving as quartermaster, wheelsman, able seaman, apprentice pilot, or in an equivalent capacity, standing regular watches at the wheel or in the pilot house as part of routine duties, over the route sought. Evidence of having completed a minimum number of round trips while serving as an observer, properly certified by the master and/or pilot of the vessel, is also acceptable. The range of round trips for an initial license is a minimum of 12 round trips

and a maximum of 20 round trips. An applicant may have additional routes added to the first class pilot license by meeting the requirements for obtaining an endorsement.

(c) An applicant for an endorsement as first class pilot for a particular route shall furnish evidence of having completed the number of round trips over the route, specified by the Officer In Charge, Marine Inspection, within the range limitations of this paragraph, for the particular grade of existing license held. The range of round trips for an endorsement is a minimum of 8 round trips and a maximum of 15 round trips.

(d) Unless determined impracticable by the OCMI, 25% of the round trips required by the OCMI under this section must be made during the hours of darkness.

(e) One of the round trips required by the OCMI under this section must be made over the route within the six months immediately preceding the date of application.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 144, Jan. 4, 1989]

§ 10.707 Examination requirements.

(a) An applicant for a license as first class pilot is required to pass the examination described in subpart I of this part.

(b) An applicant for an extension of route, or a licensed master or mate authorized to serve on vessels of over 1,600 gross tons seeking an endorsement as first class pilot, is required to pass those portions of the examination described in subpart I of this part that concern the specific route for which endorsement is sought.

§ 10.709 Annual physical examination requirements.

(a) This section applies only to an individual who pilots a vessel of 1,600 gross tons and over.

(b) Every person holding a license or endorsement as first class pilot shall have a thorough physical examination each year while holding the license or endorsement.

(c) Each annual physical examination must meet the requirements specified in § 10.205(d) except that the record of

§ 10.711

examination need not be submitted to the Coast Guard except as provided for in paragraph (e) of this section.

(d) An individual's first class pilot license or endorsement becomes invalid on the first day of the month following the first anniversary of the individual's most recent physical examination satisfactorily completed; the individual may not operate under the authority of that license or endorsement until a physical examination has been satisfactorily completed.

(e) Upon request, a first class pilot shall provide the Coast Guard with a copy of his or her most recent physical examination.

§ 10.711 Tonnage requirements.

(a) In order to obtain a first class pilot license or endorsement authorizing service on vessels of *any gross tons* over a particular route, the applicant must have sufficient experience on vessels of over 1,600 gross tons.

(b) If an applicant does not have sufficient experience on vessels of over 1,600 gross tons, the license or endorsement will be for a limited tonnage until the applicant completes a number of additional round trips, as determined by the OCMI, within the range contained in § 10.705 (b) or (c), as appropriate, on vessels of over 1,600 gross tons.

(c) For purposes of this section, an applicant is considered to have sufficient experience if the applicant has 18 months experience as master, mate, quartermaster, wheelsman, able seaman, apprentice pilot, or in an equivalent capacity, standing regular watches at the wheel or in the pilothouse as part of routine duties, on vessels of 1,600 gross tons or over, and two-thirds of the minimum number of round trips required for the route have been on vessels of 1,600 gross tons or over.

(d) For purposes of this section, for experience with respect to tonnage on towing vessels, the combined gross tonnage of the towing vessel and the vessel(s) towed will be considered. However, the OCMI may require that all or a portion of the required number of round trips be obtained on self-propelled vessels of 1,600 gross tons or over, when the OCMI determines that due to the nature of the waters and the

46 CFR Ch. I (10-1-00 Edition)

overall experience of the applicant, self-propelled vessel experience is necessary to obtain a first class pilot license or endorsement that is not restricted to tug and barge combinations.

§ 10.713 Requirements for maintaining current knowledge of waters to be navigated.

(a) If a first class pilot has not served over a particular route within the past 60 months, that person's license or endorsement is invalid for that route, and remains invalid until the individual has made one re-familiarization round trip over that route, except as provided in paragraph (b) of this section. Whether this requirement is satisfied or not has no effect on the renewal of a license or endorsement. Round trips made within the 90 day period preceding renewal will be valid for the duration of the renewed license or endorsement.

(b) For certain long or extended routes, the OCMI may, at his discretion, allow the re-familiarization requirement to be satisfied by reviewing appropriate navigation charts, coast pilots tide and current tables, local Notice to Mariners, and any other materials which would provide the pilot with current knowledge of the route. Persons using this method of re-familiarization shall certify, when applying for renewal of their license or endorsement, the material they have reviewed and the dates on which this was accomplished. Review within the 90 day period preceding renewal is valid for the duration of the renewed license or endorsement.

Subpart H—Registration of Staff Officers

§ 10.801 Applicability.

This subpart provides for the registration of staff officers for employment on vessels documented or numbered under the laws of the United States. Staff officers must be registered if serving on most vessels in ocean service or on the Great Lakes.

§ 10.803 Grades of certificates issued.

Staff officers are registered in the following grades:

(a) Chief purser.

Coast Guard, DOT

§ 10.809

- (b) Purser.
- (c) Senior assistant purser.
- (d) Junior assistant purser.
- (e) Medical doctor.
- (f) Professional nurse.

§ 10.805 General requirements.

(a) The applicant for a certificate of registry as staff officer is not required to take any examination; however, the applicant shall present to the Officer in Charge, Marine Inspection a letter justifying the need for the certificate of registry.

(b) The applicant must hold or apply for a merchant mariner's document.

(c) Endorsements for a higher grade are not made on certificates of registry. An applicant for a higher grade in the staff department shall apply in the same manner as for an original certificate of registry and shall surrender the certificate upon issuance of the new certificate of registry. A person holding a certificate of registry as staff officer may serve in a lower grade of a service for which he or she is registered.

(d) Title 46 U.S.C. 8302 addresses uniforms for staff officers who are members of the Naval Reserve.

(e) A duplicate certificate of registry may be issued by the Officer in Charge, Marine Inspection. (See § 10.219.)

(f) A certificate of registry is valid for a term of 5 years from the date of issuance. Procedures for renewing certificates of registry are found in § 10.209. The expiration date of a certificate of registry issued without an expiration date shall be determined in accordance with § 10.811.

(g) Each applicant for an original certificate of registry or a higher grade of certificate of registry, as described by paragraph (c) of this section, shall produce evidence of having passed a chemical test for dangerous drugs or of qualifying for an exception from testing in § 16.220 of this subchapter. An applicant who fails a chemical test for dangerous drugs will not be issued a certificate of registry.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 144, Jan. 4, 1989; CGD 91-211, 59 FR 49300, Sept. 27, 1994; CGD 91-223, 60 FR 4525, Jan. 23, 1995]

§ 10.807 Experience requirements for registry.

(a) The applicant for a certificate of registry as staff officer shall submit evidence of experience as follows:

(1) *Chief purser.* Two years of service aboard vessels performing duties relating to work in the purser's office.

(2) *Purser.* One year of service aboard vessels performing duties relating to work in the purser's office.

(3) *Senior assistant purser.* Six months of service aboard vessels performing duties relating to work in purser's office.

(4) *Junior assistant purser.* Previous experience not required.

(5) *Medical doctor.* A valid license as physician or surgeon issued under the authority of a state or territory of the United States, the Commonwealth of Puerto Rico, or the District of Columbia.

(6) *Professional nurse.* A valid license as a registered nurse issued under authority of a state or territory of the United States, the Commonwealth of Puerto Rico, or the District of Columbia.

(b) Employment on shore in connection with ship's business may be accepted in lieu of service aboard vessels. Related shore employment is accepted in the ratio of two months of shore service to count as one month of service aboard vessels.

(c) In computing the length of service required of an applicant for a certificate of registry, service of one season on vessels on the Great Lakes is counted as service of one year.

(d) In the event an applicant for a certificate of registry, other than medical doctor or professional nurse, presents evidence of other qualifications which, in the opinion of the Officer in Charge, Marine Inspection, is equivalent to the experience requirements of this section and is consistent with the duties of a staff officer, the Officer in Charge, Marine Inspection may issue the certificate of registry.

§ 10.809 Experience requirements for ratings endorsed on certificate of registry.

An applicant for rating to be endorsed on a certificate of registry shall

§ 10.811

submit evidence of experience as follows:

(a) *Marine physician assistant.* Successful completion of an accredited course of instruction for a physician's assistant or nurse practitioner program.

(b) *Hospital corpsman.* A rating of at least hospital corpsman or health services technician, first class in the U.S. Navy, U.S. Coast Guard, U.S. Marine Corps, or an equivalent rating in the U.S. Army (not less than staff sergeant, Medical Department, U.S.A.), or in the U.S. Air Force (not less than technical sergeant, Medical Department, U.S.A.F.), and a period of satisfactory service of at least one month in a military hospital or U.S. Public Health Service Hospital.

§ 10.811 Expiration of existing certificates of registry.

The expiration year of a certificate of registry issued without an expiration date is calculated by adding 5-year increments to the issuance date of the certificate of registry, up to first applicable year falling between 1995 and 1999, inclusive. The day and month of expiration are the same as that of issuance. Table 10.811 is provided as an aid for calculating the expiration date of a certificate of registry issued without an expiration date. A certificate of registry is not valid for use after the expiration date calculated under this section, but may be renewed in accordance with the requirements of § 10.209.

TABLE 10.811.—EXPIRATION OF CERTIFICATES OF REGISTRY ISSUED WITH NO EXPIRATION DATE¹

Expiration year				
1999	1998	1997	1996	1995
Issue Year				
1994	1993	1992	1991	1990
1989	1988	1987	1986	1985
1984	1983	1982	1981	1980
1979	1978	1977	1976	1975
1974	1973	1972	1971	1970
1969	1968	1967	1966	1965
1964	1963	1962	1961	1960
1959	1958	1957	1956	1955
1954	1953	1952	1951	1950
1949	1948	1947	1946	1945
1944	1943	1942	1941	1940

46 CFR Ch. I (10–1–00 Edition)

TABLE 10.811.—EXPIRATION OF CERTIFICATES OF REGISTRY ISSUED WITH NO EXPIRATION DATE¹—Continued

Expiration year				
1999	1998	1997	1996	1995
1939	1938	1937

¹ Find the year in which the certificate of registry was issued (Issue Year), then move up the column to find the Expiration Year. Month and day of expiration correspond to the month and day of issue.

[CGD 91-211, 59 FR 49300, Sept. 27, 1994; CGD 91-211, 59 FR 50964, Oct. 6, 1994]

Subpart I—Subjects of License Examinations and Practical Demonstrations of Competence

§ 10.901 General provisions.

(a) Each applicant for any license listed in this part shall pass examinations on the appropriate subjects listed in this subpart, except as noted in § 10.903(b).

(b) If the license is to be limited in a manner which would render any of the subject matter unnecessary or inappropriate, the examination may be amended accordingly by the Officer in Charge, Marine Inspection. Limitations which may affect the examination content are:

(1) Restricted routes for reduced service licenses (master or mate of vessels of not more than 200 gross tons, operator of uninspected passenger vessels or master or mate (pilot) of towing vessels); or,

(2) Engineer licenses with horsepower restrictions.

(c) Except as provided in §§ 10.202 and 10.209, each applicant for an STCW certificate or endorsement, to be valid for service on or after February 1, 2002, in the following capacities on vessels that operate beyond the Boundary Line shall also furnish sufficient documentary evidence that he or she has made a practical demonstration(s) of competence as set out under the appropriate STCW Regulations:

(1) *Deck Department.* (i) Officer in charge of the navigational watch on a seagoing vessel of 500 gross tons (GT) or more.

(ii) Officer in charge of the navigational watch on a seagoing vessel of

Coast Guard, DOT

§ 10.903

less than 500 GT not engaged on a near-coastal voyage.

(iii) Officer in charge of the navigational watch on a seagoing vessel of less than 500 GT engaged on a near-coastal voyage.

(iv) Master and chief mate on a seagoing vessel of 3,000 GT or more.

(v) Master and chief mate on a seagoing vessel of between 500 and 3,000 GT.

(vi) Master on a seagoing vessel of less than 500 GT not engaged on a near-coastal voyage.

(vii) Master on a seagoing vessel of less than 500 gross tons engaged on a near-coastal voyage.

(2) *Engine Department.* (i) Officer in charge of the engineering watch in a manned engine-room on a seagoing vessel.

(ii) Designated duty engineer in a periodically unmanned engine-room on a seagoing vessel.

(iii) Chief engineer officer of a seagoing vessel driven by main propulsion machinery of 3,000 kW [4,000 hp] of propulsion power or more.

(iv) Second engineer officer of a seagoing vessel driven by main propulsion machinery of 3,000 kW [4,000 hp] of propulsion power or more.

(v) Chief engineer officer of a seagoing vessel driven by main propulsion machinery of between 750 kW [1,000 hp] and 3,000 kW [4,000 hp] of propulsion power.

(vi) Second engineer officer of a seagoing vessel driven by main propulsion machinery of between 750 kW [1,000 hp] and 3,000 kW [4,000 hp] of propulsion power.

(d) Simulators used in assessment of competence under paragraph (c) of this section must meet the appropriate performance standards set out in Section A-I/12 of the STCW Code. However, simulators installed or brought into use before February 1, 2002, need not meet them so far as they fulfill the objectives of the assessment of competence or demonstration of proficiency.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 144, Jan. 4, 1989; CGD 94-029, 61 FR 47064, Sept. 6, 1996; CGD 95-062, 62 FR 34533, June 26, 1997; USCG-1998-4442, 63 FR 52188, Sept. 30, 1998; USCG-1999-6224, 64 FR 63235, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63235, Nov. 19, 1999, § 10.901, paragraph (b)(1) was amended by removing the words "uninspected towing vessels" and add, in their place, the words "master or mate (pilot) of towing vessels", effective Nov. 20, 2000.

§ 10.903 Licenses requiring examinations.

(a) The following licenses require examinations for issuance:

(1) Master ocean/near coastal any gross tons;¹

(2) Chief mate ocean/near coastal any gross tons;¹

(3) Second mate ocean/near coastal any gross tons;¹

(4) Third mate ocean/near coastal any gross tons;¹

(5) Master ocean/near coastal not more than 500 or 1600 gross tons;¹

(6) Mate ocean/near coastal not more than 500 or 1600 gross tons;¹

(7) Mate near coastal not more than 200 gross tons;

(8) Master near coastal not more than 100 gross tons;

(9) Master Great Lakes and inland any gross tons;

(10) Mate Great Lakes and inland any gross tons;

(11) Master inland any gross tons;

(12) Master river any gross tons;

(13) Master Great Lakes and inland/river not more than 500 or 1600 gross tons;¹

(14) Mate Great Lakes and inland/river not more than 500 or 1600 gross tons;¹

(15) Mate Great Lakes and inland/inland/river not more than 200 gross tons;¹

(16) Master Great Lakes and inland/inland/river not more than 100 gross tons;¹

(17) First class pilot;

(18)(i) Apprentice mate (steersman) of towing vessels;

(ii) Apprentice mate (steersman) of towing vessels, harbor assist;

(19) Operator uninspected passenger vessels;

(20) Master uninspected fishing industry vessels;

(21) Mate uninspected fishing industry vessels;

¹Examination will vary depending upon route desired.

§ 10.903

46 CFR Ch. I (10–1–00 Edition)

(22) Chief engineer steam/motor vessels;

(23) First assistant engineer steam/motor vessels;

(24) Second assistant engineer steam/motor vessels;

(25) Third assistant engineer steam/motor vessels;

(26) Chief engineer (limited) steam/motor vessels;

(27) Assistant engineer (limited) steam/motor vessels;

(28) Designated duty engineer steam/motor vessels;

(29) Chief engineer uninspected fishing industry vessels;

(30) Assistant engineer uninspected fishing industry vessels.

(b) The following licenses do not require examinations:

(1) Master ocean any gross tons when adding an endorsement as Offshore Installation Manager.

(2) Master ocean or near coastal not more than 200 gross tons, when raising license grade from mate near coastal not more than 200 gross tons. Master ocean not more than 200 gross tons would, however, require an examination in celestial navigation.

(3) Master Great Lakes and inland, inland, and rivers not more than 200 gross tons when raising license grade from mate of the same route not more than 200 gross tons.

(4) Master or mate (pilot) of towing vessels (endorsed for the same route).

(c) Each candidate for any of the following licenses, who commences Coast Guard approved or accepted training or

approved seagoing service on or after August 1, 1998, or who applies for the license on or after February 1, 2002, shall meet the requirements of the appropriate regulations and standards of competence in STCW and in part A of the STCW Code, as indicated in table 903–1:

(1) Master, oceans and near coastal, any gross tons.

(2) Chief mate, oceans and near coastal, any gross tons.

(3) Master, oceans and near coastal, 500 to 1600 gross tons.

(4) Second mate, oceans and near coastal, any gross tons.

(5) Third mate, oceans and near coastal, any gross tons.

(6) Mate, oceans and near coastal, 500 to 1600 gross tons.

(7) Master or mate of towing vessels of over 200 gross tons, oceans (domestic trade) and near-coastal.

(8) Master (OSV).

(9) Chief mate (OSV).

(10) Mate (OSV).

(11) Chief engineer, unlimited.

(12) 1st Assistant engineer, unlimited.

(13) 2nd Assistant engineer, unlimited.

(14) 3rd Assistant engineer, unlimited.

(15) Chief engineer, limited—oceans.

(16) Assistant engineer, limited—oceans.

(17) Chief engineer, limited—near coastal.

(18) Chief engineer (OSV).

(19) Engineer (OSV).

TABLE 10.903–1

STCW CODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
II/1	X	X	X	X
II/2, p. 1 & 2	X	X	X	X
II/2, p. 3 & 4	X	X
II/3
III/1	X	X	X	X
III/2	X	X	X
III/3	X	X

Coast Guard, DOT

§ 10.910

(d) After July 31, 1998, any candidate for a license listed in paragraph (c) of this section, who meets the requirements of the appropriate regulations and standards of competence in STCW and part A of the STCW code as indicated in table 10.903-1, need not comply with § 10.910, or, 10.950, of this part.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 144, Jan. 4, 1989; CGD 81-059a, 59 FR 10756, Mar. 8, 1994; CGD 95-062, 62 FR 34533, June 26, 1997; USCG-1998-4442, 63 FR 52188, Sept. 30, 1998; USCG-1999-6224, 64 FR 63235, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63235, Nov. 19, 1999, § 10.903, was amended in paragraph (c) in Table 10.903-1, in the entry for STCW CODE II/2, p. 3 & 4, add an "X" in column 7; in paragraph (c) in Table 10.903-1, in the entry for STCW CODE II/3, remove the "X" in column 7; and by revising paragraphs (a)(18), (b)(4), and (c)(7), effective Nov. 20, 2000. For the convenience of the user, the superseded text is set forth as follows:

§ 10.903 Licenses requiring examinations.

(a) * * *

(18) Operator or second-class operator uninspected towing vessels;

* * * * *

(b) * * *

(4) Operator of uninspected towing vessels, when raising license grade from second class operator of uninspected towing vessels (endorsed for same route).

(c) * * *

(7) Operator, uninspected towing vessel of over 200 gross tons, oceans (domestic trade) and near coastal.

* * * * *

§ 10.910 Subjects for deck licenses.

Table 10.910-1 gives the codes used in table 10.910-2 for all deck licenses. Table 10.910-2 indicates the examination subjects for each license, by code number. Figures in the body of the table, in place of the letter "x", refer to notes.

TABLE 10.910-1 CODES FOR DECK LICENSES

Deck Licenses:

1. Master, Oceans/near coastal, any gross tons.
2. Chief mate, oceans/near coastal, any gross tons.
3. Master, oceans/near coastal, 500/1,600 gross tons.
4. Second mate, oceans/near coastal, any gross tons.
5. Third mate, oceans/near coastal, any gross tons.
6. Mate, oceans/near coastal, 500/1,600 gross tons.
7. Master, oceans/near coastal, and mate, near coastal, 200 gross tons (includes master, near coastal, 100 gross tons).
8. Operator, uninspected passenger vessels, near coastal.
9. Operator, uninspected passenger vessels, Great Lakes/inland.
10. Apprentice mate, towing vessels, ocean (domestic trade) and near-coastal routes.
11. Apprentice mate (steersman), towing vessels, Great Lakes and inland routes.
12. Steersman, towing vessels, Western Rivers.
13. Master, Great Lakes/inland, or master, inland, any gross tons.
14. Mate, Great Lakes/inland, any gross tons.
15. Master, Great Lakes/inland, 500/1,600 gross tons.
16. Mate, Great Lakes/inland, 500/1,600 gross tons.
17. Master or mate, Great Lakes/inland, 200 gross tons (includes master, Great Lakes/inland, 100 gross tons).
18. Master, rivers, any gross tons.
19. Master, rivers, 500/1,600 gross tons.
20. Mate, rivers, 500/1,600 gross tons.
21. Master or mate, rivers, 200 gross tons (includes master, rivers, 100 gross tons).
22. Master, uninspected fishing industry vessels, oceans/near coastal.
23. Mate, uninspected fishing industry vessels, oceans/near coastal.
24. First class pilot.

TABLE 10.910–2—LICENSE CODES

Examination topics	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Navigation and position determination:																								
Ocean Track Plotting:																								
Middle Latitude Sailing	1	1		1	1																			
Mercator Sailing	X	X		1	1																			
Great Circle Sailing	1	1		1																				
Parallel Sailing	1	1		1	1																			
ETA	X	X	1	X	X																			
Piloting:																								
Distance Off	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X					X	X	X
Bearing Problems	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X					X	X	X
Fix or Running Fix	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X					X	X	X
Chart Navigation	X	X	X	X	X	X	X	X	X	X	X	2	X	X	X	X	X	2	2	2	2	X	X	X
Dead Reckoning	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X					X	X	X
Celestial Observations:																								
Special Cases (hi/lo Alt., Backsight)	1																							
Latitude by Polaris	1	1	1	1																				
Latitude by Meridian Transit	1																							
Lat. by Meridian Transit (Sun Only)	X	X	1	X	X	1	1			1												1	1	
Fix or Running Fix (Any Body)	X	X	1	X																		1		
Fix or Running Fix (Sun Only)						X	1	1		1													1	
Star Identification	1	1	1	1																				
Star Selection	1	X	1	X																			1	
Times of Celestial Phenomena:																								
Time of Meridian Transit	1																							
Time of Meridian Transit (Sun Only)	X	X	1	X	X	1	1			1												1	1	
Second Estimate Meridian Transit	1																							
Zone Time Sun Rise/Set/Twilight	X	X	1	1	1	1	1			1													1	1
Zone Time Moon Rise/Set	X	X		1																				
Speed by RPM	X	X		X																				
Fuel Conservation	X	X											3											
Electronic Navigation	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X					X	X	X
Instruments and Accessories	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Aids To Navigation	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Charts, Navigation Publications, and Notices to Mariners	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Naut. Astronomy & Nav. Definitions	X	X		X	X																			
Chart Sketch																							4	
Seamanship:																								
Marlinspike Seamanship				X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Purchases, Blocks and Tackle				X	X	X	X			X	X	X		X		X	X	X	X	X	X	X	X	X
Small Boat Handling Under Oars or Sail				X	X									X	X									
Watchkeeping:																								
COLREGS	X	X	X	X	X	X	X	X	5	X	5		5	5	5	5	5					X	X	5
Inland Navigational Rules	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Basic Principles, Watchkeeping	X	X	X	X	X	X				X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Navigation Safety Regs. (33 CFR 164)	X	X		X	X								X	X				X				6	6	6
Radar Equipment:																								
Radar Observer Certificate	X	X	X	X	X	X	1			1			X	X				X				X	X	X
Compass-Magnetic and Gyro:																								
Principles of Gyro Compass	X	X	X	X	X	X							X	X	X	X						X	X	
Principles of Magnetic Compass	X	X	X	X	X	X							X	X	X	X	X	X	X	X	X	X	X	X
Magnetic Compass Adjustment	X	X											X	X										
Gyro Compass Error/Correction	X	X	X	X	X	X	7				X	X	X	X	X	X	7					X	X	X
Magnetic Compass Error/Correction	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X					X	X	X
Determination of Compass Error:																								
Azimuth (Any Body)	X	X		1																				
Azimuth (Sun Only)			1		X	1	1			1			3									1	1	
Amplitude (Any Body)	X																							
Amplitude (Sun Only)		X	1	X	X	1	1			1			3									1	1	
Deviation Table Construction	X	X	1	X	X								3											
Terrestrial Observation	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X					X	X	X
Gyro Controlled Systems	X	X	X	X																				
Operation & Care of Main Gyro Systems	X	X	X	X																				
Meteorology and Oceanography:																								
Characteristics of Weather Systems	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Ocean Current Systems	X	X	X	X																		X	X	X

TABLE 10.910-2—LICENSE CODES—Continued

Examination topics	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Weather Charts and Reports		X	X	X	X		X			X												X		
Tides and Tidal Currents:																								
Extensive Tidal Effects	X	X	X																					
Terms and Definitions		X	X	X	X	X	X	X	X	X	X		X	X	X	X	X					X	X	X
Publications		X	X	X	X	X	X	X	X	X	X		X	X	X	X	X					X	X	X
Calculations		X	X	X	X	X	X	X	X	X	X		X	X	X	X	X					X	X	X
Ship Maneuvering and Handling:																								
Approaching Pilot Vessel or Station	X	X	X			X																		X
Shiphandling in Rivers, Estuaries	X	X	X			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Maneuvering in Shallow Water	X	X	X			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Interaction with Bank/Passing Ship	X	X	X			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Berthing and Unberthing	X	X	X			X	X	X	X	X	X			X	X	X		X	X			X	X	X
Anchoring and Mooring		X	X	X	X	X	X	X	X	X	X			X	X	X	X	X					X	X
Dragging, Clearing Fouled Anchors		X	X	X	X	X	X							X	X	X	X	X				X		
Drydocking, with & without Prior Damage		X	X											X	X	X	X					X		
Heavy Weather Operations		X	X				X	X	X								X					X	X	
Maneuvering for Launching of Lifeboats and Liferrafts in Heavy Weather		X	X				X			X			X		X						X	X		
Receiving Survivors From Lfbts/Lfrfts ...		X	X				X			X	X			X		X								
General: Turn Circle, Pivot Point, Advance and Transfer					X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Determine Maneuvering Characteristics of Major Vessel Types		X		X	X																			
Wake Reduction		X	X				X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Ice Operations/Ice Navigation	X	X	X			X				X	X	X	X	3	X	3								
Towing Operations		X	X	X	X	X	X			X	X	X		X		X	X	X	X	X	X			
Ship Stability, Construction, and Damage Control:																								
Principles of Ship Construction		X	X	X	X		X						X	3	X	3	X	X	X					
Trim and Stability	X	X	X	X	X	X	X			X	X	X	X	3	X	3	X	X	X		X	X	X	
Damage Trim and Stability	X	X	X				7																	
Stability, Trim, and Stress Calculation ..	X	X	X	X			7																	
Vessel Structural Members		X	X	X	X	X	7							X	X	3	7							
IMO Ship Stability Recommendations ..	X	X																						
Damage Control	X	X	X			X		7									7							
Change in Draft Due to Density	X	X																						
Ship Power Plants:																								
Marine Power Plant Operating Principles		X	X				7						X		X		7	X	X					
Ships' Auxiliary Machinery		X	X									X			X			X	X					
Marine Engineering Terms		X	X				7						X		X		7	X	X					
Small Engine Operations and Maintenance								X	X	X							X			X				
Cargo Handling and Stowage:																								
Cargo Stowage and Security, Including Cargo Gear		X	X	X	X	X	7						X	X	X	X	7	X	X	X				
Loading and Discharging Operations ...		X	X	X	X	X							X	X	X	X		X	X	X				
International Regulations for Cargoes, Especially IMDG	X	X	X																					
Dangerous/Hazardous Cargo Regulations	X	X	X	X	X	X							X	X	X	X		X	X	X				
Tank Vessel Safety		X	X	X	X	X							X	X	X	X		X	X	X				
Cargo Piping and Pumping Systems		X	X	X	X	X							X	X	X	X		X	X	X				
Cargo Oil Terms and Definitions		X	X	X	X	X							X	X	X	X		X	X	X				
Ballasting, Tank Clean., & Gas Free Ops		X	X	X	X	X						X	X	X	X		X	X	X					
Load on Top Procedures		X	X	X	X	X						X	X	X	X		X	X	X					
Barge Regulations (Operations)										X	X	X												
Fire Prevention and Firefighting Appliances:																								
Organization of Fire Drills	X	X	X	X	X	X	X			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Classes and Chemistry of Fire	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Firefighting Systems	X	X	X	X	X	X	X			X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Firefighting Equip. and Regulations	X	X	X	X	X	7				X	X	X	X	X	X		7	X	X	X	7	X	X	X
Firefighting Equip. & Regs. for T-Boats							X										X				X			
Basic Firefighting and Prevention	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Emergency Procedures:																								
Ship Beaching Precautions	X	X											X		X									
Actions Prior To/After Grounding	X	X											X		X			X	X					
Refloating a Grounded Ship	X	X											X		X			X	X					
Collision	X	X					X	X		X	X	X	X		X			X	X					
Temporary Repairs	X	X	X				X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

TABLE 10.910–2—LICENSE CODES—Continued

Examination topics	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Passenger/Crew Safety in Emergency	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X			
Fire or Explosion	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Abandon Ship Procedures	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Emergency Steering	X	X	X										X		X			X	X			X	X	
Rescuing Surv. From Ship/Airc. in Dist	X	X	X	X	X	X			X					X	X	X	X	X	X					
Man Overboard Procedures	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Emergency Towing	X	X	X				X			X														
Medical Care:																								
Knowledge and use of:																								
Int'l. Medical Guide for Ships		X	X																					
Ship Med. Chest and Med. Aid at Sea			X	X																				
Medical Sec., Inter. Code of Signals		X	X	X	X																			
1st Aid Guide: Accidents with Dangerous Goods		X	X																					
First Aid		X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Maritime Law:																								
International Maritime Law:																								
Int'l. Convention on Load Lines	X	X	X																					
SOLAS	X	X	X				7																	
MARPOL 73/78	X	X	X	X	X																			
International Health Regulations ..	X	X	X																					
Other International Instruments for Ship/Pass./Crew/Cargo Safety ..	X	X	X																					
National Maritime Law:																								
Load Lines	X	X	X			X	X			X	X		3	3	3	3	7							
Cert. and Documentation of Vessels	X	X	X				X	X	X	X	X	X	X		X		X	X	X		X	X		
Rules & Regs. for Inspected Vessels	X	X	X	X	X	7							X	X	X	X	7	X	X	X	7			
Rules & Regs. for Inspected T-Boats							X										X				X			
Rules and Regs for Uninsp. Vessels							X	X	X	X	X	X					X				X	X	X	X
Pollution Prevention Regulations ..	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Pilotage	X	X	X																					X
Licensing & Certification of Seamen	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Shipment and Discharge, Manning Title 46 U.S. Code	X	X	X				X			X			X		X		X	X	X					
Captain of the Port Regulations, Vessel Traffic Service Procedures for the Route Desired																								X
Shipboard Management and Training:																								
Personnel Management	X	X	X										X		X			X	X					
Shipboard Organization	X	X	X										X		X			X	X					
Required Crew Training	X	X	X										X		X			X	X					
Ship Sanitation	X	X	X				X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Vessel Alteration/Repair—Hot Work	X	X	X				X						X		X			X	X					
Safety	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Ship's Business:																								
Charters	X	X	X																					
Liens, Salvage	X	X	X																					
Insurance	X	X	X																					
Entry, Clearance	X	X	X																					
Certificates and Documents Required ..	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Communications:																								
Flashing Light	X	X	X	X	X																			
Radiotelephone Communications	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Radiotelegraphy Emerg. Dist. Signals ..	X	X	X																					
Signals: Storm/Wreck/Dist/Special	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	X	X	X	X	X	X	X	X
International Code of Signals	X	X	X	X																				
Lifesaving:																								
Survival at Sea	X	X	X	X	X	X				X												X	X	
Lifesaving Appliance Regulations	X	X	X	X	X	7							X	X	X		7	X	X	X	7	X	X	
Lifesaving Appliance Regs. for T-Boats ..						X											X				X			
Lifesaving Appliance Operation	X	X	X	X	X	7	X	X	X	X			X	X	X	X	7	X	X	X	7	X	X	
Lifesaving Appliance Ops. for T-Boats ..						X											X				X			
Search and Rescue:																								
Search and Rescue Procedures	X	X	X																					
AMVER	X	X	X																					

TABLE 10.910-2—LICENSE CODES—Continued

Examination topics	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	
SAIL/AUXILIARY SAIL VESSELS ADDENDUM (8):																									
Any other subject considered necessary to establish the applicant's proficiency	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

1—For ocean routes only.
 2—River chart navigation only.
 3—Topic covered only on Great Lakes specific module(s) taken for “Great Lakes and inland” routes.
 4—Including recommended courses, distances, prominent aids to navigation, depths of waters in channels and over hazardous shoals, other important features of the route, such as character of the bottom. The OCMI may accept chart sketching of only a portion or portions of the route for long or extended routes.
 5—Take COLREGS if license not limited to non-COLREG waters.
 6—For licenses over 1600 gross tons.
 7—For licenses over 100 gross tons.
 8—Sail vessel safety precautions, rules of the road, operations, heavy weather procedures, navigation, maneuvering, and sailing terminology. Applicants for sail/auxiliary sail endorsements to master, mate or operator of uninspected passenger vessels licenses are also tested in the subjects contained in this addendum.

[CGD 81-059a, 55 FR 14802, Apr. 18, 1990, as amended by USCG-1999-6224, 64 FR 63235, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63235, Nov. 19, 1999, § 10.910, was amended by revising paragraphs 10 through 12 in Table 10.910-1, effective Nov. 20, 2000. For the convenience of the user, the superseded text is set forth as follows:

§ 10.910 Subjects for deck licenses.

* * * * *

10. Operator, uninspected towing vessels, oceans (domestic trade)/near coastal.

11. Operator, uninspected towing vessels, Great Lakes/inland.

12. Operator, uninspected towing vessels, Western rivers.

* * * * *

§ 10.920 Subjects for MODU licenses.

Table 10.920-1 gives the codes used in Table 10.920-2 for MODU licenses. Table 10.920-2 indicates the examination subjects for each license by the code number.

Table 10.920-1 Codes for MODU Licenses

1. OIM/Unrestricted
2. OIM/Surface Units Underway
3. OIM/Surface Units on Location
4. OIM/Bottom Bearing Units Underway
5. OIM/Bottom Bearing Units on Location
6. Barge Supervisor
7. Ballast Control Operator

TABLE 10.920-2.—SUBJECTS FOR MODU LICENSES

Examination topics	1	2	3	4	5	6	7
Watchkeeping							
COLREGS	X	X	X	X
“Basic Principles for Navigational Watch”	X	X	X	X	X	X
MODU obstruction lights	X	X	X	X
Meteorology and oceanography: Synoptic chart weather forecasting	X	X	X	X	X	X
Characteristics of weather systems ..	X	X	X	X	X	X	X
Ocean current systems	X	X	X	X	X	X
Tide and tidal current publications ...	X	X	X	X	X	X
Stability, ballasting, construction and damage control: Principles of ship construction, structural members	X	X	X	X	X	X	X
Trim and stability	X	X	X	X	X	X	X
Damaged trim and stability countermeasures	X	X	X	X	X	X
Stability and trim calculations	X	X	X	X	X	X
Load line requirements	X	X	X	X	X	X	X
Operating manual: Rig characteristics and limitations	X	X	X	X	X	X	X
Hydrostatics data	X	X	X	X	X	X
Tank tables	X	X	X	X	X	X	X
KG limitations	X	X	X	X	X	X
Severe storm instructions	X	X	X	X	X	X	X
Transit instructions ..	X	X	X	X	X
On-station instructions	X	X	X	X	X
Unexpected list or trim	X	X	X	X	X	X
Ballasting procedures	X	X	X	X	X

§ 10.950

TABLE 10.920-2.—SUBJECTS FOR MODU
LICENSES—Continued

Examination topics	1	2	3	4	5	6	7
Operation of bilge system	X	X	X	X	X	X
Leg loading calculations	X	X	X
Completion of variable load form	X	X	X	X	X	X	X
Evaluation of variable load form	X	X	X	X	X	X	X
Emergency procedures	X	X	X	X	X	X	X
Maneuvering and handling:							
Anchoring and anchor handling	X	X	X	X
Heavy weather operations	X	X	X	X	X	X	X
Mooring, positioning	X	X	X	X	X	X
Moving, positioning ..	X	X	X	X
Fire prevention and firefighting appliances:							
Organization of fire drills	X	X	X	X	X	X	X
Classes and chemistry of fire	X	X	X	X	X	X	X
Firefighting systems	X	X	X	X	X	X	X
Firefighting equipment and regulations	X	X	X	X	X	X	X
Basic firefighting and prevention of fires	X	X	X	X	X	X	X
Emergency procedures and contingency plans:							
Temporary repairs ..	X	X	X	X	X
Fire or explosion	X	X	X	X	X	X	X
Abandon unit	X	X	X	X	X	X	X
Man overboard	X	X	X	X	X	X	X
Heavy weather	X	X	X	X	X	X	X
Collision	X	X	X	X	X	X	X
Failure of ballast control system	X	X	X	X	X
Mooring emergencies	X	X	X	X
Blowouts	X	X	X	X	X
H ₂ S safety	X	X	X	X	X
General Engineering—							
Power plants and auxiliary systems:							
Marine engineering terminology	X	X	X	X	X	X	X
Engineering equipment, operations and failures	X	X	X	X	X	X
Offshore drilling operations	X
Deck seamanship—							
general:							
Transfer of personnel	X	X	X	X	X	X
Support boats/helicopters	X	X	X	X	X	X
Cargo stowage and securing	X	X	X	X	X	X
Hazardous materials/dangerous goods precautions	X	X	X	X	X	X
Mooring equipment ..	X	X	X	X	X	X
Crane use procedures and inspections	X	X	X	X	X	X

46 CFR Ch. I (10–1–00 Edition)

TABLE 10.920-2.—SUBJECTS FOR MODU
LICENSES—Continued

Examination topics	1	2	3	4	5	6	7
Medical care:							
Knowledge and use of:							
First aid	X	X	X	X	X	X	X
First response medical action ..	X	X	X	X	X	X	X
Maritime law and regulation:							
National maritime law:							
Certification and documentation of vessels	X	X	X	X	X
Ship sanitation	X	X	X	X	X
Regulations for vessel inspection	X	X	X	X	X
Pollution prevention regulations	X	X	X	X	X	X	X
Licensing and certification regulations	X	X	X	X	X
Rules and regulations for MODUs	X	X	X	X	X	X
International Maritime law:
International Maritime Organization	X	X	X	X	X
International Convention on Load Lines	X	X	X	X	X
MARPOL 73/78	X	X	X	X	X
Personnel Management and Training:							
Ship's business including:							
Required logs and record keeping	X	X	X	X	X	X
Casualty reports and records	X	X	X	X	X
Communications:							
Radio communications and FCC permit	X	X	X	X	X	X
Radiotelephone procedures	X	X	X	X	X	X
Lifesaving/Survival:							
Lifesaving appliance operation (launching, boat handling)	X	X	X	X	X	X	X
Procedures/rules for lifeboats, survival suits, PFDs, life rafts and emergency signals	X	X	X	X	X	X	X
Emergency radio transmissions	X	X	X	X	X	X	X
Survival at sea	X	X	X	X	X	X	X

[CGD 81–059a, 55 FR 14802, Apr. 18, 1990]

§ 10.950 Subjects for engineer licenses.

TABLE 10.950.—SUBJECTS FOR ENGINEER LICENSES

	Unlimited chief engineer		Unlimited 1st asst. engineer		Unlimited 2nd asst. engineer		Unlimited 3rd asst. engineer		Chief engineer limited		A/E Ltd & DDE unlim.		Unin. ind. C/E	Fish. vsl. A/E	DDE Ltd HP		MODU ch. eng.	MODU asst. eng.
	STM	MTR	STM	MTR	STM	MTR	STM	MTR	STM	MTR	STM	MTR	MTR	MTR	STM	MTR		
General Subjects:	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T
Prints and Tables	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P
Pipes, Fittings, Valves	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T
Hydraulics	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P
Blige Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P
Sanitary/Sewerage Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T
Freshwater Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P
Lubricants	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P
Automation Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P-T	P	P
Control Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P-T	P	P
Propellers/Shafting Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P	P
Machine Shop	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P	P
Distilling Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P
Pumps	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P
Compressors	P-T	P-T	P-T	P-T	P	P	P	P	P	P	P	P	P	P	P	P-T	P	P
Administration	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P	P-T	P	P
Governors	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P	P	P	P
Cooling Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P
Bearings	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P
Instruments	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P
Ship Construction and Repair	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P
Theory	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
Steering Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P
Deck Machinery	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P	P
Ventilation Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P	P
Thermodynamics	T	T	T	T	T	T	T	T	T	T	P-T	P-T	P	P	P	P	P	P
Watch Duties	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P-T	P-T	P-T
Refrigeration and Air Conditioning:																		
Theory	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
Air Conditioning Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	T	T	T	T	T	T	T	T
Refrigeration Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P	P
Control Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P	P
Safety	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P
Casualty Control	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P
Electricity:																		
Theory	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T	T
General Maintenance	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	T	T	T	T	T	T	P-T	P-T
Generators	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T
Motors	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T
Motor Controllers	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T
Propulsion Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T
Distribution Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P

TABLE 10.950.—SUBJECTS FOR ENGINEER LICENSES—Continued

	Unlimited chief engineer		Unlimited 1st asst. engineer		Unlimited 2nd asst. engineer		Unlimited 3rd asst. engineer		Chief engineer limited		A/E Ltd & DDE unlim.		Unin. ind. C/E	Fish. vsl. A/E		DDE Ltd HP		MODU ch. eng.	MODU asst. eng.
	STM	MTR	STM	MTR	STM	MTR	STM	MTR	STM	MTR	STM	MTR		STM	MTR	STM	MTR		
Electronic Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P-T	P
Batteries	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Communications	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Safety	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P-T	P-T
Casualty Control	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P-T	P-T
Steam Generators:																			
Steam	P-T	P-T	P-T	P	P-T	P	P-T	P	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Main Boilers	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Auxiliary Boilers	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Feedwater Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Condensate Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Recovery Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Fuel	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Fuel Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Boiler Water	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Control Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Automation Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Safety	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Casualty Control	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Steam Engines:																			
Main Turbine	P-T	P-T	P-T	P-T	P-T	P	P-T	P	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Auxiliary Turbine	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Reciprocating Machines	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Governor Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Control Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Automation Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Lubrication Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Drive Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Safety	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Casualty Control	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Motor:																			
Main Engines	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Auxiliary Engines	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P-T	P	P
Starting Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Lubrication Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Fuel	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Fuel Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Combustion Systems	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P-T	P	P	P	P	P-T	P	P
Intake Systems	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P-T	P	P
Exhaust Systems	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P-T	P	P
Cooling Systems	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P-T	P	P
Supercharging Systems	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P-T	P	P
Drive Systems	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P	P-T	P	P

§ 10.950

Notes:
P=Practical Knowledge.
T=Theoretical Knowledge.
[CGD 81-059, 52 FR 38623 and 38669, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 147, Jan. 4, 1989; CGD 81-059a, 55 FR 14804, Apr. 18, 1990]

§ 10.1001

Subpart J—Ro-Ro Passenger Ships

SOURCE: CGD 95-062, 62 FR 34534, June 26, 1997, unless otherwise noted.

§ 10.1001 Purpose of regulations.

The purpose of the regulations in this subpart is to establish requirements for officers serving on roll-on/roll-off (Ro-Ro) passenger ships.

§ 10.1003 Definition.

Roll-on/roll-off (Ro-Ro) passenger ship means a passenger ship with Ro-Ro cargo spaces or special-category spaces as defined in the Convention for the Safety of Life at Sea, 1974, as amended (SOLAS), to which a SOLAS certificate is issued.

§ 10.1005 General requirement for license-holders.

To serve on a Ro-Ro passenger ship after January 31, 1997, a person licensed as master, chief mate, licensed mate, chief engineer, or licensed engineer shall meet the appropriate requirements of STCW Regulation V/2 and Section A-V/2 of the STCW Code and shall hold documentary evidence to show his or her meeting these requirements.

PART 12—CERTIFICATION OF SEAMEN

Subpart 12.01—General

Sec.

- 12.01-1 Purposes of regulations.
- 12.01-3 Incorporation by reference.
- 12.01-6 Definitions of terms used in this part.
- 12.01-7 Regional Examination Centers.
- 12.01-9 Paperwork approval.

Subpart 12.02—General Requirements for Certification

- 12.02-3 Where documents are issued.
- 12.02-4 Basis for denial of documents.
- 12.02-5 Form in which documents are issued.
- 12.02-7 When documents are required.
- 12.02-9 Application for documents.
- 12.02-10 Applications for documents from aliens.
- 12.02-11 General provisions respecting merchant mariners' documents.
- 12.02-13 Citizenship requirements.
- 12.02-14 Nationality of aliens.
- 12.02-15 Oath requirement.

46 CFR Ch. I (10-1-00 Edition)

- 12.02-17 Rules for the preparation and issuance of documents.
- 12.02-18 Fees.
- 12.02-19 Suspension or revocation of documents.
- 12.02-21 Issuance of documents after revocation.
- 12.02-23 Issuance of duplicate documents.
- 12.02-24 Reporting loss or recovery of continuous discharge book, merchant mariners document, or certificate of discharge.
- 12.02-25 Right of appeal.
- 12.02-27 Requirements for renewal of a merchant mariner's document.
- 12.02-29 Expiration of existing merchant mariner's documents.

Subpart 12.03—Approved and Accepted Training

- 12.03-1 Coast Guard-accepted training other than approved courses.

Subpart 12.05—Able Seamen

- 12.05-1 Certification required.
- 12.05-3 General requirements.
- 12.05-5 Physical requirements.
- 12.05-7 Service or training requirements.
- 12.05-9 Examination and demonstration of ability.
- 12.05-11 General provisions respecting merchant mariner's document endorsed for service as able seamen.

Subpart 12.07 [Reserved]

Subpart 12.10—Lifeboatman

- 12.10-1 Certification required.
- 12.10-3 General requirements.
- 12.10-5 Examination and demonstration of ability.
- 12.10-7 General provisions respecting merchant mariner's document endorsed as lifeboatman.
- 12.10-9 Certificates of proficiency in fast rescue boats.

Subpart 12.13—Persons Designated To Provide Medical Care on Board Ship

- 12.13-1 Documentary evidence required.
- 12.13-3 Basis of documentary evidence.

Subpart 12.15—Qualified Member of the Engine Department

- 12.15-1 Certification required.
- 12.15-3 General requirements.
- 12.15-5 Physical requirements.
- 12.15-7 Service or training requirements.
- 12.15-9 Examination requirements.
- 12.15-11 General provisions respecting merchant mariner's documents endorsed as qualified member of the engine department.

Coast Guard, DOT

§ 12.01-6

- 12.15-13 Deck engine mechanic.
- 12.15-15 Engineman.

Subpart 12.25—Certificates of Service for Ratings Other Than Able Seaman or Qualified Member of the Engine Department

- 12.25-1 Certification required.
- 12.25-10 General requirements.
- 12.25-20 Food handler.
- 12.25-25 Members of Merchant Marine Cadet Corps.
- 12.25-30 Student observers.
- 12.25-35 Apprentice engineers.
- 12.25-40 Apprentice mate.
- 12.25-45 GMDSS At-sea Maintainer.

Subpart 12.30—Ro-Ro Passenger Ships

- 12.30-1 Purpose of regulations.
- 12.30-3 Definitions.
- 12.30-5 General requirements.

AUTHORITY: 31 U.S.C. 9701; 46 U.S.C. 2101, 2103, 2110, 7301, 7302, 7503, 7505, 7701; 49 CFR 1.46.

SOURCE: CGFR 65-50, 30 FR 16640, Dec. 30, 1965, unless otherwise noted.

Subpart 12.01—General

§ 12.01-1 Purposes of regulations.

(a) The purposes of the regulations in this part are to provide—

(1) A comprehensive and adequate means of determining the identity or the qualifications an applicant must possess to be eligible for certification to serve on merchant vessels of the United States; and

(2) A means of determining that an applicant is competent to serve as a “rating forming part of a navigational watch” or a “rating forming part of an engine-room watch”, or is otherwise “designated to perform duties in a periodically unmanned engine-room”, on a seagoing ship, in accordance with the provisions of the International Convention on Standards of Training, Certification and Watchkeeping for Seafarers, 1978, as amended (STCW), and to receive the certificate or endorsement required by STCW.

(b) The regulations in subpart 12.03 of this part prescribe the requirements applicable to all training and assessment associated with meeting the standards of competence established by STCW.

[CGD 95-062, 62 FR 34534, June 26, 1997]

§ 12.01-3 Incorporation by reference.

(a) Certain material is incorporated by reference into this part with the approval of the Director of the Federal Register under 5 U.S.C. 552(a) and 1 CFR part 51. To enforce any edition other than that specified in paragraph (b) of this section, the Coast Guard must publish notice of change in the FEDERAL REGISTER and must ensure that the material is available to the public. All approved material is available for inspection at the Office of the Federal Register, 800 North Capitol Street, NW., suite 700, Washington, DC, and at the U.S. Coast Guard, Office of Operating and Environmental Standards, 2100 Second Street SW., Washington, DC 20593-0001, and is available from the sources indicated in paragraph (b) of this section.

(b) The material approved for incorporation by reference in this part and the sections affected are as follows:

International Maritime Organization (IMO)

4 Albert Embankment, London, SE1 7SR, England

STCW—International Convention on Standards of Training, Certification and Watchkeeping for Seafarers, 1978, as amended in 1995 (STCW Convention), and Seafarer's Training, Certification and Watchkeeping Code (STCW Code)—12.01-1; 12.01-6; 12.02-7; 12.02-11; 12.05-3; 12.05-7; 12.05-11; 12.10-3; 12.10-5; 12.10-7; 12.10-9; 12.10-11; 12.15-3; 12.15-7; 12.25-45; 12.30-5.

[CGD 95-062, 62 FR 34534, June 26, 1997; CGD 95-062, 62 FR 40140, July 25, 1997; USCG-1998-4442, 63 FR 52189, Sept. 30, 1998; USCG-1999-6216, 64 FR 53223, Oct. 1, 1999]

§ 12.01-6 Definitions of terms used in this part.

Approved means approved by the Coast Guard in accordance with 46 CFR 10.302.

Coast Guard-accepted means that the Coast Guard has officially acknowledged in writing that the material or process at issue meets the applicable requirements; that the Coast Guard has issued an official policy statement listing or describing the material or process as meeting the applicable requirements; or that an entity acting on behalf of the Coast Guard under a

Memorandum of Agreement has determined that the material or process meets the applicable requirements.

Conviction means the applicant for a merchant mariner's document has been found guilty by judgment or plea by a court of record of the United States, the District of Columbia or any State or territory of the United States of a criminal felony or misdemeanor or of an offense described in section 205 of the National Driver Register Act of 1982 (49 U.S.C. 30304). If an applicant pleads guilty or no contest, is granted deferred adjudication, or is required by the court to attend classes, make contributions of time or money, receive treatment, submit to any manner of probation or supervision, or forego appeal of a trial court's conviction, then the applicant will be considered to have received a conviction. A later expungement of the conviction will not negate a conviction unless it is proved to the OCMI that the expungement is based upon a showing that the court's earlier conviction was in error.

Designated examiner means a person who has been trained or instructed in techniques of training or assessment and is otherwise qualified to evaluate whether a candidate for a license, document, or endorsement has achieved the level of competence required to hold the license, document, or endorsement. This person may be designated by the Coast Guard, or by a Coast Guard-approved or accepted program of training or assessment. A faculty member employed at a State maritime academy or the U.S. Merchant Marine Academy operated in accordance with regulations in 46 CFR part 310 and instructing in a navigation or engineering course is qualified to serve as a designated examiner in his or her area(s) of specialization without individual evaluation by the Coast Guard.

Evaluation means processing an application, from the point of receipt to approval or rejection of the application, including review of all documents and records submitted with an application as well as those obtained from public records and databases.

Fails a chemical test for dangerous drugs means that the result of a chemical test conducted in accordance with 49 CFR part 40 is reported as "positive"

for the presence of dangerous drugs or drug metabolites in an individual's system by a Medical Review Officer in accordance with that part.

National Driver Register (NDR) means the nationwide repository of information on drivers maintained by the National Highway Traffic Safety Administration as provided under 49 U.S.C. Chapter 303.

NDR listed convictions means a conviction of any of the following motor vehicle-related offenses or comparable offenses:

- (a) Operating a motor vehicle while under the influence of, or impaired by, alcohol or a controlled substance; or
- (b) A traffic violation arising in connection with a fatal traffic accident, reckless driving, or racing on the highways.

Original document means the first merchant mariner's document issued to any person by the Coast Guard.

Passes a chemical test for dangerous drugs means the result of a chemical test conducted in accordance with 49 CFR part 40 is reported as "negative" by a Medical Review Officer in accordance with that part.

Practical demonstration means the performance of an activity under the direct observation of a designated examiner for the purpose of establishing that the performer is sufficiently proficient in a practical skill to meet a specified standard of competence or other objective criterion.

Qualified instructor means a person who has been trained or instructed in instructional techniques and is otherwise qualified to provide required training to candidates for licenses, documents, and endorsements. A faculty member employed or at a State maritime academy or the U.S. Merchant Marine Academy operated in accordance with 46 CFR part 310 and instructing in a navigation or engineering course is qualified to serve as a qualified instructor in his or her area(s) of specialization without individual evaluation by the Coast Guard.

Qualified rating means various categories of Able Seaman, Qualified Member of the Engine Department, Lifeboatman, or Tankerman endorsements on merchant mariner's documents.

Standard of competence means the level of proficiency to be achieved for the proper performance of duties on board vessels in accordance with national and international criteria.

STCW means the International Convention on Standards of Training, Certification and Watchkeeping for Seafarers, 1978, as amended in 1995.

STCW Code means the Seafarer's Training, Certification and Watchkeeping Code.

STCW endorsement means a certificate or endorsement issued in accordance with STCW. An STCW endorsement issued by the Officer in Charge, Marine Inspection (OCMI), will be valid only when accompanied by the appropriate U.S. license or document; and, if the license or document is revoked, then the associated STCW endorsement will no longer be valid for any purpose. References to STCW placed on a U.S. license or merchant mariner's document will suffice as STCW endorsements for the mariner serving on a vessel operating exclusively on a domestic voyage (i.e., to and from U.S. ports or places subject to U.S. jurisdiction).

[CGD 91-002, 58 FR 15238, Mar. 19, 1993, as amended by CGD 91-223, 60 FR 4525, Jan. 23, 1995; CGD 91-212, 60 FR 65487, Dec. 19, 1995; CGD 95-062, 62 FR 34534, June 26, 1997; CGD 97-057, 62 FR 51042, Sept. 30, 1997]

§ 12.01-7 Regional Examination Centers.

Licensing and Certification functions are performed only by the Officer in Charge, Marine Inspection, at the following locations:

Boston, MA	Toledo, OH
New York, NY	San Pedro, CA
Baltimore, MD	San Francisco, CA
Charleston, SC	Seattle, WA
Miami, FL	Anchorage, AK
New Orleans, LA	Juneau, AK
Houston, TX	Honolulu, HI
Memphis, TN	Portland, OR
St. Louis, MO	

Where the term *Officer in Charge, Marine Inspection*, or *Marine Inspection Office* is used within the context of this part it is to mean that *Officer* or *Office* at one of the above listed locations.

[CGD 82-033, 47 FR 28679, July 1, 1982, as amended by CGD 91-002, 58 FR 15239, Mar. 19, 1993; USCG-2000-7790, 65 FR 58458, Sept. 29, 2000]

§ 12.01-9 Paperwork approval.

(a) This section lists the control numbers assigned by the Office of Management and Budget under the Paperwork Reduction Act of 1980 (Pub. L. 96-511) for the reporting and record keeping requirements in this part.

(b) The following control numbers have been assigned to the sections indicated:

(1) OMB 2115-0624—46 CFR 12.02-17 and 12.03-1.

(2) [Reserved]

[CGD 95-062, 62 FR 34535, June 26, 1997]

Subpart 12.02—General Requirements for Certification

§ 12.02-3 Where documents are issued.

(a) Certificates of identification, certificates of service, certificates of efficiency, and continuous discharge books are issued to applicants qualifying therefor at any Marine Inspection Office of the Coast Guard during usual business hours.

(b)(1) Coast Guard Merchant Marine Details abroad are authorized to conduct examinations for upgrading of seamen, but are not prepared to conduct the physical examination where required. Merchant Marine Details will therefore not issue regular certificates, but temporary permits in lieu thereof. Merchant Marine Details will instruct the recipient of each temporary permit to present it to the Officer in Charge, Marine Inspection, upon arrival in the first port in the United States in which a Marine Inspection Office is located in order to exchange it for a permanent certificate.

(2) The temporary permit shall be accepted in a Marine Inspection Office as proof that the bearer has complied with the rules and regulations governing the issuance of certificates, except as noted in the body of the temporary permit. The requirements noted in the exceptions will be complied with as in the case of other applicants.

(3) The written examinations are forwarded to the Commanding Officer, National Maritime Center by Merchant Marine Details, and any Marine Inspection Office at which an applicant with a temporary permit appears may request and obtain the examination in

the case from the Commanding Officer, National Maritime Center. Any Marine Inspection Office which doubts the propriety of issuing a permanent certificate in lieu of a temporary permit which has been issued by a foreign Merchant Marine Detail shall inform the Commanding Officer, National Maritime Center fully as to the circumstances.

[CGFR 65-50, 30 FR 16640, Dec. 30, 1965, as amended by CGD 95-072, 60 FR 50460, Sept. 29, 1995; USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

§ 12.02-4 Basis for denial of documents.

(a) No person who has been convicted by a court of record of a violation of the dangerous drug laws of the United States, the District of Columbia, or any State or territory of the United States is eligible for an original merchant mariner's document, except as provided by the provisions of paragraph (c) of this section. No person who has ever been the user of, or addicted to the use of, a dangerous drug, or has ever been convicted of an offense described in section 205 of the National Driver Register Act of 1982 (49 U.S.C. 30304) due to the addiction or abuse of alcohol is eligible for a merchant mariner's document unless he or she furnishes satisfactory evidence of suitability for service in the merchant marine as provided in paragraph (e) of this section.

(b) An applicant who fails a chemical test for dangerous drugs required by § 12.02-9 will not be issued a merchant mariner's document.

(c) *Criminal Record Review.* The Officer in Charge, Marine Inspection, may require a criminal record check of an applicant for a merchant mariner's document issued as an original or reissued with a new expiration date. An applicant conducting simultaneous merchant mariner's credential transactions shall undergo only one criminal record check. Applicants must provide written disclosure of all prior convictions at the time of application.

(1) If a criminal record check is required by the Officer in Charge, Marine Inspection, applicants shall provide fingerprints at the time of application. The fingerprints will be used to deter-

mine whether the applicant has a record of a criminal conviction. An application may be disapproved if the individual's criminal record leads the Officer in Charge, Marine Inspection to determine that the applicant cannot be entrusted with the duties and responsibilities of the merchant mariner's document for which application is made. If an application is disapproved, the Officer in Charge, Marine Inspection will notify the applicant in writing of the reason(s) for disapproval and advise the applicant that the appeal procedures in § 1.03 of this chapter apply. No examination will be given pending decision on appeal.

(2) The Officer in Charge, Marine Inspection will use table 12.02-4(c) to evaluate applicants for merchant mariner's documents who have criminal convictions. The table lists major categories of criminal activity and is not to be construed as an all-inclusive list. If an applicant is convicted of an offense that does not appear on the list, the Officer in Charge, Marine Inspection will establish an appropriate assessment period using the list as a guide. The assessment period commences when an applicant is no longer incarcerated. The applicant must establish proof of the time incarcerated and periods of probation and parole to the satisfaction of the Officer in Charge, Marine Inspection. The assessment period may include supervised or unsupervised probation or parole. A conviction for a drug offense more than 10 years prior to the date of application will not alone be grounds for denial.

(3) When an applicant has convictions for more than one offense, the minimum assessment period will be the longest minimum in table 12.02-4(c) and table 12.02-4(d) based upon the applicant's convictions; the maximum assessment period will be the longest shown in table 12.02-4(c) and table 12.02-4(d) based upon the applicant's convictions.

(4) If a person with a criminal conviction applies for a merchant mariner's document before the minimum assessment period shown in table 12.02-4(c), or established by the Officer in Charge, Marine Inspection under paragraph (c)(2) of this section has elapsed, then the applicant must provide, as part of

the application package, evidence of suitability for service in the merchant marine. Factors which are evidence of suitability for service in the merchant marine are listed in paragraph (e) of this section. The Officer in Charge, Marine Inspection will consider the applicant's evidence submitted with the application and may issue the merchant mariner's document in less than the listed minimum assessment period if the Officer in Charge, Marine Inspection is satisfied that the applicant is suitable to hold the merchant mariner's document for which he or she has applied. If an application filed before the minimum assessment period has elapsed does not include evidence of suitability for service in the merchant marine, then the application will be considered incomplete and will not be processed by the Officer in Charge, Marine Inspection until the applicant provides the necessary evidence as set forth in paragraph (e) of this section.

(5) If a person with a criminal conviction applies for a merchant mariner's document during the time between the minimum and maximum assessment periods shown in table 12.02-4(c) or established by the Officer in Charge, Marine Inspection under paragraph (c)(2) of this section, then the Officer in Charge, Marine Inspection shall consider the conviction and, unless there are offsetting factors, shall grant the applicant the merchant mariner's document for which he or she has applied. Offsetting factors include such factors as multiple convictions, failure to comply with court orders (e.g., child sup-

port orders), previous failures at rehabilitation or reform, inability to maintain steady employment, or any connection between the crime and the safe operation of a vessel. If the Officer in Charge, Marine Inspection considers the applicant unsuitable for service in the merchant marine at the time of application, the Officer in Charge, Marine Inspection may disapprove the application.

(6) If a person with a criminal conviction applies for a merchant mariner's document after the maximum assessment period shown in table 12.02-4(c) or established by the Officer in Charge, Marine Inspection under paragraph (c)(2) of this section has elapsed, then the Officer in Charge, Marine Inspection will grant the applicant the merchant mariner's document for which he or she has applied unless the Officer in Charge, Marine Inspection considers the applicant still unsuitable for service in the merchant marine. If the Officer in Charge, Marine Inspection disapproves an applicant with a conviction older than the maximum assessment period listed in table 12.02-4(c), the Officer in Charge, Marine Inspection will notify the applicant in writing of the reason(s) for the disapproval including the Officer in Charge, Marine Inspection's reason(s) for considering a conviction older than the maximum assessment period listed in table 12.02-4(c). The Officer in Charge, Marine Inspection will also inform the applicant, in writing, that the reconsideration and appeal procedures contained in § 1.03 of this chapter apply.

TABLE 12.02-4(C)—GUIDELINES FOR EVALUATING APPLICANTS FOR MERCHANT MARINER'S DOCUMENTS WHO HAVE CRIMINAL CONVICTIONS

Crime ¹	Assessment periods	
	Minimum	Maximum
Crimes Against Persons		
Homicide (intentional)	7 years	20 years.
Homicide (unintentional)	5 years	10 years.
Assault (aggravated)	5 years	10 years.
Assault (simple)	1 year	5 years.
Sexual Assault (rape, child molestation)	5 years	10 years.
Other crimes against persons ² .		
Vehicular Crimes		
Conviction involving fatality	1 year	5 years.
Reckless Driving	1 year	2 years.
Racing on the Highway	1 year	2 years.

TABLE 12.02-4(c)—GUIDELINES FOR EVALUATING APPLICANTS FOR MERCHANT MARINER'S DOCUMENTS WHO HAVE CRIMINAL CONVICTIONS—Continued

Crime ¹	Assessment periods	
	Minimum	Maximum
Other vehicular crimes ² .		
Crimes Against Public Safety		
Destruction of Property	5 years	10 years.
Other crimes against public safety ² .		
Crimes Involving National Security		
Terrorism, Acts of Sabotage, Espionage and related offenses	7 years	20 years.
Dangerous Drug Offenses ^{3,4,5}		
Trafficking (sale, distribution, transfer)	5 years	10 years.
Dangerous drugs (Use or possession)	1 year	10 years.
Other dangerous drug convictions ⁶ .		

¹ Conviction of attempts, solicitations, aiding and abetting, accessory after the fact, and conspiracies to commit the criminal conduct listed in this table carry the same minimum and maximum assessment periods provided in the table.

² Other crimes are to be reviewed by the Officer in Charge, Marine Inspection to determine the minimum and maximum assessment periods depending on the nature of the crime.

³ Applicable to original applications only. Any applicant who has ever been the user of, or addicted to the use of, a dangerous drug shall meet the requirements of paragraph (a) of this section. Note: Applicants for reissue of a merchant mariner's document with a new expiration date including a renewal or additional endorsement(s), who have been convicted of a dangerous drug offense while holding a merchant mariner's document, may have their application withheld until appropriate action has been completed by the Officer in Charge, Marine Inspection under the regulations which appear in 46 CFR part 5 governing the administrative actions against merchant mariner credentials.

⁴ The OCMI may consider dangerous drug convictions more than 10 years old only if there has been a dangerous drug conviction within the past 10 years.

⁵ Applicants must demonstrate rehabilitation under paragraph (e) of this section, including applicants with dangerous drug use convictions more than ten years old.

⁶ Other dangerous drug convictions are to be reviewed by the Officer in Charge, Marine Inspection on a case by case basis to determine the appropriate assessment period depending on the nature of the offense.

(d) *National Driver Register.* A merchant mariner's document will not be issued or reissued with a new expiration date unless the applicant consents to a check of the NDR for offenses described in section 205(a)(3)(A) or (B) of the NDR Act (i.e., operation of a motor vehicle while under the influence of, or impaired by, alcohol or a controlled substance; and any traffic violations arising in connection with a fatal traffic accident, reckless driving, or racing on the highways). The Officer in Charge, Marine Inspection will not consider NDR listed civil convictions that are more than 3 years old from the date of request unless that information relates to the current suspension or revocation of the applicant's license to operate a motor vehicle. The Officer in Charge Marine Inspection may determine minimum and maximum assessment periods for NDR listed criminal convictions using table 12.02-4(c). An applicant conducting simultaneous merchant mariner's credential trans-

actions is subject to only one NDR check.

(1) Any application may be disapproved if information from the NDR check leads the Officer in Charge, Marine Inspection to determine that the applicant cannot be entrusted with the duties and responsibilities of the merchant mariner's document for which the application is made. If an application is disapproved, the Officer in Charge, Marine Inspection will notify the applicant in writing of the reason(s) for disapproval and advise the applicant that the appeal procedures in §1.03 of this chapter apply. No examination will be given or merchant mariner's document issued pending decision on appeal.

(2) Prior to disapproving an application because of information received from the NDR, the Officer in Charge, Marine Inspection will make the information available to the applicant for review and written comment. The applicant may submit reports from the

Coast Guard, DOT

§ 12.02-4

applicable State concerning driving record and convictions to the Coast Guard Regional Examination Center (REC) processing the application. The REC will hold an application with NDR listed convictions pending the completion of the evaluation and delivery by the individual of the underlying State records.

(3) The guidelines in table 12.02-4(d) will be used by the Officer in Charge, Marine Inspection when evaluating applicants for merchant mariner's documents who have drug or alcohol related NDR listed convictions. Non-drug or alcohol related NDR listed convictions will be evaluated by the Officer in Charge, Marine Inspection under table 12.02-4(c) as applicable.

(4) An applicant may request an NDR file check for *personal* use in accordance with the Federal Privacy Act of 1974 (Pub. L. 93-579) by contacting the NDR at the following address: National

Driver Register, Nassif Building, 400 7th Street SW., Washington, DC 20590.

(i) Applicants should request Form NDR-PRV or provide the following information on a notarized letter:

- (A) Full legal name;
- (B) Other names used;
- (C) Complete mailing address;
- (D) Driver license number;
- (E) Eye color;
- (F) Social security number;
- (G) Height;
- (H) Weight; and
- (I) Sex.

(ii) The NDR will respond to every valid inquiry including requests which produce no record(s) on the NDR file. Records can be made available, within a reasonable amount of time after the request, for personal inspection and copying during regular working hours at 7:45 a.m. to 4:15 p.m., each day except Federal holidays.

TABLE 12.02-4(D)—GUIDELINES FOR EVALUATING APPLICANTS FOR MERCHANT MARINER'S DOCUMENTS WHO HAVE NDR MOTOR VEHICLE CONVICTIONS INVOLVING DANGEROUS DRUGS OR ALCOHOL¹

No. of convictions	Date of conviction	Assessment period
1	Less than 1 year	1 year from date of conviction.
1	More than 1, less than 3 years ...	Application will be processed, unless suspension, or revocation ² is still in effect. Applicant will be advised that additional conviction(s) may jeopardize merchant mariner credentials.
1	More than 3 years old	Not necessary unless suspension or revocation is still in effect.
2 or more	Any less than 3 years old	1 year since last conviction and at least 3 years from 2nd most recent conviction, unless suspension or revocation is still in effect.
2 or more	All more than 3 years old	Application will be processed unless suspension or revocation is still in effect.

¹ Any applicant who has ever been the user of, or addicted to the use of, a dangerous drug shall meet the requirements of paragraph (a) of this section.

² Suspension or revocation, when referred to in table 12.02-4(d), means a State suspension or revocation of a motor vehicle operator's license.

(e) If an applicant for an original merchant mariner's document has one or more alcohol or dangerous drug related criminal or NDR listed convictions; if the applicant has ever been the user of, or addicted to the use of, a dangerous drug; or if the applicant applies before the minimum assessment period for his or her conviction has elapsed; the Officer in Charge, Marine Inspection may consider the following factors, as applicable, in assessing the applicant's suitability to hold a merchant mariner's document. This list is intended as a guideline. The Officer in Charge, Marine Inspection may con-

sider other factors which he or she judges appropriate, such as:

- (1) Proof of completion of an accredited alcohol- or drug-abuse rehabilitation program.
- (2) Active membership in a rehabilitation or counseling group, such as Alcoholics or Narcotics Anonymous.
- (3) Character references from persons who can attest to the applicant's sobriety, reliability, and suitability for employment in the merchant marine including parole or probation officers.
- (4) Steady employment.

§ 12.02-5

(5) Successful completion of all conditions of parole or probation.

[CGFR 69-116, 35 FR 6860, Apr. 30, 1970, as amended by CGD 91-223, Jan. 23, 1995; CGD 95-072, 60 FR 50460, Sept. 29, 1995; CGD 91-212, 60 FR 65487, Dec. 19, 1995]

§ 12.02-5 Form in which documents are issued.

(a) Every certificate of service, certificate of efficiency, or certificate of identification issued or reissued after November 1, 1945, shall be in the form of a merchant mariner's document, Coast Guard Form CG-2838, and wherever such certificates are mentioned in this part they shall be deemed to include merchant mariner's documents representing such certificates.

(b) Continuous discharge books are issued on Coast Guard Form CG-719.

§ 12.02-7 When documents are required.

(a) Every seaman employed on any merchant vessel of the United States of 100 gross tons or upward, except vessels employed exclusively in trade on the navigable rivers of the United States, shall be issued, at the option of the seaman, a continuous discharge book, a certificate of identification, or merchant mariner's document representing such certificate of identification, which shall be retained by him. This book or certificate of identification or merchant mariner's document will bear a number, and this same number shall be shown on all certificates of service or efficiency issued to the holder of the book or certificate or document. Provisions of this section are not applicable to unrigged vessels except seagoing barges and certain tank barges.

(b) Every seaman, as referred to in paragraph (a) of this section, shall produce a continuous discharge book or certificate of identification or merchant mariner's document representing such a certificate to the United States shipping commissioner before signing Articles of Agreement, and where the seaman is not signed on before a shipping commissioner, one of these documents shall be exhibited to the master of the vessel at the time of his employment. Seamen who do not possess one of these documents may be employed at a foreign port or place.

46 CFR Ch. I (10-1-00 Edition)

(c)(1) Every person employed on any merchant vessel of the United States of 100 gross tons and upward, except those navigating rivers exclusively and the smaller inland lakes, below the rank of licensed officer and registered staff officer, shall possess a valid certificate of service, or merchant mariner's document representing such certificate, issued by an Officer in Charge, Marine Inspection.

(2) No certificate of service or efficiency is required of any person below the rank of licensed officer employed on any unrigged vessel except seagoing barges and certain tank barges.

(3) No certificate of service or efficiency is required of any person below the rank of licensed officer employed on any sail vessel of less than 500 net tons while not carrying passengers for hire and while not operating outside the line dividing inland waters from the high seas, as defined in section 2 of the act of February 19, 1895, as amended (33 U.S.C. 151) and in 33 CFR part 82.

(d) After January 31, 1997, each person serving as a rating forming part of a navigational watch on a seagoing ship of 500 gross tons or more shall hold an STCW endorsement certifying him or her as qualified to perform the navigational function at the support level, in accordance with STCW.

(e) After January 31, 2002, each person serving as a rating forming part of a watch in a manned engine-room or designated to perform duties in a periodically unmanned engine-room, on a seagoing ship driven by main propulsion machinery of 750 kW [1,000 hp] of propulsion power or more, shall hold an STCW endorsement certifying him or her as qualified to perform the marine-engineering function at the support level, in accordance with STCW.

(f) Notwithstanding any other rule in this part, no unlicensed person serving on any of the following vessels needs hold an STCW endorsement, either because he or she is exempt from application of the STCW, or because the vessels are not subject to further obligation under STCW, on account of their special operating conditions as small vessels engaged in domestic voyages:

(1) Small passenger vessels subject to subchapter T or K of title 46, CFR.

(2) Vessels of less than 200 GRT (other than passenger vessels subject to subchapter H of title 46, CFR).

(3) Uninspected passenger vessels as defined in 46 U.S.C. 2101(42).

(4) Fishing vessels as defined in 46 U.S.C. 2101(11)(a).

(5) Fishing vessels used as fish-tender vessels as defined in 46 U.S.C. 2101(11)(c).

(6) Barges as defined in 46 U.S.C. 2101(2), including non-self-propelled mobile offshore-drilling units.

(7) Vessels operating exclusively on the Great Lakes.

[CGFR 65-50, 30 FR 16640, Dec. 30, 1965, as amended by CGD 95-062, 62 FR 34535, June 26, 1997]

§ 12.02-9 Application for documents.

(a) An applicant for a certificate of service, certificate of efficiency, certificate of identification, continuous discharge book, or merchant mariner's document, shall make written application, in duplicate, on Coast Guard Form CG-719-b and shall appear in person before an Officer in Charge, Marine Inspection, or other person authorized to issue documents. This application may be for the certificates or the rating endorsement for which the seaman believes he is qualified. In the case of a seaman applying for his first certificate, other than certificate of identification, the application shall include a request for either a continuous discharge book or a merchant mariner's document representing a certificate of identification, at the option of the applicant.

(b)(1) When the application is submitted for a certificate of identification, certificate of service, certificate of efficiency, merchant mariner's document, or any combination thereof, or a continuous discharge book, the seaman shall furnish three unmounted dull finish photographs of passport type (2 inches by 1½ inches) taken within one year and showing the full face at least one inch in height with head uncovered.

(2) When the application requests a continuous discharge book in addition to a certificate of service or certificate of efficiency or merchant mariner's document one additional photograph shall be furnished.

(c) An applicant for a document where sea service is required shall produce with his application discharges or other documentary evidence of his service, indicating the name of the vessels and dates on which he has had service, in what capacity and on what waters.

(d) If the applicant possesses a continuous discharge book, certificate of identification, or merchant mariner's document representing such certificate, it shall be exhibited at the time of making application for any other document.

(e) Approved applications are valid for 12 months.

(f) Except for applicants requesting an inactive merchant mariner's document renewal under § 12.02-27(g) of this part, to obtain an original issuance of a merchant mariner's document, the first endorsement as an able seaman, lifeboatman, qualified member of the engine department, or tankerman, or a reissuance of a merchant mariner's document with a new expiration date, each applicant shall present evidence of having passed a chemical test for dangerous drugs or of qualifying for an exception from testing in § 16.220 of this subchapter.

(g) Each applicant for an original merchant mariner's document may be required to submit to a criminal record check as required by § 12.02-4(c).

(h) Each applicant for an original merchant mariner's document or a merchant mariner's document reissued with a new expiration date shall comply with the NDR requirements in § 12.02-4(d).

[CGFR 65-50, 30 FR 16640, Dec. 30, 1965, as amended by CGD 74-178, 40 FR 57673, Dec. 11, 1975; CGD 91-211, 59 FR 49300, Sept. 27, 1994; CGD 91-223, 60 FR 4525, Jan. 23, 1995; CGD 91-212, 60 FR 65489, Dec. 19, 1995]

§ 12.02-10 Applications for documents from aliens.

(a) No application from an alien for a certificate of service, certificate of efficiency, certificate of identification, continuous discharge book, or merchant mariner's document shall be accepted unless the alien presents acceptable documentary evidence from the United States Immigration and Naturalization Service that he is lawfully

admitted to the United States for permanent residence.

(b) This evidence may be in the form of an alien registration receipt card issued by the Immigration and Naturalization Service bearing the certification that the alien was admitted to the United States as an immigrant, or a declaration of intention to become a citizen of the United States issued by a naturalization court.

§ 12.02-11 General provisions respecting merchant mariners' documents.

(a) As provided in § 12.02-5, every certificate of service, certificate of efficiency, or certificate of identification issued or reissued shall be in the form of a merchant mariner's document, Coast Guard Form CG-2838.

(b) Any licensed officer or unlicensed seaman currently holding, in a valid status, any of the documents listed in paragraph (a) of this section may, upon request and without examination, be issued a merchant mariner's document.

(c) A merchant mariner's document shall be a certificate of service authorizing the holder to serve in any rating endorsed thereon, or in any lower rating in the same department, or in any rating covered by a general endorsement thereon.

(d)(1) A merchant mariner's document issued to a licensed deck officer will be endorsed for, *any unlicensed rating in the deck department except able seaman*, and will be a certificate of service authorizing the holder to serve in any unlicensed capacity in the deck department except able seaman without being required to present his license. If a licensed deck officer qualifies as able seaman the merchant mariner's document will be endorsed, *any unlicensed rating in the deck department including able seaman*, and such endorsement will be deemed to include a certificate of efficiency as lifeboatman.

(2) A merchant mariner's document issued to an engineer officer licensed for inspected vessels of over 2,000 horsepower will be endorsed for *any unlicensed rating in the engine department*, and will be a certificate of service authorizing the holder to serve in any unlicensed capacity in the engine department without being required to present his license. If a licensed engineer quali-

fies as a lifeboatman, the further endorsement, *lifeboatman*, will be placed on the merchant mariner's document.

(3) A merchant mariner's document issued to a licensed radio officer will be endorsed as follows: *See License as Radio Officer*. If a licensed radio officer qualifies as a lifeboatman, the further endorsement, *Lifeboatman*, will be placed on the merchant mariner's document. Qualifications for other ratings for which a radio officer is eligible may also be endorsed on the document.

(e)(1) A merchant mariner's document issued to a staff officer will be endorsed as follows: *See Certificate of Registry*. The holder of a certificate of registry as chief purser, purser, senior assistant purser, or junior assistant purser may also serve in any capacity in the staff department not requiring a certificate of registry without obtaining an additional endorsement on his merchant mariner's document.

(2) The authorized holder of any valid merchant mariner's document, however endorsed, may serve in any capacity in the staff department of a vessel, except in those capacities requiring registered staff officers: *Provided*, That whenever such service includes the handling of food no person may be so employed unless his document bears the food handler's endorsement "(F.H.)."

(f) A merchant mariner's document endorsed as able seaman or as lifeboatman shall be a certificate of efficiency as lifeboatman.

(g) Every merchant mariner's document shall be a certificate of identification unless the holder also holds a continuous discharge book. The holder of a certificate of identification in the form issued before November 1, 1945, shall surrender that certificate before he is issued a merchant mariner's document.

(h) When a merchant mariner's document is issued, renewed, or endorsed, the Officer in Charge, Marine Inspection, will determine whether the holder of the document is required to hold an STCW endorsement for service on a seagoing vessel, and then, if the holder is qualified, the Officer in Charge, Marine Inspection will issue the appropriate endorsement. The Officer in Charge, Marine Inspection will also

issue an STCW endorsement at other times, if circumstances so require and if the holder of the document is qualified to hold the endorsement. The Officer in Charge, Marine Inspection will issue an STCW endorsement for the following ratings:

(1) A rating forming part of a navigational watch on a seagoing ship of 500 GT or more if the holder of the document is qualified in accordance with STCW Regulation II/4 and Section A-II/4 of the STCW Code, to perform the navigational function at the support level.

(2) A rating forming part of a watch in a manned engine-room, or designated to perform duties in a periodically unmanned engine-room, on a seagoing ship driven by main propulsion machinery of 750 kW [1,000 hp] of propulsion power or more, if the holder is qualified in accordance with STCW Regulation III/4 and Section A-III/4 of the STCW Code, to perform the marine-engineering function at the support level.

(i) At the request of the holder of the document, the Officer in Charge, Marine Inspection may add an endorsement to indicate that a qualified holder has received basic safety-training or instruction required under Chapter VI of STCW.

[CGFR 65-50, 30 FR 16640, Dec. 30, 1965, as amended by CGD 95-062, 62 FR 34535, June 26, 1997]

§ 12.02-13 Citizenship requirements.

(a) Any person making application for a continuous discharge book or a certificate of identification or a merchant mariner's document representing a certificate of identification and claiming to be a citizen of the United States shall present acceptable evidence of such citizenship at the time of making application. No original document shall be issued to any person claiming to be a citizen of the United States until such citizenship is established by acceptable evidence.

(b) Any person who has been issued a continuous discharge book or certificate of identification or merchant mariner's document showing question marks prior to the effective date of this section may at any time produce additional evidence of citizenship to a

shipping commissioner or Officer in Charge, Marine Inspection. If the additional evidence produced satisfies the shipping commissioner or the Officer in Charge, Marine Inspection, to whom it is presented that the same is acceptable evidence of the citizenship of the person, such official may draw lines through the question marks and note the citizenship of the person in the space provided therefor, attesting the change, or reissue the certificate or document. Whenever such changes are made the official making the change shall immediately thereafter notify the Commanding Officer, National Maritime Center.

(c) Acceptable evidence of citizenship is set forth in §10.02-5 of this subchapter.

[CGFR 65-50, 30 FR 16640, Dec. 30, 1965, as amended at 60 FR 50460, Sept. 29, 1995; USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

§ 12.02-14 Nationality of aliens.

(a) Any alien making application for a continuous discharge book or certificate of identification or merchant mariner's document representing a certificate of identification shall present acceptable evidence of nationality at the time of making application. No original document shall be issued to any alien until nationality is established by acceptable evidence.

(b) Any document of an official character showing the country of which the alien is a citizen or subject may be accepted as acceptable evidence of an alien's nationality. The following are examples of such a document:

(1) Declaration of intention to become a citizen of the United States made by the alien after 1929.

(2) A travel document in the nature of a passport issued by the government of the country of which the alien is a citizen or subject.

(3) A certificate issued by the consular representative of the country of which the alien is a citizen or subject.

(c) Should any doubt arise as to whether or not the document presented may be considered as acceptable evidence of the alien's nationality, the

§ 12.02-15

matter shall be referred to the Commanding Officer, National Maritime Center, for decision.

[CGFR 65-50, 30 FR 16640, Dec. 30, 1965, as amended by CGD 95-072, 60 FR 50460, Sept. 29, 1995; USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

§ 12.02-15 Oath requirement.

Applicants for a merchant mariner's document for any rating shall take an oath before an Officer in Charge, Marine Inspection, or other official authorized to give such oath, or a commissioned officer of the Coast Guard authorized to administer oaths under 10 U.S.C. 936 or 14 U.S.C. 636, that they will faithfully and honestly perform all the duties required of them by law and carry out all lawful orders of superior officers on shipboard. Such an oath remains binding for all subsequent merchant mariner's documents issued to a person until the document is surrendered to the Officer in Charge, Marine Inspection.

[CGD 91-211, 59 FR 49300, Sept. 27, 1994]

§ 12.02-17 Rules for the preparation and issuance of documents.

(a) Upon application of a person for a merchant mariner's document, any required examination will be given as soon as practicable.

(b) Upon determining that the applicant satisfactorily meets all requirements for the document and any endorsements requested, the Officer in Charge, Marine Inspection, shall issue the appropriate document to the applicant. A merchant mariner's document is valid for a term of 5 years from the date of issuance. Any document which is renewed or reissued prior to its expiration date automatically becomes void upon issuance of the replacement document.

(c) When a seaman applies for a merchant mariner's document, he must:

- (1) Sign the document; and
- (2) Impress his left thumbprint on the document; or
- (3) Impress his right thumbprint on the document if his left thumb is missing.

(d) A seaman's social security number is placed on his document and is his official identification number for record purposes.

46 CFR Ch. I (10-1-00 Edition)

(e) After July 31, 1998, an applicant for a merchant mariner's document who will be serving on a seagoing vessel of 200 GRT or more shall provide a document issued by a qualified medical practitioner attesting the applicant's medical fitness to perform the functions for which the document is issued.

(f) An applicant for a certificate of service or efficiency who has been duly examined and refused a certificate by an Officer in Charge, Marine Inspection may come before the same Officer in Charge, Marine Inspection for reexamination at any time after the date of the initial examination. The Officer in Charge, Marine Inspection sets the time of reexamination based on the applicant's performance on the initial examination. However, the maximum waiting period after the initial failure will be 30 days, and the maximum waiting period after a second or subsequent failure will be 90 days.

(g) An applicant who has been examined and refused a certificate by an Officer in Charge, Marine Inspection may not make application for examination to any other Officer in Charge, Marine Inspection until 30 days after the applicant's last failure of an examination or reexamination. However, an applicant may apply for examination by another Officer in Charge, Marine Inspection before the expiration of the 30 day period if sanctioned by the Officer in Charge, Marine Inspection who refused the applicant.

[CGFR 65-50, 30 FR 16640, Dec. 30, 1965, as amended by CGD 72-81R, 37 FR 10834, May 31, 1972; 44 FR 21021, Apr. 9, 1979; CGD 91-211, 59 FR 49300, Sept. 27, 1994; CGD 95-062, 62 FR 34535, June 26, 1997]

§ 12.02-18 Fees.

(a) Use table 12.02-18 to determine the fees that you must pay for merchant mariner document activities in this part.

(b) Unless otherwise specified in this part, when two documents are processed on the same application—

(1) *Evaluation fees.* If a merchant mariner document transaction is processed on the same application as a license or certificate of registry transaction, only the license or certificate of registry evaluation fee will be charged;

Coast Guard, DOT

§ 12.02–21

(2) *Examination fees.* If a license examination under part 10 also fulfills the examination requirements in this part for a merchant mariner document, only the fee for the license examination is charged; and

(3) *Issuance fees.* A separate issuance fee will be charged for each document issued.

(c) You may pay—

(1) All fees required by this section when you submit your application; or

(2) A fee for each phase at the following times:

(i) An evaluation fee when you submit your application.

(ii) An examination fee before you take the first examination section.

(iii) An issuance fee before you receive your merchant mariner document.

(d) If you take your examination someplace other than a Regional Examination Center (REC), you must pay the examination fee to the REC at

least one week before your scheduled examination date.

(e) Unless the REC provides additional payment options, your fees may be paid as follows:

(1) Your fee payment must be for the exact amount.

(2) Make your check or money order payable to the U.S. Coast Guard, and write your social security number on the front of each check or money order.

(3) If you pay by mail, you must use either a check or money order.

(4) If you pay in person, you may pay with cash, check, or money order at Coast Guard units where Regional Examination Centers are located.

(f) The Coast Guard may assess charges for collecting delinquent payments or returned checks. The Coast Guard will not provide documentation services to a mariner who owes money for documentation services previously provided.

TABLE 12.02–18—FEES

If you apply for—	And you need—		
	Evaluation—Then the fee is—	Examination—Then the fee is—	Issuance—Then the fee is—
Merchant Mariner Document:			
Original:			
Without endorsement	\$95	n/a	\$45.
With endorsement	\$95	\$140	\$45.
Endorsement for qualified rating	\$95	\$140	\$45.
Upgrade or Raise in Grade	\$95	\$140	\$45.
Renewal without endorsement for qualified rating	\$50	n/a	\$45.
Renewal with endorsement for qualified rating	\$50	\$45	\$45.
Renewal for continuity purposes	n/a	n/a	\$45.
Reissue, Replacement, and Duplicate	n/a	n/a	\$45. ¹
STCW Certification:			
Original	No fee	No fee	No fee.
Renewal	No fee	No fee	No fee.
Other Transactions:			
Duplicate Continuous Discharge Book	n/a	n/a	\$10.
Duplicate record of sea service	n/a	n/a	\$10.
Copy of certificate of discharge	n/a	n/a	\$10.

¹ Duplicate for document lost as result of marine casualty—No Fee.

[USCG–1997–2799, 64 FR 42815, Aug. 5, 1999; 64 FR 53231, Oct. 1, 1999]

§ 12.02–19 Suspension or revocation of documents.

Any certificate of service or of efficiency or merchant mariner's document representing such certificate(s) is subject to suspension or revocation on the same grounds and in the same manner and with like procedure as is provided in the case of suspension or revocation

of licenses of officers under the provisions of 46 U.S.C. Chapter 77.

[CGFR 65–50, 30 FR 16640, Dec. 30, 1965, as amended by CGD 95–028, 62 FR 51196, Sept. 30, 1997]

§ 12.02–21 Issuance of documents after revocation.

(a) An applicant who has had a certificate or other document revoked and

§ 12.02-23

who is applying for certification in the same or any other rating shall state in his application the date of revocation and number or type of the document revoked.

(b) No applicant who has had a certificate or other document revoked will be certificated in the same or any other rating except upon approval of the Commanding Officer, National Maritime Center.

[CGFR 65-50, 30 FR 16640, Dec. 30, 1965, as amended by CGD 95-072, 60 FR 50460, Sept. 29, 1995; USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

§ 12.02-23 Issuance of duplicate documents.

(a) If a seaman loses his continuous discharge book, merchant mariner's document or certificate of discharge by shipwreck or other casualty, he shall be supplied with a reissue of such documents free of charge. The phrase *or other casualty* as used in this section is interpreted to mean any damage to a ship caused by collision, explosion, tornado, wreck or flooding of the ship, such as a tidal wave or a grounding of the ship on a sand bar, or a beaching of the ship on a shore or by fire or other causes in a category with these mentioned.

(b) If a seaman loses a continuous discharge book, merchant mariner's document, or certificate of discharge otherwise than by shipwreck or other casualty and applies for a reissue, the appropriate fee set out in table 12.02-18 in § 12.02-18 is required.

(c) A person entitled to a duplicate merchant mariner's document, duplicate continuous discharge book, copies of certificates of discharge, or record of sea service may obtain the documents by applying at any Regional Examination Center listed in § 12.01-7 by:

(1) Completing the application form provided by the Coast Guard; and

(2) Paying the fee set out in table 12.02-18 in § 12.02-18.

(d) Each person issued a document described in § 12.02-5, shall report to an Officer in Charge, Marine Inspection, its loss.

(e) If a seaman's document or service record is missing, he may obtain a du-

46 CFR Ch. I (10-1-00 Edition)

plicate by following the procedures in paragraph (c) of this section and by:

(1) Signing an affidavit before the Officer in Charge, Marine Inspection, or his designated representative, that explains the loss of his document or service record; and

(2) Submitting at least two photographs for each duplicate document.

(f) No application from an alien for a duplicate merchant mariner's document shall be accepted unless the alien complies with the requirements of § 12.02-10.

[CGFR 65-50, 30 FR 16640, Dec. 30, 1965, as amended by CGFR 71-168, 36 FR 23297, Dec. 8, 1971; CGD 72-81R, 37 FR 10834, May 31, 1972; CGD 91-002, 58 FR 15239, Mar. 19, 1993; USCG-1997-2799, 64 FR 42816, Aug. 5, 1999]

§ 12.02-24 Reporting loss or recovery of continuous discharge book, merchant mariners document, or certificate of discharge.

Whenever a continuous discharge book, merchant mariners document, or certificate of discharge is reported to an Officer in Charge, Marine Inspection (OCMI), as having been stolen, lost, or destroyed, the OCMI shall immediately report the fact by letter to the Commanding Officer, National Maritime Center giving all the facts incident to its loss or destruction. By the same procedure the OCMI shall report the recovery of a continuous discharge book, merchant mariners document or certificate of discharge with all the facts incident to its recovery, and shall forward the recovered book, document, or discharge to the Commanding Officer, National Maritime Center.

[CGD 79-161, 44 FR 70155, Dec. 6, 1979, as amended by CGD 95-072, 60 FR 50460, Sept. 29, 1995; USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

§ 12.02-25 Right of appeal.

Any person directly affected by a decision or action taken under this part, by or on behalf of the Coast Guard, may appeal therefrom in accordance with subpart 1.03 of this chapter.

[CGD 88-033, 54 FR 50379, Dec. 6, 1989]

§ 12.02-27 Requirements for renewal of a merchant mariner's document.

(a) *General.* Except as provided in paragraph (g) of this section, an applicant for renewal of a merchant mariner's document shall establish possession of all of the necessary qualifications before a merchant mariner's document is issued.

(1) Each application must be on a Coast Guard furnished form and accompanied by the evaluation fee established in table 12.02-18 in § 12.02-18. An approved application is valid for 12 months.

(2) The applicant may apply in person at any Regional Examination Center listed in § 12.01-7 or may renew the merchant mariner's document by mail under paragraph (e)(3) of this section.

(3) The applicant shall submit the original or a photocopy of the merchant mariner's document to be renewed. A photocopy must include the front and back of the merchant mariner's document. If requested, the old document will be returned to the applicant.

(4) The expiration date of a merchant mariner's document that was issued without an expiration date is determined in accordance with § 12.02-29.

(5) Each applicant shall comply with § 12.02-09(b)(1) of this part.

(b) *Fitness.* No merchant mariner's document will be renewed if it has been suspended without probation or revoked as a result of action under part 5 of this chapter, or facts which would render a renewal improper have come to the attention of the Coast Guard.

(c) *Professional requirements.* (1) In order to renew a merchant mariner's document endorsed with a qualified rating, the applicant shall comply with one of the following:

(i) Present evidence of at least 1 year of sea service during the past 5 years;

(ii) Pass a comprehensive, open-book exercise covering the general subject matter required by this part for the applicable endorsement or pass an open-book license exercise that covers the same subject matter required for the MMD endorsement;

(iii) Complete an approved refresher training course; or,

(iv) Present evidence of employment in a position closely related to the op-

eration, construction, or repair of vessels (either deck or engineer as appropriate for the endorsement) for at least 3 years during the past 5 years.

(2) There are no professional requirements for renewal of a merchant mariner's document that is not endorsed with any qualified ratings.

(d) *Physical requirements.* (1) An applicant for renewal of a merchant mariner's document endorsed with a qualified rating other than lifeboatman, shall submit a certification by a licensed physician or physician assistant that he or she is in good health and has no physical impairment or medical condition which would render him or her incompetent to perform the ordinary duties of that qualified rating(s). This certification must address visual acuity and hearing in addition to general physical condition, and must have been completed within the previous 12 months.

(2) If the Officer in Charge, Marine Inspection has reason to believe that an applicant suffers from some physical impairment or medical condition which would render the applicant incompetent to perform the duties of the qualified rating(s) (other than lifeboatman), the applicant may be required to submit the results of an examination by a licensed physician or physician assistant that meets the requirements for originally obtaining the rating(s).

(3) An applicant who has lost sight in one eye may renew a merchant mariner's document with qualified ratings, provided the applicant is qualified in all other respects and that the visual acuity in the remaining eye passes the test required in § 10.205(d) of this chapter.

(e) *Special circumstances—*(1) *Reissuance after expiration, Period of grace.* Except as provided in this paragraph, a merchant mariner's document may not be renewed more than 12 months after it has expired. To obtain a reissuance of a merchant mariner's document expired more than 12 months, an applicant shall comply with the requirements of paragraph (f) of this section. When an applicant's merchant mariner's document expires during a time of service with the

Armed Forces and there is no reasonable opportunity for renewal, including by mail, this 12-month period of grace may be extended. The period of military service following the date of merchant mariner's document expiration which precluded renewal may be added to the 12 month period of grace. The 12 month period of grace, and any extension, do not affect the expiration date of the document. A merchant mariner's document, and any endorsements that it contains, are not valid for use after the expiration date.

(2) *Renewal in advance.* A merchant mariner's document may not be renewed more than 12 months before expiration unless it is being renewed in conjunction with a license or certificate of registry which is either due for renewal or being upgraded, or unless the Officer in Charge, Marine Inspection is satisfied that special circumstances exist to justify renewal.

(3) *Renewal by mail.* (i) Applications for renewal of merchant mariner's documents by mail may be sent to any Coast Guard Regional Examination Center. The following documents must be submitted:

(A) A properly completed application on a Coast Guard furnished form, and the evaluation fee required by table 12.02-18 in § 12.02-18.

(B) The document to be renewed, or, if it has not expired, a photocopy of the document, including the back.

(C) A certification from a licensed physician or physician assistant in accordance with paragraph (d) of this section.

(D) Evidence of, or acceptable substitute for, sea service in accordance with paragraph (c) of this section.

(ii) The open-book exercise, if required, may be administered through the mail.

(4) *Concurrent renewal of merchant mariner's documents, and licenses, or certificates of registry.* An applicant for concurrent renewal of more than one merchant mariner credential shall satisfy the individual renewal requirements and pay the applicable fees required by tables in §§ 12.02-18 and 10.109 of this chapter for each merchant mari-

ner's document, license, or certificate of registry being renewed.

(f) *Reissuance of expired merchant mariner's documents.* (1) Whenever an applicant applies for reissuance of a merchant mariner's document endorsed with qualified rating(s) more than 12 months after expiration, in lieu of the requirements of paragraph (c) of this section the applicant shall demonstrate continued professional knowledge for each qualified rating for which reissuance is sought by completing a course approved for this purpose or, by passing the complete examination for each rating, or by passing the examination for a related license required by § 10.209(f)(1) of this chapter. The fees listed in tables in §§ 12.02-18 and 10.109 apply to these examinations.

(2) A merchant mariner's document without any qualified rating endorsements that has been expired more than 12 months shall be reissued in the same manner as a current merchant mariner's document. There are no additional requirements for reissuing merchant mariner's documents without qualified ratings that have been expired more than 12 months.

(g) *Inactive document renewal.* (1) Applicants for renewal of merchant mariner's documents that are endorsed with qualified ratings, who are unwilling or otherwise unable to meet the requirements of paragraphs (c) or (d) of this section may renew the merchant mariner's document, with the following restrictive endorsement placed on the document: "Continuity only; service under document prohibited." Holders of merchant mariner's documents with this *continuity endorsement* may have the prohibition rescinded at any time by satisfying the renewal requirements in paragraphs (c) and (d) of this section and § 12.02-9(f) of this part.

(2) Applications for renewal of a document with the continuity endorsement must include:

(i) The document to be renewed, or, if it is unexpired, a photocopy of the document including the back and,

(ii) A signed statement from the applicant attesting to an awareness of

Coast Guard, DOT

§ 12.03-1

the restriction to be placed on the renewed document and of the requirements for rescinding the continuity endorsement.

[CGD 91-211, 59 FR 49301, Sept. 27, 1994, as amended by CGD 91-223, 60 FR 4525, Jan. 23, 1995; USCG-1997-2799, 64 FR 42816, Aug. 5, 1999]

§ 12.02-29 Expiration of existing merchant mariner's documents.

The expiration year of a merchant mariner's document issued without an expiration date is calculated by adding 5-year increments to the issuance date of the document, up to the first applicable year falling between 1995 and 1999, inclusive. The day and month of expiration are the same as that of issuance. Table 12.02-29 is provided as an aid for calculating the expiration date of a document issued without an expiration date. A merchant mariner's document is not valid for use after the expiration date calculated under this section, but may be renewed in accordance with the requirements of § 12.02-27.

TABLE 12.02-29.—EXPIRATION OF MERCHANT MARINER'S DOCUMENTS ISSUED WITH NO EXPIRATION DATE ¹

Expiration year				
1999	1998	1997	1996	1995
Issue Year				
1994	1993	1992	1991	1990
1989	1988	1987	1986	1985
1984	1983	1982	1981	1980
1979	1978	1977	1976	1975
1974	1973	1972	1971	1970
1969	1968	1967	1966	1965
1964	1963	1962	1961	1960
1959	1958	1957	1956	1955
1954	1953	1952	1951	1950
1949	1948	1947	1946	1945
1944	1943	1942	1941	1940
1939	1938	1937

¹Find the year in which the merchant mariner's document was issued (Issue Year), then move up the column to find the Expiration Year. Month and day of expiration correspond to the month and day of issue.

[CGD 91-211, 59 FR 49302, Sept. 27, 1994]

Subpart 12.03—Approved and Accepted Training

§ 12.03-1 Coast Guard-accepted training other than approved courses.

(a) When the training and assessment of competence required by part 10 of this chapter or by this part 12 are not subject to approval under § 10.302 of this chapter, but are used to qualify to hold an STCW certificate or endorsement for service on or after February 1, 2002, the training and assessment must meet the following requirements:

(1) The training and assessment must have written, clearly defined objectives that emphasize specific knowledge, skills, and abilities, and that include criteria to be used in establishing a student's successful achievement of the training objectives.

(2) The training must be set out in a written syllabus that conforms to a Coast Guard-accepted outline for such training and includes—

(i) The sequence of subjects to be covered;

(ii) The number of hours to be devoted to instruction in relevant areas of knowledge;

(iii) The identity and professional qualifications of the instructor(s) to be conducting the training or providing instruction;

(iv) The identity of other media or facilities to be used in conducting the training; and

(v) Measurements at appropriate intervals of each candidate's progress toward acquisition of the specific knowledge, skills, and abilities stated in the training objectives.

(3) Except as provided in paragraph (a)(4) of this section, documentary evidence must be readily available to establish that all instructors—

(i) Have experience, training, or instruction in effective instructional techniques;

(ii) Are qualified in the task for which the training is being conducted; and

(iii) Hold the level of license, endorsement, or other professional credential required of those who would apply, on board a vessel, the relevant level of knowledge, skills, and abilities described in the training objectives.

(4) Neither a specialist in a particular field of non-maritime education, such as mathematics or first aid, nor a person with at least 3 years of service as a member of the Armed Forces of the United States, specializing in a particular field, need hold a maritime license or document to conduct training in that field.

(5) A simulator may be used in training if—

(i) The simulator meets applicable performance standards;

(ii) The instructor has gained practical operational experience on the particular type of simulator being used; and

(iii) The instructor has received appropriate guidance in instructional techniques involving the use of simulators.

(6) Essential equipment and instructional materials must afford each student adequate opportunity to participate in exercises and acquire practice in performing required skills.

(7) A process for routinely assessing the effectiveness of the instructors, including the use of confidential evaluations by students, is in place.

(8) Documentary evidence is readily available to establish that any evaluation of whether a student is competent in accordance with standards, methods, and criteria set out in part A of the STCW Code is conducted by a designated examiner who has experience, training, or instruction in assessment techniques.

(9) Records of the student's performance are maintained for at least 1 year by the offeror of the training and assessment.

(10) To ensure that the training is meeting its objectives, and the requirements of paragraphs (a) (1) through (9) of this section, its offeror must either—

(i) Be regulated as a maritime academy or marine academy pursuant to 46 CFR part 310; or

(ii) Monitor it in accordance with a Coast Guard-accepted QSS, which must include the following features:

(A) The training must be provisionally certified, on the basis of an initial independent evaluation conducted under a Coast Guard-accepted QSS, as being capable of meeting its stated objective.

(B) The training must be periodically monitored in accordance with the schedule stipulated under the Coast Guard-accepted quality-standards system.

(C) Each person conducting the initial evaluation or the subsequent periodic monitoring of the training shall be knowledgeable about the subjects being evaluated or monitored and about the national and international requirements that apply to the training, and shall not himself or herself be involved in the training and assessment of students.

(D) Each person evaluating or monitoring the training shall enjoy convenient access to all appropriate documents and facilities, and opportunities both to observe all appropriate activities and to conduct confidential interviews when necessary.

(E) Arrangements must be such as to ensure that no person evaluating or monitoring the training is penalized or rewarded, directly or indirectly, by the sponsor of the training for making any particular observations or for reaching any particular conclusions.

(11) Each person conducting the initial evaluation under paragraph (a)(10)(ii)(A) of this section or the periodic monitoring of the training under paragraph (a)(10)(ii)(B) of this section shall communicate his or her conclusions to the Commanding Officer, National Maritime Center, NMC-4B, 4200 Wilson Boulevard, suite 510, Arlington, VA 22203-1804, within 1 month of the completion or the evaluation of the monitoring.

(12) Each offeror of the training shall let the Coast Guard or someone authorized by the Coast Guard observe the records of a student's performance and records otherwise relating to paragraphs (a) (1) through (10) of this section.

(b) The Coast Guard will maintain a list of training each of whose offerors

submits a certificate, initially not less than 45 calendar days before offering training under this section, and annually thereafter, signed by the offeror or its authorized representative, stating that the training fully complies with requirements of this section, and identifying the Coast Guard-accepted QSS being used for independent monitoring. Training on this list will offer the training necessary for licenses and STCW endorsements under this part. The Coast Guard will update this list periodically and make it available to members of the public on request.

(c) If the Coast Guard determines, on the basis of observations or conclusions either of its own or of someone authorized by it to monitor the training, that particular training does not satisfy one or more of the conditions described in paragraph (a) of this section—

(1) The Coast Guard will so notify the offeror of the training by letter, enclosing a report of the observations and conclusions;

(2) The offeror may, within a period specified in the notice, either appeal the observations or conclusions to the Commandant (G-MS) or bring the training into compliance; and

(3) If the appeal is denied—or the deficiency is not corrected in the allotted time, or within any additional period judged by the Coast Guard to be appropriate, considering progress towards compliance—the Coast Guard will remove the training from the list maintained under paragraph (b) of this section until it can verify full compliance; and it may deny applications for licenses for STCW endorsement based in whole or in part on training not on the list, until additional training or assessment is documented.

[CGD 95-062, 62 FR 34536, June 26, 1997, as amended by USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

Subpart 12.05—Able Seamen

§ 12.05-1 Certification required.

(a) Every person employed in a rating as able seaman on any United States vessel requiring certificated able seamen, before signing articles of agreement, shall present to the master, his or her certificate as able seaman

(issued in the form of a merchant mariner's document).

(b) No certificate as able seaman is required of any person employed on any tug or towboat on the bays and sounds connected directly with the seas, or on any unriggered vessel except seagoing barges or tank barges.

(c) The following categories of able seaman are established:

- (1) Able Seaman—Any Waters, Unlimited.
- (2) Able Seaman—Limited.
- (3) Able Seaman—Special.
- (4) Able Seaman—Special (OSV).

[CGD 80-131, 45 FR 69240, Oct. 20, 1980]

§ 12.05-3 General requirements.

(a) To qualify for certification as able seaman an applicant must:

- (1) Be at least 18 years of age;
- (2) Pass the prescribed physical examination;
- (3) Meet the sea service or training requirements set forth in this part;
- (4) Pass an examination demonstrating ability as an able seaman and lifeboatman; and,
- (5) Speak and understand the English language as would be required in performing the general duties of able seaman and during an emergency aboard ship.

(b) An STCW endorsement valid for any period on or after February 1, 2002, will be issued or renewed only when the candidate for certification as an able seaman also produces satisfactory evidence, on the basis of assessment of a practical demonstration of skills and abilities, of having achieved or maintained within the previous 5 years the minimum standards of competence for the following 4 areas of basic safety:

- (1) Personal survival techniques as set out in table A-VI/1-1 of the STCW Code.
 - (2) Fire prevention and fire-fighting as set out in table A-VI/1-2 of the STCW Code.
 - (3) Elementary first aid as set out in table A-VI/1-3 of the STCW Code.
 - (4) Personal safety and social responsibilities as set out in table A-VI/1-4 of the STCW Code.
- (c) An STCW endorsement valid for any period on or after February 1, 2002, will be issued or renewed only when the

§ 12.05-5

candidate for certification as able seaman meets the requirements of STCW Regulation II/4 and of Section A-II/4 of the STCW Code, if the candidate will be serving as a rating forming part of the navigational watch on a seagoing ship of 500 GT or more.

[CGD 80-131, 45 FR 69240, Oct. 20, 1980, as amended by CGD 95-062, 62 FR 34537, June 26, 1997; CGD 95-062, 62 FR 40140, July 25, 1997]

§ 12.05-5 Physical requirements.

(a) All applicants for a certificate of service as able seaman shall be required to pass a physical examination given by a medical officer of the United States Public Health Service and present to the Officer in Charge, Marine Inspection, a certificate executed by the Public Health Service Officer. Such certificate shall attest to the applicant's acuity of vision, color sense, hearing, and general physical condition. In exceptional cases where an applicant would be put to great inconvenience or expense to appear before a medical officer of the United States Public Health Service, the physical examination and certification may be made by any other reputable physician.

(b) The medical examination for an able seaman is the same as for an original license as a deck officer as set forth in § 10.205 of this subchapter. If the applicant is in possession of an unexpired deck license, the Officer in Charge, Marine Inspection, may waive the requirement for a physical examination.

[CGFR 65-50, 30 FR 16640, Dec. 30, 1965, as amended by USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

§ 12.05-7 Service or training requirements.

(a) The minimum service required to qualify an applicant for the various categories of able seaman is as listed in this paragraph.

(1) Able Seaman—Any Waters, Unlimited. Three years service on deck on vessels operating on the oceans or the Great Lakes.

(2) Able Seaman—Limited. Eighteen months service on deck in vessels of 100 gross tons or over which operate in a service not exclusively confined to the rivers and smaller inland lakes of the United States.

46 CFR Ch. I (10-1-00 Edition)

(3) Able Seaman—Special. Twelve months service on deck on vessels operating on the oceans, or the navigable waters of the United States including the Great Lakes.

(4) Able Seaman—Special (OSV). Six months service on deck on vessels operating on the oceans, or the navigable waters of the United States including the Great Lakes.

(5) After July 31, 1998, to receive an STCW endorsement for service as a "rating forming part of a navigational watch" on a seagoing ship of 500 GT or more, the applicant's seagoing service must include training and experience associated with navigational watchkeeping and involve the performance of duties carried out under the direct supervision of the master, the officer in charge of the navigational watch, or a qualified rating forming part of a navigational watch. The training and experience must be sufficient to establish that the candidate has achieved the standard of competence prescribed in table A-II/4 of the STCW Code, in accordance with the methods of demonstrating competence and the criteria for evaluating competence specified in that table.

NOTE: Employment considerations for the various categories of able seaman are contained in § 157.20-15 of this chapter.

(b) Training programs approved by the Commanding Officer, National Maritime Center, may be substituted for the required periods of service on deck as follows:

(1) A graduate of a school ship may be rated as able seaman upon satisfactory completion of the course of instruction. For this purpose, *school ship* is interpreted to mean an institution which offers a complete course of instruction, including a period of at sea training, in the skills appropriate to the rating of able seaman.

(2) Training programs, other than those classified as a school ship, may be substituted for up to one third of the required service on deck. The service/training ratio for each program is determined by the Commanding Officer, National Maritime Center, who may allow a maximum of three days on deck service credit for each day of instruction.

(c) A certificate of service as *Able Seaman, Great Lakes—18 months' service*, is considered equivalent to a certificate of service as *Able Seaman—Limited*.

(d) A certificate of service as Able Seaman with the following route, vessel, or time restrictions is considered equivalent to a certificate of service as *Able Seaman—Special*:

(1) *Any waters—12 months*.

(2) *Tugs and towboats—any waters*.

(3) *Bays and sounds—12 months, vessels 500 gross tons or under not carrying passengers*.

(4) *Seagoing barges—12 months*.

(e) An individual holding a certificate of service endorsed as noted in paragraphs (c) or (d) of this section may have his or her merchant mariner's document endorsed with the equivalent category, upon request.

[CGD 80-131, 45 FR 69240, Oct. 20, 1980, as amended by CGD 95-072, 60 FR 50460, Sept. 29, 1995; CGD 95-062, 62 FR 34537, June 26, 1997; CGD 95-062, 62 FR 40140, July 25, 1997; USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

§ 12.05-9 Examination and demonstration of ability.

(a) Before an applicant is certified as an able seaman, he or she shall prove to the satisfaction of the Coast Guard by oral or other means of examination, and by actual demonstration, his or her knowledge of seamanship and the ability to carry out effectively all the duties that may be required of an able seaman, including those of a lifeboatman. The applicant shall demonstrate that he or she:

(1) Has been trained in all the operations connected with the launching of lifeboats and liferafts, and in the use of oars;

(2) Is acquainted with the practical handling of boats; and

(3) Is capable of taking command of the boat's crew.

(b) The examination, whether administered orally or by other means, must be conducted only in the English language and must consist of questions regarding:

(1) Lifeboats and liferafts, the names of their essential parts, and a description of the required equipment;

(2) The clearing away, swinging out, and lowering of lifeboats and liferafts, and handling of lifeboats under oars

and sails, including questions relative to the proper handling of a boat in a heavy sea;

(3) The operation and functions of commonly used types of davits;

(4) The applicant's knowledge of nautical terms; boxing the compass, either by degrees or points according to his experience; running lights, passing signals, and fog signals for vessels on the high seas, in inland waters, or on the Great Lakes depending upon the waters on which the applicant has had service; and distress signals; and,

(5) The applicant's knowledge of commands in handling the wheel by obeying orders passed to him as *wheelman*, and knowledge of the use of engineroom telegraph or bell-pull signals.

(c) In the actual demonstration, the applicant shall show his ability by taking command of a boat and directing the operation of clearing away, swinging out, lowering the boat into the water, and acting as coxswain in charge of the boat under oars. He shall demonstrate his ability to row by actually pulling an oar in the boat. He shall also demonstrate knowledge of the principal knots, bends, splices, and hitches in common use by actually making them.

(c-1) The applicant must demonstrate to the satisfaction of the Officer in Charge, Marine Inspection, his knowledge of pollution laws and regulations, procedures for discharge containment and cleanup, and methods for disposal of sludge and waste material from cargo and fueling operations.

(d) Any person who is in valid possession of a certificate as able seaman endorsed, *any waters—12 months* and who can produce documentary evidence of sufficient service to qualify for a certificate as able seaman endorsed, *any waters—unlimited*, may be issued a new document bearing this endorsement without additional professional examination. The applicant shall surrender for cancellation the document bearing the limited endorsement. No physical examination will be required at the time of this exchange unless it is found that the applicant obviously suffers from some physical or mental infirmity to a degree that in the opinion of

§ 12.05–11

the Officer in Charge, Marine Inspection, would render him incompetent to perform the usual duties of an able seaman at sea. If such condition is believed to exist, the applicant shall be required to undergo an examination by a medical officer of the Public Health Service to determine his competency.

[CGFR 65–50, 30 FR 16640, Dec. 30, 1965, as amended by CGD 71–161R, 37 FR 28263, Dec. 21, 1972; CGD 94–029, 61 FR 47064, Sept. 6, 1996]

§ 12.05–11 General provisions respecting merchant mariner's document endorsed for service as able seamen.

(a) The holder of a merchant mariner's document endorsed for the rating of able seamen may serve in any unlicensed rating in the deck department without obtaining an additional endorsement; *provided*, however, that the holder shall hold the appropriate STCW endorsement when serving in as a "rating forming part of a navigational watch" on a seagoing ship of 500 GT or more.

(b) A merchant mariner's document endorsed as able seaman will also be considered a certificate of efficiency as lifeboatman without further endorsement.

(c) This type of document will describe clearly the type of able seaman certificate which it represents, e.g.: able seaman—any waters; able seaman—any waters, 12 months; able seaman—Great Lakes, 18 months; able seaman—on freight vessels, 500 gross tons or less on bays or sounds, and on tugs, towboats, and barges on any waters.

[CGFR 65–50, 30 FR 16640, Dec. 30, 1965, as amended by CGD 95–062, 62 FR 34537, June 26, 1997]

Subpart 12.07 [Reserved]

Subpart 12.10—Lifeboatman

§ 12.10–1 Certification required.

Every person employed in a rating as lifeboatman on any United States vessel requiring certificated lifeboatmen shall produce a certificate as lifeboatman or merchant mariner's document endorsed as lifeboatman or able seaman to the shipping commis-

46 CFR Ch. I (10–1–00 Edition)

sioner, United States collector or deputy collector of customs, or master before signing articles of agreement. No certificate of efficiency as lifeboatman is required of any person employed on any unrigged vessel, except on a seagoing barge and on a tank barge navigating waters other than rivers and/or canals.

§ 12.10–3 General requirements.

(a) An applicant to be eligible for certification as lifeboatman must meet one of the following requirements:

(1) At least 1 year's sea service in the deck department, or at least 2 years' sea service in the other departments of ocean, coastwise, Great Lakes, and other lakes, bays, or sounds vessels.

(2) Graduation from a schoolship approved by and conducted under rules prescribed by the Commanding Officer, National Maritime Center.

(3) Satisfactory completion of basic training by a Cadet of the United States Merchant Marine Cadet Corps.

(4) Satisfactory completion of 3 years' training at the U.S. Naval Academy or the U.S. Coast Guard Academy including two training cruises.

(5) Satisfactory completion of a course of training approved by the Commanding Officer, National Maritime Center, and served aboard a training vessel.

(6) Successful completion of a training course, approved by the Commanding Officer, National Maritime Center, such course to include a minimum of 30 hours' actual lifeboat training; *provided*, however, that the applicant produces satisfactory evidence of having served a minimum of 6 months at sea board ocean or coastwise vessels.

(b) An applicant, to be eligible for certification as lifeboatman, shall be able to speak and understand the English language as would be required in the rating of lifeboatman and in an emergency aboard ship.

(c) An applicant shall be 18 years old to be certified as proficient in survival craft under STCW Regulation VI/2.

[CGFR 65–50, 30 FR 16640, Dec. 30, 1965, as amended by CGD 95–072, 60 FR 50460, Sept. 29, 1995; CGD 95–062, 62 FR 34537, June 26, 1997; USCG–1998–4442, 63 FR 52189, Sept. 30, 1998]

Coast Guard, DOT

§ 12.13-1

§ 12.10-5 Examination and demonstration of ability.

(a) Before an applicant is certified as a lifeboatman, he or she shall prove to the satisfaction of the Coast Guard by oral or other means of examination, and by actual demonstration, his or her knowledge of seamanship and the ability to carry out effectively all the duties that may be required of a lifeboatman. The applicant shall demonstrate that he or she:

(1) Has been trained in all the operations connected with the launching of lifeboats and liferafts, and in the use of oars;

(2) Is acquainted with the practical handling of boats; and

(3) Is capable of taking command of the boat's crew.

(b) The examination, whether administered orally or by other means, must be conducted only in the English language and must consist of questions regarding:

(1) Lifeboats and liferafts, the names of their essential parts, and a description of the required equipment;

(2) The clearing away, swinging out, and lowering of lifeboats and liferafts, the handling of lifeboats under oars and sails, including questions relative to the proper handling of a boat in a heavy sea; and,

(3) The operation and functions of commonly used types of davits.

(c) The practical examination shall consist of a demonstration of the applicant's ability to carry out the orders incident to launching lifeboats, and the use of the boat's sail, and to row.

(d) After July 31, 1998, each applicant for a lifeboatman's certificate endorsed for proficiency in survival craft and rescue boats shall be not less than 18 years old and shall produce satisfactory evidence that he or she meets the requirements of STCW Regulation VI/2, paragraph 1, and the appropriate provisions of Section A-VI/2 of the STCW Code.

[CGFR 60-50, 30 FR 16640, Dec. 30, 1965, as amended by CGD 71-161R, 37 FR 28263, Dec. 21, 1972; CGD 94-029, 61 FR 47064, Sept. 6, 1996; CGD 95-062, 62 FR 34537, June 26, 1997]

§ 12.10-7 General provisions respecting merchant mariner's document endorsed as lifeboatman.

A merchant mariner's document endorsed as able seaman is the equivalent of a certificate as lifeboatman or of an endorsement as lifeboatman and will be accepted as either of these wherever either is required by law; *provided*, however, that, when the holder documented as an able seaman has to be certificated as either proficient in survival craft and rescue boats or proficient in fast rescue boats, he or she shall hold an STCW endorsement.

[CGD 95-062, 62 FR 34537, June 26, 1997; CGD 95-062, 62 FR 40140, July 25, 1997]

§ 12.10-9 Certificates of proficiency in fast rescue boats.

(a) After July 31, 1998, each person engaged or employed as a lifeboatman proficient in fast rescue boats shall hold either a certificate of proficiency in these boats or a merchant mariner's document endorsed for proficiency in them.

(b) To be eligible for either a certificate of proficiency in fast rescue boats or a merchant mariner's document endorsed for proficiency in them, an applicant shall—

(1) Be qualified as a lifeboatman with proficiency in survival craft and fast rescue boats under this subpart; and

(2) Furnish satisfactory proof that he or she has met the requirements for training and competence of STCW Regulation, VI/2, paragraph 2, and the appropriate requirements of Section A-VI/2 of the STCW Code.

[CGD 95-062, 62 FR 34537, June 26, 1997]

Subpart 12.13—Persons Designated To Provide Medical Care on Board Ship

SOURCE: CGD 95-062, 62 FR 34537, June 26, 1997, unless otherwise noted.

§ 12.13-1 Documentary evidence required.

After July 31, 1998, each person designated to provide medical first aid on board ship, or to take charge of medical care on board ship, shall hold documentary evidence attesting that the

§ 12.13-3

person has attended a course of training in medical first aid or medical care, as appropriate.

§ 12.13-3 Basis of documentary evidence.

The Officer in Charge, Marine Inspection will issue such documentary evidence to the person, or endorse his or her license or document, on being satisfied that the training required under section 12.13-1 of this section establishes that he or she meets the standards of competence set out in STCW Regulation VI/4 and Section A-VI/4 of the STCW Code.

Subpart 12.15—Qualified Member of the Engine Department

§ 12.15-1 Certification required.

(a) Every person employed in a rating as qualified member of the engine department on any United States vessel requiring certificated qualified members of the engine department shall produce a certificate as qualified member of the engine department to the shipping commissioner, United States Collector or Deputy Collector of Customs, or master before signing articles of agreement.

(b) No certificate as qualified member of the engine department is required of any person employed on any unrigged vessel, except seagoing barges.

§ 12.15-3 General requirements.

(a) A qualified member of the engine department is any person below the rating of licensed officer and above the rating of coal passer or wiper, who holds a certificate of service as such qualified member of the engine department issued by the Coast Guard or predecessor authority.

(b) For purposes of administering this part the rating of *assistant electrician* is considered a rating not above that of coal passer or wiper, but equal thereto.

(c) An applicant, to be eligible for certification as qualified member of the engine department, shall be able to speak and understand the English language as would be required in the rating of qualified member of the engine

46 CFR Ch. I (10-1-00 Edition)

department and in an emergency aboard ship.

(d) After July 31, 1998, an STCW endorsement valid for any period on or after February 1, 2002, will be issued or renewed only when the candidate for certification as a qualified member of the engine department also produces satisfactory evidence, on the basis of assessment of a practical demonstration of skills and abilities, of having achieved or maintained within the previous 5 years the minimum standards of competence for the following 4 areas of basic safety:

(1) Personal survival techniques as set out in table A-VI/1-1 of the STCW Code.

(2) Fire prevention and fire-fighting as set out in table A-VI/1-2 of the STCW Code.

(3) Elementary first aid as set out in table A-VI/1-3 of the STCW Code.

(4) Personal safety and social responsibilities as set out in table A-VI/1-4 of the STCW Code.

(e) After July 31, 1998 an STCW endorsement that is valid for any period on or after February 1, 2002, will be issued or renewed only when the candidate for certification as a qualified member of the engine department meets the standards of competence set out in STCW Regulation III/4 and Section A-III/4 of the STCW Code, if the candidate will be serving as a rating forming part of a watch in a manned engine-room, or designated to perform duties in a periodically unmanned engine-room, on a seagoing ship driven by main propulsion machinery of 750 kW [1,000 hp] propulsion power or more.

[CGFR 65-50, 30 FR 16640, Dec. 30, 1965, as amended by CGD 95-062, 62 FR 34538, June 26, 1997; USCG-2000-7790, 65 FR 58458, Sept. 29, 2000]

§ 12.15-5 Physical requirements.

(a) An applicant for a certificate of service as a qualified member of the engine department shall present a certificate of a medical officer of the United States Public Health Service, or other reputable physician attesting that his eyesight, hearing, and physical condition are such that he can perform the duties required of a qualified member of the engine department.

Coast Guard, DOT

§ 12.15-9

(b) The medical examination for qualified member of the engine department is the same as for an original license as engineer, as set forth in § 10.205 of this subchapter. If the applicant is in possession of an unexpired license, the Officer in Charge, Marine Inspection, may waive the requirement for a physical examination.

(c) An applicant holding a certificate of service for a particular rating as qualified member of the engine department and desiring certification for another rating covered by this same form of certificate may qualify therefor without a physical examination unless the Officer in Charge, Marine Inspection, finds that the applicant obviously suffers from some physical or mental infirmity to a degree that would render him incompetent to perform the ordinary duties of a qualified member of the engine department. In this event the applicant shall be required to undergo an examination to determine his competency.

[CGFR 65-50, 30 FR 16640, Dec. 30, 1965, as amended by USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

§ 12.15-7 Service or training requirements.

(a) An applicant for a certificate of service as qualified member of the engine department shall furnish the Coast Guard proof of qualification based on six months' service in a rating at least equal to that of wiper or coal passer.

(b) Training programs approved by the Commanding Officer, National Maritime Center, may be substituted for the required service at sea in accordance with the following:

(1) A graduate of a school ship may be rated as qualified member of the engine department upon satisfactory completion of the course of instruction. For this purpose, *school ship* is interpreted to mean an institution which offers a complete course of instruction, including a period of sea training, in

the skills appropriate to the rating of qualified member of the engine department.

(2) Training programs other than those classified as a school ship may be substituted for up to one-half of the required service at sea.

(c) To qualify to receive an STCW endorsement for service as a "rating forming part of a watch in a manned engine-room or designated to perform duties in a periodically unmanned engine-room" on a seagoing vessel driven by main propulsion machinery 750 kW [1,000 hp] propulsion power or more, an applicant shall prove seagoing service that includes training and experience associated with engine-room watchkeeping and involves the performance of duties carried out under the direct supervision of a qualified engineer officer or a member of a qualified rating. The training must establish that the applicant has achieved the standard of competence prescribed in table A-III/4 of the STCW Code, in accordance with the methods of demonstrating competence and the criteria for evaluating competence specified in that table.

[CGD 80-131, 45 FR 69241, Oct. 20, 1980, as amended by CGD 95-072, 60 FR 50460, Sept. 29, 1995; CGD 95-062, 62 FR 34538, June 26, 1997; CGD 95-062, 62 FR 40140, July 25, 1997; USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

§ 12.15-9 Examination requirements.

(a) Each applicant for certification as a qualified member of the engine department in the rating of oiler, watertender, fireman, deck engineer, refrigeration engineer, junior engineer, electrician, or machinist shall be examined orally or by other means and only in the English language on the subjects listed in paragraph (b) of this section. The applicant's general knowledge of the subjects must be sufficient to satisfy the examiner that he is qualified to perform the duties of the rating for which he makes application.

(b) List of subjects required:

Subjects	Machinist	Refrigerating engineer	Fireman/Watertender	Oiler	Electrician	Junior engineer	Deck engineer
1. Application, maintenance, and use of hand tools and measuring instruments	X	X	X	X	X	X	X
2. Uses of babbitt, copper, brass, steel, and other metals	X	X	X	X	X	X	X

Subjects	Machin- ist	Refrig- erating engi- neer	Fire- man/ Water- tender	Oiler	Elec- trician	Junior engi- neer	Deck engi- neer
3. Methods of measuring pipe, pipe fittings, sheet metal, machine bolts and nuts, packing, etc	X	X	X	X	X	X	X
4. Operation and maintenance of mechanical remote control equipment	X		X	X	X	X	X
5. Precautions to be taken for the prevention of fire and the proper use of firefighting equipment	X	X	X	X	X	X	X
6. Principles of mechanical refrigeration; and functions, operation, and maintenance of various machines and parts of the systems		X		X		X	
7. Knowledge of piping systems as used in ammonia, freon, and CO ₂ , including testing for leaks, operation of bypasses, and making up of joints		X				X	
8. Safety precautions to be observed in the operation of various refrigerating systems, including storage of refrigerants, and the use of gas masks and firefighting equipment	X	X	X	X	X	X	X
9. Combustion of fuels, proper temperature, pressures, and atomization			X	X		X	
10. Operation of the fuel oil system on oil burning boilers, including the transfer and storage of fuel oil			X	X		X	X
11. Hazards involved and the precautions taken against accumulation of oil in furnaces, bilges, floorplates, and tank tops; flarebacks, leaks in fuel oil heaters, clogged strainers and burner tips	X	X	X	X	X	X	
12. Precautions necessary when filling empty boilers, starting up the fuel oil burning system, and raising steam from a cold boiler			X	X		X	
13. The function, operation, and maintenance of the various engineroom auxiliaries	X	X	X	X	X	X	
14. Proper operation of the various types of lubricating systems	X	X	X	X	X	X	X
15. Safety precautions to be observed in connection with the operation of engineroom auxiliaries, electrical machinery, and switchboard equipment	X	X	X	X	X	X	X
16. The function, operation, and maintenance of the bilge, ballast, fire, freshwater, sanitary, and lubricating systems	X	X	X	X		X	X
17. Proper care of spare machine parts and idle equipment	X	X	X	X	X	X	X
18. The procedure in preparing a turbine, reciprocating, or Diesel engine for standby; also the procedure in securing			X	X		X	
19. Operation and maintenance of the equipment necessary for the supply of water to boilers, the dangers of high and low water and remedial action			X	X		X	
20. Operation, location, and maintenance of the various boiler fittings and accessories	X		X	X		X	
21. The practical application and solution of basic electrical calculations (Ohm's law, power formula, etc.)					X	X	X
22. Electrical wiring circuits of the various two-wire and three-wire D.C. systems and the various single-phase and poly-phase A.C. systems					X	X	X
23. Application and characteristics of parallel and series circuits					X	X	X
24. Application and maintenance of electrical meters and instruments					X	X	X
25. The maintenance and installation of lighting and power wiring involving testing for, locating and correcting grounds, short circuits and open circuits, and making splices					X	X	X
26. The operation and maintenance of the various types of generators and motors, both A.C. and D.C.					X	X	X
27. Operation, installation, and maintenance of the various types of electrical controls and safety devices					X	X	X
28. Testing and maintenance of special electrical equipment, such as telegraphs, telephones, alarm systems, fire-detecting systems, and rudder angle indicators					X	X	
29. Rules and Regulations and requirements for installation, repair, and maintenance of electrical wiring and equipment installed aboard ships					X	X	X
29a. Pollution laws and regulations, procedures for discharge containment and cleanup, and methods for disposal of sludge and waste from cargo and fueling operations	X	X	X	X	X	X	
30. Such further examination of a nonmathematical character as the Officer in Charge, Marine Inspection, may consider necessary to establish the applicant's proficiency	X	X	X	X	X	X	X

Coast Guard, DOT

§ 12.15–15

(c) Each applicant for certification as a qualified member of the engine department in the rating of pumpman shall, by oral or other examination, demonstrate sufficient knowledge of the subjects peculiar to that rating to satisfy the Officer in Charge, Marine Inspection, that he or she is qualified to perform the duties of that rating.

(d) Applicants for certification as qualified members of the engine department in the rating of deck engine mechanic or engineman, who have proved eligibility for such endorsement under either § 12.15–13 or § 12.15–15, will not be required to take a written or oral examination for such ratings.

[CGFR 65–50, 30 FR 16640, Dec. 30, 1965, as amended by CGFR 66–46, 31 FR 13649, Oct. 22, 1966; CGD 71–161R, 37 FR 28263, Dec. 21, 1972; CGD 74–75, 42 FR 24741, May 16, 1977; CGD 94–029, 61 FR 47064, Sept. 6, 1996]

§ 12.15–11 General provisions respecting merchant mariner's documents endorsed as qualified member of the engine department.

The holder of a merchant mariner's document endorsed with one or more qualified member of the engine department ratings may serve in any unqualified rating in the engine department without obtaining an additional endorsement. This does not mean that an endorsement of one qualified member of the engine department rating authorizes the holder to serve in all qualified member of the engine department ratings. Each qualified member of the engine department rating for which a holder of a merchant mariner's document is qualified must be endorsed separately. When, however, the applicant qualifies for all ratings covered by a certificate as a qualified member of the engine department, the certification may read *QMED—any rating*. The ratings are as follows:

- (a) Refrigerating engineer.
- (b) Oiler.
- (c) Deck engineer.
- (d) Fireman/Watertender.
- (e) Junior engineer.
- (f) Electrician.
- (g) Machinist.
- (h) Pumpman.
- (i) Deck engine mechanic.

(j) Engineman.

[CGFR 65–50, 30 FR 16640, Dec. 30, 1965, as amended by CGFR 66–46, 31 FR 13649, Oct. 22, 1966; CGD 74–45, 42 FR 24741, May 16, 1977]

§ 12.15–13 Deck engine mechanic.

(a) An applicant for a certificate as *deck engine mechanic* shall be a person holding a merchant mariner's document endorsed as *junior engineer*. The applicant shall be eligible for such certification upon furnishing one of the following:

(1) Satisfactory documentary evidence of sea service of 6 months in the rating of *junior engineer* on steam vessels of 4,000 horsepower or over; or,

(2) Documentary evidence from an operator of an automated vessel that he has completed satisfactorily at least 4 weeks indoctrination and training in the engine department of an automated steam vessel of 4,000 horsepower or over; or,

(3) Satisfactory completion of a course of training for *deck engine mechanic* acceptable to the Commanding Officer, National Maritime Center.

(b) The Officer in Charge, Marine Inspection, who is satisfied that an applicant for the rating of *deck engine mechanic* meets the requirements specified in this section, will endorse this rating on the current merchant mariner's document held by the applicant.

(c) Any holder of a merchant mariner's document endorsed for *any unlicensed rating in the engine department or QMED—any rating* is qualified as a *deck engine mechanic* and that endorsement will not be entered on his document.

[CGFR 66–46, 31 FR 13649, Oct. 22, 1966, as amended by CGD 95–072, 60 FR 50460, Sept. 29, 1995; CGD 95–028, 62 FR 51196, Sept. 30, 1997; USCG–1998–4442, 63 FR 52189, Sept. 30, 1998]

§ 12.15–15 Engineman.

(a) An applicant for a certificate as *engineman* shall be a person holding a merchant mariner's document endorsed as *fireman/watertender* and *oiler*, or *junior engineer*. The applicant shall be eligible for such certification upon furnishing one of the following:

(1) Satisfactory documentary evidence of sea service of 6 months in any one or combination of *junior engineer*, *fireman/watertender* or *oiler* on steam vessels of 4,000 horsepower or over; or,

§ 12.25-1

(2) Documentary evidence from an operator of a *partially automated* steam vessel that he has completed satisfactorily at least 2 weeks indoctrination and training in the engine department of a *partially automated* steam vessel of 4,000 horsepower or over; or

(3) Satisfactory completion of a course of training for *engineman* acceptable to the Commanding Officer, National Maritime Center.

(b) The Officer in Charge, Marine Inspection, who is satisfied that an applicant for the rating of *engineman* meets the requirements specified in this section, will endorse this rating on the current merchant mariner's document held by the applicant.

(c) Any holder of a merchant mariner's document endorsed for *any unlicensed rating in the engine department, QMED—any rating or deck engine mechanic* is qualified as an *engineman* and that endorsement will not be entered on his document.

[CGFR 66-46, 31 FR 13650, Oct. 22, 1966, as amended by CGD 95-072, 60 FR 50460, Sept. 29, 1995; CGD 95-028, 62 FR 51196, Sept. 30, 1997; USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

Subpart 12.25—Certificates of Service for Ratings Other Than Able Seaman or Qualified Member of the Engine Department

§ 12.25-1 Certification required.

Every person employed in a rating other than able seaman or qualified member of the engine department of U.S. merchant vessels requiring such certificated persons shall produce a merchant mariner's document to the master, or person in charge if appropriate, before signing a shipping articles agreement.

[CGD 95-028, 62 FR 51196, Sept. 30, 1997]

§ 12.25-10 General requirements.

(a) Merchant mariner's documents shall be issued without professional examination to applicants for certificates of service as endorsements on merchant mariner's documents in capacities other than able seaman, lifeboatman, tankerman or qualified member of the engine department and shall be endorsed for one or more rat-

46 CFR Ch. I (10-1-00 Edition)

ings. For example, *ordinary seaman—wiper—steward's document (F.H.)*. Holders of documents endorsed for service as *ordinary seaman* may serve in any unqualified rating in the deck department. Holders of documents endorsed for service as *wiper* may serve in any unqualified rating in the engine department. Documents endorsed for *steward's department (F.H.)* will authorize the holder's service in any capacity in the steward's department. (See § 12.02-11(e)(2) for unqualified ratings in the staff department.)

(b) When the holder of a merchant mariner's document has qualified as a food handler, the endorsement of his rating will be followed by the further indorsement (*F.H.*).

§ 12.25-20 Food handler.

No applicant for a rating authorizing the handling of food will be certificated unless he produces a certificate from a medical officer of the United States Public Health Service, or other reputable physician stating that the applicant is free from communicable disease.

§ 12.25-25 Members of Merchant Marine Cadet Corps.

No ratings other than cadet (deck) or cadet (engine) as appropriate, and lifeboatman shall be shown on a merchant mariner's document issued to a member of the U.S. Merchant Marine Cadet Corps. The merchant mariner's document shall also be stamped *Valid only while cadet in the U.S. Maritime Administration training program*. The merchant mariner's document thus prepared shall be surrendered upon the holder being certified in any other rating or being issued a license and the rating of cadet (deck) or cadet (engine) shall be omitted from any new merchant mariner's document issued.

§ 12.25-30 Student observers.

Students in technical schools who are enrolled in courses in marine management and ship operations who present a letter or other documentary evidence that they are so enrolled shall be issued a merchant mariner's document as *student observers—any department* and may be signed on ships as

such. Students holding these documents or certificates will not take the place of any of the crew, or fill any of the regular ratings.

§ 12.25–35 Apprentice engineers.

(a) Persons enrolled in an apprentice engineer training program approved by the Commanding Officer, National Maritime Center, and who present a letter or other documentary evidence that they are so enrolled may be issued a merchant mariner's document as apprentice engineer and may be signed on ships as such. The endorsement apprentice engineer may be in addition to other endorsements. However, this endorsement of apprentice engineer does not authorize the holder to fill any of the regular ratings.

(b) Persons holding merchant mariner's documents with the endorsement apprentice engineer shall be deemed to be seamen.

[CGFR 66–69, 31 FR 15669, Dec. 13, 1966, as amended by CGD 95–072, 60 FR 50460, Sept. 29, 1995; CGD 95–028, 62 FR 51196, Sept. 30, 1997; USCG–1998–4442, 63 FR 52189, Sept. 30, 1998]

§ 12.25–40 Apprentice mate.

A person enrolled in an apprentice mate training program approved by the Commanding Officer, National Maritime Center who presents a letter or other documentary evidence that he is so enrolled may be issued a merchant mariner's document as apprentice mate and may be signed on ships as apprentice mate. The endorsement *apprentice mate* may be in addition to other endorsements. However, this endorsement as apprentice mate does not authorize the holder to fill any of the regular ratings.

[CGD 74–226, 40 FR 33976, Aug. 13, 1975, as amended by CGD 95–072, 60 FR 50460, Sept. 29, 1995; USCG–1998–4442, 63 FR 52189, Sept. 30, 1998]

§ 12.25–45 GMDSS At-sea Maintainer.

An applicant is eligible to have his or her STCW certificate or endorsement include a statement of qualification as GMDSS At-sea Maintainer if he or she holds sufficient evidence of having completed a training program that covers at least the scope and content of training outlined in Section B–IV/2 of the STCW Code for training in mainte-

nance of GMDSS installations on board vessels.

[CGD 95–062, 62 FR 34538, June 26, 1997]

Subpart 12.30—Ro-Ro Passenger Ships

SOURCE: CGD 95–062, 62 FR 34538, June 26, 1997, unless otherwise noted.

§ 12.30–1 Purpose of regulations.

The purpose of the regulations in this subpart is to establish requirements for certification of seamen serving on roll-on/roll-off (Ro-Ro) passenger ships.

[CGD 95–062, 62 FR 34538, June 26, 1997, as amended by CGD 97–057, 62 FR 51042, Sept. 30, 1997]

§ 12.30–3 Definitions.

Roll-on/Roll-off (Ro-Ro) passenger ship means a passenger ship with Ro-Ro cargo spaces or special-category spaces as defined in the International Convention for the Safety of Life at Sea, 1974, as amended (SOLAS), to which ship a SOLAS Certificate is issued.

MMD means merchant mariner's document.

§ 12.30–5 General requirements.

To serve on a Ro-Ro passenger ship after January 31, 1997, a person holding an MMD and performing duties toward safety, cargo-handling, or care for passengers shall meet the appropriate requirements of STCW Regulation V/2 and of Section A–V/2 of the STCW Code, and hold documentary evidence to show his or her meeting these requirements.

PART 13—CERTIFICATION OF TANKER MEN

Subpart A—General

Sec.	
13.101	Purpose.
13.103	Definitions.
13.105	Paperwork approval.
13.107	Tankerman endorsement: General.
13.109	Tankerman endorsement: Authorized cargoes.
13.111	Restricted endorsement.
13.113	Tankermen certified under prior regulations.
13.115	Licensed engineer: Endorsement as Tankerman-Engineer based on service on

§ 13.101

tankships or self-propelled tank vessels before March 31, 1996.

- 13.117 Any person: Endorsement as Tankerman-Assistant based on unlicensed deck service before March 31, 1996.
- 13.119 Expiration of endorsement.
- 13.120 Renewal of endorsement.
- 13.121 Courses for training tankerman.
- 13.123 Recency of service or experience for original tankerman endorsement.
- 13.125 Physical requirements.
- 13.127 Service: General.
- 13.129 Quick-reference table for tankerman.

Subpart B—Requirements for “Tankerman-PIC” Endorsement

- 13.201 Original application for “Tankerman-PIC” endorsement.
- 13.203 Eligibility: Experience.
- 13.205 Proof of service for “Tankerman-PIC” endorsement.
- 13.207 Eligibility: Firefighting course.
- 13.209 Eligibility: Cargo course.

Subpart C—Requirements for “Tankerman-PIC (Barge)” Endorsement

- 13.301 Original application for “Tankerman-PIC (Barge)” endorsement.
- 13.303 Eligibility: Experience.
- 13.305 Proof of service for “Tankerman-PIC (Barge)” endorsement.
- 13.307 Eligibility: Firefighting course.
- 13.309 Eligibility: Cargo course.

Subpart D—Requirements for “Tankerman-Assistant” Endorsement

- 13.401 Original application for “Tankerman-Assistant” endorsement.
- 13.403 Eligibility: Experience.
- 13.405 Proof of service for “Tankerman-Assistant” endorsement.
- 13.407 Eligibility: Firefighting course.
- 13.409 Eligibility: Cargo course.

Subpart E—Requirements for “Tankerman-Engineer” Endorsement

- 13.501 Original application for “Tankerman-Engineer” endorsement.
- 13.503 Eligibility: Experience.
- 13.505 Proof of service for “Tankerman-Engineer” endorsement.
- 13.507 Eligibility: Firefighting course.
- 13.509 Eligibility: Cargo course.

AUTHORITY: 46 U.S.C. 3703, 7317, 8105, 8703, 9102; 49 CFR 1.46.

SOURCE: CGD 79-116, 60 FR 17142, Apr. 4, 1995, unless otherwise noted.

46 CFR Ch. I (10-1-00 Edition)

Subpart A—General

§ 13.101 Purpose.

This part describes the various tankerman endorsements issued by the Coast Guard and prescribes the requirements for obtaining an endorsement as a “Tankerman-PIC,” “Tankerman-PIC (Barge),” “Tankerman-Assistant,” or “Tankerman-Engineer” to a merchant mariner’s document.

§ 13.103 Definitions.

As used in this part:

Approved training means training that is approved by the Coast Guard or meets the requirements of §10.309 of this chapter.

Cargo engineer means a licensed person on a dangerous-liquid tankship or a liquefied-gas tankship whose primary responsibility is maintaining the cargo system and cargo-handling equipment.

Competent person means a person designated as such in accordance with 29 CFR 1915.7.

Dangerous liquid means a liquid listed in 46 CFR 153.40 that is not a liquefied gas as defined in this part. Liquid cargoes in bulk listed in 46 CFR Part 153, Table 2, are not dangerous-liquid cargoes when carried by non-oceangoing barges.

Directly supervised means being in the direct line of sight of the person in charge, or maintaining direct, two-way communications by a convenient, reliable means, such as a predetermined working frequency over a hand-held radio.

DL means dangerous liquid.

IMO means the International Maritime Organization.

Liquefied gas means a cargo that has a vapor pressure of 172 kPa (25 psia) or more at 37.8 C (100 F).

LG means liquefied gas.

Liquid cargo in bulk means a liquid or liquefied gas listed in 46 CFR 153.40 and carried as a liquid cargo or liquid-cargo residue in integral, fixed, or portable tanks, except a liquid cargo carried in a portable tank actually loaded and discharged from a vessel with the contents intact.

Marine chemist means a person certificated by the National Fire Protection Association.

Coast Guard, DOT

§ 13.107

MMD means a merchant mariner's document issued by the Coast Guard.

Officer in Charge, Marine Inspection (OCMI), means, for this part, the officer or individual so designated at one of the locations of the regional examination centers listed in § 10.105.

Participation, when used with regard to the service on transfers required for tankerman by § 13.120, 13.203, or 13.303, means either actual participation in the transfers or close observation of how the transfers are conducted and supervised.

PIC means a person in charge.

Regional examination center (REC) means an office of an OCMI that performs licensing and certification.

Restricted Tankerman endorsement means a valid tankerman endorsement on an MMD restricting its holder as the OCMI deems appropriate—for instance, to one or a combination of the following: A specific cargo or cargoes; a specific vessel or vessels; a specific facility or facilities; a specific employer or employers; a specific activity or activities (such as loading or unloading in a cargo transfer); or a particular area of water.

Self-propelled tank vessel means a self-propelled tank vessel other than a tankship.

Simulated transfer means a transfer practiced in a course meeting the requirements of § 13.121 that uses simulation supplying part of the service on transfers required for tankerman by § 13.203 or 13.303.

Tank barge means a non-self-propelled tank vessel.

Tankship means a self-propelled tank vessel constructed or adapted primarily to carry oil or hazardous material in bulk in the cargo spaces.

Tank vessel means a vessel that is constructed or adapted to carry, or that carries, oil or hazardous material in bulk as cargo or cargo residue, and that—

- (a) Is a vessel of the United States;
- (b) Operates on the navigable waters of the United States; or
- (c) Transfers oil or hazardous material in a port or place subject to the jurisdiction of the United States.

Tankerman-Assistant means a person holding a valid "Tankerman-Assistant" endorsement to his or her MMD.

Tankerman-Engineer means a person holding a valid "Tankerman-Engineer" endorsement to his or her MMD.

Tankerman-PIC means a person holding a valid "Tankerman-PIC" endorsement to his or her MMD.

Tankerman-PIC (Barge) means a person holding a valid "Tankerman-PIC (Barge)" endorsement to his or her MMD.

Tankship means any tank vessel constructed or adapted primarily to carry oil or hazardous material in bulk as cargo or as cargo residue and propelled by power or sail.

Transfer means any movement of dangerous liquid or liquefied gas as cargo in bulk or as cargo residue to, from, or within a vessel by means of pumping, gravitation, or displacement. Section 13.127 describes what qualifies as participation in a creditable transfer.

[CGD 79-116, 60 FR 17142, Apr. 4, 1995, as amended by CGD 79-116, 62 FR 25127, May 8, 1997]

§ 13.105 Paperwork approval.

(a) This section lists the control numbers assigned by the Office of Management and Budget (OMB) under the Paperwork Reduction Act of 1980 [Pub. L. 96-511] for the reporting and record-keeping requirements in this part.

(b) OMB has assigned the following control numbers to the sections indicated:

(1) OMB 2115-0514—46 CFR 13.113, 13.115, 13.117, 13.201, 13.203, 13.205, 13.301, 13.303, 13.305, 13.401, 13.403, 13.405, 13.501, 13.503, 13.505.

(2) OMB 2115-0111—46 CFR 13.121, 13.207, 13.209, 13.307, 13.309, 13.407, 13.409, 13.507, 13.509.

§ 13.107 Tankerman endorsement: General.

(a) If an applicant meets the requirements of subpart B of this part, the OCMI at an REC may endorse his or her MMD as "Tankerman-PIC" with the appropriate cargo classification or classifications. A person holding this endorsement and meeting the other requirements of 33 CFR 155.710(a) may act as a PIC of a transfer of fuel oil, of a transfer of liquid cargo in bulk, or of cargo-tank cleaning on any tank vessel. That person may also act as a

§ 13.109

Tankerman-Engineer, provided that he or she also holds an engineer's license.

(b) If an applicant meets the requirements of subpart C of this part, the OCMI at an REC may endorse his or her MMD as "Tankerman-PIC (Barge)" with the appropriate cargo classification or classifications. A person holding this endorsement and meeting the other requirements of 33 CFR 155.710(b) may act as a PIC of a transfer of liquid cargo in bulk only on a tank barge.

(c) If an applicant meets the requirements of subpart D of this part, the OCMI at an REC may endorse his or her MMD as "Tankerman-Assistant" with the appropriate cargo classification or classifications. No person holding this endorsement may act as a PIC of any transfer of fuel oil, of any transfer of liquid cargo in bulk, or of cargo-tank cleaning unless he or she also holds an endorsement authorizing service as PIC. He or she may, however, without being directly supervised by the PIC, perform duties relative to cargo and cargo-handling equipment assigned by the PIC of transfers of fuel oil, of transfers of liquid cargo in bulk, or of cargo-tank cleaning. When performing these duties, he or she shall maintain continuous two-way voice communications with the PIC.

(d) If an applicant meets the requirements of subpart E of this part, the OCMI at an REC may endorse his or her MMD as Tankerman-Engineer. No person holding this endorsement may act as a PIC or "Tankerman-Assistant" of any transfer of fuel oil, of any transfer of liquid cargo in bulk, or of cargo-tank cleaning unless he or she also holds an endorsement authorizing such service. A person holding this endorsement and acting in this capacity has the primary responsibility, on his or her self-propelled tank vessel carrying DL or LG, for maintaining both the cargo systems and equipment for transfer of liquids in bulk and the bunkering systems and equipment. No person licensed under part 10 of this chapter may serve as a chief engineer, first assistant engineer, or cargo engineer aboard an inspected self-propelled tank vessel when liquid cargo in bulk or cargo residue is carried unless he or she holds this endorsement or equivalent.

46 CFR Ch. I (10–1–00 Edition)

(e) If an applicant meets the requirements of § 13.111, the OCMI at an REC may place on his or her MMD an endorsement as a "Tankerman-PIC" restricted according to the definitions of "restricted Tankerman endorsement" in § 13.103.

(f) A tankerman wishing to obtain an endorsement that he or she does not hold shall apply at an REC listed in § 10.105 of this chapter. If he or she meets all requirements for the new endorsement, the REC may issue a new MMD including the endorsement.

(g) This section does not apply to any person solely by reason of his or her involvement in bunkering or fueling.

[CGD 79-116, 60 FR 17142, Apr. 4, 1995, as amended by CGD 79-116, 62 FR 25127, May 8, 1997]

§ 13.109 Tankerman endorsement: Authorized cargoes.

(a) Each tankerman endorsement described in § 13.107 will expressly limit the holder's service under it to transfers involving one or both of the following cargo classifications:

- (1) Dangerous liquid (DL).
- (2) Liquefied gas (LG).

(b) No tankerman endorsement is necessary to transfer the liquid cargoes in bulk listed in Table 2 of Part 153 of this chapter when those cargoes are carried on barges not certified for ocean service.

(c) A tankerman having qualified in one cargo classification and wishing to qualify in another shall apply at an REC listed in § 10.105 of this chapter. If he or she meets all requirements for the other, the REC may issue a new MMD including the endorsement.

§ 13.111 Restricted endorsement.

(a) An applicant may apply at an REC listed in 46 CFR 10.105 for a tankerman endorsement restricted to specific cargoes, specific vessels or groups of vessels (such as uninspected towing vessels and Oil Spill Response Vessels), specific facilities, specific employers, or otherwise as the OCMI deems appropriate. The OCMI will evaluate each application and may modify the applicable requirements for the endorsement, allowing for special circumstances and for whichever restrictions the endorsement will state.

(b) To qualify for a restricted "Tankerman-PIC" endorsement, an applicant shall meet §§ 13.201, excluding paragraph (f); 13.203; and 13.205.

(1) Twenty-five percent of the service described in § 13.203(a) must have occurred within the past five years.

(2) Two of the transfers described in § 13.203(b) must have occurred within the past five years.

(c) To qualify for a restricted "Tankerman-PIC (Barge)" endorsement, an applicant shall meet §§ 13.301, excluding paragraph (f); and 13.305.

(1) Twenty-five percent of the service described in § 13.303(a) must have occurred within the past five years.

(2) Two of the transfers described in § 13.303(b) must have occurred within the past five years.

(d) To qualify for a restricted "Tankerman-PIC (Barge)" endorsement restricted to a tank-cleaning and gas-freeing facility, an applicant shall—

(1) Be at least 18 years old;

(2) Apply on a Coast Guard form;

(3) Present evidence of passing a physical examination in accordance with § 13.125;

(4) Present evidence in the form of a letter on company letterhead from the operator of the facility stating that OSHA considers the applicant a "competent person" for the facility and that the applicant has the knowledge necessary to supervise tank-cleaning and gas-freeing; and

(5) Be capable of speaking and understanding, in English, all instructions needed to commence, conduct, and complete a transfer of cargo, and of reading the English found in the Declaration of Inspection, vessel response plans, and Cargo Information Cards.

(e) The restricted "Tankerman-PIC (Barge)" endorsement restricted to a tank-cleaning and gas-freeing facility is valid only while the applicant is employed by the operator of the facility that provided the letter of service required by paragraph (d)(4) of this section, and this and any other appropriate restrictions will appear in the endorsement.

(f) Because the International Convention on Standards of Training, Certification and Watchkeeping for Seafarers, 1978 (STCW), does not recognize re-

stricted Tankerman-PIC endorsements, persons may act under these only aboard vessels conducting business inside the Boundary Line.

[CGD 79-116, 60 FR 17142, Apr. 4, 1995, as amended by CGD 79-116, 62 FR 25128, May 8, 1997]

§ 13.113 Tankermen certified under prior regulations.

(a) A person who holds a license issued under part 10 of this chapter, and who as a PIC transferred liquid cargoes in bulk before March 31, 1996, may continue to serve as a "Tankerman-PIC" under the license until the first renewal of his or her MMD under § 12.02-27 of this chapter that occurs after March 31, 1997, or, if he or she holds no MMD, until the first renewal of his or her license that occurs after March 31, 1997, as follows:

(1) A person holding a current license issued under part 10 of this chapter may act as a "Tankerman-PIC" if he or she can produce a letter on company letterhead from the owner, operator, master, or chief engineer of the vessel that proves his or her qualifying service as required by paragraph (d)(1)(iii) of this section.

(2) A person that cannot produce a letter to prove his or her qualifying service may submit relevant evidence to an REC for evaluation. If the OCMI determines that the person does qualify under paragraph (a) of this section, the OCMI will issue a letter of acknowledgment as a substitute for a letter of service.

(b) A person who holds a current "Tankerman" endorsement issued before March 31, 1996, may continue to serve as a Tankerman-PIC (Barge) until the first renewal of his or her MMD under § 12.02-27 of this chapter that occurs after March 31, 1997. If a person with such an endorsement qualifies for a non-tankerman endorsement that requires a new MMD, he or she may bring the tankerman endorsement forward onto the new MMD.

(c) A person who served as PIC for the transfer of liquid cargoes in bulk listed in subchapter O of this chapter but who did not require a tankerman endorsement, because the cargoes were non-flammable or non-combustible, may act as a "Tankerman-PIC

(Barge)” for those liquid cargoes until March 31, 2001, if he or she produces a letter—on company letterhead, from the owner or operator of a terminal or of a tank barge or from the owner, operator, or master of a self-propelled tank vessel—that proves his or her qualifying service as required by paragraph (e)(1)(iii) of this section.

(d) A person who qualifies under paragraph (a) of this section by holding a current license may apply for a “Tankerman-PIC” or a “Tankerman-PIC (Barge)” endorsement under this subpart.

(1) To qualify for a “Tankerman-PIC” endorsement, a licensed officer shall present—

(i) A certificate of completion from a course in shipboard firefighting approved by the Commandant and meeting the basic firefighting section of the IMO’s Resolution A.437(XI), “Training of Crews in Fire Fighting,” or a certificate of completion from a firefighting course before March 31, 1996, that the OCMF finds in substantial compliance with that section;

(ii) Either—

(A) A certificate of completion from a liquid-cargo course in DL or LG approved by the Commandant, appropriate to the endorsement applied for, or a certificate of completion from a liquid-cargo course in DL or LG up to ten years before March 31, 1996, that the OCMF finds acceptable under § 13.121(d) and Table 13.121(f), appropriate to the endorsement applied for; or

(B) A letter on company letterhead from the applicant’s employer stating that the applicant has successfully completed the approved training discussed in § 13.121 (i) or (j); and

(iii) Evidence of service as follows:

(A) A letter on company letterhead from the owner, operator, master, or chief engineer of the vessel attesting that the applicant—

(1) Acted as the PIC of the transfer of DL or LG, appropriate to the endorsement applied for, on self-propelled tank vessels before March 31, 1996; acted as the PIC of the transfer of DL or LG, appropriate to the endorsement applied for within the last 5 years; and accumulated two transfers on self-propelled

tank vessels within the last 10 years; and

(2) Served at least 90 days as a master or mate on self-propelled tank vessels certified to carry DL or LG, appropriate to the endorsement applied for, before March 31, 1996; and acted as a master or mate on self-propelled tank vessels certified to carry DL or LG within the last 10 years.

(B) Certificates of discharge proving at least 90 days of service as master or mate on self-propelled tank vessels certified to carry DL or LG, appropriate to the endorsement applied for, before March 31, 1996, with at least one discharge date within the last 5 years.

(2) To qualify for a “Tankerman-PIC (Barge)” endorsement, a licensed officer shall present—

(i) Either—

(A) A certificate of completion from a course in shipboard firefighting described in paragraph (d)(1)(i) of this section, or from a course in tank-barge firefighting approved by the Commandant; or

(B) A letter on company letterhead from the owner, operator, master, or chief engineer of a tank vessel attesting that before March 31, 1996, the applicant received training in awareness of hazards due to flammability and in firefighting through a program, lecture, or seminar that included hands-on firefighting that the OCMF finds in substantial compliance with § 13.121(g);

(ii) Either—

(A) A certificate of completion from a liquid-cargo course in DL or LG for tankships or tank barges approved by the Commandant, appropriate to the endorsement applied for;

(B) A certificate of completion from a liquid-cargo course in DL or LG for tankships or tank barges up to 10 years before March 31, 1996, that the OCMF determines substantially covers the material required by Table 13.121(f); or

(C) A letter on company letterhead from the applicant’s employer stating that the applicant has successfully completed the approved training discussed in § 13.121(i) or (j); and

(iii) Evidence either—

(A) Of service that satisfies paragraph (d)(1)(iii) of this section, except that for paragraphs (d)(1)(iii) (A)(2) and

Coast Guard, DOT

§ 13.113

(B) 60 days of service on any tank vessel are enough; or

(B) On company letterhead, from the owner or operator of a terminal, or of a tank barge, of service attesting that the applicant both acted as the PIC of the transfer of DL or LG, appropriate to the endorsement applied for, on tank barges, before March 31, 1996, and accumulated two transfers on tank barges within the last 10 years.

(3) To qualify for a restricted endorsement based on grades of cargo handled, a mariner shall—

(i) For a restricted “Tankerman-PIC” endorsement, meet paragraphs (d)(1) (i) and (iii) of this section; or

(ii) For a restricted “Tankerman-PIC (Barge)” endorsement, meet paragraphs (e)(1) (i) and (iii) of this section.

(e) A person who qualifies under paragraph (b) of this section by holding a current “Tankerman” endorsement or under paragraph (c) of this section by having served as PIC for the transfer of liquid cargoes in bulk that are listed in subchapter O but that did not require a tankerman endorsement may apply for a “Tankerman-PIC (Barge)” endorsement under this subpart.

(1) To qualify for a “Tankerman-PIC (Barge)” endorsement, an applicant shall present—

(i) Evidence of training in firefighting in the form of—

(A) A certificate of completion from a course in shipboard firefighting approved by the Commandant and meeting the basic firefighting section of the IMO’s Resolution A.437 (XI), “Training of Crews in Fire Fighting”, or a certificate of completion from such a course before March 31, 1996, that the OCMF finds in substantial compliance with that section;

(B) A certificate of completion from a training course meeting § 13.121 in tank-barge firefighting or a certificate of completion from a course in tank-barge firefighting before March 31, 1996, that the OCMF finds in substantial compliance with § 13.121; or

(C) A letter on company letterhead from the owner, operator, master, or chief engineer attesting that before March 31, 1996, the applicant received training in awareness of flammability

hazards and in firefighting through a program, lecture, or seminar that included hands-on firefighting that the OCMF finds in substantial compliance with § 13.121;

(ii) Either—

(A) A certificate of completion from a liquid-cargo course in DL or LG approved by the Commandant up to 10 years before March 31, 1996, appropriate to the endorsement applied for;

(B) A certificate of completion from a liquid-cargo course in DL or LG up to 10 years before March 31, 1996, that the OCMF determines substantially covers the material required by Table 13.121(f); or

(C) A letter on company letterhead from the applicant’s employer stating that the applicant has successfully completed the approved training discussed in § 13.121 (i) or (j); and

(iii) Evidence on company letterhead from the owner, operator, master, or chief engineer of the vessel, or from the owner or operator of a terminal or of a tank barge, of service attesting that the applicant both acted as the PIC of the transfer of DL or LG, appropriate to the endorsement applied for on self-propelled tank vessels or on tank barges, before March 31, 1996, and accumulated two transfers on self-propelled tank vessels or on tank barges within the last 10 years.

(2) To qualify for a restricted “Tankerman-PIC (Barge)” endorsement, based on his or her cargo-handling experience for the grades handled, an applicant shall meet all the requirements of paragraphs (e)(1) (i) and (iii) of this section.

(f) Each person qualifying under this section shall obtain a tankerman endorsement at the first renewal of his or her MMD under § 12.02-27 of this chapter that occurs after March 31, 1997, except that each person qualifying under paragraph (c) of this section shall obtain the endorsement by March 31, 2001.

(g) The following table relates the experience and training to the endorsement for tankerman certified under prior regulations. The section numbers on the table refer to the specific requirements applicable.

TABLE 13.113.—TANKERMAN CERTIFIED UNDER PRIOR REGULATIONS

Before effective date served as:	Service after effective date but before permanent endorsement:	Requirements for permanent endorsement to an MMD:	Requirements for RE-STRICED endorsement to an MMD:
Licensed Officer	May serve as Tankerman-PIC in accordance with 13.113(a), until first renewal of MMD or license after March 31, 1997.	Section 13.113(d) (1), (2)	Section 13.113(d)(3).
Tankerman with endorsement on MMD.	May serve as Tankerman-PIC (Barge) in accordance with 13.113(B), until first renewal of MMD after March 31, 1997.	Section 13.113(e)(1)	Section 13.113(e)(2).
PIC of non-flammable or non-combustible cargoes listed in Subchapter O.	May serve as Tankerman-PIC (Barge) in accordance with 13.113(c) until March 31, 2001.	Section 13.113(e)(1)	Section 13.113(e)(2).

[CGD 79–116, 60 FR 17142, Apr. 4, 1995, as amended by CGD 79–116, 62 FR 25128, 25129, May 8, 1997]

§ 13.115 Licensed engineer: Endorsement as Tankerman-Engineer based on service on tankships or self-propelled tank vessels before March 31, 1996.

A licensed person with at least 30 days of service as chief engineer, first assistant engineer, or cargo engineer on one or more tankships or self-propelled tank vessels before March 31, 1996, may, at any time until the first renewal of his or her MMD under § 12.02–27 of this chapter that occurs after March 31, 1997, apply for a “Tankerman-Engineer” endorsement under this subpart if he or she presents—

(a) Either—

(1) A letter on company letterhead from the owner, operator, master, or chief engineer of the vessel attesting that the applicant served at least 30 days as chief engineer, first assistant engineer, or cargo engineer on tankships or self-propelled tank vessels certified to carry DL or LG, appropriate to the endorsement applied for, before March 31, 1996, and has so served within the last 5 years; or

(2) Certificates of Discharge proving at least 30 days of service as chief engineer, first assistant engineer, or cargo engineer on tankships or self-propelled tank vessels certified to carry DL or LG, appropriate to the endorsement applied for before March 31, 1996, with a

discharge date within the last 5 years; and

(b) Either—

(1) A certificate of completion from a liquid-cargo course in DL or LG for tankships approved by the Commandant, appropriate to the endorsement applied for;

(2) A certificate of completion from a liquid-cargo course in DL or LG for tankships up to 10 years before March 31, 1996, that the OCMI determines substantially covers the material covered by Table 13.121(f); or

(3) A letter on company letterhead from the applicant’s employer stating that the applicant has successfully completed the approved training discussed in § 13.121 (i) or (j).

[CGD 79–116, 62 FR 25129, May 8, 1997]

§ 13.117 Any person: Endorsement as Tankerman-Assistant based on unlicensed deck service before March 31, 1996.

An applicant with unlicensed deck service on tankships or self-propelled tank vessels before March 31, 1996, may, at any time until the first renewal of his or her MMD under § 12.02–27 of this chapter that occurs after March 31, 1997, apply for a “Tankerman-Assistant” endorsement under this subpart if he or she presents either—

(a) A letter on company letterhead from the owner, operator, or master of the vessel attesting that the applicant performed at least 30 days of deck service or service as a pumpman of tankships or self-propelled tank vessels certified to carry DL or LG appropriate to the endorsement applied for before March 31, 1996, and has so performed within the last 5 years;

(b) Certificates of Discharge proving at least 30 days of deck service or of service as a pumpman on tankships or self-propelled tank vessels certified to carry DL or LG, appropriate to the endorsement applied for, before March 31, 1996, with a discharge date within the last 5 years; or

(c) A certificate of completion from a tanker-familiarization course approved by the Commandant.

[CGD 79-116, 62 FR 25130, May 8, 1997]

§ 13.119 Expiration of endorsement.

An endorsement as tankerman is valid for the duration of the MMD.

§ 13.120 Renewal of endorsement.

An applicant wishing to renew a tankerman's endorsement shall meet the requirements of § 12.02-27 of this chapter for renewing an MMD and prove either participation in at least two transfers within the last 5 years in accordance with § 13.127(b) or completion of an approved course as described in § 10.304.

[CGD 79-116, 62 FR 25130, May 8, 1997]

§ 13.121 Courses for training tankerman.

(a) This section prescribes the requirements, beyond those in §§ 10.203 and 10.303 of this chapter, applicable to schools offering courses required for a tankerman endorsement and courses that are a substitute for experience with transfers of liquid cargo in bulk required for the endorsement.

(b) Upon satisfactory completion of an approved course, each student shall receive a certificate, signed by the head of the school offering the course or by a designated representative, indicating the title of the course, the duration, and, if appropriate, credit allowed towards meeting the transfer requirements of this part.

(c) A course that uses simulated transfers to train students in loading and discharging tank vessels may replace up to 2 loadings and 2 discharges, 1 commencement and 1 completion of loading, and 1 commencement and 1 completion of discharge required for a Tankerman-PIC or Tankerman-PIC (Barge) endorsement. The request for approval of the course must specify those segments of a transfer that the course will simulate. The letter from the Coast Guard approving the course will state the number and kind of segments that the course will replace.

(d) The course in liquid cargo required for an endorsement as—

(1) "Tankerman-PIC DL" is Tankship: Dangerous Liquids;

(2) "Tankerman-PIC (Barge) DL" is Tank Barge: Dangerous Liquids;

(3) "Tankerman-PIC LG" is Tankship: Liquefied Gases;

(4) "Tankerman-PIC (Barge) LG" is Tank Barge: Liquefied Gases;

(5) "Tankerman-Assistant DL" is Familiarization with DL Tankship; and

(6) "Tankerman-Assistant LG" is Familiarization with LG Tankship.

(e) The course in firefighting required for an endorsement as—

(1) "Tankerman-PIC (Barge)" is Tank Barge: Firefighting; and

(2) "Tankerman-PIC", "Tankerman-Assistant", and "Tankerman-Engineer" is a firefighting course that meets the basic firefighting section of the IMO's Resolution A.437 (XI), "Training of Crews in Fire Fighting".

(f) No school may issue a certificate unless the student has successfully completed an approved course with the appropriate curriculum outlined in Table 13.121(f) or § 13.121(h).

(g) An organization with a course in DL or LG or a course in tank-barge firefighting taught before March 31, 1996, that substantially covered the material required by Table 13.121(f) for liquid cargoes, Table 13.121(g) for firefighting, or § 13.121(h) for familiarization with tankships, may seek approval under § 10.302 of this chapter from the Coast Guard for any course taught up to ten years before March 31, 1996.

(h) The Coast Guard will evaluate the curricula of courses for Familiarization with DL and LG Tankships to ensure adequate coverage of the required

subjects. Training may employ classroom instruction, demonstrations, or simulated or actual operations.

(1) The curricula of courses for Familiarization with DL Tankships must consist of the following:

(i) General characteristics, compatibility, reaction, firefighting, and safety precautions for bulk liquid cargoes defined as DL in this part.

(ii) Terminology of tankships carrying oil and other chemicals.

(iii) General arrangement and construction of cargo tanks, vapor control, and venting.

(iv) Cargo-piping systems and valves.

(v) General operation of cargo pumps.

(vi) General discussion of the following operations connected with the loading and discharging of cargo:

(A) Pre-transfer inspection and conference and Declaration of Inspection.

(B) Lining up of the cargo and vapor-control systems and starting of liquid flow.

(C) Connecting and disconnecting of cargo hoses and loading arms.

(D) Loading.

(E) Ballasting and de-ballasting.

(F) Discharging.

(G) Tank-gauging (open and closed).

(vii) Rules of the Coast Guard governing operations in general and prevention of pollution in particular.

(viii) Prevention and control of pollution.

(ix) Emergency procedures.

(x) Safety precautions relative to:

(A) Entering cargo tanks and pump room.

(B) Dangers of contact with skin.

(C) Inhalation of vapors.

(D) Protective clothing and equipment.

(E) Hot work.

(F) Precautions respecting electrical hazards, including hazards of static electricity.

(xi) General principles and procedures of Crude-Oil Washing (COW) Systems and inert-gas systems.

(xii) Tank-cleaning procedures and precautions.

(xiii) Principles and procedures of vapor-control systems.

(xiv) Cargo-hazard-information systems.

(2) To ensure adequate coverage of the required subjects, training may

employ classroom instruction, demonstrations, or simulated or actual operations. The curricula of courses for Familiarization with LG Tankships must consist of the following:

(i) General characteristics, compatibility, reaction, firefighting, and safety precautions for cargoes defined as LG in this part.

(ii) Terminology of tankships carrying LG.

(iii) Physical properties of LG.

(iv) Potential hazards and safety precautions of LG:

(A) Combustion characteristics.

(B) Hot work.

(C) Results of release of LG to the atmosphere.

(D) Health hazards (skin contact, inhalation, and ingestion).

(E) Protective clothing and equipment.

(F) Tank-entry procedures and precautions.

(G) Thermal stresses.

(H) Precautions respecting electrical hazards, including hazards of static electricity.

(v) Cargo-containment systems.

(vi) General arrangement and construction of cargo tanks.

(vii) Cargo-piping systems and valves.

(viii) Instrumentation:

(A) Cargo-level indicators.

(B) Gas-detecting systems.

(C) Systems for monitoring temperatures of hulls and cargoes.

(D) Automatic shut-down systems.

(ix) Heating systems for cofferdams and ballast tanks.

(x) General discussion of the following operations connected with the loading and discharging of cargo:

(A) Pre-transfer inspection and conference and Declaration of Inspection.

(B) Lining up of the cargo and vapor-control systems and starting of liquid flow.

(C) Connecting and disconnecting of cargo hoses and loading arms.

(D) Loading.

(E) Ballasting and de-ballasting.

(F) Discharging.

(xi) Disposal of boil-off.

(xii) Emergency procedures.

(xiii) Rules of the Coast Guard governing operations in general and prevention of pollution in particular.

Coast Guard, DOT

§ 13.121

(xiv) Principles and procedures of IGSs.

(xv) Tank-cleaning procedures and precautions.

(xvi) Principles and procedures of vapor-control systems.

(xvii) Cargo-hazard-information systems.

(i) A company that offers approved DL training for its employees shall ensure discussion of the following topics (further discussed in STCW Regulation V, Section A-V/1, paragraphs 9 through 21):

- (1) Treaties and rules.
- (2) Design and equipment.
- (3) Cargo characteristics.
- (4) Ship operations.
- (5) Repair and maintenance.

(6) Emergency procedures.

(j) A company that offers approved LG training for its employees shall ensure discussion of the following topics (further discussed in STCW Regulation V, Section A-V/1, paragraphs 22 through 34):

- (1) Treaties and rules.
- (2) Chemistry and physics.
- (3) Health hazards.
- (4) Cargo containment.
- (5) Pollution.
- (6) Cargo-handling systems.
- (7) Ship operations.
- (8) Safety practices and equipment.
- (9) Emergency procedures.
- (10) General principles of cargo operations.

TABLE 13.121(F)

Course topics	1	2	3	4
General characteristics, compatibility, reaction, firefighting procedures, and safety precautions for the cargoes of:				
Bulk liquids defined as Dangerous Liquids in 46 CFR Part 13	x	x		
Bulk liquefied gases & their vapors defined as Liquefied Gases in 46 CFR Part 13			x	x
Physical phenomena of liquefied gas, including:				
Basic concept			x	x
Compression and expansion			x	x
Mechanism of heat transfer			x	x
Potential hazards of liquefied gas, including:				
Chemical and physical properties			x	x
Combustion characteristics			x	x
Results of gas release to the atmosphere			x	x
Health hazards (skin contact, inhalation, and ingestion)			x	x
Control of flammability range with inert gas			x	x
Thermal stress in structure and piping of vessel			x	x
Cargo systems, including:				
Principles of containment systems	x	x	x	x
Construction, materials, coating, & insulation of cargo tanks			x	x
General arrangement of cargo tanks	x	x	x	x
Venting and vapor-control systems	x	x	x	x
Cargo-handling systems, including:				
Piping systems, valves, pumps, and expansion systems	x	x	x	x
Operating characteristics	x	x	x	x
Instrumentation systems, including:				
Cargo-level indicators	x	x	x	x
Gas-detecting systems	x		x	x
Temperature-monitoring systems, cargo	x		x	x
Temperature-monitoring systems, hull			x	x
Automatic-shutdown systems	x		x	x
Auxiliary systems, including:				
Ventilation, inerting	x	x	x	x
Valves, including:				
Quick-closing	x	x	x	x
Remote-control	x	x	x	x
Pneumatic	x	x	x	x
Excess-flow	x	x	x	x
Safety-relief	x	x	x	x
Pressure-vacuum	x	x	x	x
Heating-systems: cofferdams & ballast tanks			x	x
Operations connected with the loading and discharging of cargo, including:				
Lining up the cargo and vapor-control systems	x	x	x	x
Pre-transfer inspections and completion of the Declaration of Inspection	x	x	x	x
Hooking up of cargo hose, loading arms, and grounding-strap	x	x	x	x
Starting of liquid flow	x	x	x	x
Calculation of loading rates	x		x	
Discussion of loading	x	x	x	x
Ballasting and deballasting	x	x	x	x

TABLE 13.121(F)—Continued

Course topics	1	2	3	4
Topping off of the cargo tanks	x	x	x	x
Discussion of discharging	x	x	x	x
Stripping of the cargo tanks	x	x		
Monitoring of transfers	x	x	x	x
Gauging of cargo tanks	x	x	x	x
Disconnecting of cargo hoses or loading arms	x	x	x	x
Cargo-tank-cleaning procedures and precautions	x	x		
Operating procedures and sequence for:				
Inerting of cargo tanks and void spaces	x	x	x	x
Cooldown and warmup of cargo tanks			x	x
Gas-freeing	x	x	x	x
Loaded or ballasted voyages	x		x	
Testing of cargo-tank atmospheres for oxygen & cargo vapor	x	x	x	x
Stability and stress considerations connected with loading and discharging of cargo	x	x	x	x
Loadline, draft, and trim	x	x	x	x
Disposal of boil-off, including:				
System design			x	x
Safety features			x	x
Stability-letter requirements	x		x	
Emergency procedures, including notice to appropriate authorities, for:				
Fire	x	x	x	x
Collision	x	x	x	x
Grounding	x	x	x	x
Equipment failure	x	x	x	x
Leaks and spills	x	x	x	
Structural failure	x	x	x	x
Emergency discharge of cargo	x	x	x	x
Entering cargo tanks	x	x	x	x
Emergency shutdown of cargo-handling	x	x	x	x
Emergency systems for closing cargo tanks	x	x		
Rules & regulations (international and Federal, for all tank vessels) on conducting operations and preventing pollution	x	x	x	x
Pollution prevention, including:				
Procedures to prevent air and water pollution	x	x	x	x
Measures to take in event of spillage	x	x	x	x
Danger from drift of vapor cloud		x	x	x
Terminology for tankships carrying oil and chemicals	x			
Terminology for tank barges carrying oil and chemicals		x		
Terminology for tankships carrying liquefied gases			x	
Terminology for tank barges carrying liquefied gases				x
Principles & procedures of crude-oil-washing (COW) systems, including:				
Purpose	x			
Equipment and design	x			
Operations	x			
Safety precautions	x			
Maintenance of plant and equipment	x			
Principles & procedures of the inert-gas systems (IGSs), including:				
Purpose	x		x	
Equipment and design	x		x	
Operations	x		x	
Safety precautions	x		x	
Maintenance of plant and equipment	x		x	
Principles & procedures of vapor-control systems, including:				
Purpose	x	x	x	x
Principles	x	x	x	x
Coast Guard regulations	x	x	x	x
Hazards	x	x	x	x
Active system components	x	x	x	x
Passive system components	x	x	x	x
Operating procedures, including:				
Testing and inspection requirements	x	x	x	x
Pre-transfer procedures	x	x	x	x
Connecting sequence	x	x	x	x
Start-up sequence	x	x	x	x
Normal operations	x	x	x	x
Emergency procedures	x	x	x	x
Cargo-hazard-information systems	x	x	x	x
Safe entry into confined spaces, including:				
Testing tank atmospheres for oxygen & hydrocarbon vapors	x	x		
Definition and hazards of confined spaces	x	x	x	x
Cargo tanks and pumprooms	x	x	x	x
Evaluation and assessment of risks and hazards	x	x	x	x

TABLE 13.121(F)—Continued

Course topics	1	2	3	4
Safety precautions and procedures	x	x	x	x
Personnel protective equipment (PPE) and clothing	x	x	x	x
Maintenance of PPE	x	x	x	x
Dangers of skin contact	x	x	x	x
Inhalation of vapors	x	x		
Electricity and static electricity—hazards and precautions	x	x	x	x
Emergency procedures	x	x	x	x
Federal regulations, national standards & industry guidelines	x	x	x	x
Inspections by marine chemists & competent persons, including hot-work permits & procedures	x	x	x	x
Vessel response plans:				
Purpose, content, and location of information	x	x	x	x
Procedures for notice and mitigation of spills	x	x	x	x
Geographic-specific appendices	x	x	x	x
Vessel-specific appendices	x	x	x	x
Emergency-action checklist	x	x	x	x

Column 1—Tankerman-PIC DL.

Column 2—Tankerman-PIC (Barge) DL.

Column 3—Tankerman-PIC LG.

Column 4—Tankerman-PIC (Barge) LG.

TABLE 13.121(G)

Course topics	1	2
Elements of fire (Fire triangle):		
Fuel	X	X
Source of ignition	X	X
Oxygen	X	X
Ignition sources (general):		
Chemical		X
Biological		X
Physical		X
Ignition sources applicable to barges	X	
Definitions of flammability and combustibility:		
Flammability	X	X
Ignition point	X	X
Burning temperature	X	X
Burning speed		X
Thermal value		X
Lower flammable limit	X	X
Upper flammable limit	X	X
Flammable range	X	X
Inerting		X
Static electricity	X	X
Flash point	X	X
Auto-ignition	X	X
Spread of fire:		
By radiation	X	X
By convection	X	X
By conduction	X	X
Reactivity	X	X
Fire classifications and applicable extinguishing agents	X	X
Main causes of fires:		
Oil leakage	X	X
Smoking	X	X
Overheating pumps	X	X
Galley appliances		X
Spontaneous ignition	X	X
Hot work	X	X
Electrical apparatus		X
Reaction, self-heating, and auto-ignition		X
Fire prevention:		
General	X	X
Fire hazards of DL and LG	X	X
Fire detection:		
Fire- and smoke-detection systems		X
Automatic fire alarms		X

TABLE 13.121(G)—Continued

Course topics	1	2
Firefighting equipment:		
Fire mains, hydrants		X
International shore-connection		X
Smothering-installations, carbon dioxide (CO ₂), foam... ..		X
Halogenated hydrocarbons		X
Pressure-water spray system in special-category spaces		X
Automatic sprinkler system		X
Emergency fire pump, emergency generator		X
Chemical-powder applicants		X
General outline of required and mobile apparatus		X
Fireman's outfit, personal equipment		X
Breathing apparatus		X
Resuscitation apparatus		X
Smoke helmet or mask		X
Fireproof life-line and harness		X
Fire hose, nozzles, connections, and fire axes		X
Fire blankets		X
Portable fire extinguishers	X	X
Limitations of portable and semiportable extinguishers	X	X
Emergency procedures:		
Arrangements:		
Escape routes	X	X
Means of gas-freeing tanks	X	X
Class A, B, and C divisions		X
Inert-gas system		X
Ship firefighting organization:		
General alarms		X
Fire-control plans, muster stations, and duties		X
Communications		X
Periodic shipboard drills		X
Patrol system		X
Basic firefighting techniques:		
Sounding alarm	X	X
Locating and isolating fires	X	X
Stopping leakage of cargo	X	X
Jettisoning		X
Inhibiting		X
Cooling		X
Smothering		X

TABLE 13.121(G)—Continued

Course topics	1	2
Sizing up situation	X
Locating information on cargo	X
Extinguishing	X	X
Extinguishing with portable units	X	X
Setting reflash watch	X	X
Using additional personnel	X	X
Firefighting extinguishing-agents:		
Water (solid jet, spray, fog, and flooding)	X
Foam (high, medium and low expansion)	X
Carbon dioxide (CO ₂)	X	X
Halon	X
Aqueous-film-forming foam (AFFF)	X
Dry chemicals	X	X
Use of extinguisher on:		
Flammable and combustible liquids	X	X
Manifold-flange fire	X	X
Drip-pan fire	X	X
Pump fire	X	X
Drills for typical fires on barges	X
Field exercises:		
Extinguish small fires using portable extinguishers:		
Electrical	X	X
Manifold-flange	X	X
Drip-pan	X	X
Pump	X	X
Use self-contained breathing apparatus	X
Extinguish extensive fires with water	X
Extinguish fires with foam, or chemical	X
Fight fire in smoke-filled enclosed space wearing SCBA	X
Extinguish fire with water fog in an enclosed space with heavy smoke	X
Extinguish oil fire with fog applicator and spray nozzles, dry-chemical, or foam applicators	X
Effect a rescue in a smoke-filled space while wearing breathing apparatus	X

(1) Course in tank-barge firefighting.

(2) From the basic firefighting section of the IMO's Resolution A.437 (XI), "Training of Crews in Fire Fighting".

[CGD 79-116, 60 FR 17142, Apr. 4, 1995, as amended by CGD 79-116, 62 FR 25130, 25131, 25133, May 8, 1997]

§ 13.123 Recency of service or experience for original tankerman endorsement.

An applicant for an original tankerman endorsement in subpart B, C, D, or E of this part shall have obtained at least 25% of the qualifying service and, if the endorsement requires transfers, at least two of the qualifying transfers, within five years of the date of application.

§ 13.125 Physical requirements.

Each applicant for an original tankerman endorsement shall meet the physical requirements of § 10.205(d) of this chapter, excluding paragraph (d)(2) of that section.

§ 13.127 Service: General.

(a) A service letter must be signed by the owner, operator, master, or chief engineer of the vessel and must specify—

(1) The classification of cargo (DL, LG, or, for a restricted endorsement, a specific product) handled while the applicant accumulated the service;

(2) The dates, the number and kinds of transfers the applicant has participated in, and the number of transfers that involved commencement or completion; and

(3) That the applicant has demonstrated to the satisfaction of the signer that he or she is fully capable of supervising transfers of liquid cargo, including

- (i) Pre-transfer inspection;
- (ii) Pre-transfer conference and execution of the Declaration of Inspection;
- (iii) Connection of cargo hoses or loading-arms;
- (iv) Line-up of the cargo system for loading and discharge;
- (v) Start of liquid flow during loading;
- (vi) Start of cargo pump and increase of pressure to normal discharge pressure;
- (vii) Calculation of loading-rates;
- (viii) Monitoring;
- (ix) Topping-off of cargo tanks during loading;

(x) Stripping of cargo tanks;

(xi) Ballasting and deballasting, if appropriate;

(xii) Disconnection of the cargo hoses or loading-arms; and

(xiii) Securing of cargo systems.

(b) In determining the numbers and kinds of transfers that the applicant has participated in under paragraph (a)(2) of this section, the following rules apply:

(1) A transfer must involve the loading or discharge from at least one of the vessel's cargo tanks to or from a shore facility or another vessel. A shift of cargo from one tank to another tank is not a transfer for this purpose.

(2) Regardless of how long the transfer lasts beyond four hours, it counts as only one transfer.

(3) A transfer must include both a commencement and a completion.

(4) Regardless of how many tanks or products are being loaded or discharged

at the same time, a person may receive credit for only one transfer, one loading, and one discharge a watch.

(5) Credit for a transfer during a watch of less than four hours accrues only if the watch includes either the connection and the commencement of transfer or the completion of transfer and the disconnection.

(6) Credit for a commencement of loading accrues only if the applicant participates in the pre-transfer inspection, the pre-transfer conference including execution of the Declaration of Inspection, the connection of cargo hoses or loading-arms, the line-up of the cargo system for the loading, the start of liquid flow, and the calculation of loading-rates, where applicable.

(7) Credit for a commencement of discharge accrues only if the applicant participates in the pre-transfer inspection, the pre-transfer conference including execution of the Declaration of Inspection, the connection of cargo hoses or loading-arms, the line-up of the cargo system for the discharge, the start of the cargo pump or pumps and increase of pressure to normal pressure

for discharge, and the monitoring of discharge rates.

(8) Credit for a completion of transfer, whether loading or discharge, accrues only if the applicant participates in the topping-off at the loading port, or in the stripping of cargo tanks and the commencement of ballasting, if required by the vessel's transfer procedures, at the discharge port.

(9) Personnel desiring credit for transfers during off-duty hours may satisfy requirements of competence through incremental training periods that include segments of transfers. The cumulative number of transfers must equal the minimum specified in § 13.203(b) or 13.303(b).

[CGD 79-116, 60 FR 17142, Apr. 4, 1995, as amended by CGD 79-116, 62 FR 25133, May 8, 1997]

§ 13.129 Quick-reference table for tankerman.

Table 13.129 provides a guide to the requirements for various tankerman endorsements. Provisions in the reference sections are controlling.

TABLE 13.129

Category	Minimum age	Physical required	Service	Recency of service	Proof of service	Certificate from fire-fighting course 13.207	Cargo course	English language
Tankerman-PIC Subpart B.	18; 13.201(a)	Yes; 13.125	13.203	13.123	13.205	13.207	13.209	13.201(g)
Tankerman-PIC (Barge) Subpart C.	18; 13.301(a)	Yes; 13.125	13.303	13.123	13.305	13.307	13.309	13.301(g)
Tankerman-Assistant Subpart D.	18; 13.401(a)	Yes; 13.125	13.403	13.123	13.405	13.407	13.409	13.401(f)
Tankerman-Engineer Subpart E.	18; 13.501(a)	Yes; 13.125	13.503	13.123	13.505	13.507	13.509	13.501(g)
Restricted Tankerman-PIC.	18; 13.111(b)	Yes; 13.111(b)	13.111(b)	13.111(b)	13.111(b)	13.111(b)	No	13.111(b)
Restricted Tankerman-PIC (Barge).	18; 13.111(c)	Yes; 13.111(c)	13.111(c)	13.111(c)	13.111(c)	13.111(c)	No	13.111(c)
Restricted Tankerman-PIC (Barge), Facility.	18; 13.111(d)(1) ...	Yes; 13.111(d)(3)	13.111(d)(4)	No	13.111(d)(4)	No	No	13.111(d)(5)

[CGD 79-116, 60 FR 17142, Apr. 4, 1995, as amended by CGD 79-116, 62 FR 25133, May 8, 1997]

Subpart B—Requirements for “Tankerman-PIC” Endorsement

§ 13.201 Original application for “Tankerman-PIC” endorsement.

Each applicant for an original “Tankerman-PIC” endorsement shall—

- (a) Be at least 18 years old;
- (b) Apply on a Coast Guard form;
- (c) Present evidence of passing a physical examination in accordance with § 13.125;
- (d) Present evidence of service on tankships in accordance with § 13.203;
- (e) Meet the requirement of a course on firefighting in § 13.207;
- (f) Meet the requirement of a course in DL or LG appropriate for the endorsement applied for in § 13.209; and
- (g) Be capable of speaking and understanding, in English, all instructions needed to commence, conduct, and complete a transfer of cargo, and be capable of reading the English found in the Declaration of Inspection, vessel response plans, and Cargo Information Cards.

§ 13.203 Eligibility: Experience.

Each applicant for a “Tankerman-PIC” endorsement for DL or LG shall meet the requirements of either paragraphs (a) and (b) or paragraph (c) of this section.

(a) Each applicant shall present evidence of—

(1) At least 90 days of service as a licensed deck officer or a licensed engineering officer on one or more tankships or self-propelled tank vessels certified to carry DL or LG appropriate to the endorsement applied for;

(2) At least 90 days of unlicensed or cadet service on deck or in the engine department on one or more tankships or self-propelled tank vessels certified to carry DL or LG appropriate to the endorsement applied for; or

(3) A combination of the service in paragraphs (a) (1) and (2) of this section.

(b) Each applicant shall present evidence of participation, under the supervision of a “Tankerman-PIC,” in at least 10 transfers of liquid cargo in bulk of the classification desired on tankships or self-propelled tank vessels, including at least—

- (1) Five loadings and five discharges;

(2) Two commencements of loading and two completions of loading; and

(3) Two commencements of discharge and two completions of discharge.

(c) Each applicant already holding an MMD endorsed “Tankerman-PIC” for DL and seeking an endorsement for LG, or the converse, shall—

(1) Provide evidence of at least half the service required by paragraph (a) of this section; and

(2) Comply with paragraph (b) of this section, except that he or she need provide evidence of only three loadings and three discharges along with evidence of compliance with paragraphs (b) (2) and (3) of this section.

[CGD 79-116, 60 FR 17142, Apr. 4, 1995, as amended by CGD 79-116, 62 FR 25134, May 8, 1997]

§ 13.205 Proof of service for “Tankerman-PIC” endorsement.

Service must be proved by a letter on company letterhead from the owner, operator, or master of the vessel on which the applicant obtained the service. The letter must contain the information described in § 13.127(a).

§ 13.207 Eligibility: Firefighting course.

Each applicant for an original “Tankerman-PIC” endorsement shall present a certificate of successful completion from a course in shipboard firefighting, approved by the Commandant and meeting the basic firefighting section of the IMO’s Resolution A.437 (XI), “Training of Crews in Fire Fighting”, completed within five years of the date of application for the endorsement, unless he or she has previously submitted such a certificate for a license or a tankerman endorsement.

§ 13.209 Eligibility: Cargo course.

Each applicant for an original “Tankerman-PIC” endorsement shall present a certificate of completion from a course in DL or LG appropriate for tankships and for the endorsement applied for, and approved by the Commandant. The date of the certificate may not be more than 5 years earlier than the date of application.

[CGD 79-116, 62 FR 25134, May 8, 1997]

**Subpart C—Requirements for
“Tankerman-PIC (Barge)” En-
dorsement**

**§ 13.301 Original application for
“Tankerman-PIC (Barge)” endorse-
ment.**

Each applicant for a “Tankerman-PIC (Barge)” endorsement shall—

- (a) Be at least 18 years old;
- (b) Apply on a Coast Guard form;
- (c) Present evidence of passing a physical examination in accordance with § 13.125;
- (d) Present evidence of service on tank vessels in accordance with § 13.303;
- (e) Meet the requirement of a fire-fighting course in § 13.307;
- (f) Meet the requirement of a course in DL or LG appropriate for the endorsement applied for in § 13.309; and
- (g) Be capable of speaking, and understanding, in English, all instructions needed to commence, conduct, and complete a transfer of cargo, and be capable of reading the English found in the Declaration of Inspection, vessel response plans, and Cargo Information Cards.

§ 13.303 Eligibility: Experience.

Each applicant for a “Tankerman-PIC (Barge)” endorsement for DL or LG shall meet the requirements of either paragraphs (a) and (b) or paragraph (c) of this section.

(a) Each applicant shall present evidence of—

- (1) At least 60 days of service, whether by shore-based or by vessel-based personnel, on one or more tank vessels certified to carry DL or LG appropriate to the endorsement applied for; or
- (2) At least 6 months of closely related service directly involved with tank barges appropriate to the endorsement applied for; and
- (b) Participation, under the supervision of a “Tankerman-PIC” or “Tankerman-PIC (Barge),” in at least 10 transfers of liquid cargo in bulk of the classification desired on any tank vessel, including at least—
 - (1) Five loadings and five discharges;
 - (2) Two commencements of loading and two completions of loading; and
 - (3) Two commencements of discharge and two completions of discharge.

(c) Each applicant already holding an MMD endorsed “Tankerman-PIC (Barge)” for DL and seeking an endorsement for LG, or the converse, shall—

(1) Provide evidence of at least half the service required by paragraph (a) of this section; and

(2) Comply with paragraph (b) of this section, except that he or she need provide evidence of only three loadings and three discharges along with evidence of compliance with paragraphs (b)(2) and (3) of this section.

[CGD 79–116, 60 FR 17142, Apr. 4, 1995, as amended by CGD 79–116, 62 FR 25134, May 8, 1997]

**§ 13.305 Proof of service for
“Tankerman-PIC (Barge)” endorse-
ment.**

Service must be proved by a letter on company letterhead from the owner or operator of a terminal; the owner or operator of a tank barge; the owner, operator, or master of a tank vessel; or the employer of shore-based tankermen. The letter must contain the information required by § 13.127(a), excluding paragraph (a)(3)(vii).

[CGD 79–116, 62 FR 25134, May 8, 1997]

**§ 13.307 Eligibility: Firefighting
course.**

Each applicant for a “Tankerman-PIC (Barge)” endorsement shall present a certificate of successful completion from—

- (a) A course in shipboard firefighting, approved by the Commandant and meeting the basic firefighting section of the IMO’s Resolution A.437(XI), “Training of Crews in Firefighting,” completed 5 years or less before the date of application for the endorsement, unless he or she has previously submitted such a certificate for a license or a tankerman endorsement; or
- (b) A course in tank-barge firefighting, approved by the Commandant and meeting § 13.121, completed within five years of the date of application for the endorsement.

[CGD 79–116, 60 FR 17142, Apr. 4, 1995, as amended by CGD 79–116, 62 FR 25134, May 8, 1997]

Coast Guard, DOT

§ 13.405

§ 13.309 Eligibility: Cargo course.

Each applicant for an original “Tankerman-PIC (Barge)” endorsement shall present a certificate of completion from a course in DL or LG appropriate for tank barges and for Tankerman-PIC or Tankerman-PIC (Barge), and approved by the Commandant. The date of the certificate may not be more than 5 years earlier than the date of application.

[CGD 79-116, 62 FR 25134, May 8, 1997]

Subpart D—Requirements for “Tankerman-Assistant” Endorsement

§ 13.401 Original application for “Tankerman-Assistant” endorsement.

Each applicant for a “Tankerman-Assistant” endorsement shall—

- (a) Be at least 18 years old;
- (b) Apply on a Coast Guard form;
- (c) Present evidence of passing a physical examination in accordance with § 13.125;
- (d) Meet the requirement of a fire-fighting course in § 13.407;
- (e) (1) Meet the requirement of a course in DL or LG appropriate for the endorsement applied for in § 13.409; or
(2) Present evidence of service on tankships or self-propelled tank vessels in accordance with § 13.403; and
- (f) Be capable of speaking and understanding, in English, all instructions needed to commence, conduct, and complete a transfer of cargo.

[CGD 79-116, 60 FR 17142, Apr. 4, 1995, as amended by CGD 79-116, 62 FR 25134, May 8, 1997]

§ 13.403 Eligibility: Experience.

(a) Each applicant for a “Tankerman-Assistant” endorsement shall present—

- (1) Evidence of at least 90 days of deck service on tankships or self-propelled tank vessels certified to carry DL or LG appropriate to the endorsement applied for; or
- (2) A certificate of completion from a course in DL or LG appropriate for the endorsement applied for as prescribed in § 13.409.

(b) Each applicant already holding an MMD endorsed “Tankerman-Assistant”

endorsement” for DL and seeking one for LG, or the converse, shall—

(1) Provide evidence of at least half the service required in paragraph (a)(1) of this section; or

(2) Meet the requirement of a course in DL or LG appropriate for the endorsement applied for as prescribed in § 13.409.

[CGD 79-116, 60 FR 17142, Apr. 4, 1995, as amended by CGD 79-116, 62 FR 25134, May 8, 1997]

§ 13.405 Proof of service for “Tankerman-Assistant” endorsement.

(a) Service must be proved by a letter on company letterhead from the owner, operator, or master of a tankship or self-propelled tank vessel. The letter must specify—

(1) The classification of cargo (DL or LG) carried while the applicant accumulated the service;

(2) The number of days of deck service the applicant accumulated on the tankship or self-propelled tank vessel; and

(3) That the applicant has demonstrated an understanding of cargo transfer and a sense of responsibility that, in the opinion of the signer, will allow the applicant to safely carry out duties respecting cargo transfer and transfer equipment assigned by the PIC of the transfer without direct supervision by the PIC; or

(b) Service must be proved by—

(1) Certificates of Discharge from tankships with the appropriate classification of cargo (DL, LG, or both); and

(2) A letter on company letterhead from the owner, operator, or master of one of the tankships or self-propelled tank vessel stating that he or she has demonstrated—

(i) An understanding of cargo transfer; and

(ii) A sense of responsibility that, in the opinion of the signer, will allow him or her to safely carry out duties respecting cargo and its equipment assigned by the PIC of the transfer without direct supervision by the PIC.

[CGD 79-116, 60 FR 17142, Apr. 4, 1995, as amended by CGD 79-116, 62 FR 25134, May 8, 1997]

§ 13.407

46 CFR Ch. I (10–1–00 Edition)

§ 13.407 Eligibility: Firefighting course.

Each applicant for a “Tankerman-Assistant” endorsement shall present a certificate of successful completion from a course in shipboard firefighting, approved by the Commandant and meeting the basic firefighting section of the IMO’s Resolution A.437 (XI), “Training of Crews in Fire Fighting”, completed within five years of the date of application for the endorsement, unless he or she has previously submitted such a certificate from one of these courses for a license or endorsement.

§ 13.409 Eligibility: Cargo course.

Each applicant for an original “Tankerman-Assistant” endorsement who has not presented the required service on tankships or self-propelled tank vessels shall present a certificate of completion from a course for Familiarization with DL or LG Tankships or from a tanker-familiarization course appropriate to the endorsement applied for, and approved by the Commandant. The date of the certificate may not be more than 5 years earlier than the date of application.

[CGD 79–116, 62 FR 25134, May 8, 1997]

Subpart E—Requirements for “Tankerman-Engineer” Endorsement

§ 13.501 Original application for “Tankerman-Engineer” endorsement.

Each applicant for a “Tankerman-Engineer” endorsement shall—

- (a) Be at least 18 years old;
- (b) Apply on a Coast Guard form;
- (c) Present evidence of passing a physical examination in accordance with § 13.125;
- (d) Present evidence of service on tankships and self-propelled tank vessels in accordance with § 13.503;
- (e) Meet the requirement of a firefighting course in § 13.507;
- (f) Meet the requirement of a course in DL or LG appropriate for the endorsement applied for in § 13.509; and
- (g) Be capable of speaking and understanding, in English, all instructions

needed to commence, conduct, and complete a transfer of cargo.

[CGD 79–116, 60 FR 17142, Apr. 4, 1995, as amended by CGD 79–116, 62 FR 25134, May 8, 1997]

§ 13.503 Eligibility: Experience.

(a) Each applicant for a “Tankerman-Engineer” endorsement shall present evidence of at least—

(1) 90 days of service as a licensed engineering officer of tankships or self-propelled tank vessels certified to carry DL or LG appropriate to the endorsement applied for;

(2) 90 days of unlicensed or cadet service in the engine department on tankships or self-propelled tank vessels certified to carry DL or LG appropriate to the endorsement applied for; or

(3) A combination of the service in paragraphs (a) (1) and (2) of this section.

(b) Each applicant already holding an MMD endorsed as Tankerman-Engineer for DL and seeking one for LG, or the converse, shall prove at least half the service required by paragraph (a) of this section.

[CGD 79–116, 60 FR 17142, Apr. 4, 1995, as amended by CGD 79–116, 62 FR 25134, May 8, 1997]

§ 13.505 Proof of service for “Tankerman-Engineer” endorsement.

(a) Service must be proved by a letter on company letterhead from the owner, operator, master, or chief engineer of a tankship or self-propelled tank vessel. The letter must specify—

(1) The classification of cargo (DL, LG, or both) carried while the applicant accumulated the service; and

(2) The number of days of licensed and unlicensed service in the engine department on tankships or self-propelled tank vessels; or

(b) Service must be proved by certificates of discharge from tankships or self-propelled tank vessels with the appropriate classification of cargo (DL, LG, or both).

[CGD 79–116, 60 FR 17142, Apr. 4, 1995, as amended by CGD 79–116, 62 FR 25135, May 8, 1997]

Coast Guard, DOT

§ 14.201

§ 13.507 Eligibility: Firefighting course.

Each applicant for a “Tankerman-Engineer” endorsement shall present a certificate of successful completion from a course in shipboard firefighting, approved by the Commandant and meeting the basic firefighting section of the IMO’s Resolution A.437 (XI), “Training of Crews in Fire Fighting”, completed within five years of the date of application for the endorsement, unless he or she has previously submitted such a certificate for a license or tankerman endorsement.

§ 13.509 Eligibility: Cargo course.

Each applicant for an original “Tankerman-Engineer” endorsement shall present a certificate of completion from a course in DL or LG, appropriate for tankships and the endorsement applied for, approved by the Commandant. The date of the certificate may not be more than 5 years earlier than the date of application.

[CGD 79-116, 62 FR 25135, May 8, 1997]

PART 14—SHIPMENT AND DISCHARGE OF MERCHANT MARINERS

Subpart A—General

Sec.

- 14.101 Purpose of part.
- 14.103 Addresses of Coast Guard.
- 14.105 Disclosure and privacy.

Subpart B—Shipment of Merchant Mariners

- 14.201 Voyages upon which shipping articles are required.
- 14.203 Voyages upon which shipping articles are not required.
- 14.205 Production of credentials by merchant mariner signing shipping articles.
- 14.207 Content and form of shipping articles.
- 14.209 Preparation of shipping articles at beginning of voyage.
- 14.211 Posting of copy of shipping articles.
- 14.213 Report of shipment of merchant mariner.

Subpart C—Discharge of Merchant Mariners

- 14.301 Paying off of merchant mariner during or after voyage upon which shipping articles are required.
- 14.303 Discharge of merchant mariner in foreign port.

- 14.305 Entries in continuous discharge book.
- 14.307 Entries on certificate of discharge.
- 14.309 Entries in shipping articles at end of voyage.
- 14.311 Report of discharge of merchant mariner.
- 14.313 Storage of shipping articles and of certificates of discharge.

Subpart D—Oceanographic Research Vessels

- 14.401 General.
- 14.403 Exemptions.
- 14.405 Procedures.
- 14.407 Reports.

AUTHORITY: 5 U.S.C. 552; 46 U.S.C. Chapters 103 and 104.

SOURCE: CGD 94-004, 61 FR 56637, Nov. 4, 1996, unless otherwise noted.

Subpart A—General

§ 14.101 Purpose of part.

This part prescribes rules for the shipment and discharge of merchant mariners aboard certain vessels of the United States.

§ 14.103 Addresses of Coast Guard.

(a) By mail: National Maritime Center (NMC-4A), U.S. Coast Guard, Suite 510, 4200 Wilson Boulevard, Arlington, VA 22203-1804.

(b) By facsimile: 703-235-1062.

§ 14.105 Disclosure and privacy.

The Coast Guard makes information available to the public in accordance with 49 CFR part 7, including appendix B.

Subpart B—Shipment of Merchant Mariners

§ 14.201 Voyages upon which shipping articles are required.

(a) Before proceeding either upon a foreign, intercoastal, or coastwise voyage (including a voyage on the Great Lakes) listed in paragraph (b) of this section or with the engagement or replacement of a merchant mariner for such a voyage, each master or individual in charge of a vessel or seagoing barge of the United States shall execute shipping articles however prepared, manually or electronically. The master or individual in charge and

§ 14.203

46 CFR Ch. I (10–1–00 Edition)

each mariner engaged or replaced shall sign the articles.

(b) Except as provided by § 14.203, articles are required upon each voyage by a vessel of the United States—

(1) Of 100 gross tons or more, on a foreign voyage, which is a voyage from a port in the United States to any foreign port other than a port in—

- (i) Canada;
- (ii) Mexico; or
- (iii) The West Indies.

(2) Of 75 gross tons or more on a voyage between a port of the United States on the Atlantic Ocean and a port of the United States on the Pacific Coast; or

(3) Of 50 gross tons or more on a voyage between a port in one State and a port in another State other than an adjoining State.

§ 14.203 Voyages upon which shipping articles are not required.

Although they may be used for the voyage; shipping articles are not required for any voyage by—

- (a) A yacht;
- (b) A vessel engaged exclusively in fishing or whaling;
- (c) A vessel aboard which the merchant mariners are by custom or agreement entitled to participate in the profits or results of a cruise or voyage;
- (d) A vessel employed exclusively in trade on the navigable rivers of the United States; or
- (e) A ferry, or a tug used in ferrying, if the vessel is employed exclusively in trade on the Great Lakes, other lakes, bays, sounds, bayous, canals, or harbors.

§ 14.205 Production of credentials by merchant mariner signing shipping articles.

On engagement for a voyage upon which shipping articles are required, each merchant mariner shall present to the master or individual in charge of the vessel every document, certificate, or license required by law for the service the mariner would perform.

§ 14.207 Content and form of shipping articles.

(a)(1) The content and form of shipping articles for each vessel of the United States of 100 gross tons or more upon a foreign or intercoastal voyage

must conform to the present shipping articles, form CG-705A, which meets the requirements of 46 U.S.C. 10302, 10303, 10304, and 10305. The articles must identify the nature of the voyage and specify at least the name, the number of the license or merchant mariner's document, the capacity of service, the time due on board to begin work, and the name and address of the next of kin of, and the wages due to each merchant mariner, either who was discharged or whose services were otherwise terminated during the month.

(2) The content and form of articles for each such vessel upon a coastwise voyage (including a voyage on the Great Lakes) must also conform to the present shipping articles, form CG-705A, which meet the requirements of 46 U.S.C. 10502. The articles must specify at least the matter identified by paragraph (a)(1) of this section, except that they must not specify the wages due to the mariner. The wages section of the form shall be left blank for coastwise voyages.

(b) Any shipping company that manually prepares the articles may, upon request, obtain Shipping Articles, Form CG-705A, from any Officer in Charge, Marine Inspection (OCMI), of the Coast Guard.

(c) Any company that electronically prepares the articles may, upon request submitted to either address in § 14.103, obtain a copy of software developed by the Coast Guard to produce articles in the proper format. Alternatively, a company may develop its own software or buy it off the shelf; but, in either of these cases, it must secure approval of the software from the National Maritime Center at either address in § 14.103.

§ 14.209 Preparation of shipping articles at beginning of voyage.

Each master or individual in charge of a vessel when shipping articles are required shall prepare an original and two copies of the articles. The original and one copy must be signed by the master or individual in charge and by each merchant mariner; but the second copy must not be signed by any of them.

§ 14.211 Posting of copy of shipping articles.

On commencement of a foreign, intercoastal, or coastwise voyage (including a voyage on the Great Lakes), each master or individual in charge of a vessel when shipping articles are required shall ensure that a legible copy of the articles, unsigned by the mariner, and without the next of kin information, is posted at a place accessible to the crew.

§ 14.213 Report of shipment of merchant mariner.

(a) When a vessel of the United States sails upon a foreign, intercoastal, or coastwise voyage (excluding a voyage on the Great Lakes), each master or individual in charge shall, at the commencement of the voyage, send one copy of shipping articles, signed by the master and by each merchant mariner, to the owner, charterer, or managing operator. The master shall keep the original throughout the voyage and enter in it all charges made to the crew during the voyage.

(b) (1) When a vessel of the United States sails exclusively on the Great Lakes, each master or individual in charge shall, at the commencement of the season, or once the vessel is put into service, whichever occurs earlier, send one copy of articles, signed by the master and by each mariner, to the owner, charterer, or managing operator.

(2) The master or individual in charge shall every 60 days send supplementary particulars of engagement covering each mariner engaged during this period, signed by the master and by each mariner, to the owner, charterer, or managing operator.

(3) The master of individual in charge shall, at the close of the season, or once the vessel is withdrawn from service, whichever occurs later, send articles, signed by the master and by each mariner, to the owner, charterer, or managing operator.

(c) When a vessel of the United States sails exclusively on bays or sounds, each master or individual in charge shall, at least every 60 days, send articles, signed by the master and by each mariner, to the owner, charter, or managing operator.

(d) Any person who fails to comply with the requirements of this section is subject to a civil penalty of \$5,000.

Subpart C—Discharge of Merchant Mariners**§ 14.301 Paying off of merchant mariner during or after voyage upon which shipping articles are required.**

Each master or individual in charge of a vessel when shipping articles are required shall complete and sign, and each merchant mariner paid off during or after such a voyage shall sign the articles and otherwise comply with the requirements of this subpart. When signed by the master or individual in charge and by the mariner, the articles constitute a release from the duties to which they bound their parties.

§ 14.303 Discharge of merchant mariner in foreign port.

Upon the discharge of any mariner in a foreign port, the master shall make the required entries on the ship's articles. Upon the request of the master or a mariner, the consular officer shall discharge the mariner in accordance with the requirements of 46 U.S.C. 10318.

§ 14.305 Entries in continuous discharge book.

If the merchant mariner holds a continuous discharge book, the master or individual in charge of the vessel shall make the proper entries in it.

§ 14.307 Entries on certificate of discharge.

(a) Each master or individual in charge of a vessel shall, for each merchant mariner being discharged from the vessel, prepare a certificate of discharge and two copies; whether by writing or typing them on the prescribed form with permanent ink or generating them from computer in the prescribed format; and shall sign them with permanent ink. The prescribed format for a certificate of discharge is the same as the present form CG-719A (Rev. 8-80). The left portion of the form

§ 14.309

has the mariner's printed name, signature, citizenship, and merchant mariner's document number; the certification statement, date and the master's signature. The right portion of the form contains the rate/rank the mariner is serving on the voyage, date and place of shipment, date and place of discharge, name of the vessel, name of the operating company, official number of the vessel, class of the vessel, and the nature of the voyage.

(b) Each mariner being discharged shall sign the certificate and both copies with permanent ink.

(c) When the mariner leaves the vessel, the master or individual in charge shall give the original certificate to the mariner.

(d) Except as directed by § 14.313, the shipping company shall keep both copies of the certificate.

(e) The company shall provide copies of certificates of discharge to the mariner and the Coast Guard upon request.

§ 14.309 Entries in shipping articles at end of voyage.

(a) At the end of each voyage upon which shipping articles are required, the master or individual in charge of the vessel shall—

(1) Complete the articles, conforming the pertinent entries in them to those on the certificate of discharge and its copies;

(2) Note in the articles the execution of each Mutual Release;

(3) Attach to the articles each Mutual Release and a copy of each certificate; and

(4) Pay to each merchant mariner all wages due.

(b) When paid off, each mariner shall sign the articles.

§ 14.311 Report of discharge of merchant mariner.

(a) At the end of each foreign, intercoastal, and coastwise voyage by a vessel of the United States, or of each voyage by such a vessel that sails exclusively on bays or sounds (or by such a vessel at the close of the season on the Great Lakes, or once the vessel is withdrawn from service there, whichever occurs later), the shipping company shall electronically transmit the data from the certificates of discharge via

46 CFR Ch. I (10–1–00 Edition)

modem to an electronic address which the shipping company may request from the National Maritime Center.

(b) If the data is submitted manually, the shipping companies shall provide the data for foreign and intercoastal voyages at the end of each voyage. For coastwise voyages or of each voyage by such a vessel that sails exclusively on bays or sounds (or by such a vessel at the close of the season of the Great Lakes, or once the vessel is withdrawn from service there, whichever occurs later), the shipping companies shall submit a copy of each certificate of discharge to the address in § 14.103(a) at least once per calendar month.

§ 14.313 Storage of shipping articles and of certificates of discharge.

(a) Each shipping company shall keep all original shipping articles and copies of all certificates of discharge for 3 years. After 3 years the shipping companies shall prepare the original shipping articles in alphabetical order by vessel name and send to the address in § 14.103(a) for storage at the Federal Records Center at Suitland, Maryland. The company may dispose of the copies of certificates of discharge. The Coast Guard will dispose of copies of certificates submitted manually, once the data are entered into its sea-service database and are validated.

(b) Each shipping company that goes out of business or merges with another company shall send all original articles to the address in § 14.103(a) within 30 days of the transaction.

(c) The shipping company must provide copies of shipping articles and certificates of discharge to the mariner and the Coast Guard upon request.

Subpart D—Oceanographic Research Vessels

§ 14.401 General.

Unless otherwise provided by Title 46 United States Code, by any act amending or supplementing that Title, or by this subpart, that Title as far as it governs the employment of merchant mariners remains, and any act amending or supplementing that title becomes, applicable to oceanographic research vessels.

§ 14.403 Exemptions.

(a) Certain requirements of Title 46, United States Code do not apply to the employment of merchant mariners on oceanographic research vessels. These requirements are those concerned with, among other things, the shipment and discharge of mariners, their pay and allotments, and the adequacy of their clothing. 46 U.S.C. 2113(2) allows exemptions of oceanographic research vessels from certain requirements of parts B, C, F, or G of subtitle II of 46 U.S.C., upon such terms as the Secretary of the Department of Transportation deems suitable. The exemptions available under this subpart are subject to the following terms:

(1) No use of any exemption relieves the owner, charterer, managing operator, master, or individual in charge of the vessel of other statutory responsibilities for the protection of every mariner under his or her command.

(2) If it is presented at a reasonable time and in a reasonable manner, the master or individual in charge shall receive, consider, and appropriately address the legitimate complaint of any mariner.

(b) For any oceanographic research vessel sailing with any mariner employed by any firm, association, corporation, or educational or governmental body or agency, the Commandant may grant exemptions from—

- (1) 46 U.S.C. 10301, Application;
- (2) 46 U.S.C. 10302, Shipping articles (for foreign and intercoastal voyages);
- (3) 46 U.S.C. 10307, Posting of articles;
- (4) 46 U.S.C. 10308, Foreign engagements;
- (5) 46 U.S.C. 10311, Certificates of discharge;
- (6) 46 U.S.C. 10313 and 10504, Wages;
- (7) 46 U.S.C. 10314 and 10505, Advances;
- (8) 46 U.S.C. 10315, Allotments;
- (9) 46 U.S.C. 10316 and 10506, Trusts;
- (10) 46 U.S.C. 10321 and 10508, General penalties;
- (11) 46 U.S.C. 10502, Shipping articles (for coastwise voyages); and
- (12) 46 U.S.C. 10509, Penalty for failure to begin coastwise voyages.

§ 14.405 Procedures.

(a) Upon written request for the owner, charterer, managing operator,

master, or individual in charge of the vessel to the OCMI of the Coast Guard in whose zone the vessel is located, the Commandant may grant an exemption of any oceanographic research vessel designated by 46 U.S.C. 2113(2) from any requirement of any section listed by § 14.403(b).

(b) The request must state—

(1) Any requirement of any section listed in § 14.403(b) from which the applicant wishes an exemption; and

(2) What business practices regarding, among other things, the shipment and discharge of merchant mariners, their pay and allotments, and the adequacy of their clothing would justify the exemption.

(c) The OCMI will forward the request, along with his or her recommendation, to the Commandant, who will determine whether to grant any exemption of any vessel from any requirement. The OCMI will issue a letter indicating any exemption granted. The master or individual in charge of the vessel shall keep the letter aboard the vessel.

(d) If operating conditions change, the owner, charterer, managing operator, master, or individual in charge of the vessel shall so advise the OCMI. The OCMI will forward pertinent information on how the conditions have changed, along with his or her recommendation, to the Commandant, who will determine whether any exemption should remain granted.

§ 14.407 Reports.

(a) The owner, charterer, managing operator, master, or individual in charge of each oceanographic research vessel of 100 gross tons or more shall maintain a record of the employment, discharge, or termination of service of every merchant mariner in the crew. At least every 6 months, the person maintaining this record shall transmit it to the Coast Guard, either manually, in the form of a copy of a certificate of discharge, or electronically.

(b) The owner, charterer, managing operator, master, or individual in charge of the vessel shall keep original shipping articles and a copy of each certificate ready for review by the Coast Guard or the concerned mariner upon request. After January 3, 1997, the

Pt. 15

Coast Guard will no longer keep either original articles or copies of certificates; it will keep only electronic records of employment.

(c) The master or individual in charge of the vessel shall ensure that every entry made in the articles agrees with the corresponding entry made in a continuous discharge book, on a certificate, or in any other proof of sea service furnished to the mariner.

(d) Each oceanographic company shall keep all original articles and copies of all certificates for 3 years. After that each such company shall send all articles to the address in § 14.103(a).

(e) Each oceanographic company that goes out of business or merges with another company shall send all original articles to the address in § 14.103(a) within 30 days of the transaction.

PART 15—MANNING REQUIREMENTS

Subpart A—Purpose and Applicability

Sec.

- 15.101 Purpose of regulations.
- 15.102 Paperwork approval.
- 15.103 General.
- 15.105 Incorporation by reference.

Subpart B—Definition of Terms

- 15.301 Definitions of terms used in this part.

Subpart C—Manning Requirements; All Vessels

- 15.401 Employment and service within restrictions of license or document.
- 15.405 Familiarity with vessel characteristics.
- 15.410 Licensed individuals for assistance towing vessels.

Subpart D—Manning Requirements; Inspected Vessels

- 15.501 Certificate of inspection.
- 15.505 Changes in the certificate of inspection.
- 15.510 Right of appeal.
- 15.515 Compliance with certificate of inspection.
- 15.520 Mobile offshore drilling units.
- 15.525 Reference to other parts.

Subpart E—Manning Requirements; Uninspected Vessels

- 15.601 General.

46 CFR Ch. I (10–1–00 Edition)

- 15.605 Licensed operators for uninspected passenger vessels.
- 15.610 Master and mate (pilot) of towing vessels.

Subpart F—Limitations and Qualifying Factors

- 15.701 Officers Competency Certificates Convention, 1936.
- 15.705 Watches.
- 15.710 Working hours.
- 15.715 Automated vessels.
- 15.720 Use of non-U.S. licensed and/or documented personnel.
- 15.725 Sailing short.
- 15.730 Language requirements.

Subpart G—Computations

- 15.801 General.
- 15.805 Master.
- 15.810 Mates.
- 15.812 Pilots.
- 15.815 Radar observers.
- 15.820 Chief engineer.
- 15.825 Engineers.
- 15.830 Radio officers.
- 15.835 Staff officers.
- 15.840 Able seamen.
- 15.845 Lifeboatmen.
- 15.850 Lookouts.
- 15.855 Cabin watchmen and fire patrolmen.
- 15.860 Tankerman.

Subpart H—Equivalents

- 15.901 Inspected vessels of less than 100 gross tons.
- 15.905 Uninspected passenger vessels.
- 15.910 Towing vessels.
- 15.915 Engineer licenses.

Subpart I—Vessels in Foreign Trade

- 15.1001 General.
- 15.1010 California.
- 15.1020 Hawaii.
- 15.1030 New York and New Jersey.
- 15.1040 Massachusetts.
- 15.1050 North Carolina.

Subpart J—Vessels Subject to Requirements of STCW

- 15.1101 General.
- 15.1103 Employment and service within restrictions of license, document, and STCW endorsement.
- 15.1105 Familiarization and basic safety-training.
- 15.1107 Maintenance of merchant mariners' records by owner or operator.
- 15.1109 Watches.
- 15.1111 Work hours and rest periods.

AUTHORITY: 46 U.S.C. 2101, 2103, 3306, 3703, 8101, 8102, 8104, 8105, 8301, 8304, 8502, 8503, 8701,

Coast Guard, DOT

§ 15.103

8702, 8901, 8902, 8903, 8904, 8905(b), and 9102; and 49 CFR 1.45 and 1.46.

SOURCE: CGD 81-059, 52 FR 38652, Oct. 16, 1987, unless otherwise noted.

Subpart A—Purpose and Applicability

§ 15.101 Purpose of regulations.

The purpose of the regulations in this part is to set forth uniform minimum requirements for the manning of vessels. In general, they implement, interpret, or apply the specific statutory manning requirements in title 46, U.S.C., parts E & F, implement various international conventions which affect merchant marine personnel, and provide the means for establishing the complement necessary for safe operation of vessels.

§ 15.102 Paperwork approval.

(a) This section lists the control numbers assigned by the Office of Management and Budget under the Paper Reduction Act of 1980 (Pub. L. 96-511) for the reporting and recordkeeping requirements in this part.

(b) The following control numbers have been assigned to the sections indicated:

(1) OMB 2115-0624—46 CFR 15.1107, and 15.111.

(2) [Reserved]

[CGD 95-62, 62 FR 34538, June 26, 1997]

§ 15.103 General.

(a) The regulations in this part apply to all vessels which are subject to the manning requirements contained in the navigation and shipping laws of the United States, including uninspected vessels (46 U.S.C. 7101-9308).

(b) The navigation and shipping laws state that a vessel may not be operated unless certain manning requirements are met. In addition to establishing a minimum of licensed individuals and members of the crew to be carried on board certain vessels, they establish minimum qualifications concerning licenses, citizenship, and conditions of employment. It is the responsibility of the owner, charterer, managing operator, master, or person in charge or command of the vessel to ensure that appropriate personnel are carried to

meet the requirements of the applicable navigation and shipping laws and regulations.

(c) Inspected vessels are issued a certificate of inspection which indicates the minimum complement of licensed individuals and crew (including lifeboatmen) considered necessary for safe operation. The certificate of inspection complements the statutory requirements but does not supersede them.

(d) The regulations in subpart J of this part apply to seagoing vessels subject to the International Convention on Standards of Training, Certification and watchkeeping for Seafarers as amended in 1995 (STCW).

(e) Neither any person serving on any of the following vessels, nor any owner or operator of any of these vessels, need meet the requirements of subpart J, because the vessels are exempt from application of STCW:

(1) Uninspected passenger vessels as defined in 46 U.S.C. 2101(42).

(2) Fishing vessels as defined in 46 U.S.C. 2101(11)(a).

(3) Fishing vessels used as fish-tender vessels as defined in 46 U.S.C. 2101(11)(c).

(4) Barges as defined in 46 U.S.C. 2101(2), including non-self-propelled mobile offshore-drilling units.

(5) Vessels operating exclusively on the Great Lakes.

(f) Personnel serving on the following vessels, and the owners and operators of these vessels, are in compliance with subpart J and are not subject to further obligation for the purposes of STCW, on account of the vessels' special operating conditions as small vessels engaged in domestic voyages:

(1) Small passenger vessels subject to subchapter T or K of title 46, CFR.

(2) Vessels of less than 200 GRT (other than passenger vessels subject to subchapter H of title 46 CFR).

(g) Licensed personnel serving on vessels identified in paragraphs (e)(5), (f)(1), and (f)(2) of this section will be issued, without additional proof of qualification, an appropriate STCW certificate or endorsement when the Officer in Charge, Marine Inspection determines that such an endorsement is necessary to enable the vessel to engage in an international voyage. The

§ 15.105

STCW certificate or endorsement will be expressly limited to service on the vessel or the class of vessels and will not establish qualification for any other purpose.

[CGD 81-059, 52 FR 38652, Oct. 16, 1987, as amended by CGD 95-062, 62 FR 34538, June 26, 1997]

§ 15.105 Incorporation by reference.

(a) Certain material is incorporated by reference into this part with the approval of the Director of the Federal Register under 5 U.S.C. 552(a) and 1 CFR part 51. To enforce any edition other than that specified in paragraph (b) of this section, the Coast Guard must publish notice of change in the FEDERAL REGISTER and must ensure that the material is available to the public. All approved material is available for inspection at the Office of the Federal Register, 800 North Capitol Street NW., Suite 700, Washington, DC, and at the U.S. Coast Guard, Office of Operating and Environmental Standards, 2100 Second Street SW., Washington, DC 20593-0001, and is available from the sources indicated in paragraph (b) of this section.

(b) The material approved for incorporation by reference in this part and the sections affected are as follows:

International Maritime Organization (IMO)

4 Albert Embankment, London, SE1 7SR, England

STCW—The International Convention on Standards of Training, Certification and Watchkeeping for Seafarers, 1978, as amended in 1995, (STCW Convention), and Seafarer's Training, Certification and Watchkeeping Code (STCW Code)—15.103; 15.1101; 15.1103; 15.1105; 15.1109.

[CGD 95-062, 62 FR 34539, June 26, 1997, as amended by USCG-1999-6216, 64 FR 53223, Oct. 1, 1999]

Subpart B—Definition of Terms

§ 15.301 Definitions of terms used in this part.

(a) The following terms defined in this subpart apply only to the manning of vessels subject to the manning provisions in the navigation and shipping laws of the United States:

46 CFR Ch. I (10-1-00 Edition)

Assistance Towing means towing a disabled vessel for consideration.

Coastwise seagoing vessel means a vessel that is authorized by its Certificate of Inspection to proceed beyond the Boundary Line established in part 7 of this chapter.

Deck crew (excluding licensed individuals) means, as used in 46 U.S.C. 8702, only the following members of the deck department below the grade of licensed individual: Able seamen and ordinary seamen.

Designated areas means those areas within pilotage waters for which first class pilot's licenses or endorsements are issued under part 10, subpart G, of this Chapter, by the Officer in Charge, Marine Inspection (OCMI). The areas for which first class pilot's licenses or endorsements are issued within a particular Marine Inspection Zone and the specific requirements to obtain them may be obtained from the OCMI concerned.

Directly supervised means being in the direct line of sight of the person in charge or maintaining direct, two-way communications by a convenient, reliable means, such as a predetermined working frequency over a hand-held radio.

Disabled vessel means a vessel that needs assistance, whether docked, moored, anchored, aground, adrift, or under way; but does not mean a barge or any other vessel not regularly operated under its own power.

Officer in Charge, Marine Inspection (OCMI) for the purposes of part 15 means any person designated as such by the Commandant and who under the Coast Guard District Commander is in charge of an inspection zone.

Pilotage waters means the navigable waters of the United States, including all inland waters and offshore waters to a distance of three nautical miles from the baseline from which the Territorial Sea is measured.

Staff officer means a person who holds a certificate of registry in the staff department such as a purser, a medical doctor or professional nurse, which is issued by the Coast Guard.

Self-Propelled has the same meaning as the terms propelled by *machinery* and mechanically propelled. This term

Coast Guard, DOT

§ 15.401

would also include vessels fitted with both sails and mechanical propulsion.

Tank barge means a non-self-propelled tank vessel.

Tank vessel means a vessel that is constructed or adapted to carry, or that carries, oil or hazardous material in bulk as cargo or cargo residue.

Tankship means any tank vessel constructed or adapted primarily to carry oil or hazardous material in bulk as cargo or cargo residue and propelled by power or sail.

Transfer means any movement of dangerous liquid or liquefied gas as cargo in bulk or as cargo residue to, from, or within a vessel by means of pumping, gravitation, or displacement. Section 13.127 of this chapter describes what qualifies as participation in a creditable transfer.

(b) The following categories of licensed individuals are established in part 10 of this chapter. When used in this part, the following terms mean an individual holding a valid license and/or endorsement to serve in that capacity issued under part 10 of this chapter.

- (1) Master;
- (2) Mate;
- (3) Pilot;
- (4) Engineer;
- (5) Radio officer;
- (6) Operator of uninspected passenger vessels;
- (7) Offshore installation manager (OIM);
- (8) Barge supervisor (BS);
- (9) Ballast control operator (BCO); and
- (10) [Reserved]

(c) The following ratings are established in part 12 of this chapter. When used in this part, terms for the ratings identify persons holding valid merchant mariners' documents for service in the ratings issued under that part:

- (1) Able seaman.
- (2) Ordinary seaman.
- (3) Qualified member of the engine department.
- (4) Lifeboatman.
- (5) Wiper.
- (6) Steward's department (F.H.).
- (7) GMDSS At-sea Maintainer.

(d) The following ratings are established in part 13 of this chapter. When used in this part, the terms for the rat-

ings identify persons holding valid merchant mariners' documents for service in the ratings issued under that part:

- (1) Tankerman-PIC.
- (2) Tankerman-PIC (Barge).
- (3) Restricted Tankerman-PIC.
- (4) Restricted Tankerman-PIC (Barge).
- (5) Tankerman-Assistant.
- (6) Tankerman-Engineer.

[CGD 81-059 and CGD 81-059a, 52 FR 38623 and 38670, Oct. 16, 1987, as amended by CGD 87-017, 53 FR 18562, May 24, 1988; CGD 81-059, 54 FR 149, Jan. 4, 1989; CGD 81-059a, 55 FR 14805, Apr. 18, 1990; CGD 84-060, 59 FR 4841, Feb. 2, 1994; CGD 79-116, 60 FR 17154, Apr. 4, 1995; CGD 84-060, 60 FR 20652, Apr. 27, 1995; CGD 79-116, 62 FR 25135, May 8, 1997; CGD 95-062, 62 FR 34539, June 26, 1997; USCG-1999-6224, 64 FR 63235, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63235, Nov. 19, 1999, § 15.301 was amended in paragraph (a) by adding the definition of *Disabled Vessel*, by removing paragraph (b)(6), and redesignating paragraphs (b)(7) through (10) as paragraphs (b)(6) through (9), effective Nov. 20, 2000. For the convenience of the user, the superseded text is set forth as follows:

§ 15.301 Definitions of terms used in this part.

(a) * * *

(6) Operator of uninspected towing vessels;

* * * * *

Subpart C—Manning Requirements; All Vessels

§ 15.401 Employment and service with-in restrictions of license or document.

A person may not employ or engage an individual, and an individual may not serve, in a position in which an individual is required by law or regulation to hold a license, certificate of registry, or merchant mariner's document, unless the individual holds a valid license, certificate of registry, or merchant mariner's document, as appropriate, authorizing service in the capacity in which the individual is engaged or employed and the individual serves within any restrictions placed on the license, certificate of registry, or merchant mariner's document.

[CGD 81-059, 54 FR 149, Jan. 4, 1989]

§ 15.405

§ 15.405 Familiarity with vessel characteristics.

Each licensed, registered, or certificated individual must become familiar with the relevant characteristics of the vessel on which engaged prior to assuming his or her duties. As appropriate, these include but are not limited to: general arrangement of the vessel; maneuvering characteristics; proper operation of the installed navigation equipment; firefighting and life-saving equipment; stability and loading characteristics; emergency duties; and main propulsion and auxiliary machinery, including steering gear systems and controls.

§ 15.410 Licensed individuals for assistance towing vessels.

Every assistance towing vessel must be under the direction and control of a licensed individual authorized to engage in assistance towing under the provisions of 46 CFR 10.482.

[CGD 87-017, 53 FR 18562, May 24, 1988]

Subpart D—Manning Requirements; Inspected Vessels

§ 15.501 Certificate of inspection.

(a) The certificate of inspection (COI) issued by an Officer in Charge, Marine Inspection (OCMI), to a vessel required to be inspected under 46 U.S.C. 3301 specifies the minimum complement of officers and crew necessary for the safe operation of the vessel.

(b) The manning requirements for a particular vessel are determined by the OCMI after consideration of the applicable laws, the regulations in this part, and all other factors involved, such as: Emergency situations, size and type of vessel, installed equipment, proposed routes of operation including frequency of port calls, cargo carried, type of service in which employed, degree of automation, use of labor saving devices, and the organizational structure of the vessel.

[CGD 81-059, 52 FR 38652, Oct. 16, 1987, as amended at CGD 81-059, 54 FR 149, Jan. 4, 1989]

46 CFR Ch. I (10-1-00 Edition)

§ 15.505 Changes in the certificate of inspection.

All requests for changes in manning as indicated on the certificate of inspection must be made to the OCMI who last issued the certificate of inspection, unless the request is made in conjunction with an inspection for certification, in which case the request should be addressed to the OCMI conducting the inspection.

§ 15.510 Right of appeal.

Any person directly affected by a decision or action taken under this part, by or on behalf of the Coast Guard, may appeal therefrom in accordance with subpart 1.03 of this chapter.

[CGD 88-033, 54 FR 50380, Dec. 6, 1989]

§ 15.515 Compliance with certificate of inspection.

(a) Except as provided by § 15.725, no vessel may be operated unless it has in its service and on board the complement required by the certificate of inspection.

(b) Any vessel subject to inspection under 46 U.S.C. 3301 must, while on a voyage, be under the direction and control of an individual who holds an appropriate license issued by the Coast Guard. For the purposes of this paragraph:

(1) A voyage is the period of time necessary to transit from the port of departure to the final port of arrival.

(2) A port does not include an Outer Continental Shelf (OCS) facility as defined in 33 CFR part 140.

§ 15.520 Mobile offshore drilling units.

(a) The requirements in this section for mobile offshore drilling units (MODUs) supplement other requirements in this part.

(b) The OCMI determines the minimum number of licensed individuals and crew (including lifeboatmen) required for the safe operation of inspected MODUs. In addition to other factors listed in this part, the specialized nature of the MODU is considered in determining the specific manning levels.

(c) A license as offshore installation manager (OIM), barge supervisor (BS),

Coast Guard, DOT

§ 15.610

or ballast control operator (BCO) authorizes service only on MODUs. A license or endorsement as OIM is restricted to the MODU type and mode of operation specified on the license.

(d) A self-propelled MODU other than a drillship must be under the command of an individual who holds a license as master endorsed as OIM.

(e) A drillship must be under the command of an individual who holds a license as master. When a drillship is on location, the individual in command must hold a license as master endorsed as OIM.

(f) A non-self-propelled MODU must be under the command of an individual who holds a license or endorsement as OIM.

(g) An individual serving as mate on a self-propelled surface unit other than a drillship must hold an appropriate license as mate and an endorsement as BS or BCO. An individual holding a license or endorsement as barge supervisor or ballast control operator may be substituted for a required mate when a self-propelled surface unit other than a drillship is on location or under tow, under certain circumstances as determined by the cognizant OCMI.

(h) An individual holding a license or endorsement as barge supervisor is required on a non-self-propelled surface unit other than a drillship.

(i) An individual holding a license or endorsement as barge supervisor may serve as ballast control operator.

(j) The OCMI issuing the MODU's certificate of inspection may authorize the substitution of chief or assistant engineer (MODU) for chief or assistant engineer, respectively, on self-propelled or propulsion assisted surface units, except drillships. The OCMI may also authorize the substitution of assistant engineer (MODU) for assistant engineer on drillships.

(k) Requirements in this part concerning radar observers do not apply to non-self-propelled MODUs.

(l) A surface mobile offshore drilling unit underway or on location, when afloat and equipped with a ballast control room, must have that ballast control room manned by an individual holding a license or endorsement au-

thorizing service as ballast control operator.

[CGD 81-059a, 55 FR 14805, Apr. 18, 1990]

§ 15.525 Reference to other parts.

Parts 31 and 35 of this chapter contain additional manning requirements applicable to tank vessels.

Subpart E—Manning Requirements; Uninspected Vessels

§ 15.601 General.

The following sections of subparts F, G, and H of this part contain provisions concerning manning of uninspected vessels; §§ 15.701, 15.705, 15.710, 15.720, 15.730, 15.801, 15.805, 15.810, 15.820, 15.825, 15.840, 15.850, 15.855, 15.905, 15.910, and 15.915.

§ 15.605 Licensed operators for uninspected passenger vessels.

Each self-propelled, uninspected vessel carrying not more than six passengers, as defined by 46 U.S.C. 2101(21)(D), must be under the direction and control of an individual licensed by the Coast Guard.

§ 15.610 Master and mate (pilot) of towing vessels.

Every towing vessel at least 8 meters (at least 26 feet) in length measured from end to end over the deck (excluding sheer), except a vessel described by the next sentence, must be under the direction and control of a person licensed as master or mate (pilot) of towing vessels or as master or mate of vessels of appropriate gross tonnage holding an endorsement on his or her license for towing vessels. This does not apply to any vessel engaged in assistance towing, or to any towing vessel of less than 200 gross tons engaged in the offshore mineral and oil industry if the vessel has sites or equipment of that industry as its place of departure or ultimate destination.

[USCG-1999-6224, 64 FR 63235, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63235, Nov. 19, 1999, § 15.610 was revised, effective Nov. 20, 2000. For the convenience of the user, the superseded text is set forth as follows:

§ 15.701

46 CFR Ch. I (10–1–00 Edition)

§ 15.610 Licensed operators for uninspected towing vessels.

Every uninspected towing vessel which is at least 26 feet in length measured from end to end over the deck (excluding sheer) must be under the direction and control of an individual licensed by the Coast Guard. This does not apply to a vessel of less than 200 gross tons engaged in the offshore mineral and oil industry if the vessel has offshore mineral and oil industry sites or equipment as its ultimate destination or place of departure.

Subpart F—Limitations and Qualifying Factors

§ 15.701 Officers Competency Certificates Convention, 1936.

(a) This section implements the Officers Competency Certificates Convention, 1936, and applies to each vessel documented under the laws of the United States navigating seaward of the Boundary Lines in part 7 of this chapter, except:

- (1) A public vessel;
- (2) A wooden vessel of primitive build, such as a dhow or junk;
- (3) A barge; and,
- (4) A vessel of less than 200 gross tons.

(b) The master, mates and engineers on any vessel to which this section applies must hold a license to serve in that capacity issued by the Coast Guard under part 10 of this chapter.

(c) A vessel to which this section applies, or a foreign flag vessel to which the Convention applies, may be detained by a designated official until that official is satisfied that the vessel is in compliance with the Convention. *Designated official* includes Coast Guard officers, Coast Guard petty officers and officers or employees of the Customs Service.

(d) Whenever a vessel is detained, the owner, charterer, managing operator, agent, master, or individual in charge may appeal the detention within five days under the provisions of § 2.01–70 of this chapter.

§ 15.705 Watches.

(a) Title 46 U.S.C. 8104 is the law applicable to the establishment of watches aboard certain U.S. vessels. The establishment of adequate watches is the responsibility of the vessel's master.

The Coast Guard interprets the term *watch* to be the direct performance of vessel operations, whether deck or engine, where such operations would routinely be controlled and performed in a scheduled and fixed rotation. The performance of maintenance or work necessary to the vessel's safe operation on a daily basis does not in itself constitute the establishment of a watch. The minimal safe manning levels specified in a vessel's certificate of inspection takes into consideration routine maintenance requirements and ability of the crew to perform all operational evolutions, including emergencies, as well as those functions which may be assigned to persons in watches.

(b) Subject to exceptions, 46 U.S.C. 8104 requires that when a master of a seagoing vessel of more than 100 gross tons establishes watches for the licensed individuals, sailors, coal passers, firemen, oilers and watertenders, the personnel shall be *divided, when at sea, into at least three watches and shall be kept on duty successively to perform ordinary work incident to the operation and management of the vessel*. The Coast Guard interprets *sailors* to mean those members of the deck department other than licensed officers, whose duties involve the mechanics of conducting the ship on its voyage, such as helmsman (wheelman), lookout, etc., and which are necessary to the maintenance of a continuous watch. *Sailors* is not interpreted to include able seamen and ordinary seamen not performing these duties.

(c) Subject to exceptions, 46 U.S.C. 8104(g) permits the licensed individuals and crew members (except the coal passers, firemen, oilers, and watertenders) to be divided into two watches when at sea and engaged on a voyage of less than 600 miles on the following categories of vessels:

- (1) Towing vessel;
- (2) Offshore supply vessel; or,
- (3) Barge.

(d) Subject to exceptions, 46 U.S.C. 8104(h) permits a licensed master or mate (pilot) operating a towing vessel that is at least 26 feet in length measured from end to end over the deck (excluding sheer) to work not more than 12 hours in a consecutive 24 hour period except in an emergency. The Coast

Coast Guard, DOT

§ 15.720

Guard interprets this, in conjunction with other provisions of the law, to permit licensed masters or mates (pilots) serving as operators of towing vessels that are not subject to the provisions of the Officers' Competency Certificates Convention, 1936, to be divided into two watches regardless of the length of the voyage.

(e) Fish processing vessels are subject to various provisions of 46 U.S.C. 8104 concerning watches.

(1) For fish processing vessels that entered into service before January 1, 1988, the following watch requirements apply to the licensed officers and deck crew:

(i) If over 5000 gross tons—three watches.

(ii) If more than 1600 gross tons and not more than 5000 gross tons—two watches.

(iii) If not more than 1600 gross tons—no watch division specified.

(2) For fish Processing vessels which enter into service after December 31, 1987, the following watch requirements apply to the licensed officers and deck crew:

(i) If over 5000 gross tons—three watches.

(ii) If not more than 5000 gross tons and having more than 16 individuals on board primarily employed in the preparation of fish or fish products—two watches.

(iii) If not more than 5000 gross tons and having not more than 16 individuals on board primarily employed in the preparation of fish or fish products—no watch division specified.

[CGD 81-059, 52 FR 38652, Oct. 16, 1987, as amended by USCG-1999-6224, 64 FR 63235, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63235, Nov. 19, 1999, § 15.705, was amended in paragraph (d) by removing the words "individual operating an uninspected towing vessel" and adding, in their place, the words "master or mate (pilot) operating a towing vessel"; and by removing the words "individuals serving as operators of uninspected towing vessels" and adding, in their place, the words "masters or mates (pilots) serving as operators of towing vessels", effective Nov. 20, 2000.

§ 15.710 Working hours.

In addition to prescribing watch requirements, 46 U.S.C. 8104 sets limita-

tions on the working hours of licensed individuals and crew members, prescribes certain rest periods, and prohibits unnecessary work on Sundays and certain holidays when the vessel is in a safe harbor. It is the responsibility of the master or person in charge to ensure that these limitations are met. However, under 46 U.S.C. 8104(f), the master or other licensed individual can require any part of the crew to work when, in his or her judgment, they are needed for:

(a) Maneuvering, shifting berth, mooring, unmooring;

(b) Performing work necessary for the safety of the vessel, or the vessel's passengers, crew, or cargo;

(c) Saving of life on board another vessel in jeopardy; or,

(d) Performing fire, lifeboat, or other drills in port or at sea.

§ 15.715 Automated vessels.

(a) Coast Guard acceptance of automated systems to replace specific personnel or to reduce overall crew requirements is predicated upon the capabilities of the system, the system's demonstrated and continuing reliability, and a planned maintenance program that ensures continued safe operation of the vessel.

(b) The OCMI considers the capabilities of an automated system in establishing initial manning levels; however, until the system is proven reliable, a manning level adequate to operate in a continuously attended mode will be specified on a vessel's COI. It remains the responsibility of the vessel's master to determine when a continuous watch is necessary.

§ 15.720 Use of non-U.S. licensed and/or documented personnel.

(a) United States vessels which need to replace one or more persons while on a foreign voyage and outside the jurisdiction of the United States, in order to meet manning requirements, may utilize non-U.S. licensed and documented personnel, except for the positions of master and radio officer, until the vessel returns to a port at which in the most expeditious manner replacements who are citizens of the United States can be obtained.

§ 15.725

(b) The citizenship requirements of 46 U.S.C. 8103 (a) and (b) are waived, except for the requirement that the master must be a U.S. citizen, with respect to the following vessels:

(1) A U.S.-documented offshore supply vessel (OSV) (as that term is defined in 46 U.S.C. 2101(19)) that is operating from a foreign port; and

(2) A U.S.-documented mobile offshore drilling unit (MODU) (as that term is defined in 46 U.S.C. 2101(15a)) that is operating beyond the water above the U.S. Outer Continental Shelf.

(c) The waiver provided in paragraph (b) of this section does not apply to any vessel operating in water above the U.S. Outer Continental Shelf (as that term is defined in 43 U.S.C. 1331(a)).

(d) The master shall assure that any replacements of crewmembers by non-U.S. citizens made in accordance with this section will be with an individual who holds a license or document which is equivalent in experience, training, and other qualifications to the U.S. license or document required for the position and that the person possesses or will possess the training required to communicate to the extent required by § 15.730.

[CGD 89-061, 55 FR 1212, Jan. 12, 1990]

§ 15.725 Sailing short.

Whenever a vessel is deprived of the service of a member of its complement, and the master or person in charge is unable to find appropriate licensed or documented personnel to man the vessel, the master or person in charge may proceed on the voyage, having determined the vessel is sufficiently manned for the voyage. A report of sailing short must be filed in writing with the Officer in Charge, Marine Inspection (OCMI) having cognizance for inspection in the area in which the vessel is operating, or the OCMI within whose jurisdiction the voyage is completed. The report must explain the cause of each deficiency and be submitted within twelve hours after arrival at the next port. The actions of the master or person in charge in such instances are subject to review and it must be shown the vacancy was not due to the consent, fault or collusion of the master or other individuals specified in 46 U.S.C.

46 CFR Ch. I (10-1-00 Edition)

8101(e). A civil penalty may be assessed against the master or person in charge for failure to submit the report.

§ 15.730 Language requirements.

(a) The provisions of 46 U.S.C. 8702 relating to language apply generally to vessels of at least 100 gross tons except:

(1) Vessels operating on rivers and lakes (except the Great Lakes);

(2) A manned barge (except a sea-going barge or a barge to which chapter 37 of 46 U.S.C. applies);

(3) A fishing vessel, fish tender vessel, whaling vessel, or yacht;

(4) A sailing school vessel with respect to sailing school instructors and sailing school students;

(5) An oceanographic research vessel with respect to scientific personnel;

(6) A fish processing vessel which entered into service before January 1, 1988, and is not more than 1600 gross tons or which enters into service after December 31, 1987, and has not more than 16 individuals on board primarily employed in the preparation of fish or fish products; and,

(7) All fish processing vessels with respect to those personnel primarily employed in the preparation of fish or fish products or in a support position not related to navigation.

(b) 46 U.S.C. 8702(b) requires that on board vessels departing U.S. ports *75 percent of the crew in each department on board is able to understand any order spoken by the officers.*

(c) The words *able to understand any order spoken by the officers* relates to any order to a member of the crew when directing the performance of that person's duties and orders relating to emergency situations such as used for response to a fire or in using lifesaving equipment. It is not expected that a member of the deck department understand terminology normally used only in the engineroom or vice versa.

(d) Whenever information is presented to the Coast Guard that a vessel fails to comply with the specified language requirements the Coast Guard investigates the allegation to determine its validity. In determining if an allegation is factual, the Coast Guard

may require a demonstration by the licensed individuals and crew that appropriate orders are understood. The demonstration will require that orders be spoken to the individual members of the crew by the licensed individuals in the language ordinarily and customarily used by the licensed individuals. The orders must be spoken directly by the licensed individual to the crew member and not through an interpreter. Signs, gestures, or signals may not be used in the test. The Coast Guard representative will specify the orders to be given and will include not only daily routine but orders involving emergencies, either of a departmental or of a general nature. This test will be conducted, if possible, at a time reasonably in advance of the vessel's departure, to avoid delays.

Subpart G—Computations

§ 15.801 General.

The OCMI will determine the specific manning levels for vessels required to have certificates of inspection by part B of subtitle II of title 46 U.S.C. The masters or individuals in command of all vessels, whether required to be inspected under 46 U.S.C. 3301 or not, are responsible for properly manning vessels in accordance with the applicable laws, regulations, and international conventions.

[CGD 81-059, 54 FR 149, Jan. 4, 1989]

§ 15.805 Master.

(a) There must be an individual holding an appropriate license as master in command of each of the following vessels:

- (1) Every self-propelled, seagoing documented vessel of 200 gross tons and over.
- (2) Every self-propelled inspected vessel.
- (3) Every inspected passenger vessel.
- (4) Every inspected small passenger vessel.
- (5) Every towing vessel of at least 8 meters (at least 26 feet) or more in length.
- (b) Every vessel documented under the laws of the United States, other than a vessel with only a recreational

endorsement, must be under the command of a U.S. citizen.

[CGD 81-059, 52 FR 38623, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 149, Jan. 4, 1989; USCG-1999-6216, 64 FR 53223, Oct. 1, 1999; USCG-1999-6224, 64 FR 63235, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63235, Nov. 19, 1999, § 15.805, was amended by adding paragraph (a)(5), effective Nov. 20, 2000.

§ 15.810 Mates.

(a) The OCMI determines the minimum number of licensed mates required for the safe operation of inspected vessels.

(b) The minimum number of licensed mates required to be carried on every inspected, self-propelled, seagoing and Great Lakes vessel, and every inspected, seagoing, passenger vessel must not be less than the following, except when reductions are authorized under paragraph (e) of this section:

(1) Vessels of 1000 gross tons or more (except MODUs)—three licensed mates (except when on a voyage of less than 400 miles from port of departure to port of final destination—two licensed mates).

(2) MODUs of 1000 gross tons or more:

(i) Three licensed mates when on a voyage of more than 72 hours.

(ii) Two licensed mates when on a voyage of more than 16 but not more than 72 hours.

(iii) One licensed mate when on a voyage of not more than 16 hours.

(3) Vessels of 100 or more gross tons but less than 1000 gross tons—two licensed mates (except vessels of at least 100 but less than 200 gross tons on voyages which do not exceed 24 hours in duration—one licensed mate).

(4) All offshore supply vessels of 100 gross tons or more—two licensed mates (except when on a voyage of less than 600 miles—one licensed mate). A voyage includes the accrued distance from port of departure to port of arrival and does not include stops at offshore points.

(5) All vessels of less than 100 gross tons—one licensed mate (except vessels on voyages not exceeding 12 hours in duration may, if the OCMI determines it to be safe, be operated without licensed mates).

(c) An individual in charge of the navigation or maneuvering of a self-

§ 15.812

46 CFR Ch. I (10–1–00 Edition)

propelled, uninspected, documented, seagoing vessel of 200 gross tons or over must hold an appropriate license authorizing service as mate.

(d) Each person in charge of the navigation or maneuvering of a towing vessel of at least 8 meters (at least 26 feet) in length shall hold either a license authorizing service as mate of towing vessels—or, on inland routes, as pilot of towing vessels—or a license as master of vessels of appropriate gross tonnage according to the routes, endorsed for towing vessels.

(e) The OCMI may increase the minimum number of mates indicated in paragraph (b) of this section where he or she determines that the vessel's characteristics, route, or other operating conditions create special circumstances warranting an increase.

(f) The Commandant will consider reductions to the number of mates required by this section when special circumstances allowing a vessel to be safely operated can be demonstrated.

[CGD 81–059, 52 FR 38652, Oct. 16, 1987, as amended by CGD 81–059, 54 FR 149, Jan. 4, 1989; CGD 81–059a, 55 FR 14805, Apr. 18, 1990; USCG–1999–6224, 64 FR 63235, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG–1999–6224, 64 FR 63235, Nov. 19, 1999, § 15.810, was amended by redesignating paragraphs (d) and (e) as (e) and (f), and adding a new paragraph (d), effective Nov. 20, 2000.

§ 15.812 Pilots.

(a) Except as specified in paragraph (f) of this section, the following vessels, not sailing on register, when underway on the navigable waters of the United States, must be under the direction and control of an individual qualified to serve as pilot under paragraph (b) or (c) of this section as appropriate:

(1) Coastwise seagoing vessels propelled by machinery and subject to inspection under 46 U.S.C. Chapter 33, and coastwise seagoing tank barges subject to inspection under 46 U.S.C. Chapter 37;

(2) Vessels that are not authorized by their Certificate of Inspection to proceed beyond the Boundary Line established in part 7 of this Chapter which are in excess of 1,600 gross tons, propelled by machinery, and subject to inspection under 46 U.S.C. chapter 33; and

(3) Vessels operating on the Great Lakes that are propelled by machinery and subject to inspection under 46 U.S.C. chapter 33, or are tank barges subject to inspection under 46 U.S.C. chapter 37.

(b) The following individuals may serve as a pilot for a vessel subject to paragraph (a) of this section, when underway on the navigable waters of the United States that are designated areas.

(1) An individual holding a valid first class pilot's license issued by the Coast Guard, operating within the restrictions of his or her license, may serve as pilot on any vessel to which this section applies.

(2) An individual holding a valid license issued by the Coast Guard as master or mate, employed aboard a vessel within the restrictions of his or her license, may serve as pilot on a vessel of not more than 1,600 gross tons propelled by machinery, described in paragraphs (a)(1) and (a)(3) of this section, provided he or she:

(i) Is at least 21 years old;

(ii) Complies with the currency of knowledge provisions of § 10.713 of this chapter; and

(iii) Has completed a minimum of four round trips over the route to be traversed while in the wheelhouse as watchstander or observer. At least one of the round trips must be made during the hours of darkness if the route is to be traversed during darkness.

(3) An individual holding a valid license issued by the Coast Guard as master, mate, or operator employed aboard a vessel within the restrictions of his or her license, may serve as pilot on a tank barge or tank barges totaling not more than 10,000 gross tons, described in paragraphs (a)(1) and (a)(3) of this section, provided he or she:

(i) Is at least 21 years old;

(ii) Complies with the currency of knowledge provisions of § 10.713 of this chapter;

(iii) Has a current physical examination in accordance with the provisions of § 10.709 of this chapter;

(iv) Has at least six months service in the deck department on towing vessels engaged in towing operations; and

(v) Has completed a minimum of twelve round trips over the route to be

Coast Guard, DOT

§ 15.812

traversed, as an observer or under instruction in the wheelhouse. At least three of the round trips must be made during the hours of darkness if the route is to be traversed during darkness.

(c) An individual holding a valid license issued by the Coast Guard as master, mate, or operator, employed aboard a vessel within the restrictions of his or her license, may serve as a pilot for a vessel subject to paragraph (a)(1) and (a)(2) of this section, when underway on the navigable waters of the United States that are not designated as first class pilotage areas, provided he or she:

(1) Is at least 21 years old;

(2) Complies with the currency of knowledge provisions of § 10.713 of this chapter; and

(3) Has a current physical examination in accordance with the provisions of § 10.709 of this chapter.

(d) In any instance when the qualifications of a person satisfying the requirements for pilotage through the provisions of this Subpart are questioned by the Coast Guard, the individual shall, within a reasonable time, provide the Coast Guard with documentation proving compliance with the applicable portion(s) of paragraphs (b) and (c) of this section.

(e) Federal pilotage requirements contained in paragraphs (a) through (d) of this section are summarized in two quick reference tables.

(1) Table 15.812(e)(1) provides a guide to the pilotage requirements for inspected, self-propelled vessels.

TABLE 15.812(e)(1).—QUICK REFERENCE TABLE FOR FEDERAL PILOTAGE REQUIREMENTS FOR U.S. INSPECTED SELF-PROPELLED VESSELS, NOT SAILING ON REGISTER

	Designated areas of pilotage waters (routes for which First Class Pilot's licenses are issued)	Nondesignated areas of pilotage waters (between the three mile line and the start of traditional pilotage routes)
Inspected self-propelled vessels greater than 1,600 GT, authorized by their Certificate of Inspection (COI) to proceed beyond the Boundary Line, or operating on the Great Lakes.	First Class Pilot	Master or Mate may serve as pilot if the individual: 1. Is at least 21 years old. 2. Has an annual physical exam. 3. Maintains current knowledge of the waters to be navigated. ¹
Inspected self-propelled vessels not more than 1,600 GT, authorized by their Certificate of Inspection to proceed beyond the Boundary Line, or operating on the Great Lakes.	First Class Pilot, or Master or Mate may serve as pilot if the individual: 1. Is at least 21 years old. 2. Maintains current knowledge of the waters to be navigated. ¹ 3. Has 4 round trips over the route. ²	Master or Mate may serve as pilot if the individual: 1. Is at least 21 years old. 2. Maintains current knowledge of the waters to be navigated. ¹
Inspected self-propelled vessels greater than 1,600 GT, not authorized by their COI to proceed beyond the Boundary Line (Inland route vessels); other than vessels operating on the Great Lakes.	First Class Pilot	Master or Mate may serve as pilot if the individual: 1. Is at least 21 years old. 2. Has an annual physical exam. 3. Maintains current knowledge of the waters to be navigated. ¹
Inspected self-propelled vessels not more than 1,600 GT, not authorized by their COI to proceed beyond the Boundary Line (Inland route vessels); other than vessels operating on the Great Lakes.	No pilotage requirement	No pilotage requirement.

¹ One round trip within the past 60 months.

² If the route is to be traversed during darkness, 1 of the 4 round trips must be made during darkness.

(2) Table 15.812(e)(2) provides a guide to the pilotage requirements for tank barges.

TABLE 15.812(e)(2).—QUICK REFERENCE TABLE FOR FEDERAL PILOTAGE REQUIREMENTS FOR U.S. INSPECTED TANK BARGES, NOT SAILING ON REGISTER

	Designated areas of pilotage waters (routes for which First Class Pilot's li- censes are issued)	Nondesignated areas of pilotage waters (between the three mile line and the start of traditional pilotage routes)
Tank Barges greater than 10,000 GT, au- thorized by their Certificate of Inspec- tion to proceed beyond the Boundary Line, or operating on the Great Lakes.	First Class Pilot	Master, Mate, or Operator may serve as pilot if the individual: 1. Is at least 21 years old. 2. Has an annual physical exam. ¹ 3. Maintains current knowledge of the waters to be navigated. ² 4. Has at least 6 months' service in the deck department on towing vessels engaged in towing.
Tank Barges 10,000 GT or less, author- ized by their Certificate of Inspection to proceed beyond the Boundary Line, or operating on the Great Lakes.	First Class Pilot, or Master, Mate, or Op- erator may serve as pilot if the indi- vidual: 1. Is at least 21 years old 2. Has an annual physical exam. ¹ 3. Maintains current knowledge of the waters to be navigated. ² 4. Has at least 6 months' service in the deck department on towing vessels engaged in towing operations. 5. Has 12 round trips over the route. ³ No pilotage requirement	Master, Mate, or Operator may serve as pilot if the individual: 1. Is at least 21 years old. 2. Has an annual physical exam. ¹ 3. Maintains current knowledge of the waters to be navigated. ² 4. Has at least 6 months' service in the deck department on towing vessels engaged in towing operations.
Tank Barges authorized by their Certifi- cate of Inspection for Inland routes only (Lakes, Bays, and Sounds/Riv- ers); other than vessels operating on the Great Lakes.	No pilotage requirement	No pilotage requirement.

¹ Annual physical exam does not apply to an individual who will serve as a pilot of a Tank Barge of less than 1,600 gross tons.

² One round trip within the past 60 months.

³ If the route is to be traversed during darkness, 3 of the 12 round trips must be made during darkness.

(f) In Prince William Sound, Alaska, coastwise seagoing vessels over 1,600 gross tons and propelled by machinery and subject to inspection under 46 U.S.C. Chapter 37 must:

(1) When operating from 60°49' North latitude to the Port of Valdez be under the direction and control of a federally licensed pilot who:

- (i) Is operating under the Federal li-
cense;
- (ii) Holds a license issued by the
State of Alaska; and
- (iii) Is not a member of the crew of
the vessel.

(2) Navigate with either two licensed deck officers on the bridge or a feder-
ally licensed pilot when operating
South of 60°49' North latitude and in
the approaches through Hinchinbrook
Entrance and in the area bounded:

- (i) On the West by a line one mile
west of the western boundary of the
Traffic Separation Scheme;
- (ii) On the East by 146°00' West lon-
gitude;
- (iii) On the North by 60°49' North lati-
tude; and

(iv) On the South by that area of
Hinchinbrook Entrance within the ter-
ritorial sea bounded by 60° 07' North
latitude and 146°31.5' West longitude.

[CGD 84-060, 59 FR 4842, Feb. 2, 1994, as
amended by CGD 84-060, 60 FR 20652, 20653,
Apr. 27, 1995]

§ 15.815 Radar observers.

(a) Each person in the required com-
plement of licensed deck individuals,
including the master, on inspected ves-
sels of 300 gross tons or over which are
radar equipped, shall hold a valid en-
dorsement as radar observer.

(b) Each person who is employed or
serves as pilot in accordance with Fed-
eral law on board vessels of 300 gross
tons or over which are radar equipped,
shall hold a valid endorsement as radar
observer.

(c) Each person having to be licensed
under 46 U.S.C. 8904(a) for employment
or service as master, mate, or operator
on board an uninspected towing vessel
of 8 meters (approximately 26 feet) or
more in length shall, if the vessel is
equipped with radar, hold—

Coast Guard, DOT

§ 15.855

(1) A valid endorsement as radar observer; or,

(2) If the person holds a valid license dated before June 1, 1995, a valid certificate from a Radar-Operation course.

[CGD 81-059, 52 FR 38652, Oct. 16, 1987, as amended by CGD 94-041, 60 FR 8309, Feb. 14, 1995; CGD 95-028, 62 FR 51196, Sept. 30, 1997]

§ 15.820 Chief engineer.

(a) There must be an individual holding an appropriate license as chief engineer or a license authorizing service as chief engineer employed on board the following inspected mechanically propelled vessels:

(1) Seagoing or Great Lakes vessels of 200 gross tons and over.

(2) Offshore supply vessels of more than 200 gross tons.

(3) Inland (other than Great Lakes) vessels of 300 gross tons and over, if the OCMI determines that a licensed individual responsible for the vessel's mechanical propulsion is necessary.

(b) An individual engaged or employed to perform the duties of chief engineer on a mechanically propelled, uninspected, seagoing, documented vessel of 200 gross tons or over must hold an appropriate license authorizing service as a chief engineer.

§ 15.825 Engineers.

(a) An individual in charge of an engineering watch on a mechanically propelled, seagoing, documented vessel of 200 gross tons or over, other than an individual described in § 15.820, must hold an appropriate license authorizing service as an assistant engineer.

(b) The Officer in Charge, Marine Inspection determines the minimum number of licensed engineers required for the safe operation of inspected vessels.

§ 15.830 Radio officers.

Radio officers are required on certain merchant vessels of the United States. The determination of when a radio officer is required is based on the Federal Communications Commission requirements.

§ 15.835 Staff officers.

Staff officers, when carried, must be registered as specified in part 10 of this chapter.

§ 15.840 Able seamen.

(a) With certain exceptions, 46 U.S.C. 8702 applies to all vessels of at least 100 gross tons. At least 65 percent of the deck crew of these vessels, excluding licensed individuals, must be able seamen. For vessels permitted to maintain a two watch system, the percentage of able seamen may be reduced to 50 percent.

(b) Able seamen are rated as: unlimited, limited, special, offshore supply vessel, sail, and fishing industry, under the provisions of part 12 of this chapter. 46 U.S.C. 7312 specifies the categories of able seamen (i.e., unlimited, limited, etc.) necessary to meet the requirements of 46 U.S.C. 8702.

(c) It is the responsibility of the master or person in charge to ensure that the able seamen in the service of the vessel meet the requirements of 46 U.S.C. 7312 and 8702.

§ 15.845 Lifeboatmen.

The number of lifeboatmen required for a vessel are specified in the parts of the regulations dealing with the inspection of that specific type of vessel.

§ 15.850 Lookouts.

The requirements for the maintenance of a proper lookout are specified in Rule 5 of the International Regulations for Preventing Collisions at Sea, 1972, and Rule 5 of the Inland Navigational Rules Act of 1980 (33 U.S.C. 2005). Lookout is a function to be performed by a member of a navigational watch.

§ 15.855 Cabin watchmen and fire patrolmen.

(a) On vessels carrying passengers at night, the master or person in charge shall ensure that a suitable number of watchmen are in the vicinity of the cabins or staterooms and on each deck, to guard against and give alarm in case of fire or other danger.

(b) On a fish processing vessel of more than 100 gross tons, there must be a suitable number of watchmen trained in firefighting on board when hot work is being done, to guard against and give alarm in case of a fire.

§ 15.860 Tankerman.

(a) The Officer in Charge, Marine Inspection, enters on the Certificate of Inspection issued to each manned tank vessel subject to the regulations in this chapter the number of crewmembers required to hold valid merchant mariners' documents with the proper tankerman endorsement. Table 15.860(a)(1) provides the minimal requirements for tankermen aboard manned tank vessels; Table 15.860(a)(2) provides the tankerman endorsements required for personnel aboard tankships.

(b) For each tankship of more than 5,000 gross tons certified for voyages beyond the Boundary Line:

(1) The number of "Tankerman-PICs" or restricted "Tankerman-PICs" carried must be not fewer than two.

(2) The number of "Tankerman-Assistants" carried must be not fewer than three.

(3) The number of "Tankerman-Engineers" carried must be not fewer than two.

(c) For each tankship of 5,000 gross tons or less certified for voyages beyond the Boundary Line:

(1) The number of "Tankerman-PICs" or restricted "Tankerman-PICs" carried must be not fewer than two.

(2) The number of "Tankerman-Engineers" carried must be not fewer than two, unless only one engineer is required, in which case the number of "Tankerman-Engineers" carried may be just one.

(d) For each tankship not certified for voyages beyond the Boundary Line, if the total crew complement is:

(1) One or two, the number of "Tankerman-PICs" or restricted "Tankerman-PICs" carried may be just one.

(2) More than two, the number of "Tankerman-PICs" or restricted "Tankerman-PICs" carried must be not fewer than two.

(e) For each tank barge manned under §31.15-5 of this chapter, if the total crew complement is:

(1) One or two, the number of "Tankerman-PICs", restricted "Tankerman-PICs", "Tankerman-PICs (Barge)", or restricted "Tankerman-PICs (Barge)" carried may be just one.

(2) More than two, the number of "Tankerman-PICs", restricted "Tankerman-PICs", "Tankerman-PICs (Barge)", or restricted "Tankerman-PICs (Barge)" carried must be not fewer than two.

(f) The following personnel aboard each tankship certified for voyages beyond the Boundary Line shall hold valid merchant mariners' documents, endorsed as follows:

(1) The master and chief mate shall each hold a "Tankerman-PIC" or restricted "Tankerman-PIC" endorsement.

(2) The chief, first assistant, and cargo engineers shall each hold a "Tankerman-Engineer" or "Tankerman (PIC)" endorsement.

(3) Each licensed person acting as the PIC of a transfer of liquid cargo in bulk shall hold a "Tankerman-PIC" or restricted "Tankerman-PIC" endorsement.

(4) Each licensed or unlicensed person, who is assigned by the PIC duties and responsibilities related to the cargo or cargo-handling equipment during a transfer of liquid cargo in bulk but is not directly supervised by the PIC, shall hold a "Tankerman-Assistant" endorsement.

(g) The endorsements required by this section must be for the classification of the liquid cargo in bulk or of the cargo residue being carried.

(h) Because STCW does not recognize restricted Tankerman-PIC endorsements, persons may act under these only aboard vessels conducting business inside the Boundary Line.

TABLE 15.860(a)(1).—MINIMAL REQUIREMENTS FOR TANKERMEN ABOARD MANNED TANK VESSELS

Tank vessels	Tankerman PIC	Tankerman assistant	Tankerman engineer	Tankerman PIC or tankerman PIC (barge)
Tankship Certified for Voyages Beyond Boundary Line:				
Over 5000 GT	2	3	2
5000 GT or less	2	*2
Tankship Not Certified for Voyages Beyond Boundary Line	*2

Coast Guard, DOT

§ 15.910

TABLE 15.860(a)(1).—MINIMAL REQUIREMENTS FOR TANKERMAN ABOARD MANNED TANK VESSELS—
Continued

Tank vessels	Tankerman PIC	Tankerman assistant	Tankerman engineer	Tankerman PIC or tankerman PIC (barge)
Tank Barge	***2

* If only one engineer is required, then only one Tankerman Engineer is required.

** If the total crew complement is one or two persons, then only one Tankerman PIC is required.

*** If the total crew complement is one or two persons, then only one Tankerman PIC or Tankerman PIC (Barge) is required.

TABLE 15.860(a)(2).—TANKERMAN ENDORSEMENTS REQUIRED FOR PERSONNEL ABOARD TANKSHIPS
[Endorsement for the Classification of the Bulk Liquid Cargo or Residues Carried]

Tankship certified for voyages beyond boundary line	Tankerman PIC	Tankerman engineer	Tankerman assistant
Master	✓		
Chief Mate	✓		
Chief Engineer	✓	or	✓
First Assistant Engineer	✓	or	✓
Cargo Engineer	✓	or	✓
Licensed Person Acting as PIC of Transfer of Liquid Cargo in Bulk	✓		
Licensed or Unlicensed Person Not Directly Supervised by PIC			✓

[CGD 79-116, 60 FR 17154, Apr. 4, 1995, as amended by CGD 79-116, 62 FR 25135, May 8, 1997]

Subpart H—Equivalents

§ 15.901 Inspected vessels of less than 100 gross tons.

(a) An individual holding a license as mate or pilot of inspected, self-propelled vessels of over 200 gross tons is authorized to serve as master on inspected vessels of less than 100 gross tons within any restrictions on the individual's license.

(b) An individual holding a license authorizing service as master or mate of inspected, self-propelled vessels is authorized to serve as master or mate, respectively, of non-self-propelled vessels other than sail vessels, within any restrictions on the individual's license.

(c) An individual holding a license authorizing service as master or mate of inspected, sail vessels is authorized to serve as master or mate, respectively, of other non-self-propelled vessels, within any restrictions on the individual's license.

(d) An individual holding a license authorizing service as master or mate of inspected, auxiliary sail vessels, is authorized to serve as master or mate, respectively, of self-propelled and non-self-propelled vessels, within any restrictions on the individual's license.

[CGD 81-059, 54 FR 150, Jan. 4, 1989]

§ 15.905 Uninspected passenger vessels.

(a) An individual holding a license as master or pilot of inspected, self-propelled vessels is authorized to serve as operator of uninspected passenger vessels within any restrictions, other than gross tonnage limitations, on the individual's license.

(b) An individual holding a license as mate of inspected, self-propelled vessels, other than Great Lakes, inland, or river vessels of not more than 200 gross tons, is authorized to serve as operator of uninspected passenger vessels, within any restrictions, other than gross tonnage limitations, on the individual's license.

[CGD 81-059, 54 FR 150, Jan. 4, 1989]

§ 15.910 Towing vessels.

No person may serve as master or mate (pilot) of any towing vessel of at least 8 meters (at least 26 feet) in length unless he or she holds a license authorizing such service.

[USCG-1999-6224, 64 FR 63235, Nov. 19, 1999]

EFFECTIVE DATE NOTE: By USCG-1999-6224, 64 FR 63235, Nov. 19, 1999, § 15.910 was revised, effective Nov. 20, 2000. For the convenience of the user, the superseded is set forth as follows:

§ 15.915

46 CFR Ch. I (10–1–00 Edition)

§ 15.910 Uninspected towing vessels.

(a) An individual of 21 years or more of age holding a license as master of inspected, self-propelled vessels, or a license as mate or pilot of inspected, self-propelled vessels of more than 200 gross tons, is authorized to serve as operator of uninspected towing vessels within any restrictions on the individual's license. A licensed mate or pilot authorized by this section to serve as operator of uninspected towing vessels may only be in command of the vessel on domestic routes.

(b) Whenever an uninspected towing vessel is under the direction and control of a person holding a license for service only as second-class operator of uninspected towing vessels, a person holding a license authorizing service as operator of uninspected towing vessels must be on board as a member of the crew.

(c) An individual of 19 years or more of age holding a license which authorizes service as mate of vessels of not more than 200 gross tons authorizes the holder to serve as second-class operator of uninspected towing vessels within any restrictions on the individual's license.

[CGD 81-059, 52 FR 38652, Oct. 16, 1987, as amended by CGD 81-059, 54 FR 150, Jan. 4, 1989]

§ 15.915 Engineer licenses.

The following licenses authorize the holder to serve as noted, within any restrictions on the license:

(a) A designated duty engineer license authorizes service as chief or assistant engineer on vessels of not more than 500 gross tons in the following manner:

(1) A designated duty engineer limited to vessels of not more than 1000 horsepower or 4000 horsepower may serve only on near coastal, Great Lakes, or inland waters;

(2) A designated duty engineer with no horsepower limitations may serve on any waters.

(b) A chief engineer (limited-oceans) license authorizes service as chief or assistant engineer on vessels of any gross tons on inland waters and of not more than 1600 gross tons on ocean, near coastal, or Great Lakes waters.

(c) A chief engineer (limited-near coastal) license authorizes service as chief or assistant engineer on vessels of any gross tons on inland waters and of not more than 1600 gross tons on near coastal or Great Lakes waters.

(d) An assistant engineer (limited-oceans) license authorizes service on

vessels of any gross tons on inland waters and of not more than 1600 gross tons on ocean, near coastal, or Great Lakes waters.

[CGD 81-059, 54 FR 150, Jan. 4, 1989]

Subpart I—Vessels in Foreign Trade

SOURCE: CGD 92-061, 60 FR 24796, May 10, 1995, unless otherwise noted.

§ 15.1001 General.

Self-propelled vessels engaged in foreign commerce are required to use a pilot holding an appropriately endorsed Federal first class pilot's license issued by the Coast Guard when operating in the navigable waters of the United States specified in this subpart.

§ 15.1010 California.

The following offshore marine oil terminals located within U.S. navigable waters of the State of California:

(a) *Carlsbad, CA*. The waters including the San Diego Gas and Electric, Encina Power Plant, lying within an area bounded by a line beginning at latitude 33°10'06"N, longitude 117°21'42"W, thence southwesterly to latitude 33°08'54"N, longitude 117°24'36"W, thence southwesterly to latitude 33°04'30"N, longitude 117°21'42"W, thence northeasterly to latitude 33°05'36"N, longitude 117°18'54"W, thence northwesterly along the shoreline to latitude 33°10'06"N, longitude 117°21'42"W.

(b) *Huntington Beach, CA*. The waters including the Golden West Refining Company, Huntington Beach Marine Terminal, lying within an area bounded by a line beginning at latitude 33°39'06"N, longitude 118°00'00"W, thence westerly to latitude 33°39'18"N, longitude 118°05'12"W, thence southeasterly along a line drawn three nautical miles from the baseline to latitude 33°35'30"N, longitude 118°00'00"W, thence easterly to latitude 33°35'30"N, longitude 117°52'30"W, thence northwesterly along the shoreline to latitude 33°39'06"N, longitude 118°00'00"W.

(c) *El Segundo, CA*. The waters including the Chevron USA, El Segundo Marine Terminal, lying within an area bounded by a line beginning at latitude

Coast Guard, DOT

§ 15.1020

33°56'18"N, longitude 118°26'18"W, thence westerly to latitude 33°56'18"N, longitude 118°30'48"W, thence southeasterly along a line drawn three nautical miles from the baseline to latitude 33°51'48"N, longitude 118°27'54"W, thence easterly to latitude 33°51'48"N, longitude 118°24'00"W, thence northwesterly along the shoreline to latitude 33°56'18"N, longitude 118°26'18"W.

(d) *Oxnard, CA*. The waters including the Southern California Edison Company, Mandalay Generating Station, lying within an area bounded by a line beginning at latitude 34°14'12"N, longitude 119°16'00"W, thence westerly to latitude 34°14'12"N, longitude 119°19'36"W, thence southeasterly along a line drawn three nautical miles from the baseline to latitude 34°09'24"N, longitude 119°17'20"W, thence easterly to latitude 34°09'24"N, longitude 119°13'24"W, thence northwesterly along the shoreline to latitude 34°14'24"N, longitude 119°16'00"W.

(e) *Goleta, CA*. The waters including the ARCO, Ellwood Marine Terminal, lying within an area bounded by a line beginning at latitude 34°26'12"N, longitude 119°57'00"W, thence southerly to latitude 34°22'48"N, longitude 119°57'00"W, thence southeasterly along a line drawn three nautical miles from the baseline to latitude 34°21'06"N, longitude 119°50'30.5"W, thence northerly to latitude 34°24'18"N, longitude 119°50'30"W, thence northwesterly along the shoreline to latitude 34°26'12"N, longitude 119°57'00"W.

(f) *Gaviota, CA*. The waters including the Texaco Trading and Transportation, Gaviota Marine Terminal, lying within an area bounded by a line beginning at latitude 34°28'06"N, longitude 120°16'00"W, thence southerly to latitude 34°25'06"N, longitude 120°16'00"W, thence easterly along a line drawn three nautical miles from the baseline to latitude 34°25'24"N, longitude 120°08'30"W, thence northerly to latitude 34°28'24"N, longitude 120°08'30"W, thence westerly along the shoreline to latitude 34°28'06"N, longitude 120°16'00"W.

(g) *Moss Landing, CA*. The waters including the Pacific Gas and Electric Company Power Plant, lying within an area bounded by a line beginning at latitude 36°49'00"N, longitude

121°47'42"W, thence westerly to latitude 36°49'00"N, longitude 121°51'00"W, thence southerly to latitude 36°47'00"N, longitude 121°51'00"W thence easterly to latitude 36°47'00"N, longitude 121°47'54"W, thence northerly along the shoreline to latitude 36°49'00"N, longitude 121°47'42"W.

(h) *Estero Bay, CA*. The waters including various moorings, including the Pacific Gas and Electric Company mooring and the two Chevron Oil Company Terminals lying within an area bounded by a line beginning at latitude 36°25'00"N, longitude 120°52'30"W, thence westerly to latitude 36°25'00"N, longitude 120°56'00"W, thence southerly to latitude 36°22'00"N, longitude 120°56'00"W, thence easterly to latitude 36°22'00"N, longitude 120°52'12"W, thence northerly along the shoreline to latitude 36°25'00"N, longitude 120°52'30"W.

(i) *San Luis Obispo Bay, CA*. The waters including the Unocal Corporation Avila Terminal and the approaches thereto, lying in an area bounded by a line beginning at latitude 35°09'42"N, longitude 120°46'00"W, thence southerly to latitude 35°07'00"N, longitude 120°46'00"W, thence easterly to latitude 35°07'00"N, longitude 120°43'00"W, thence northerly to latitude 35°10'24"N, longitude 120°43'00"W, thence westerly along the shoreline to latitude 35°09'42"N, longitude 120°46'00"W.

[CGD 92-061, 60 FR 24796, Jan. 4, 1995, as amended by USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

§ 15.1020 Hawaii.

The following offshore marine oil terminals located within U.S. navigable waters of the State of Hawaii: *Barbers Point, Island of Oahu*. The waters including the Hawaiian Independent Refinery, Inc. and the Chevron moorings lying within an area bounded by a line bearing 180 degrees true from Barbers Point Light to latitude 21°14.8'N, longitude 158°06.4'W, thence easterly to latitude 21°14.8'N, longitude 158°03.3'W, thence northeasterly to latitude 21°15.6'N, longitude 158°01.1'W, thence northwesterly to latitude 21°18.5'N, longitude 158°02.0'W, thence westerly along the shoreline to latitude 21°17.8'N, longitude 158°06.4'W.

§ 15.1030

46 CFR Ch. I (10–1–00 Edition)

§ 15.1030 New York and New Jersey.

The following U.S. navigable waters located within the States of New York and New Jersey when the vessel is making an intra-port transit, to include, but not limited to, a movement from a dock to a dock, from a dock to an anchorage, from an anchorage to a dock, or from an anchorage to an anchorage, within the following listed operating areas:

- (a) East River from Execution Rocks to New York Harbor, Upper Bay;
- (b) Hudson River from Yonkers, New York to New York Harbor, Upper Bay;
- (c) Raritan River from Grossman Dock/Arsenal to New York Harbor, Lower Bay;
- (d) Arthur Kill Channel;
- (e) Kill Van Kull Channel;
- (f) Newark Bay;
- (g) Passaic River from Point No Point to Newark Bay;
- (h) Hackensack River from the turning basin to Newark Bay; and
- (i) New York Harbor, Upper and Lower Bay.

§ 15.1040 Massachusetts.

The following U.S. navigable waters located within the State of Massachusetts when the vessel is in transit, but not bound to or departing from a port within the following listed operating areas:

- (a) Cape Cod Bay south of latitude 41°48'54"N;
- (b) The Cape Cod Canal; and
- (c) Buzzards Bay east of a line extending from the southernmost point of Wilbur Point (latitude 41°34'55"N longitude 70°51'15"W) to the easternmost point of Pasque Island (latitude 41°26'55"N longitude 70°50'30"W).

[CGD 92-061, 60 FR 24796, May 10, 1995, as amended by USCG-1998-4442, 63 FR 52189, Sept. 10, 1998]

§ 15.1050 North Carolina.

- (a) The following navigable waters of the United States within the State of North Carolina when the vessel is maneuvering while berthing or unberthing, is approaching or passing through a bridge, or is making any intra-port transit, which transit may include but is not limited to movement from a dock to a dock, from a dock to

an anchorage, from an anchorage to a dock, or from an anchorage to an anchorage, within either of the following areas:

- (1) The waters of the Cape Fear River from the boundary line established by 46 CFR 7.60 to Latitude 34° 16.5'N.

- (2) The waters of the Northeast Cape Fear River from its confluence with the Cape Fear River at Point Peter to Latitude 34°17'N.

- (b) This subpart does not apply to any vessel on the waters specified in paragraph (a) of this section if the laws of the State of North Carolina require a State-licensed pilot on the vessel.

[CGD 97-073, 63 FR 57255, Oct. 27, 1998]

Subpart J—Vessels Subject to Requirements of STCW

SOURCE: CGD 95-062, 62 FR 34539, June 26, 1997, unless otherwise noted.

§ 15.1101 General.

- (a) *Definitions.* For purposes of this subpart, the term—

- (1) *STCW* means the International Convention on Standards of Training, Certification and Watchkeeping for Seafarers, 1978, as amended in 1995;

- (2) *STCW Code* means the Seafarer's Training, Certification and Watchkeeping Code;

- (3) *Seagoing vessel* means a self-propelled vessel in commercial service that operates beyond the Boundary Line established by 46 CFR part 7. It does not include a vessel that navigates exclusively on inland waters;

- (4) *Rest* means a period of time during which the person concerned is off duty, is not performing work (which includes administrative tasks such as chart corrections or preparation of port-entry documents), and is allowed to sleep without being interrupted; and

- (5) *Overriding operational conditions* means circumstances in which essential shipboard work cannot be delayed for safety or environmental reasons, or could not reasonably have been anticipated at the commencement of the voyage.

- (b) Except as otherwise provided in § 15.1103(d), the regulations in this subpart apply to seagoing vessels subject to STCW.

(c) A vessel that has on board a valid Safety Management Certificate and a copy of a Document of Compliance issued for that vessel in accordance with 46 U.S.C. 3205 is presumed in compliance with the regulations in this subpart.

§ 15.1103 Employment and service within restrictions of license, document, and STCW endorsement.

(a) On board a seagoing vessel operating beyond the Boundary Line, no person may employ or engage any person to serve, and no person may serve, in a position requiring a person to hold an STCW endorsement, including master, chief mate, chief engineer, second engineer, officer of the navigational or engineering watch, or radio operator, unless the person serving holds an appropriate, valid STCW certificate or endorsement issued in accordance with part 10 or 12 of this chapter.

(b) On board a seagoing vessel of 500 GT or more, no person may employ or engage any person to serve, and no person may serve, as a rating forming part of the navigational watch, except for training, unless the person serving holds an appropriate, valid STCW certificate or endorsement issued in accordance with part 12 of this chapter.

(c) After January 31, 2002, on board a seagoing vessel driven by main propulsion machinery of 750 kW [1,000 hp] propulsion power or more, no person may employ or engage any person to serve, and no person may serve, in a rating forming part of a watch in a manned engine-room, nor may any person be designated to perform duties in a periodically unmanned engine-room, except for training or for the performance of duties of an unskilled nature, unless the person serving holds an appropriate, valid STCW certificate or endorsement issued in accordance with part 12 of this chapter.

(d) After January 31, 1997, no person may either be engaged or employed to serve on board a roll-on/roll-off (Ro-Ro) passenger ship to which a certificate signifying compliance with the International Convention for the Safety of Life at Sea, 1974, as amended (SOLAS), has been issued, or perform duties on board such a ship, unless he or she holds documentary evidence to show he

or she meets the requirements of § 10.1005 or § 12.30-5 of this chapter, whichever is appropriate to the service or the duties.

(e) After January 31, 2002, on board a seagoing vessel required to comply with provisions of the Global Maritime Distress and Safety System (GMDSS) in Chapter IV of SOLAS, no person may employ or engage any person to serve, and no person may serve, as the master, chief mate, or officer of the navigational watch, unless the person serving holds the appropriate certificate for operator of radio in GMDSS.

(f) After January 31, 1999, on board a seagoing vessel required to comply with provisions of the GMDSS in Chapter IV of SOLAS, no person may employ or engage any person to serve, and no person may serve, as the person designated to perform at-sea maintenance of GMDSS installations, when such designation is used to meet the maintenance requirements of SOLAS Regulation IV/15, which allows for capability of at-sea electronic maintenance to ensure that radio equipment is available for radio communication, unless the person serving holds documentary evidence that he or she is competent to maintain GMDSS equipment.

(g) After January 31, 2002, on board a seagoing vessel fitted with an Automatic Radar-Plotting Aid (ARPA), no person may employ or engage any person to serve, and no person may serve, as the master, chief mate, or officer of the navigational watch, unless the person serving has been trained in the use of ARPA in accordance with § 10.205 or § 10.209 of this chapter.

§ 15.1105 Familiarization and basic safety-training.

(a) After January 31, 1997, on board a seagoing vessel, no person may assign any person to perform shipboard duties, and no person may perform those duties, unless the person performing them has received—

(1) Training in personal survival techniques as set out in the standard of competence under STCW Regulation VI/1; or

(2) Sufficient familiarization training or instruction that he or she—

(i) Can communicate with other persons on board about elementary safety

matters and understand informational symbols, signs, and alarm signals concerning safety;

(ii) Knows what to do if a person falls overboard; if fire or smoke is detected; or if the firm alarm or abandon-ship alarm sounds;

(iii) Can identify stations for muster and embarkation, and emergency-escape routes;

(iv) Can locate and don life-jackets;

(v) Can raise the alarm and knows the use of portable fire extinguishers;

(vi) Can take immediate action upon encountering an accident or other medical emergency before seeking further medical assistance on board; and

(vii) Can close and open the fire doors, weather-tight doors, and watertight doors fitted in the vessel other than those for hull openings.

(b) After January 31, 1997, on board a seagoing vessel, no person may assign a shipboard duty or responsibility to any person who is serving in a position that must be filled as part of the required crew complement, and no person may perform any such duty or responsibility, unless he or she is familiar with it and with all vessel's arrangements, installations, equipment, procedures, and characteristics relevant to his or her routine or emergency duties or responsibilities, in accordance with STCW Regulation I/14.

(c) After January 31, 1997, on board a seagoing vessel, no person may assign a shipboard duty or responsibility to any person who is serving in a position that must be filled as part of the required crew complement or who is assigned a responsibility on the muster list, and no person may perform any such duty or responsibility, unless the person performing it can produce evidence of having—

(1) Received appropriate approved basic safety training or instruction as set out in the standards of competence under STCW Regulation VI/1, with respect to personal survival techniques, fire prevention and fire-fighting, elementary first aid, and personal safety and social responsibilities; and

(2) Achieved or, if training has been completed, maintained competence within the last 5 years, in accordance with STCW regulation VI/1.

(d) Subject to training requirements that may apply for issue or renewal of a license or document under part 10 or 12 of this chapter, a person who is serving on a seagoing vessel immediately before February 1, 1997, and has not received training or instruction in basic safety training, may continue to serve until February 1, 2002, without receiving such training or instruction, if he or she can produce evidence of having participated in well-organized drills and other structured exercises or in on-board safety-training programs during which his or her performance was evaluated and weaknesses were brought to his or her attention.

(e) Fish-processing vessels in compliance with the provisions of 46 CFR part 28 on instructions, drills, and safety orientation are deemed to be in compliance with the requirements of this section on familiarization and basic safety-training.

§ 15.1107 Maintenance of merchant mariners' records by owner or operator.

Each owner or operator of a U.S.-documented seagoing vessel shall ensure that procedures are in place, in respect of each merchant mariner holding a license or merchant mariner's document and serving on any such vessel, to ensure that the following information is maintained throughout his or her service, and is readily accessible to those in management responsible for the safety of the vessel and for the prevention of marine pollution:

(a) Medical fitness (such as results of a recent evaluation by a medical professional certifying that the mariner is physically able to perform the tasks and duties normally associated with a particular shipboard position or does not have an apparent medical condition that disqualifies him or her from the requirements of a particular shipboard position).

(b) Experience and training relevant to assigned shipboard duties (i.e., record of training completed, and of relevant on-the-job experience acquired).

(c) Competency in assigned shipboard duties (evidenced by copies of current licenses, documents, or endorsements that the mariner holds, as well as by a

Coast Guard, DOT

§ 16.101

record of the most recent basic safety assessment and by instances where ship-specific familiarization has been achieved and maintained).

§ 15.1109 Watches.

Each master of a vessel that operates beyond the Boundary Line shall ensure observance of the principles concerning watchkeeping set out in STCW Regulation VIII/2 and section A-VIII/2 of the STCW Code.

§ 15.1111 Work hours and rest periods.

(a) After January 31, 1997, each person assigned duty as officer in charge of a navigational or engineering watch, or duty as a rating forming part of a navigational or engineering watch, on board any vessel that operates beyond the Boundary Line shall receive a minimum of 10 hours of rest in any 24-hour period.

(b) The hours of rest required under paragraph (a) of this section may be divided into no more than two periods, of which one must be at least 6 hours in length.

(c) The requirements of paragraphs (a) and (b) of this section need not be maintained in the case of an emergency or drill or in other overriding operational conditions.

(d) The minimum period of 10 hours of rest required under paragraph (a) of this section may be reduced to not less than 6 consecutive hours as long as—

(1) No reduction extends beyond 2 days; and

(2) Not less than 70 hours of rest are provided each 7-day period.

(e) The minimum period of rest required under paragraph (a) of this section may not be devoted to watchkeeping or other duties.

(f) Watchkeeping personnel remain subject to the work-hour limits in 46 U.S.C. 8104 and to the conditions when crew members may be required to work.

(g) The Master shall post watch schedules where they are easily accessible. They must cover each affected member of the crew and must take into account the rest requirements of this section as well as port rotations and changes in the vessel's itinerary.

PART 16—CHEMICAL TESTING

Subpart A—General

Sec.

16.101 Purpose of regulations.

16.105 Definitions of terms used in this part.

Subpart B—Required Chemical Testing

16.201 Application.

16.205 Implementation of chemical testing programs.

16.207 Conflict with foreign laws.

16.210 Pre-employment testing requirements.

16.220 Periodic testing requirements.

16.230 Random testing requirements.

16.240 Serious marine incident testing requirements.

16.250 Reasonable cause testing requirements.

16.260 Records.

Subpart C—Standards for Chemical Testing for Dangerous Drugs

16.301 Procedures for Transportation Workplace Drug Testing Programs.

16.310 General.

16.320 Chain of custody.

16.330 Specimen handling and shipping.

16.340 Test laboratory requirements.

16.350 Specimen analyses.

16.360 Specimen analysis reports.

16.370 Medical Review Officer.

16.380 Release of information.

Subpart D—Employee Assistance Programs

16.401 Employee Assistance Program (EAP).

Subpart E—Management Information System

16.500 Management Information System requirements.

APPENDIX A [RESERVED]

APPENDIX B DRUG AND ALCOHOL TESTING
MANAGEMENT INFORMATION SYSTEM (MIS)
DATA COLLECTION FORM

AUTHORITY: 46 U.S.C. 2103, 3306, 7101, 7301, and 7701; 49 CFR 1.46.

SOURCE: CGD 86-067, 53 FR 47079, Nov. 21, 1988, unless otherwise noted.

Subpart A—General

§ 16.101 Purpose of regulations.

(a) The regulations in this part provide a means to minimize the use of intoxicants by merchant marine personnel and to promote a drug free and safe work environment.

(b) These regulations prescribe the minimum standards, procedures, and means to be used to test for the use of dangerous drugs.

(c) As part of a reasonable cause drug testing program established pursuant to this part, employers may test for drugs in addition to those specified in this part only with approval granted by the Coast Guard under 49 CFR part 40 and for substances for which the Department of Health and Human Services has established an approved testing protocol and positive threshold.

§ 16.105 Definitions of terms used in this part.

Chemical test means a scientifically recognized test which analyzes an individual's breath, blood, urine, saliva, bodily fluids, or tissues for evidence of dangerous drug or alcohol use.

Crewmember means an individual who is:

(a) On board a vessel acting under the authority of a license, certificate of registry, or merchant mariner's document issued under this subchapter, whether or not the individual is a member of the vessel's crew; or

(b) Engaged or employed on board a vessel owned in the United States that is required by law or regulation to engage, employ, or be operated by an individual holding a license, certificate of registry, or merchant mariner's document issued under this subchapter, except the following:

(1) Individuals on fish processing vessels who are primarily employed in the preparation of fish or fish products, or in a support position, and who have no duties that directly affect the safe operation of the vessel;

(2) Scientific personnel on an oceanographic research vessel;

(3) Individuals on industrial vessels who are industrial personnel, as defined in this chapter; and

(4) Individuals not required under part 15 of this subchapter who have no duties that directly affect the safe operation of the vessel.

Dangerous drug means a narcotic drug, a controlled substance, or a controlled-substance analog (as defined in section 102 of the Comprehensive Drug Abuse and Control Act of 1970 (21 U.S.C. 802)).

Dangerous drug level means the amount of traces of dangerous drugs or drug metabolites in an individual's breath, blood, urine, saliva, or body fluids or tissues.

Drug test means a chemical test of an individual's urine for evidence of dangerous drug use.

Employer means a marine employer or sponsoring organization.

Fails a chemical test for dangerous drugs means that the result of a chemical test conducted in accordance with 49 CFR part 40 is reported as "positive" for the presence of dangerous drugs or drug metabolites in an individual's system by a Medical Review Officer in accordance with that part.

Intoxicant means any form of alcohol, dangerous drug, or combination thereof.

Marine employer means the owner, managing operator, charterer, agent, master, or person in charge of a vessel, other than a recreational vessel.

Medical Review Officer means an individual designated by the employer to carry out the duties specified in § 16.370 of this part.

Operation means to navigate, steer, direct, manage, or sail a vessel, or to control, monitor, or maintain the vessel's main or auxiliary equipment or systems. Operation includes:

(a) Determining the vessel's position, piloting, directing the vessel along a desired trackline, keeping account of the vessel's progress through the water, ordering or executing changes in course, rudder position, or speed, and maintaining a lookout;

(b) Controlling, operating, monitoring, maintaining, or testing: the vessel's propulsion and steering systems; electric power generators; bilge, ballast, fire, and cargo pumps; deck machinery including winches, windlasses, and lifting equipment; life-saving equipment and appliances; fire-fighting systems and equipment; and navigation and communication equipment; and

(c) Mooring, anchoring, and line handling; loading or discharging of cargo or fuel; assembling or disassembling of tows; and maintaining the vessel's stability and watertight integrity.

Passes a chemical test for dangerous drugs means the result of a chemical

test conducted in accordance with 49 CFR part 40 is reported as "negative" by a Medical Review Officer in accordance with that part.

Positive rate means the number of positive results for random drug tests conducted under this part plus the number of refusals to take random tests required by this part, divided by the total number of random drug tests conducted under this part plus the number of refusals to take random tests required by this part.

Refuse to submit means that a crewmember fails to provide a urine sample as required by 49 CFR part 40, without a genuine inability to provide a specimen (as determined by a medical evaluation), after he or she has received notice of the requirement to be tested in accordance with the provisions of this part, or engages in conduct that clearly obstructs the testing process.

Serious marine incident means an event defined in 46 CFR 4.03-2.

Sponsoring organization is any company, consortium, corporation, association, union, or other organization with which individuals serving in the marine industry, or their employers, are associated.

Vessel owned in the United States means any vessel documented or numbered under the laws of the United States; and any vessel owned by a citizen of the United States that is not documented or numbered by any nation.

[CGD 86-067, 53 FR 47079, Nov. 21, 1988; 53 FR 48367, Nov. 30, 1988, as amended by CGD 90-014, 56 FR 31033, July 8, 1991; CGD 90-053, 58 FR 31107, May 28, 1993; CGD 93-051, 59 FR 28792, June 3, 1994; 59 FR 62226, Dec. 2, 1994; CGD 91-223, 60 FR 4525, Jan. 23, 1995]

Subpart B—Required Chemical Testing

§ 16.201 Application.

(a) Chemical testing of personnel must be conducted as required by this subpart.

(b) If an individual fails a chemical test for dangerous drugs under this part, the individual will be presumed to be a user of dangerous drugs.

(c) If an individual holding a license, certificate of registry, or merchant mariner's document fails a chemical

test for dangerous drugs, the individual's employer or prospective employer shall report the test results in writing to the nearest Coast Guard Officer in Charge, Marine Inspection (OCMI). The individual shall be denied employment as a crewmember or removed from duties which directly affect the safe operation of the vessel as soon as practicable and shall be subject to suspension and revocation proceedings against his or her license, certificate of registry, or merchant mariner's document under 46 CFR part 5.

(d) If an individual who does not hold a license, certificate of registry, or merchant mariner's document fails a chemical test for dangerous drugs, the individual shall be denied employment as a crewmember or removed from duties which directly affect the safe operation of the vessel as soon as possible.

(e) An individual who has failed a required chemical test for dangerous drugs may not be reemployed aboard a vessel until the requirements of § 16.370(d) of this part and 46 CFR part 5, if applicable, have been satisfied.

[CGD 86-607, 53 FR 47049, November 11, 1988, as amended by CGD 90-014, 56 FR 31034, July 8, 1991]

§ 16.205 Implementation of chemical testing programs.

(a) When a vessel owned in the United States is operating in waters that are not subject to the jurisdiction of the United States, the testing requirements of §§ 16.210 and 16.230 do not apply to a citizen of a foreign country engaged or employed as pilot in accordance with the laws or customs of that foreign country.

(b) Upon written request of an employer, Commandant (G-MOA) will review the employer's chemical testing program to determine compliance with the provisions of this part.

[CGD 90-014, 56 FR 60930, Nov. 30, 1991, as amended by 59 FR 62226, Dec. 2, 1994; CGD 95-072, 60 FR 50461, Sept. 29, 1995; CGD 96-041, 61 FR 50726, Sept. 27, 1996; CGD 95-028, 62 FR 51196, Sept. 30, 1997]

§ 16.207 Conflict with foreign laws.

(a) This part applies to the testing of all U.S. crewmembers onboard U.S. vessels operating in waters that are subject to the jurisdiction of a foreign

§ 16.210

government on and after January 2, 1997; however, implementation may be delayed until July 1, 1997.

(b) Employers for whom compliance with this part would violate the domestic laws or policies of another country may request an exemption from the drug testing requirements of this part by submitting a written request to Commandant (G-MOA), at the address listed in § 16.500(a).

[CGD 95-011, 61 FR 66613, Dec. 18, 1996]

§ 16.210 Pre-employment testing requirements.

(a) No marine employer shall engage or employ any individual to serve as a crewmember unless the individual passes a chemical test for dangerous drugs for that employer.

(b) An employer may waive a pre-employment test required for a job applicant by paragraph (a) of this section if the individual provides satisfactory evidence that he or she has:

(1) Passed a chemical test for dangerous drugs, required by this part, within the previous six months with no subsequent positive drug tests during the remainder of the six-month period; or

(2) During the previous 185 days been subject to a random testing program required by § 16.230 for at least 60 days and did not fail or refuse to participate in a chemical test for dangerous drugs required by this part.

[CGD 90-053, 58 FR 31107, May 28, 1993, as amended by CGD 93-051, 59 FR 28792, June 3, 1994]

§ 16.220 Periodic testing requirements.

(a) Except as provided by paragraph (c) of this section, and §§ 10.209(h) and 12.02-9(f) of this subchapter, an applicant for an original issuance or a renewal of a license or a certificate of registry (COR), a raise in grade of a license, a higher grade of COR, an original issuance of a merchant mariner's document (MMD), the first endorsement as an able seaman, lifeboatman, qualified member of the engine department, or tankerman, or a reissuance of an MMD with a new expiration date shall be required to pass a chemical test for dangerous drugs. The applicant shall provide the results of the test to

46 CFR Ch. I (10-1-00 Edition)

the Coast Guard Regional Examination Center (REC) at the time of submitting an application. The test results must be completed and dated not more than 185 days prior to submission of the application.

(b) Unless excepted under paragraph (c) of this section, each pilot required by this subchapter to receive an annual physical examination must pass a chemical test for dangerous drugs as a part of that examination. The individual shall provide the results of each test required by this section to the REC when the pilot applies for a license renewal or when requested by the Coast Guard.

(c) An applicant need not submit evidence of passing a chemical test for dangerous drugs required by paragraph (a) or (b) of this section if he or she provides satisfactory evidence that he or she has—

(1) Passed a chemical test for dangerous drugs required by this part within the previous six months with no subsequent positive chemical tests during the remainder of the 6-month period; or

(2) During the previous 185 days been subject to a random testing program required by § 16.230 for at least 60 days and did not fail or refuse to participate in a chemical test for dangerous drugs required by this part.

(d) Except as provided by paragraph (b) of this section, an applicant is required to provide the results of only one chemical test for dangerous drugs when multiple transactions are covered by or requested in a single application.

[CGD 91-223, 60 FR 4525, Jan. 23, 1995]

§ 16.230 Random testing requirements.

(a) Marine employers shall establish programs for the chemical testing for dangerous drugs on a random basis of crewmembers on inspected vessels who:

(1) Occupy a position, or perform the duties and functions of a position, required by the vessel's Certificate of Inspection;

(2) Perform the duties and functions of patrolmen or watchmen required by this chapter; or,

(3) Are specifically assigned the duties of warning, mustering, assembling, assisting, or controlling the movement of passengers during emergencies.

(b) Marine employers shall establish programs for the chemical testing for dangerous drugs on a random basis of crewmembers on uninspected vessels who:

(1) Are required by law or regulation to hold a license issued by the Coast Guard in order to perform their duties on the vessel;

(2) Perform duties and functions directly related to the safe operation of the vessel;

(3) Perform the duties and functions of patrolmen or watchmen required by this chapter; or,

(4) Are specifically assigned the duties of warning, mustering, assembling, assisting, or controlling the movement of passengers during emergencies.

(c) The selection of crewmembers for random drug testing shall be made by a scientifically valid method, such as a random number table or a computer-based random number generator that is matched with crewmembers' Social Security numbers, payroll identification numbers, or other comparable identifying numbers. Under the testing frequency and selection process used, each covered crewmember shall have an equal chance of being tested each time selections are made and an employee's chance of selection shall continue to exist throughout his or her employment. As an alternative, random selection may be accomplished by periodically selecting one or more vessels and testing all crewmembers covered by this section, provided that each vessel subject to the marine employer's test program remains equally subject to selection.

(d) Marine employers may form or otherwise use sponsoring organizations, or may use contractors, to conduct the random chemical testing programs required by this part.

(e) Except as provided in paragraph (f) of this section, the minimum annual percentage rate for random drug testing shall be 50 percent of covered crewmembers.

(f) The annual rate for random drug testing may be adjusted in accordance with this paragraph.

(1) The Commandant's decision to increase or decrease the minimum annual percentage rate for random drug testing is based on the reported ran-

dom positive rate for the entire industry. All information used for this determination is drawn from the drug MIS reports required by this part. In order to ensure reliability of the data, the Commandant considers the quality and completeness of the reported data, may obtain additional information or reports from marine employers, and may make appropriate modifications in calculating the industry random positive rate. Each year, the Commandant will publish in the FEDERAL REGISTER the minimum annual percentage rate for random drug testing of covered crewmembers. The new minimum annual percentage rate for random drug testing will be applicable starting January 1 of the calendar year following publication.

(2) When the minimum annual percentage rate for random drug testing is 50 percent, the Commandant may lower this rate to 25 percent of all covered crewmembers if the Commandant determines that the data received under the reporting requirements of 46 CFR 16.500 for two consecutive calendar years indicate that the positive rate is less than 1.0 percent.

(3) When the minimum annual percentage rate for random drug testing is 25 percent, and the data received under the reporting requirements of 46 CFR 16.500 for any calendar year indicate that the positive rate is equal to or greater than 1.0 percent, the Commandant will increase the minimum annual percentage rate for random drug testing to 50 percent of all covered crewmembers.

(g) Marine employers shall randomly select a sufficient number of covered crewmembers for testing during each calendar year to equal an annual rate not less than the minimum annual percentage rate for random drug testing determined by the Commandant. If the marine employer conducts random drug testing through a consortium, the number of crewmembers to be tested may be calculated for each individual marine employer or may be based on the total number of covered crewmembers covered by the consortium who are subject to random drug testing at the same minimum annual percentage rate under this part or any DOT drug testing rule.

(h) Each marine employer shall ensure that random drug tests conducted under this part are unannounced and that the dates for administering random tests are spread reasonably throughout the calendar year.

(i) If a given covered crewmember is subject to random drug testing under the drug testing rules of more than one DOT agency for the same marine employer, the crewmember shall be subject to random drug testing at the percentage rate established for the calendar year by the DOT agency regulating more than 50 percent of the crewmember's function.

(j) If a marine employer is required to conduct random drug testing under the drug testing rules of more than one DOT agency, the marine employer may—

(1) Establish separate pools for random selection, with each pool containing the covered crewmembers who are subject to testing at the same required rate; or

(2) Randomly select such crewmembers for testing at the highest percentage rate established for the calendar year by any DOT agency to which the marine employer is subject.

(k) An individual may not be engaged or employed, including self-employment, on a vessel in a position as master, operator, or person in charge for which a license or merchant mariner's document is required by law or regulation unless all crewmembers covered by this section are subject to the random testing requirements of this section.

[CGD 90-014, 56 FR 31034, July 8, 1991, as amended by 59 FR 62227, Dec. 2, 1994]

§ 16.240 Serious marine incident testing requirements.

The marine employer shall ensure that all persons directly involved in a serious marine incident are chemically tested for evidence of dangerous drugs and alcohol in accordance with the requirements of 46 CFR 4.06.

§ 16.250 Reasonable cause testing requirements.

(a) The marine employer shall require any crewmember engaged or employed on board a vessel owned in the United States that is required by law

or regulation to engage, employ or be operated by an individual holding a license, certificate of registry, or merchant mariner's document issued under this subchapter, who is reasonably suspected of using a dangerous drug to be chemically tested for dangerous drugs.

(b) The marine employer's decision to test must be based on a reasonable and articulable belief that the individual has used a dangerous drug based on direct observation of specific, contemporaneous physical, behavioral, or performance indicators of probable use. Where practicable, this belief should be based on the observation of the individual by two persons in supervisory positions.

(c) When the marine employer requires testing of an individual under the provisions of this section, the individual must be informed of that fact and directed to provide a urine specimen as soon as practicable. This fact shall be entered in the vessel's official log book, if one is required.

(d) If an individual refuses to provide a urine specimen when directed to do so by the employer under the provisions of this section, this fact shall be entered in the vessel's official log book, if one is required.

§ 16.260 Records.

(a) Employers shall maintain records of chemical tests which the Medical Review Officer reports as *positive* for a period of at least 5 years and shall make these records available to Coast Guard officials upon request. Records of tests reported as *negative* shall be retained for one year.

(b) The records shall be sufficient to:

(1) Satisfy the requirements of §§ 16.210(b) and 16.220(c) of this part.

(2) Identify the total number of individuals chemically tested annually for dangerous drugs in each of the categories of testing required by this part including the annual number of individuals failing chemical tests and the number and types of drugs for which individuals tested positive.

[CGD 86-067, 53 FR 47079, Nov. 21, 1988, as amended by CGD 91-223, 60 FR 4526, Jan. 23, 1995]

Subpart C—Standards for Chemical Testing for Dangerous Drugs

§ 16.301 Procedures for Transportation Workplace Drug Testing Programs.

Drug testing programs subject to this part shall be conducted in accordance with 49 CFR part 40, Procedures for Transportation Workplace Drug Testing Programs. This subpart summarizes requirements for drug testing programs contained in those regulations. Those regulations should be consulted to determine the specific procedures which must be established and utilized. Drug testing programs required by this part shall use only drug testing laboratories certified by the Department of Health and Human Services (DHHS).

§ 16.310 General.

(a) *Collection site.* The employer shall ensure that the collection site is adequate to provide for the collection, security, temporary storage, and shipping of specimens to a certified drug testing laboratory.

(b) *Security.* Procedures shall provide for the collection site to be secure. Collection sites dedicated solely for specimen collection must be secure at all times. Collection sites which are not dedicated solely for specimen collection must be secured during specimen collection.

(c) *Access to authorized personnel only.* No unauthorized personnel shall be permitted in any part of a collection site when specimens are collected nor shall unauthorized personnel be allowed access to stored specimens.

(d) *Privacy.* Procedures for collecting urine specimens shall allow for individual privacy unless there is reason to believe that a particular individual may alter or substitute the specimen to be provided.

(e) *Integrity of specimens.* Collection site personnel shall take precautions to ensure that each specimen is not adulterated or diluted during the collection process.

§ 16.320 Chain of custody.

(a) A chain of custody for each specimen to be chemically tested shall be established and maintained from the

time of specimen collection through the testing of the specimen.

(b) If a specimen is not immediately prepared for shipment, it shall be safeguarded during temporary storage.

(c) Every effort shall be made to minimize the number of persons handling specimens.

§ 16.330 Specimen handling and shipping.

(a) The employer shall obtain a specimen collection and shipping kit to be used to collect specimens and ship them to the certified drug testing laboratory.

(b) The specimen collection and shipping kit, as required by 49 CFR part 40, shall contain:

(1) Plastic urine specimen bottles in a sufficient quantity to accommodate the people to be tested;

(2) Means for sealing and identifying specimen bottles;

(3) Chain of custody forms;

(4) A set of step-by-step instructions which describe the proper procedures to be followed during specimen collection, handling, and shipping; and

(5) Shipping materials.

(c) The marine employer shall ensure that specimens are promptly shipped to a certified testing laboratory meeting the requirements of § 16.340. Chain of custody documents must accompany each specimen from the time of specimen collection through shipment to and testing by the laboratory.

(d) Specimens shall be shipped by an expeditious means.

§ 16.340 Test laboratory requirements.

(a) The employer shall ensure that all chemical testing for dangerous drugs required by this part is conducted by a DHHS certified laboratory.

(b) The laboratory shall meet the requirements of 49 CFR part 40.

§ 16.350 Specimen analysis.

(a) Each specimen shall be analyzed in accordance with 49 CFR 40.29, which requires testing for—

(1) Marijuana;

(2) Cocaine;

(3) Opiates;

(4) Phencyclidine (PCP); and

(5) Amphetamines.

§ 16.360

(b) A specimen which indicates the presence of a dangerous drug at a level equal to or exceeding the levels established in 49 CFR 40.29 is reported to the Medical Review Officer as positive.

[CGD 90-053, 58 FR 31107, May 28, 1993]

§ 16.360 Specimen analysis reports.

(a) The laboratory shall report all test results as required by 49 CFR 40.29(g). Reports are made within an average of five days after receipt of a specimen by the laboratory.

(b) The laboratory reports as negative all specimens which are negative on the initial test or negative on the confirmatory test. Only specimens confirmed positive are reported positive to the Medical Review Officer for a specific drug or drug metabolite.

[CGD 86-067, 53 FR 47079, Nov. 21, 1988, as amended by CGD 90-053, 58 FR 31107, May 28, 1993]

§ 16.370 Medical Review Officer.

(a) The employer shall designate or appoint a Medical Review Officer (MRO) meeting the qualifications of 49 CFR 40.33. If the employer does not have a qualified individual on staff to serve as MRO, the employer may contract for the provision of MRO services as part of its drug testing program.

(b) The MRO shall review and interpret each confirmed positive test result in accordance with 49 CFR 40.33.

(c) If the MRO verifies a laboratory confirmed positive report, the MRO shall report the positive test result to the employer or the employer's designated agent.

(d) Before an individual who has failed a required chemical test for dangerous drugs may return to work aboard a vessel, the MRO shall determine that the individual is drug-free and the risk of subsequent use of dangerous drugs by that person is sufficiently low to justify his or her return to work. In addition, the individual shall agree to be subject to increased, unannounced testing for a period as determined by the MRO of up to 60 months.

[CGD 86-067, 53 FR 47079, Nov. 21, 1988; 53 FR 48367, Nov. 30, 1988, as amended by CGD 90-053, 58 FR 31107, May 28, 1993]

46 CFR Ch. I (10-1-00 Edition)

§ 16.380 Release of information.

(a) Except as provided for in this part and in § 4.06-60 of this chapter, an employer shall not release individual test results or other personal information for anti-drug program records.

(b) Individual results from drug tests required by this part may be released if the individual tested signs a specific authorization for the release of the results to an identified person.

(c) Nothing in this section shall prevent an individual tested under this part from obtaining the results of that test.

Subpart D—Employee Assistance Programs

§ 16.401 Employee Assistance Program (EAP).

The employer shall provide an Employee Assistance Program (EAP) for all crewmembers. The employer may establish the EAP as a part of its internal personnel services or the employer may contract with an entity that will provide EAP services to a crewmember. Each EAP must include education and training on drug use for crewmembers and the employer's supervisory personnel as provided below:

(a) *EAP education program:* Each EAP education program must include at least the following elements: display and distribution of informational material; display and distribution of a community service hot-line telephone number for crewmember assistance, and display and distribution of the employer's policy regarding drug and alcohol use in the workplace.

(b) *EAP training program:* An EAP training program must be conducted for the employer's crewmembers and supervisory personnel. The training program must include at least the following elements: the effects and consequences of drug and alcohol use on personal health, safety, and work environment; the manifestations and behavioral cues that may indicate drug and alcohol use and abuse; and documentation of training given to crewmembers and the employer's supervisory personnel. Supervisory personnel must receive at least 60 minutes of training.

Subpart E—Management Information System

§ 16.500 Management Information System requirements.

(a) *Data collection.* All marine employers must collect the following drug and alcohol testing program data for each calendar year:

(1) Total number of employees during the calendar year that were subject to the drug testing rules in this part.

(2) Number of employees subject to testing under the anti-drug rules of both the Coast Guard and another DOT agency based on the nature of their assigned duties as identified by each agency.

(3) Number of drug and alcohol tests conducted identified by test type. Drug test types are pre-employment, periodic, random, post-accident, and reasonable cause. Alcohol test types are post-accident and reasonable cause.

(4) Number of positive drug test results verified by a Medical Review Officer (MRO) by test type and types of drug(s). Number of alcohol tests resulting in a blood alcohol concentration weight of .04 percent or more by test type.

(5) Number of negative drug and alcohol test results reported by MRO by test type.

(6) Number of applicants denied employment based on a positive drug test result verified by an MRO.

(7) Number of marine employees with a MRO-verified positive test result who returned to duty in a safety-sensitive position subject to required chemical testing, after meeting the requirements of § 16.370(d) and part 5 of this chapter.

(8) Number of marine employees with positive drug test results verified by a MRO as positive for one drug or a combination of drugs.

(9) Number of employees required under this part to be tested who refused to submit to a drug test.

(10) Number of covered employees and supervisory personnel who received the required initial training.

(b) *Data reporting.* (1) By March 15 of the year following the collection of the data in paragraph (a) of this section, marine employers must submit the data on Form CG-5573 to Commandant (G-MOA), 2100 Second Street, SW, Washington, DC, 20593-0001. Marine employers must complete all data fields on the form.

(2) Form CG-5573 is reproduced in Appendix B of this part and you may obtain the form from any Marine Inspection Office. You may also download a copy of Form CG-5573 from the U.S. Coast Guard Marine Safety and Environmental Protection web site at <http://www.uscg.mil/hq/g-m/nmc/genpub.htm>.

(3) A consortium or other employer representative may submit data for a marine employer. Reports may contain data for more than one marine employer. Each report, however, must list the marine employers included in the report.

(4) Marine employers must ensure that data submitted by a consortium or other employer representative under paragraph (b)(3) of this section is correct.

(c) After filing 3 consecutive annual MIS reports since January 1, 1996, required by paragraph (b) of this section, marine employers with 10 or fewer covered employees may stop filing the annual report each succeeding year during which they have no more than 10 covered employees.

(d) Marine employers who conduct operations regulated by another Department of Transportation Operating Administration must submit appropriate data to that Operating Administration for employees subject to that Operating Administration's regulations.

[USCG-1998-4469, 64 FR 22559, Apr. 27, 1999; 64 FR 31989, June 15, 1999]

APPENDIX A [RESERVED]

**APPENDIX B - DRUG AND ALCOHOL TESTING MANAGEMENT INFORMATION SYSTEM
(MIS) DATA COLLECTION FORM**

INSTRUCTIONS

This reporting form includes four parts. Collectively, these parts address the data elements required in the United States Coast Guard (USCG) and the U.S. Department of Transportation (DOT) drug and alcohol testing regulations. The form is preceded by instructions which outline and explain the information requested and indicate the probable sources for this information. The four sections, the page number for the instructions, and the page location on the reporting form are:

<u>Section</u>	<u>Instructions Page</u>	<u>Reporting Form Page</u>
A. MARINE EMPLOYER INFORMATION	i	1
B. COVERED EMPLOYEES	i	1
C. MARINE EMPLOYEE DRUG TESTING INFORMATION	ii-iv	2
D. MARINE EMPLOYEE ALCOHOL TESTING INFORMATION	iv-v	2

Page 1 **MARINE EMPLOYER INFORMATION** (Section A) requires the company name for which the report is done and a current address. Below this, a signature, typed or printed name, title, date, and current telephone number (including the area code) are required from the person certifying the correctness and completeness of the form.

Page 1 **COVERED EMPLOYEES** (Section B) requires a count of employees (including prospective employees who were pre-employment tested) who were subject to testing under the USCG/DOT drug testing regulations. The most likely source for this information is the employer's personnel department. The count should include all covered employees working for the company during the reported year.

Additional information must be completed if your company employs personnel who perform duties covered by the drug and alcohol rules of more than one DOT operating administration. **NUMBER OF EMPLOYEES COVERED BY MORE THAN ONE DOT OPERATING ADMINISTRATION**, requires that you identify the number of employees under the appropriate additional operating administration(s).

The following instructions are to be used as a guide for completing the drug testing information in the USCG/DOT Drug and Alcohol Testing MIS Data Collection Form. A sample testing results table with a narrative explanation is provided on pages ii-iii as an example to facilitate the process of completing the form correctly.

Section C is used to summarize the drug testing results for applicants and covered employees. There are four categories of testing to be completed. Items necessary to complete this table include:

- 1) the number of specimens collected in each testing category;
- 2) the number of specimens tested which were reported negative and verified positive for any drug(s); and
- 3) individual counts of those specimens which were verified positive for each of the five drugs.

Do not include results of quality control samples submitted to the testing laboratory in the table.

A sample table with detailed instructions is provided.

Page 2

MARINE EMPLOYEE DRUG TESTING INFORMATION (Section C) requires information for drug testing by category of testing. Each part of this table must be completed for each category of testing. These numbers **do not** include refusals for testing. A sample of the table with example numbers is presented on page iii.

Three types of information are necessary to complete the left side of this table. The first blank column with the heading "**NUMBER OF SPECIMENS COLLECTED**," requires a count for all collected specimens by testing category. It **should not** include refusals to test. The second blank column with the heading "**NUMBER OF SPECIMENS REPORTED NEGATIVE**," requires a count for all completed tests by testing category that were reported negative by your Medical Review Officer (MRO).

The third blank column with the heading "**NUMBER OF SPECIMENS VERIFIED POSITIVE FOR ONE OR MORE OF THE FIVE DRUGS**," refers to the number of specimens provided by job applicants or employees that were verified positive. "Verified positive" means the results were verified by your MRO.

The right hand portion of this table, with the heading "**NUMBER OF SPECIMENS VERIFIED POSITIVE FOR EACH TYPE OF DRUG**," requires counts of positive tests **for each** of the five drugs for which tests were done, i.e., marijuana (THC), cocaine, phencyclidine (PCP), opiates, and amphetamines. The number of specimens verified positive for each drug should be entered in the appropriate column for that drug type. Again, "verified positive" refers to test results verified by your MRO.

If an applicant or employee tested positive for more than one drug; for example, both marijuana and cocaine, that person's positive results would be included once in each of the appropriate columns (marijuana and cocaine).

SAMPLE MARINE EMPLOYEE TEST RESULTS TABLE

The following example is for Section C, **MARINE EMPLOYEE DRUG TESTING INFORMATION**, and summarizes pre-employment testing results. The procedures detailed here also apply to the

other categories of testing in Section C which require you to summarize testing results for employees.

A

Urine specimens were collected for 157 job applicants for covered positions during the reporting year. This information is entered in the first blank column of the table in the row marked "PRE-EMPLOYMENT".

B

The MRO for your company reported that 153 of those 157 specimens from applicants were negative (i.e., no drugs were detected). Enter this information in the second blank column of the table in the row marked "PRE-EMPLOYMENT".

C

The MRO for your company reported that 4 of those 157 specimens from applicants were positive (i.e., a drug or drugs were detected). Enter this information in the third blank column of the table in the row marked "PRE-EMPLOYMENT".

D

With the 4 specimens that tested positive, the following drugs were detected:

<u>Specimen</u>	<u>Drugs</u>
#1	Marijuana
#2	Amphetamines
#3	Marijuana and Cocaine (Multi-drug specimen)
#4	Marijuana

Marijuana was detected in three (3) specimens, cocaine in one (1), and amphetamines in one (1). This information is entered in the columns on the right hand side of the table under each of these drugs. Two different drugs were detected in specimen #3 (multi-drug) so an entry is made in both the marijuana and the cocaine column for this specimen.

TYPE OF TEST	NUMBER OF SPECIMENS COLLECTED	NUMBER OF SPECIMENS REPORTED NEGATIVE	NUMBER OF SPECIMENS VERIFIED POSITIVE FOR ONE OR MORE OF THE FIVE DRUGS	NUMBER OF SPECIMENS VERIFIED POSITIVE FOR EACH TYPE OF DRUG				
				Marijuana (THC)	Cocaine	Phencyclidine (PCP)	Opiates	Amphetamines
PRE-EMPLOYMENT	157	153	4	3	1	0	0	1

A
B
C
D

Note that adding up the numbers for each type of drug in a row ("NUMBER OF SPECIMENS VERIFIED POSITIVE FOR EACH TYPE OF DRUG") will not always match the number entered in the third column, "NUMBER OF SPECIMENS VERIFIED POSITIVE FOR ONE OR MORE OF THE FIVE DRUGS". The total for the numbers on the right hand side of the table may differ from the number of specimens testing positive since some specimens may contain more than one drug.

- Page 2 Below the table for **MARINE EMPLOYEE DRUG TESTING INFORMATION** is a box with the heading **"Number of persons denied a position as a covered employee following a verified positive drug test"**. This is simply a count of those persons who were not placed in a covered position because they tested positive for one or more drugs.
- Page 2 Also following the table for **MARINE EMPLOYEE DRUG TESTING INFORMATION**, you must provide counts for employees who have tested positive and have returned to work in a covered position during the reported period. This information should be available from the personnel office and/or drug program manager.
- Page 2 **SPECIMENS VERIFIED POSITIVE FOR MORE THAN ONE DRUG** requires information on specimens that contained more than one drug. First, indicate the **NUMBER OF VERIFIED POSITIVES**. Then specify the combination of drugs reported as positive by placing the same number in the appropriate columns. For example, if marijuana and cocaine were detected in 3 specimens, then you would write "3" as the number of verified positives and "3" in the columns for "Marijuana" and "Cocaine". If marijuana and opiates were detected in 2 specimens, then you would write "2" as the number of verified positives and "2" in the columns for "Marijuana" and "Opiates".
- Page 2 **EMPLOYEES WHO REFUSED TO SUBMIT TO A DRUG TEST** requires a count of the **NUMBER OF COVERED EMPLOYEES** who refused to submit to a **random** or **non-random** (pre-employment, post-accident, or reasonable cause) drug test required under the USCG regulation.
- Page 2 **DRUG AND ALCOHOL TRAINING** requires information on the number of covered employees and supervisory personnel who have received the required drug and alcohol training during the current reporting period.

The following instructions are to be used as a guide for completing the alcohol testing information for the USCG/DOT **Drug and Alcohol Testing MIS Data Collection Form**. A sample testing results table with a narrative explanation is provided on page v as an example to facilitate the process of completing the form correctly.

Section D is used to summarize the alcohol testing results for covered employees. There are two categories of testing to be completed in this table. Items necessary to complete this table includes:

- 1) the number of alcohol tests performed for each testing category; and
- 2) the number of test results which were equal to or greater than 0.04.

A sample table with detailed instructions is provided.

- Page 2 **MARINE EMPLOYEE ALCOHOL TESTING INFORMATION** (Section D) requires information for post-accident and reasonable cause alcohol testing. These numbers **do not** include refusals for testing. A sample table with example numbers is presented on page v.

Two types of information are necessary to complete this table. The first blank column with the heading "NUMBER OF TESTS" requires a count of all alcohol tests performed for each testing category.

The second blank column with the heading "NUMBER OF TEST RESULTS EQUAL TO OR GREATER THAN 0.04" requires a count of positive tests.

SAMPLE MARINE EMPLOYEE TEST RESULTS TABLE

The following example is for Section D, **MARINE EMPLOYEE ALCOHOL TESTING INFORMATION**, which summarizes post-accident and reasonable cause testing results.

A

Tests were conducted on 6 employees in covered positions during the reporting year. This information is entered in the first blank column of the table in the row marked "POST-ACCIDENT". The test results for these 6 employees were the following:

<u>Employee</u>	<u>Results</u>
#1	0.06
#2	0.00
#3	0.00
#4	0.04
#5	0.00
#6	0.02

B

The test results for 2 of the employees in covered positions were equal to or greater than 0.04. Enter this information in the second blank column of the table in the row marked "POST-ACCIDENT".

TYPE OF TEST	NUMBER OF TESTS	NUMBER OF TEST RESULTS EQUAL TO OR GREATER THAN 0.04
POST-ACCIDENT	6	2
REASONABLE CAUSE	10	1

A

→

B

→

Please note that the sample data collection form also has information for REASONABLE CAUSE testing on line two. For REASONABLE CAUSE testing, 10 tests were conducted and 1 was equal to or greater than 0.04.

USCG DRUG AND ALCOHOL TESTING MIS DATA COLLECTION FORM

OMB No. 2115-0003

YEAR COVERED BY THIS REPORT: 19__

A. MARINE EMPLOYER INFORMATION

Company _____

Address _____

I, the undersigned, certify that the information provided on this United States Coast Guard Drug and Alcohol Testing Management Information System Data Collection Form is, to the best of my knowledge and belief, true, correct, and complete for the period stated.

Signature _____ Printed Name _____ Date _____

Title _____ Phone Number _____

Title 18, U.S.C. Section 1001, makes it a criminal offense subject to a maximum fine of \$10,000, or imprisonment for not more than 5 years, or both, to knowingly and willfully make or cause to be made any false or fraudulent statements or representations in any matter within the jurisdiction of any agency of the United States.

B. COVERED EMPLOYEES

COVERED EMPLOYEES						
EMPLOYEE CATEGORY	NUMBER OF USCG COVERED EMPLOYEES	NUMBER OF EMPLOYEES COVERED BY MORE THAN ONE DOT OPERATING ADMINISTRATION				
		FAA	FHWA	FRA	FTA	RSPA
Crewmembers						

READ BEFORE COMPLETING THE REMAINDER OF THIS FORM:

- All items refer to the **current** reporting period **only** (for example, January 1, 1994 - December 31, 1994).
- This report is only for testing **REQUIRED BY THE UNITED STATES COAST GUARD (USCG)**:
 - Results should be reported only for employees in **COVERED POSITIONS** as defined by the USCG drug and alcohol testing regulations.
 - The information requested should only include testing for: marijuana (THC), cocaine, phencyclidine (PCP), opiates, and amphetamines using the standard procedures required by DOT regulation 49 CFR Part 40; and alcohol using the standard procedures required by USCG regulations 33 CFR Part 95 and 46 CFR Parts 4 and 16.
- Information on refusals for testing should only be reported in the table entitled "EMPLOYEES WHO REFUSED TO SUBMIT TO A DRUG TEST". Do not include refusals for testing in other sections of this report.
- Do not include the results of any quality control samples submitted to the testing laboratory in any of the tables.
- Complete all items; DO NOT LEAVE ANY ITEM BLANK. If the value for an item is zero (0), place a zero (0) on the form.

The United States Coast Guard estimates that the average burden for this report form is 31 minutes. You may submit any comments concerning the accuracy of this burden estimate or any suggestions for reducing the burden to: Commandant, U.S. Coast Guard Headquarters (G-MMI); 2100 2nd St., S.W.; Washington, D.C. 20593-0001; OR Office of Management and Budget, Paperwork Reduction Project (2115-0003); Washington, D.C. 20503.

REVERSE OF CG-5573 (11-93)

This part of the form requires information on VERIFIED POSITIVE and REPORTED NEGATIVE drug tests. These are the results that are reported to you by your Medical Review Officer (MRO).

C. MARINE EMPLOYEE DRUG TESTING INFORMATION

TYPE OF TEST	NUMBER OF SPECIMENS COLLECTED	NUMBER OF SPECIMENS REPORTED NEGATIVE	NUMBER OF SPECIMENS VERIFIED POSITIVE FOR ONE OR MORE OF THE FIVE DRUGS	NUMBER OF SPECIMENS VERIFIED POSITIVE FOR EACH TYPE OF DRUG				
				Marijuana (THC)	Cocaine	Phencyclidine (PCP)	Opiates	Amphetamines
PRE-EMPLOYMENT								
RANDOM								
POST-ACCIDENT								
REASONABLE CAUSE								
Number of persons denied a position as a covered employee following a verified positive drug test:								
Number of marine employees with a positive drug test result verified by an MRO, who were returned to duty in a covered position, having met the requirements of 46 CFR 16.370 (d) and 46 CFR Part 5:								
SPECIMENS VERIFIED POSITIVE FOR MORE THAN ONE DRUG								
NUMBER OF VERIFIED POSITIVES	Marijuana (THC)	Cocaine	Phencyclidine (PCP)	Opiates	Amphetamines			
EMPLOYEES WHO REFUSED TO SUBMIT TO A DRUG TEST								Number
Covered employees who refused to submit to a random drug test required under USCG regulations:								
Covered employees who refused to submit to a non-random drug test required under USCG regulations:								
DRUG AND ALCOHOL TRAINING								Number
Covered employees who have received initial training on the consequences, manifestations, and behavioral cues of drug and alcohol use as required by USCG drug and alcohol testing regulations:								
Supervisory personnel who have received initial training on the specific contemporaneous physical, behavioral, and performance indicators of probable drug and alcohol use as required by USCG drug and alcohol testing regulations:								

D. MARINE EMPLOYEE ALCOHOL TESTING INFORMATION

TYPE OF TEST	NUMBER OF TESTS	NUMBER OF TEST RESULTS EQUAL TO OR GREATER THAN 0.04
POST-ACCIDENT		
REASONABLE CAUSE		

INDEX

SUBCHAPTER B—MERCHANT MARINE OFFICERS AND SEAMEN

EDITORIAL NOTE: This listing is provided for informational purposes only. It is compiled and kept current by the U.S. Coast Guard, Department of Transportation.

Part, subpart, or section

A

Able seaman:	
Age requirement	12.05-3
Certification required	12.05-1
Color sense test.....	12.05-5(a)
Demonstration of ability	12.05-9
Discharge of.....	14.10
Examination	12.05-9
Eye test.....	12.05-5
General requirements for	12.05-3
Hearing test	12.05-5
Medical examination.....	12.05-5
Number required	15.840
Physical requirements	12.05-5
Presentation of certificate.....	12.05-1
Ratings for which qualified	12.05-11
Service in other ratings.....	12.05-11
Service or training requirements.....	12.05-7
Shipment of	Part 14
Training requirements	12.05-7
Tugs and towboats	12.05-7(d)
Vision test.....	12.05-5
Acknowledgment of service for MODU	10.476
Affidavits, loss of seaman's documents	12.02-23(e)
Age requirements for:	
Certification as able seaman.....	12.05-3
Licenses	10.201(f)
Aliens, proving nationality	12.02-14
Appeal:	
License denial	10.204
Manning	15.510
Seaman's certificate.....	12.02-25
Applications:	
Aliens	12.02-10
Duplicate seamen's documents.....	12.02-23
False or incomplete information	10.205(f) (4)
Original license	10.202(a)
Raise of grade of license.....	10.207(a)
Renewal of license.....	10.209(a)
Seamen's documents	12.02-9
Apprentice engineers	12.25-35
Apprentice mate	12.25-40

46 CFR Ch. I (10–1–00 Edition)

Approved courses.....	10.302
Assistance towing:	
Definition	10.103, 15.301
License endorsement authorizing	10.482
Vessel manning requirement.....	15.410
Assistant electrician, ranking rating defined.....	12.15-3(b)
Assistant engineer (See also subpart B—General Requirements)	
Definition.....	10.103
Limited-oceans, service requirements	10.522
Uninspected fishing industry vessel.....	10.530
Automated vessels.....	15.715
Auxiliary-sail vessels over 200 tons, service required for license endorse- ment	10.401(f)

B

Ballast Control Operator:	
Definition.....	10.103
License requirements.....	10.474
Barge supervisor:	
Definition.....	10.103
License requirements.....	10.472
Basis and purpose of regulations	10.101, 12.01-1, 14.01-1, 15.101, 16.101
Boatswain, definition	10.103

C

Cabin watchmen.....	15.855
Cadet rating on merchant mariner's document.....	12.25-25
Cardiopulmonary resuscitation (CPR) course certificate.....	10.205(h)
Certificate of discharge, issuing duplicates.....	12.02-23
Certificate of identification	12.02-11(g)
Certificate of inspection	15.505, 15.515
Certificate of registry (See also subpart B—General Requirements)	10.801
Certificates of service:	
Application	12.02-9
Entry ratings.....	12.25-10
Fees	12.02-18
Ratings other than able seaman and QMED	12.25-10
Service under.....	12.02-11(c)
When required	12.02-7, 12.25-1
Where issued	12.02-3
Certificates of service for ratings other than able seaman and QMED:	
General requirements.....	12.25-10
When required	12.25-1
Certificates, report loss or recovery of.....	12.02-24
Certification as QMED, when required.....	12.15-1
Certification of seamen:	
Application for documents.....	12.02-9
Basis and purpose of regulations.....	12.01-1
Cadet	12.25-25
Citizenship requirements.....	12.02-13
Documents required for shipment.....	12.02-7
Fees	12.02-18
Form in which documents issued.....	12.02-5, 12.02-11
Oath requirement	12.02-15
Other than able seaman and QMED, when required	12.25-1
Preparation and issuance of documents	12.02-17
QMED physical requirements	12.15-5

Subchapter B Index

Student observers.....	12.25-30
Character check and references for original license.....	10.205(f)
Chemical testing for dangerous drugs:	
Analyses specimens of.....	16.350
Applicability.....	16.201
Chain of custody.....	16.320
Conflict with foreign laws.....	16.207
Definitions.....	10.103, 16.105
Employee assistance program.....	16.401
General procedures.....	16.310
Laboratory requirements.....	16.340
Medical Review Officer.....	16.370
Periodic testing.....	16.220
Pre-employment testing.....	16.210
Purpose.....	16.101
Random testing.....	16.230
Reasonable cause testing.....	16.250
Records.....	16.260
Release of information.....	16.380
Report of specimen analyses.....	16.360
Serious marine incident testing.....	16.240
Specimen handling and shipping.....	16.330
Standards.....	16.301
Chief engineer: (See also subpart B—General Requirements)	
Definition.....	10.103
Limited-oceans, service requirements.....	10.518
Limited-near coastal, service requirements.....	10.520
Requirement for.....	15.820
Uninspected fishing industry vessel, service requirements.....	10.530
Unlimited, service requirements.....	10.510
Chief mate:	
Definition.....	10.103
Required service (See also subpart B—General Requirements).....	10.405
Chief purser	
(See also subpart B—General Requirements).....	10.803, 10.807
Citizenship:	
Acceptable evidence.....	10.205(c)
Requirements for license.....	10.201(e)
Requirements for seamen's documents.....	12.02-13
Color sense test, original license.....	10.205(d)(2)
Commandant evaluation of service for equivalency.....	10.211(e)
Commitment of employment:	
Definition.....	16.105
Continuous discharge book:	
Application.....	12.02-9
Duplicate, issuance.....	12.02-23
Convictions for drug violations.....	10.201(b)
Course approvals:	
General standards.....	10.303
Period of approval.....	10.302(c)
Radar observer courses.....	10.305, 10.307
Records retention.....	10.303(d)
Renewal of approval.....	10.302(d)
Request for approval.....	10.302(a)
Substitution of training for required service.....	10.304
Crewmember, definition.....	16.105

D

Day, definition	10.103
Decision of Officer in Charge, right of appeal	10.204
Deck crew, definition	15.301
Deck engine mechanic	12.15-13
Definitions:	
Assistance towing	10.103, 15.301
Assistant engineer	10.103
Ballast control operator	10.103
Barge supervisor	10.103
Boatswain	10.103
Chemical test	16.105
Chief engineer	10.103
Chief mate	10.103
Crewmember	16.105
Dangerous drug	16.105
Dangerous drug level	16.105
Day	10.103
Deck crew	15.301
Designated duty Engineer	10.103
Drug test	16.105
Employer	16.105
Employment assigned to	10.103
Endorsement	10.103
Evaluation	10.103, 12.01-6
Fails a test for dangerous drugs	16.105
First assistant engineer	10.103
Great Lakes	10.103
Horsepower	10.103
Inland waters	10.103
Intoxicant	16.105
Lower level license	10.103
Marine employer	16.105
Master	10.103
Mate	10.103
Medical review officer	16.105
Mobile offshore drilling unit	10.103
Month	10.103
Near coastal	10.103
Oceans	10.103
Officer in Charge, Marine Inspection	10.103
Offshore installation manager	10.103
On location	10.103
Operation (of a vessel)	16.105
Operator	10.103
Orally assisted examination	10.103
Original document	12.01-6
Original license	10.103
Qualified rating	12.01-6
Raise of grade	10.103
Rivers	10.103
Self-propelled	15.301
Senior company official	10.103
Serious marine incident	16.105
Sponsoring organization	16.105
Staff officer	15.301
Underway	10.103

Subchapter B Index

Undocumented vessel	10.103
Upper level license	10.103
Vessel owned in the United States	16.105
Western Rivers	10.103
Year	10.103
Denial of license	10.202(g)
Denial of seaman's certificate	12.02-4
Designated duty engineer (See also subpart B—General Requirements)	
Definition	10.103
License requirements	10.524
Service authority	10.501, 15.915
Detention of a vessel	15.701(c)
Discharge certificate, duplicate, issuance	12.02-23
Discharge of seamen, procedure	Subpart 14.10
Discharge of seamen, rules and regulations	Subpart 14.10, 14.15
Documentary evidence of service	10.211(a)
Documents, seamen's:	
Application	12.02-9
Application from aliens	12.02-10
Basis for denial of documents	12.02-4
Fees	12.02-18
Form in which issued	12.02-5, 12.02-11
Production of required	14.205
When required	12.02-7
Where issued	12.02-3
Drugs, disqualifying for license or COR	10.201(b)
Drug testing:	
Analyses of specimens	16.350
Applicability	16.201
Chain of custody	16.320
Conflict with foreign laws	16.207
Definitions	10.103, 16.105
Employee assistance program	16.401
General procedures	16.310
Laboratory requirements	16.340
Medical Review Officer	16.370
Periodic testing	16.220
Pre-employment testing	16.210
Purpose	16.101
Random testing	16.230
Reasonable cause testing	16.250
Records	16.260
Release of information	16.380
Report of specimen analyses	16.360
Serious marine incident testing	16.240
Specimen handling and shipping	16.330
Standards	16.301
Dual mode ITB	10.211(d)
Duplicate license:	
Fee	10.109(e)
Issuance	10.219
Duplicate seamen's documents:	
Application	12.02-23
Fee	12.02-18(a)(5)
Issuance	12.02-23

E

Electrician:

46 CFR Ch. I (10–1–00 Edition)

Assistant, rating defined	12.15-3
Examination	12.15-9
Employer, definition	16.105
Endorsement:	
Able seamen	12.05-7
Definition	10.103
Food handler	12.25-10, 12.25-20
License fee	10.109
Merchant mariner's document:	
Able seamen	12.05-11
Apprentice engineer	12.25-35
Fees	12.02-18(a)
General provisions	12.02-11
Licensed officers	12.02-11(d)
QMED	12.15-11
Staff officer	12.02-11(e)
Pilot's endorsement to master's, mate's or OUTV's license	10.703
Engineer:	
Apprentice engineer	12.25-35
Requirement for	15.825
Engineer's Licenses: (See also subpart B—General Requirements)	
Horsepower limitation	10.503
Service authorization	10.501, 15.915
Uninspected fishing industry vessel	10.530
Engineman	12.15-15
Engine mechanic, deck	12.15-13
English language proficiency	10.201(c)
Equivalents, manning	15.901
Equivalent, service	10.211(e)
Evaluation:	
Definition	10.103, 12.01-6
Experience not listed	10.211(e)
Sea service as member of armed forces of U.S.	10.213
Sea service on vessels owned by U.S.	10.213
Examination for license:	
Fees	10.109
List of subjects:	
Deck	10.910
Engineer	10.950
Procedures	10.217
Examination for seaman's documents:	
Able seaman	12.05-9
Fees	12.02-18
Lifeboatman	12.10-5
Qualified member engine department	12.15-9
Ratings other than able seaman or QMED	12.25-10
Reexamination	12.02-17
To be given as soon as practicable	12.02-17, 12.20-5
Expired license, reissue	10.209(f)
Extension of pilot's route	10.705(c)
Eyesight requirements	10.205(d)

F

Failure on examination for license	10.217
False or incomplete application	10.205(f)(4)
Familiarity with vessel	10.101(b), 15.405
Fees:	

Subchapter B Index

Exemptions	10.112
License	10.112
Merchant mariner's documents	12.02-18
Penalties	10.111, 12.02-18(d)
Fingerprint records, original license	10.205(f)(2)
Fire patrolmen	15.855
Firefighting training certificate	10.205(g), 10.207(f)
First aid certificate, for original license	10.205(h)
First assistant engineer:	
Definition	10.103
Required service (See also subpart B—General Requirements)	10.512
First class pilot (See also subpart B—General Requirements)	10.701
Fishing industry vessel licenses (See also subpart B—General Requirements)	
Deck	10.462
Engineer	10.530
Food handler:	
Endorsement on merchant mariner's document	12.25-10
Medical examination	12.25-20
Foreign nationals:	
License eligibility	10.201(e)
Seaman's certificate eligibility	12.02-14
Serving on U.S. vessels	15.720
Foreign service	10.205(e)(3) and (4)
Form in which seamen's documents are issued	12.02-5

G

General provisions:	
Merchant mariner's documents	12.02-11
Endorsed as able seaman	12.05-11
Endorsed as QMED	12.15-11
General requirements:	
Able seaman	12.05-3
Deck engine mechanic	12.15-13
Engineman	12.15-15
Issuance of merchant mariner's documents for ratings other than able seaman or QMED	12.25-10
Licenses	Subpart B
Tankerman	13.107, 13.203, 13.401
Glasses, required wearing	10.209(e)(1)
Great Lakes, definition	10.103

H

Horsepower:	
Definition	10.103
Limitations on engineer's license	10.503
Hospital corpsman	10.809(b)

I

Inland waters, definition	10.103
Integrated tug and barge, dual mode	10-211(d)
Issuance:	
Duplicate license	10.219
Duplicate seamen's documents	12.02-23
Fees:	
Licenses	10.109
Merchant mariner's documents	12.02-18(a)(4)

46 CFR Ch. I (10–1–00 Edition)

Licenses.....	10.202
Merchant mariner's documents.....	12.02-11
Seamen's documents after revocation.....	12.02-21

J

Junior assistant purser.....	10.803, 10.807
Junior engineer, examination.....	12.15-9

L

Language requirements:	
Able seaman examination.....	12.05-9(b)
Crew	15.730
License applicants.....	10.201(c)
Puerto Rican waters, OUPV.....	10.466(h)
Puerto Rican waters, OUTV	10.464(i)
Lifeboatman examination.....	12.10-5(b)
QMED examination.....	13.201, 13.301, 13.401, 13.501
Tankerman examination.....	12.20-5
License:	
Application for original	10.202(a)
Application for renewal	10.209(a)
Citizenship requirement	10.201(e), 10.205(c)
Denial.....	10.202(g)
Duplicate license.....	10.219
Examination subjects:	
Deck.....	10.910
Engineer	10.950
Fees.....	10.109
Issuance.....	10.202
Lifting of limitations.....	10.215
Limitations, authority to impose	10.202(h)
Loss.....	10.219
Officer in Charge, Marine Inspection's authority to reduce license re-	
quirements and issue limited license.....	10.202(h)
Parting with.....	10.221
Restrictions, serving within.....	15.401
Lifeboatman:	
Certification required	12.10-1
Demonstration of ability	12.10-5
Examination	12.10-5
Endorsement on merchant mariner's document	12.10-7
Members of Merchant Marine Cadet Corps	12.10-3, 12.25-25
Number required	15.845
Service requirements	12.10-3
Training requirements.....	12.10-3
When certificate required	12.10-1
Limitation on license, lifting.....	10.202(h), 10.215
Lookouts	15.850
Loss of license	10.219
Lost document, affidavit.....	12.02-23(e)
Lower level license, definition	10.103

M

Manning equivalents	Part 15, Subpart H
Manning, required:	
Able seaman	15.840

Subchapter B Index

Chief engineer	15.820
Engineer	15.825
Lifeboatmen	15.845
Master	15.805
Mate	15.810
OCMI will determine	15.801
Pilot	15.812
Radio officer	15.830
Substitution of non-U.S. licensed or documented personnel	15.720
Marine employer, definition	16.105
Marine physician assistant	10.809(a)
Master: (See also subpart B—General Requirements)	
Definition	10.103
Great Lakes and inland:	
Any gross tons	10.433
Limited master	10.456
Not more than 1600 gross tons	10.442
Not more than 500 gross tons	10.446
Not more than 200 gross tons	10.452
Not more than 100 gross	10.455
Inland:	
Any gross tons	10.435
Not more than 100 gross tons	10.457
Near coastal:	
Any gross tons	10.404
Limited master	10.429
Not more than 1600 gross tons	10.412
Not more than 500 gross tons	10.418
Not more than 200 gross tons	10.426
Not more than 100 gross tons	10.428
Oceans:	
Any gross tons	10.404
Not more than 1600 gross tons	10.412
Not more than 500 gross tons	10.418
Not more than 200 gross tons	10.424
Requirement for	15.805
Rivers	10.459
Uninspected fishing industry vessels	10.462
Master: (See also subpart B—General Requirements)	
Definition	10.103
Great Lakes and inland:	
Any gross tons	10.437
Not more than 1600 gross tons	10.444
Not more than 500 gross tons	10.448
Not more than 200 gross tons	10.454
Near coastal:	
Not more than 1600 gross tons	10.416
Not more than 500 gross tons	10.421
Not more than 200 gross tons	10.427
Oceans:	
Not more than 1600 gross tons	10.414
Not more than 500 gross tons	10.420
Requirement for	15.810
Rivers	10.459
Uninspected fishing industry vessels	10.462
Mechanic, deck engine	12.15-13
Medical Doctor	10.803, 10.807
Medical examination:	

46 CFR Ch. I (10–1–00 Edition)

Able Seaman	12.05-5
Food Handler	12.25-20
Original license	10.205(d)
Pilot, annual	10.709
QMED	12.15-5
Raise of grade of license	10.207(e)
Renewal of license	10.209(d)
Tankerman	13.125
Medical review officer, definition	16.105
Merchant Marine Cadet Corps, issuance of merchant mariner's documents	12.25-25
Merchant mariner's document:	
Able seaman endorsement considered for lifeboat certificate	12.02-11(f), 12.05-11(b), 12.10-1, 12.10-7
Application	12.02-9
Cadet	12.25-25
Citizenship requirements	12.02-13
Considered a certificate of identification	12.02-11(g)
Duplicate, issuance	12.02-23
Endorsement as able seaman, authorities of	12.05-11
Endorsement as lifeboatman, able seaman as	12.10-7
Endorsement for ratings other than able seaman or QMED	12.25-1, 12.25-10
Endorsements, general provisions	12.02-11
Entry ratings	12.25-10
Fees	12.02-18
Food handler endorsement	12.25-10, 12.25-20
Form in which issued	12.02-5
Issuance after revocation	12.02-21
Issuance of duplicate	12.02-23
Issuance to members of Merchant Marine Cadet Corps	12.25-25
Issuance to ratings other than able seaman or QMED	12.25-10
Issuance to student observers	12.25-30
Lifeboatman endorsement	12.10-7
Loss, report of	12.02-23, 12.02-24
Oath requirement	12.02-15
Preparation and issuance	12.02-17
Qualified member engine department (QMED):	
Endorsement	12.15-11
Examinations	12.15-9
Service or training requirements	12.15-7
Seaman producing document, when required	14.205
Signature and thumb-print	12.02-17(c)
Social security number	12.02-17(d)
Stolen, report of	12.02-23(d), 12.02-24
Student observer rating	12.25-30
Suspension or revocation	13
Tankerman endorsement	12.20
When required	12.02-7
Where issued	12.02-3
Military service	10.213
Mobile offshore drilling units:	
Definition	10.103
Licenses for	10.468
Manning of	15.520
Month, definition	10.103

N

Near coastal, definition	10.103
--------------------------------	--------

Subchapter B Index

O

Oath:	
License.....	10.202(d)
Seaman's documents	12.02-15
Oceans, definition.....	10.103
Officer in Charge, Marine Inspection, definition.....	10.103, 5.301
Officers' Competency Certificates Convention, 1936.....	15.701
Offshore installation manager:	
Definition.....	10.103
Required service (See also subpart B—General Requirements).....	10.470
On location, definition	10.103
Operation (of a vessel), definition	16.105
Operator, definition.....	10.103
Operator of uninspected passenger vessels:	
Equivalents	15.905
Required service: (See also subpart B—General Requirements).....	10.466
Operator of uninspected towing vessels:	
Equivalents	15.910
Required service: (See also subpart B—General Requirements).....	10.464
Oral examinations:	
Able seaman.....	12.05-9(a)
Definition.....	10.103
License.....	10.205(i)(1)
Lifeboatman.....	12.10-5(a)
QMED.....	12.15-9
Tankerman.....	12.20-5
Original document, definition.....	12.01-6
Original license:	
Age requirement	10.201(f)
Cardiopulmonary resuscitation (CPR) course certificate	10.205(h)
Character check and references.....	10.205(f)
Citizenship	10.205(c)
Definition.....	10.103
Experience requirements.....	10.205(e)
Fees.....	10.109
Fingerprint records.....	10.205(f)(2)
Firefighting certificate required.....	10.205(g)
First aid certificate required	10.205(h)
Issuance to applicant on probation.....	10.205(f)(3)
Issuance to naturalized citizen.....	10.205(e)(4)
Not issued to naturalized citizens on less experience than required of a citizen by birth.....	10.205(e)(2)
Physical examination	10.205(d)
Professional examination.....	10.205(i)
Recommendations of master and other officers required	10.205(f)(1)

P

Parting with license.....	10.221
Payment for duplicate seaman's documents	12.02-18(a)(5)
Period of grace, expired license renewal	10.209(e)(1)
Photographs.....	12.02-9(b)
Physical examination:	
Able seaman.....	12.05-3
Food handler.....	12.25-20
Original license.....	10.205(d)
Pilot, annual	10.709

46 CFR Ch. I (10–1–00 Edition)

Raise of grade of license.....	10.207(e)
Renewal of license.....	10.209(d)
Tankerman.....	13.125
QMED.....	12.15-5
Physical requirements:	
Able seaman.....	12.05-5
Original license.....	10.205(d)
Pilot, annual.....	10.709
QMED.....	12.15-5
Raise of grade of license.....	10.207(e)
Renewal of license.....	10.209(d)
Tankerman.....	12.20-3
Physical waiver.....	10.205(d)(4)
Pilot: (See also subpart B—General Requirements)	
Current knowledge requirement.....	10.713
Endorsement of master's or mate's license.....	10.703(d)
Examination for license.....	10.707
Extension of route.....	10.705(c)
Minimum number of trips for license.....	10.705(b)
Minimum number of trips for extension of route.....	10.705(c)
Requirement for.....	15.812
Service required.....	10.703
Probation, applicant on:	
Original license.....	10.205(f)(3)
Raise of grade.....	10.207(c)(6)
Professional examination for license:	
Expired over 12 months.....	10.209(f)
Fees.....	10.109
Original license.....	10.205(i)
Raise of grade of license.....	10.207(d)
Renewal.....	10.209(c)
Professional nurse.....	10.803, 10.807
Purser.....	10.803, 10.807

Q

Qualified member engine department:	
Certification required.....	12.15-1
Definition.....	12.15-3
Examination, list of subjects.....	12.15-9
Examination requirements.....	12.15-9
General requirements.....	12.15-3
Endorsement on merchant mariner's document.....	12.15-11
Physical requirements.....	12.15-5
Ratings.....	12.15-11
Service or training requirements.....	12.15-7
Qualified rating, definition.....	12.01-6
Qualifying experience for license:	
Sea service as member of armed forces of U.S.	10.213
Sea service on vessels owned by U.S.	10.213

R

Radar observer:	
Qualification courses.....	10.305
Qualifications for.....	10.480
Requirement for.....	15.815
Radio officers: (See also subpart B—General Requirements)	
License.....	10.601

Subchapter B Index

Requirement for	15.830
Raise of grade of license:	
Age requirement.....	10.207(c)(1)
Applicant on probation	10.207(c)(6)
Applicant who has lost sight in one eye.....	10.207(e)(3)
Definition.....	10.103
Documentary evidence of service.....	10.207(c)(2)
Not issued to naturalized citizen on less experience than required of a citizen by birth.....	10.207(c)(4)
Physical requirements	10.207(e)
Professional examination	10.207(d)
Recency of sea service.....	10.202(e)
Sea service acquired prior to issuance of license held not accept- able.....	10.207(c)(3)
Surrendering old license	10.207(b)
Recency of experience or sea service.....	10.202(e)
Reexamination for:	
License	10.217(a)
Seaman's document	12.02-17(f)
References, character for license.....	10.205(f)
Registration of staff officers	10.803
Reissue of expired license	10.209(f)
Reissue of duplicate seamen's documents	12.02-23
Related service	10.209(c)(1)
Renewal of licenses:	
After expiration	10.209(e)(1)
Applicant who has lost the sight of one eye.....	10.209(d)(3)
Applicant	10.209(a)
Before expiration.....	10.209(e)(2)
Expired license	10.209(f)
Fees	10.109
Inactive license renewal for continuity purposes	10.209(g)
Mailing of.....	10.209(e)(3)
Period of grace	10.209(e)(1)
Physical requirements	10.209(d)
Pilot.....	10.209(c)(3), 10.713
Professional requirements	10.209(c)
Radio officer.....	10.209(c)(4)
Suspended license	10.209(b)
Revocation of seamen's documents	12.02-19, 12.02-21
Right of appeal from decision of Officer in Charge	10.204, 12.02-25
Rivers, definition	10.103

S

Sail vessels, license endorsement	10.401(f)
Sailing short	15.725
Seamen:	
Application for documents.....	12.02-9
Cadet-midshipmen.....	12.25-25
Certificate of identification, where issued.....	12.02-3
Certificates of service, where issued	12.02-3
Citizenship requirements.....	12.02-13
Continuous discharge books, where issued.....	12.02-3
Not shipped or discharged before shipping commissioner	14.05-10
Paying off during voyage	14.05-7
Suspension or revocation of documents	12.02-19
Temporary permit in lieu of regular certificates.....	12.02-3
Seamen's documents:	

46 CFR Ch. I (10–1–00 Edition)

Aliens.....	12.02-3, 12.02-14
Application	12.02-9
Citizenship requirements.....	12.02-13
Commitment of employment required for entry ratings	12.25-5
Duplicates, procedure for obtaining	12.02-23
General provisions.....	12.02-11
Endorsements	12.02-11
Entry ratings, commitment of employment required.....	12.25-5
Fees	12.02-18
Form in which issued	12.02-5, 12.02-1
Loss	12.02-23
Oath requirement	12.02-15
Other than able seaman or QMED, when required	12.25-1
Preparation and issuance	12.02-17
QMED, service or training requirements	12.15-7
Revocation, issuance after	12.02-21
Stolen, lost, or destroyed, report of	12.02-23
Student observers.....	12.25-30
Suspension or revocation	12.02-19
Temporary permit in lieu of regular certificates	12.02-3(b)
When required.....	12.02-7
Second assistant engineer (See also subpart B—General Requirements)	10.514
Second class operator of uninspected towing vessels (See also subpart B—General Requirements).....	10.464(d)
Second mate (See also subpart B—General Requirements).....	10.406
Self-propelled, definition.....	15.301
Senior assistant purser.....	10.803, 10.807
Senior company official, definition.....	10.103
Serious marine incident, definition	16.105
Service requirements for licenses:	
Creditable service.....	10.211
Documentation for original license.....	10.205(e)(1)
Documentation for raise of grade of license.....	10.207(c)(2)
Equivalent service.....	10.211
Experience on foreign vessels	10.205(e)(3), 10.207(c)(5)
Experience on motor vessels where licenses not required.....	10.422(c)
Recency	10.202(e)
Self certification.....	10.211(a)
Training substitution for required service	10.304
Service within restrictions of license.....	15.401
Shipping articles:	
Completing at voyage end.....	14.309
Form.....	14.207
Posting	14.211
Paying off during voyage	14.301
Preparation	14.209
Reporting shipment and discharge of seamen.....	14.213, 14.311
Signaling examination for deck officer's.....	10.401(h)
Signature	10.202(c)
Simulator training.....	10.304(d)
Social security number	12.02-17(d)
Sponsoring organization	16.105
Staff officers:	
Definition.....	15.301
Required service (See also subpart B—General Requirements).....	10.803
Requirement for	15.835
Student observers, issuance of merchant mariner's document	12.25-30

Subchapter B Index

Surrender of old license upon issuance of a new license	10.207(b)
Suspension or revocation:	
Licenses.....	10.223
Seamen's documents	12.02-19

T

Tankerman:	
Examination requirements.....	Part 13
General requirements.....	13.107
Officer's license considered certification	13.113
Physical requirements	13.125
Temporary MODU license	10.476
Third assistant engineer (See also subpart B—General Require- ments)	10.516
Third mate (See also subpart B—General Requirements)	10.407
Tonnage limitations:	
Computation for license.....	10.402(b)
Computations for vessels not more than 200 gross tons.....	10.422(a)
Raises for vessels over 1600 gross tons.....	10.402(c)
Raises for vessels not more than 200 gross tons	10.422(b)
Training course approvals:	
General standards	10.303
Period of approval.....	10-302(c)
Radar observer courses	10.305, 10.307
Records retention.....	10.303(d)
Renewal of approval.....	10.302(d)
Request for approval	10.302(a)
Substitution of training for required service.....	10.304

U

Underway, definition.....	10.103
Undocumented vessel, definition.....	10.103
Uninspected passenger vessels:	
Equivalent licenses	15.905
License (See also subpart B—General Requirements)	10.466
Manning	15.905
Uninspected towing vessels:	
Equivalent licenses	15.910
License (See also subpart B—General Requirements)	10.464
Manning	15.610
Upper level license, definition.....	10.103

V

Vessel familiarity.....	10.101(b), 15.405
Vessel owned in the United States, definition	16.105
Vision:	
Glasses.....	10.202(f)
Loss in one eye	10.207(e)(3), 10.209(d)(3)
Requirements:	
Deck officers (master, mate, pilot, operator)	10.205(d)(2)
Engineer officers	10.205(d)(3)
Mobile offshore units.....	10.205(d)(3)
Radio officers.....	10.205(d)(3)
Waiver	10.205(d)(4)

46 CFR Ch. I (10–1–00 Edition)

W

Waiver of physical standards	10.205(d)(4)
Watches	15.705
Watchmen	15.855
Waters, restrictions on authority of engineer's licenses	15.501, 15.519
Western Rivers, definition	10.103
Working hours.....	15.710

Y

Year, definition	10.103
------------------------	--------

SUBCHAPTER C—UNINSPECTED VESSELS

PART 24—GENERAL PROVISIONS

Subpart 24.01—Purpose

Sec.

- 24.01-1 Purpose of regulations.
- 24.01-7 Right of appeal.

Subpart 24.05—Application

- 24.05-1 Vessels subject to the requirements of this subchapter.
- 24.05-5 Specific application noted in text.

Subpart 24.10—Definition of Terms Used in This Subchapter

- 24.10-1 Approved.
- 24.10-2 Barge.
- 24.10-3 Carrying passengers for hire.
- 24.10-5 Carrying freight for hire.
- 24.10-7 Commandant.
- 24.10-9 Coast Guard District Commander.
- 24.10-11 Headquarters.
- 24.10-13 International voyage.
- 24.10-15 Marine inspector or inspector.
- 24.10-17 Motorboat.
- 24.10-19 Motor vessel.
- 24.10-20 Oceanographic research vessel.
- 24.10-21 Officer in Charge, Marine Inspection.
- 24.10-23 Passenger.
- 24.10-27 Vessel.

Subpart 24.15—Equivalents

- 24.15-1 Conditions under which equivalents may be used.
- 24.15-5 Canadian pleasure craft temporarily using navigable waters of the United States.

Subpart 24.20—General Marine Engineering Requirements

- 24.20-1 Marine engineering details.

AUTHORITY: 46 U.S.C. 2113, 3306, 4104, 4302; E.O. 12234, 45 FR 58801, 3 CFR, 1980 Comp., p. 277; 49 CFR 1.46.

SOURCE: CGFR 65-50, 30 FR 16650, Dec. 30, 1965, unless otherwise noted.

Subpart 24.01—Purpose

§ 24.01-1 Purpose of regulations.

The purpose of the regulations in this subchapter is to set forth uniform minimum requirements for uninspected commercial vessels, certain motor vessels, vessels propelled by sail carrying passengers for hire, and barges carrying passengers for hire.

[CGD 95-028, 62 FR 51196, Sept. 30, 1997]

§ 24.01-7 Right of appeal.

Any person directly affected by a decision or action taken under this subchapter, by or on behalf of the Coast Guard, may appeal therefrom in accordance with subpart 1.03 of this chapter.

[CGD 88-033, 54 FR 50380, Dec. 6, 1989]

Subpart 24.05—Application

§ 24.05-1 Vessels subject to the requirements of this subchapter.

(a) This subchapter shall be applicable to all vessels indicated in Column 6 of Table 24.05-1 (a), and shall apply to all such United States flag vessels, and to all such foreign vessels, except as follows:

(1) Any vessel operating exclusively on inland waters which are not navigable waters of the United States.

(2) Any vessel while laid up and dismantled and out of commission.

(3) With the exception of vessels of the U.S. Maritime Administration, any vessel with title vested in the United States and which is used for public purposes.

TABLE 24.05–1(a)

Method of propulsion	Classes of vessels (including motorboats) examined or inspected under various Coast Guard regulations ¹					
	Size or other limitations ¹	Vessels inspected and certificated under subchapter D—Tank Vessels ²	Vessels inspected and certificated under either subchapter H—Passenger Vessels ^{2,3,4,5} or subchapter T—Small Passenger Vessels ^{2,3,4}	Vessels inspected and certificated under subchapter I—Cargo and Miscellaneous Vessels ^{2,3}	Vessels subject to provisions of subchapter C—Uninspected Vessels ^{3,5,6,7,8}	Vessels subject to provisions of subchapter U—Oceanographic Vessels ^{3,5,6,7,8}
Column 1	Column 2	Column 3	Column 4	Column 5	Column 6	Column 7
Steam	Vessels not over 65 feet in length.	All vessels carrying combustible or flammable liquid cargo in bulk.	All vessels carrying more than 6 passengers. ⁷	All tugboats and towboats.	All vessels except those covered by columns 3, 4, 5, and 7.	None
	Vessels over 65 feet in length.	All vessels carrying combustible or flammable liquid cargo in bulk. ⁵	1. All vessels carrying more than 12 passengers on an international voyage, except yachts. 2. All vessels of not over 15 gross tons which carry more than 6 passengers. ⁷ 3. All other vessels carrying passengers, ⁷ except: a. Yachts. b. Documented cargo or tank vessels issued a permit to carry not more than 16 persons in addition to the crew.	All vessels except those covered by columns 3 and 4.	None	All vessels engaged in oceanographic research.
						Do.

Vessels subject to the provisions of subchapter O—Certain Bulk Dangerous Cargoes¹⁰

Column 8

All vessels carrying in bulk the cargoes listed in Table I of Pt. 153 and Table 4 of Pt. 154.¹²

Motor	Vessels not over 15 gross tons.	All vessels carrying combustible or flammable liquid cargo in bulk.	c. Towing and fishing vessels, in other than ocean and coastwise service, may carry persons on the legitimate business of the vessel, in addition to crew, but not to exceed one for each net ton of the vessel.	All vessels carrying more than 6 passengers. ⁷	Those vessels carrying dangerous cargoes when required by 46 CFR part 98 or 49 CFR parts 171-179.	All vessels except those covered by columns 3, 4, 5, and 7.	None	Do.
	Vessels over 15 gross tons except seagoing motor vessels of 300 gross tons and over.	All vessels carrying combustible or flammable liquid cargo in bulk. ⁵		1. All vessels carrying more than 12 passengers on an international voyage, except yachts. 2. All vessels not over 65 feet in length which carry more than 6 passengers. ⁷ 3. All other vessels of over 65 feet in length carrying passengers for hire except documented cargo or tank vessels issued a permit to carry not more than 16 persons in addition to the crew.	All vessels carrying freight for hire except those covered by columns 3 and 4.	All vessels except those covered by columns 3, 4, 5, and 7.	None	Do.

TABLE 24.05–1(a)—Continued

Method of propulsion	Size or other limitations ¹	Classes of vessels (including motorboats) examined or inspected under various Coast Guard regulations ¹					
		Vessels inspected and certificated under subchapter D—Tank Vessels ²	Vessels inspected and certificated under either subchapter H—Passenger Vessels ^{2,3,4,5} or subchapter T—Small Passenger Vessels ^{23,4}	Vessels inspected under subchapter I—Cargo and Miscellaneous Vessels ^{2,3}	Vessels subject to provisions of subchapter C—Uninspected Vessels ^{2,3,5,6,7,8}	Vessels subject to provisions of subchapter U—Oceanographic Vessels ^{3,5,6,7,9}	Vessels subject to the provisions of subchapter O—Certain Bulk Dangerous Cargoes ¹⁰
Column 1	Column 2	Column 3	Column 4	Column 5	Column 6	Column 7	Column 8
	Seagoing motor vessels of 300 gross tons and over	All vessels carrying combustible or flammable liquid cargo in bulk. ⁵	1. All vessels carrying more than 12 passengers on an international voyage, except yachts 2. All other vessels carrying passengers, ⁷ except: a. Yachts. b. Documented cargo or tank vessels issued a permit to carry not more than 16 persons in addition to the crew.	All vessels except those covered by columns 3 and 4, and those engaged in the fishing, oystering, clamming, crabbing, or any other branch of the fishery, kelp, or sponge industry.	All vessels except those covered by columns 3, 4, 5, and 7.	All vessels engaged in oceanographic research.	None.
Sail	Vessels not over 700 gross tons.	All vessels carrying combustible or flammable liquid cargo in bulk.	All vessels carrying more than 6 passengers. ⁷	Those vessels carrying dangerous cargoes when required by 46 CFR part 98 or 49 CFR parts 171–179.	All vessels carrying 6 or less passengers for hire. ¹²	None	All vessels carrying in bulk the cargoes listed in Table I of Pt. 153 and Table 4 of Pt. 154. ¹²

Non-self-propelled	Vessels over 700 gross tons.	All vessels carrying combustible or flammable liquid cargo in bulk.	All vessels carrying passengers for hire.	Those vessels carrying dangerous cargoes when required by 46 CFR part 98 or 49 CFR parts 171-179.	None	None	Do.
	Vessels less than 100 gross tons.	All vessels carrying combustible or liquid cargo in bulk.	All vessels carrying more than 6 passengers. ⁷	Those vessels carrying dangerous cargoes when required by 49 CFR parts 171-179.	All barges carrying passengers except those covered by column 4.	None	All tank barges carrying in bulk the cargoes listed in Table 151.05 of this chapter. ¹¹¹²
	Vessels 100 gross tons or over.	All vessels carrying combustible or flammable liquid cargo in bulk.	All vessels carrying passengers for hire.	All seagoing barges except those covered by columns 3 and 4; and those inland barges carrying dangerous cargoes when required by 49 CFR parts 171-179.	All barges carrying passengers except those covered by columns 4 and 7.	All seagoing barges engaged in oceanographic research.	

¹ Where length is used in this table it means the length measured from end to end over the deck, excluding sheer. This expression means a straight line measurement of the overall length from the foremost part of the vessel to the aftermost part of the vessel, measured parallel to the centerline.

² Subchapters E (Load Lines), F (Marine Engineering), J (Electrical Engineering), and N (Dangerous Cargoes) of this chapter may also be applicable under certain conditions. The provisions of 49 CFR parts 171-179 apply whenever hazardous materials are on board vessels (including motorboats), except when specifically exempted by law.

³ Public nautical schoolships, other than vessels of the Navy and Coast Guard, shall meet the requirements of part 167 of subchapter R (Nautical Schools) of this chapter. Civilian nautical schoolships, as defined by 46 U.S.C. 1331, shall meet the requirements of subchapter H (Passenger Vessels) and part 168 of subchapter R (Nautical Schools) of this chapter.

⁴ Subchapter H (Passenger Vessels) of this chapter covers only those vessels of 100 gross tons or more. Subchapter T (Small Passenger Vessels) of this chapter covers only those vessels of less than 100 gross tons.

⁵ Vessels covered by subchapter H (Passenger Vessels) or I (Cargo and Miscellaneous Vessels) of this chapter, where the principal purpose or use of the vessel is not for the carriage of liquid cargo, may be granted a permit to carry a limited amount of flammable or combustible liquid cargo in bulk. The portion of the vessel used for the carriage of the flammable or combustible liquid cargo shall meet the requirements of subchapter D (Tank Vessels) in addition to the requirements of subchapter H (Passenger Vessels) or I (Cargo and Miscellaneous Vessels) of this chapter.

⁶ Any vessel on an international voyage is subject to the requirements of the International Convention for Safety of Life at Sea, 1974.

⁷ The meaning of the term *passenger* is as defined in the Act of May 10, 1956 (Sec. 1, 70, Stat. 151; 46 U.S.C. 300). On oceanographic vessels scientific personnel on board shall not be deemed to be passengers nor seamen, but for calculations of lifesaving equipment, etc., shall be counted as persons.

⁸ Boilers and machinery are subject to examination on vessels over 40 feet in length.

⁹ Under 46 U.S.C. 441 an *oceanographic research vessel* is a vessel " * * * being employed exclusively in instruction in oceanography or limnology, or both, or exclusively in oceanographic research, * * * ." Under 46 U.S.C. 443, "an oceanographic research vessel shall not be deemed to be engaged in trade or commerce." If or when an oceanographic vessel engages in trade or commerce, such vessel cannot operate under its certificate of inspection as an oceanographic vessel, but shall be inspected and certificated for the service in which engaged, and the scientific personnel aboard then become persons employed in the business of the vessel.

¹⁰ Bulk dangerous cargoes are cargoes specified in table 151.01-10(b), in table I of part 153, and in table 4 of part 154 of this chapter.

¹¹ For manned tank barges see § 151.01-10(e) of this chapter.

¹² Lifesaving device requirements of subpart 25.25 only.

[CGFR 65-50, 30 FR 16650, Dec. 30, 1965, as amended by CGFR 67-33, 33 FR 1104, Jan. 27, 1968; CGFR 70-10, 35 FR 3707, Feb. 25, 1970; CGD 72-172R, 38 FR 3116, Mar. 28, 1973; CGD 73-96, 42 FR 49023, Sept. 26, 1977; CGD 86-033, 53 FR 36023, Sept. 16, 1988; 53 FR 46871, Nov. 21, 1988; CGD 90-008, 55 FR 30659, July 26, 1990]

§ 24.05-5

§ 24.05-5 Specific application noted in text.

(a) At the beginning of the various parts, subparts, and sections, a more specific application is generally given for the particular portion of the text involved. This application sets forth the types, sizes, or services of vessels to which the text pertains, and in many cases limits the application of the text to vessels contracted for before or after a specific date. As used in this subchapter, the term *vessels contracted for* includes not only the contracting for the construction of a vessel, but also the contracting for a material alteration to a vessel, the contracting for the conversion of a vessel to a passenger vessel, and the changing of service or route of a vessel if such change increases or modifies the general requirements for the vessel or increases the hazards to which it might be subjected.

(b) [Reserved]

Subpart 24.10—Definition of Terms Used in This subchapter

§ 24.10-1 Approved.

This term means approved by the Commandant unless otherwise stated.

§ 24.10-2 Barge.

This term means any vessel not equipped with means of self-propulsion.

[CGFR 68-32, 33 FR 5711, Apr. 12, 1968]

§ 24.10-3 Carrying passengers for hire.

The carriage of any person or persons by a vessel for a valuable consideration, whether directly or indirectly flowing to the owner, charterer, operator, agent or any other person interested in the vessel.

§ 24.10-5 Carrying freight for hire.

The carriage of any goods, wares, or merchandise or any other freight for a valuable consideration, whether directly or indirectly flowing to the owner, charterer, operator, agent, or any other person interested in the vessel.

§ 24.10-7 Commandant.

This term means the Commandant of the Coast Guard.

46 CFR Ch. I (10-1-00 Edition)

§ 24.10-9 Coast Guard District Commander.

This term means an officer of the Coast Guard designated as such by the Commandant to command all Coast Guard activities within his district, which include the inspection, enforcement, and administration of Subtitle II, Title 46 U.S. Code, Title 46 and Title 33 U.S. Code, and regulations issued under these statutes.

[CGFR 65-50, 30 FR 16650, Dec. 30, 1965, as amended by CGD 95-028, 62 FR 51196, Sept. 30, 1997]

§ 24.10-11 Headquarters.

This term means the Office of the Commandant, Washington, DC.

§ 24.10-13 International voyage.

(a) This section describes those voyages which are considered to be "international voyages" for the purposes of this subchapter.

(b) Except as provided in paragraph (c) of this section, the term *international voyage* as used in this subchapter shall have the same meaning as that contained in Regulation 2(d), chapter I of the International Convention for Safety of Life at Sea, 1974, i.e., "*International voyage* means a voyage from a country to which the present convention applies to a port outside such country, or conversely."

(c) The International Convention for Safety of Life at Sea, 1974, does not apply to vessels "solely navigating the Great Lakes of North America and the River St. Lawrence as far east as a straight line drawn from Cap de Rosiers to West Point, Anticosti Island and, on the north side of Anticosti Island, the 63d Meridian." Accordingly, such vessels shall not be considered as being on an *international voyage* for the purpose of this subchapter.

(d) In addition, although voyages between the continental United States and Hawaii or Alaska, and voyages between Hawaii and Alaska are not *international voyages* under the provisions of the International Convention for Safety of Life at Sea, 1974, such voyages are similar in nature and shall be considered as *international voyages* for the purposes of this subchapter.

[CGD 90-008, 55 FR 30659, July 26, 1990]

Coast Guard, DOT

§ 24.10-27

§ 24.10-15 Marine inspector or inspector.

These terms mean any person from the civilian or military branch of the Coast Guard assigned under the superintendence and direction of an Officer in Charge, Marine Inspection, or any other person as may be designated for the performance of duties with respect to the inspection, enforcement, and administration of Subtitle II, Title 46 U.S. Code, Title 46 and Title 33 U.S. Code, and regulations issued under these statutes.

[CGFR 65-50, 30 FR 16650, Dec. 30, 1965, as amended by CGD 95-028, 62 FR 51196, Sept. 30, 1997]

§ 24.10-17 Motorboat.

(a) This term means any vessel indicated in column 6 of Table 24.05-1(a), 65 feet in length or less which is equipped with propulsion machinery (including steam). The length shall be measured from end to end over the deck excluding sheer. This term includes a boat temporarily or permanently equipped with a detachable motor. For the purpose of this subchapter, motorboats are included under the term *vessel* unless specifically noted otherwise. The various length categories of motorboats are as follows:

Any motorboat less than 16 feet in length.

Any motorboat 16 feet or over and less than 26 feet in length.

Any motorboat 26 feet or over and less than 40 feet in length.

Any motorboat 40 feet or over and not more than 65 feet in length.

(b) The expression "length shall be measured from end to end over the deck excluding sheer" means a straight line measurement of the overall length from the foremost part of the vessel to the aftermost part of the vessel, measured parallel to the centerline. Bow sprits, bumpkins, rudders, outboard motor brackets, and similar fittings or attachments, are not to be included in the measurement. Length shall be stated in feet and inches.

[CGFR 65-50, 30 FR 16650, Dec. 30, 1965, as amended by CGFR 69-18, 34 FR 5723, Mar. 27, 1969; CGD's 97-057, 95-028, 62 FR 51042, 51196, Sept. 30, 1997]

§ 24.10-19 Motor vessel.

This term means any vessel more than 65 feet in length, which is propelled by machinery other than steam.

§ 24.10-20 Oceanographic research vessel.

An *oceanographic research vessel* is a vessel which the U.S. Coast Guard finds is employed exclusively in one or more of the following:

- (a) Oceanographic instruction;
- (b) Limnologic instruction;
- (c) Oceanographic research; or
- (d) Limnologic research.

[CGD 77-0811, 46 FR 56204, Nov. 16, 1981]

§ 24.10-21 Officer in Charge, Marine Inspection.

This term means any person from the civilian or military branch of the Coast Guard designated as such by the Commandant and who, under the superintendence and direction of the Coast Guard District Commander, is in charge of an inspection zone for the performance of duties with respect to the inspections, enforcement, and administration of Subtitle II, Title 46 U.S. Code, Title 46 and Title 33 U.S. Code, and regulations issued under these statutes.

[CGFR 65-50, 30 FR 16650, Dec. 30, 1965, as amended by CGD 95-028, 62 FR 51196, Sept. 30, 1997]

§ 24.10-23 Passenger.

A passenger is every person, other than the master and the members of the crew or other persons employed or engaged in any capacity on board a vessel in the business of that vessel. In the case of a vessel on an international voyage a child under one year of age is not counted as a passenger.

§ 24.10-27 Vessel.

Where the word *vessel* is used in this subchapter, it shall be considered to include all vessels indicated in Column 6 of Table 24.05-1(a), except as otherwise noted in this subpart.

Subpart 24.15—Equivalents

§ 24.15-1 Conditions under which equivalents may be used.

(a) Where in this subchapter it is provided that a particular fitting, material, appliance, apparatus, or equipment, or type thereof, shall be fitted or carried in a vessel, or that any particular provision shall be made or arrangement shall be adopted, the Commandant may accept in substitution therefor any other fitting, material, apparatus, or equipment, or type thereof, or any other arrangement: *Provided*, That he shall have been satisfied by suitable trials that the fitting, material, appliance, apparatus, or equipment, or type thereof, or the provision or arrangement is at least as effective as that specified in this subchapter.

(b) In any case where it is shown to the satisfaction of the Commandant that the use of any particular equipment, apparatus, or arrangement not specifically required by law is unreasonable or impracticable, the Commandant may permit the use of alternate equipment, apparatus, or arrangement to such an extent and upon such conditions as will insure to his satisfaction, a degree of safety consistent with the minimum standards set forth in this subchapter.

§ 24.15-5 Canadian pleasure craft temporarily using navigable waters of the United States.

Uninspected Canadian pleasure craft (uninspected vessels) temporarily using navigable waters of the United States may carry in lieu of the equipment required by this subchapter, the equipment as required by the laws of the Dominion of Canada and the regulations of the Department of Transport, Ottawa, Canada.

[CGFR 65-50, 30 FR 16650, Dec. 30, 1965, as amended by CGD 95-028, 62 FR 51196, Sept. 30, 1997]

Subpart 24.20—General Marine Engineering Requirements

§ 24.20-1 Marine engineering details.

(a) All marine engineering details relative to the design, construction, and testing of boilers and machinery

on steam-propelled motorboats of over 40 feet in length will be found in subchapter F (Marine Engineering) of this chapter.

PART 25—REQUIREMENTS

Subpart 25.01—Application

Sec.

- 25.01-1 Applicable to all vessels.
- 25.01-3 Incorporation by reference.
- 25.01-5 OMB control numbers assigned pursuant to the Paperwork Reduction Act.

Subpart 25.25—Life Preservers and Other Lifesaving Equipment

- 25.25-1 Application.
- 25.25-3 Definitions.
- 25.25-5 Life preservers and other lifesaving equipment required.
- 25.25-7 Marking.
- 25.25-9 Storage.
- 25.25-11 Condition.
- 25.25-13 Personal flotation device lights.
- 25.25-15 Retroreflective material for personal flotation devices.

Subpart 25.26—Emergency Position Indicating Radio Beacons (EPIRB)

- 25.26-1 Definitions.
- 25.26-5 Commercial fishing industry vessels.
- 25.26-10 Uninspected passenger vessels.
- 25.26-20 Other manned uninspected commercial vessels.
- 25.26-50 Servicing of EPIRBs.
- 25.26-60 Exemptions.

Subpart 25.30—Fire Extinguishing Equipment

- 25.30-1 Application.
- 25.30-5 General provisions.
- 25.30-10 Hand portable fire extinguishers and semiportable fire extinguishing systems.
- 25.30-15 Fixed fire extinguishing systems.
- 25.30-20 Fire extinguishing equipment required.
- 25.30-90 Vessels contracted for prior to November 19, 1952.

Subpart 25.35—Backfire Flame Control

- 25.35-1 Requirements.

Subpart 25.40—Ventilation

- 25.40-1 Tanks and engine spaces.

Subpart 25.45—Cooking, Heating, and Lighting Systems

- 25.45-1 Heating and lighting systems on vessels carrying passengers for hire.

Coast Guard, DOT

§ 25.25-1

25.45-2 Cooking systems on vessels carrying passengers for hire.

Subpart 25.50—Garbage Retention

25.50-1 Criteria.

AUTHORITY: 33 U.S.C. 1903(b); 46 U.S.C. 3306, 4302; 49 CFR 1.46.

SOURCE: CGFR 65-50, 30 FR 16653, Dec. 30, 1965, unless otherwise noted.

Subpart 25.01—Application

§ 25.01-1 Applicable to all vessels.

(a) The provisions of this part shall apply to all vessels except as specifically noted.

§ 25.01-3 Incorporation by reference.

(a) Certain material is incorporated by reference into this part with the approval of the Director of the Federal Register in accordance with 5 U.S.C. 552(a). To enforce any edition other than that specified in paragraph (b) of this section, the Coast Guard must publish notice of change in the FEDERAL REGISTER and make the material available to the public. All approved material is on file at the Office of the Federal Register, 800 North Capitol Street, NW., suite 700, Washington, DC and at the U.S. Coast Guard, Office of Compliance (G-MOC), 2100 Second Street SW., Washington, DC 20593-0001 and is available from the sources indicated in paragraph (b) of this section.

(b) The material approved for incorporation by reference in this part and the sections affected are:

American Boat and Yacht Council (ABYC)

3069 Solomons Island Road, Edgewater, MD 21037

Standard A-1-78, Marine LPG-Liquefied Petroleum Gas Systems, December 15, 1978.....25.45-2

Standard A-22-78, Marine CNG-Compressed Natural Gas Systems, December 15, 1978.....25.45-2

National Fire Protection Association (NFPA)

1 Batterymarch Park, Quincy, MA 02269
NFPA 302, Fire Protection Standard for Pleasure and Commercial Motor Craft, 1989.....25.45-2

Society of Automotive Engineers (SAE)

400 Commonwealth Drive, Warrendale, PA 15096
SAE J-1928, Devices Providing Back-

fire Flame Control for Gasoline Engines in Marine Applications, June 1989.....25.35-1

Underwriter's Laboratories (UL)

12 Laboratory Drive, Research Triangle Park, NC 27709

UL 1111, Marine Carburetor Flame Arrestors, June 1988.....25.35-1

[CGD 88-032, 56 FR 35820, July 29, 1991, as amended by CGD 95-072, 60 FR 50461, Sept. 29, 1995; CGD 95-072, 60 FR 54106, Oct. 19, 1995; CGD 96-041, 61 FR 50726, Sept. 27, 1996]

§ 25.01-5 OMB control numbers assigned pursuant to the Paperwork Reduction Act.

(a) *Purpose.* This section collects and displays the control numbers assigned to information collection and record-keeping requirements in this subchapter by the Office of Management and Budget (OMB) pursuant to the Paperwork Reduction Act of 1980 (44 U.S.C. 3501 *et seq.*). The Coast Guard intends that this section comply with the requirements of 44 U.S.C. 3507(f), which requires that agencies display a current control number assigned by the Director of the OMB for each approved agency information collection requirement.

(b) *Display.*

46 CFR part or section where identified or described	Current OMB control No.
§ 25.45-2	2115.0549

[CGD 83-013, 54 FR 6401, Feb. 10, 1989 and CGD 83-013, 55 FR 3959, Feb. 6, 1990]

Subpart 25.25—Life Preservers and Other Lifesaving Equipment

SOURCE: CGD 72-172R, 38 FR 8117, Mar. 28, 1973, unless otherwise noted.

§ 25.25-1 Application.

This subpart applies to each vessel to which this part applies, except:

(a) Vessels used for noncommercial use;

(b) Vessels leased, rented, or chartered to another for the latter's noncommercial use;

(c) Commercial vessels propelled by sail not carrying passengers for hire; or

(d) Commercial barges not carrying passengers for hire.

§ 25.25-3

46 CFR Ch. I (10-1-00 Edition)

§ 25.25-3 Definitions.

As used in this subpart:

(a) *Approved* means approved under subchapter Q of this chapter.

(b) *Use* means operate, navigate, or employ.

§ 25.25-5 Life preservers and other lifesaving equipment required.

(a) No person may operate a vessel to which this subpart applies unless it meets the requirements of this subpart.

(b) Each vessel not carrying passengers for hire, less than 40 feet in length must have at least one life preserver (Type I PFD), buoyant vest (Type II PFD), or marine buoyant device intended to be worn (Type III PFD), approved under subchapter Q of a suitable size for each person on board. Kapok and fibrous glass life preservers that do not have plastic-covered pad inserts as required by subparts 160.062 and 160.005 of this chapter are not acceptable as equipment required by this paragraph.

(c) Each vessel carrying passengers for hire and each vessel 40 feet in length or longer not carrying passengers for hire must have at least one life preserver approved under subchapter Q of a suitable size for each person on board. Kapok and fibrous glass life preservers which do not have plastic-covered pad inserts as required by subparts 160.002 and 160.005 of this chapter are not acceptable as equipment required by this paragraph.

(d) In addition to the equipment required by paragraph (b) or (c) of this section, each vessel 26 feet in length or longer must have at least one approved ring life buoy, constructed in accordance with subpart 160.050 of this chapter; except a ring life buoy that was approved under former subpart 160.009 of this chapter may be used as long as it is in good and serviceable condition.

(e) Each vessel not carrying passengers for hire may substitute an immersion suit for a life preserver, buoyant vest, or marine buoyant device required under paragraphs (b) or (c) of this section. Each immersion suit carried in accordance with this paragraph must be of a type approved under subpart 160.171 of this chapter.

(f) On each vessel, regardless of length and regardless of whether car-

rying passengers for hire, an approved commercial hybrid PFD may be substituted for a life preserver, buoyant vest, or marine buoyant device required under paragraphs (b) or (c) of this section if it is—

(1) Used in accordance with the conditions marked on the PFD and in the owner's manual;

(2) Labeled for use on commercial vessels; and

(3) In the case of a Type V commercial hybrid PFD, worn when the vessel is underway and the intended wearer is not within an enclosed space.

[CGD 72-172R, 38 FR 8117, Mar. 28, 1973, as amended by CGD 77-081, 47 FR 10558, Mar. 11, 1982; CGD 82-075a, 49 FR 4483, Feb. 7, 1984; CGD 78-174A, 51 FR 4350, Feb. 4, 1986; CGD 78-174, 60 FR 2485, Jan. 9, 1995; CGD 97-057, 62 FR 51042, Sept. 30, 1997]

§ 25.25-7 Marking.

The lifesaving equipment required by this subpart must be legibly marked as specified in subchapter Q of this chapter.

§ 25.25-9 Storage.

(a) The lifesaving equipment designed to be worn required in § 25.25-5 (b), (c) and (e) must be readily accessible.

(b) Lifesaving equipment designed to be thrown required in § 25.25-5(d) must be immediately available.

[CGD 72-172R, 38 FR 8117, Mar. 28, 1973, as amended by CGD 82-075a, 49 FR 4483, Feb. 7, 1984]

§ 25.25-11 Condition.

The lifesaving equipment required by this subpart must be in serviceable condition.

§ 25.25-13 Personal flotation device lights.

(a) This section applies to vessels described in § 25.25-1 that engage in ocean, coastwise, or Great Lakes voyages.

(b) Each immersion suit carried in accordance with § 25.25-5(e), each life preserver, each marine buoyant device intended to be worn, and each buoyant vest must have a personal flotation device light that is approved under subpart 161.012 of this chapter.

(c) Each personal flotation device light required by this section must be securely attached to the front shoulder area of the immersion suit, life preserver, or other personal flotation device.

(d) If a personal flotation device light has a non-replaceable power source, the light must be replaced on or before the expiration date of the power source. If the light has a replaceable power source, the power source must be replaced on or before its expiration date and the light must be replaced when it is no longer serviceable.

[44 FR 38783, July 2, 1979, as amended by CGD 82-075a, 49 FR 4483, Feb. 7, 1984; CGD 97-057, 62 FR 51042, Sept. 30, 1997]

§ 25.25-15 Retroreflective material for personal flotation devices.

(a) Each life preserver, each marine buoyant device intended to be worn, and each buoyant vest carried on a vessel must have Type I retroreflective material that is approved under subpart 164.018 of this chapter.

(b) Each item required to have retroreflective material must have at least 200 sq. cm (31 sq. in.) of material attached to its front side, at least 200 sq. cm of material on its back side, and, if the item is reversible, at least 200 sq. cm of material on each of its reversible sides. The material attached on each side of the item must be divided equally between the upper quadrants of the side, and the material in each quadrant must be attached as closely as possible to the shoulder area of the item.

[CGD 76-028, 44 FR 38783, July 2, 1979, as amended by CGD 82-075a, 49 FR 4483, Feb. 7, 1984]

Subpart 25.26—Emergency Position Indicating Radio Beacons (EPIRB)

SOURCE: CGD 87-016a, 58 FR 13367, Mar. 10, 1993, unless otherwise noted.

§ 25.26-1 Definitions.

As used in this subpart:

Berthing space means a space that is intended to be used for sleeping and is provided with installed bunks and mattresses.

EPIRB means an Emergency Position Indicating Radiobeacon which is Type Accepted by the Federal Communications Commission under requirements in 47 CFR parts 2 and 80.

Galley means a space that provides for the preparation and extended storage of food. This does not include small alcohol or propane stoves with limited cooking capability, or ice chests or similar devices that are intended for keeping small quantities of food for short durations.

High seas means the waters beyond a line three nautical miles seaward of the Territorial Sea Baseline as defined in 33 CFR 2.05-10.

Length means the length listed on a vessel's Certificate of Documentation or Certificate of Number.

Uninspected passenger vessel means a vessel which, when used for commercial service, is used solely to carry passengers for hire or to provide non-emergency assistance to boaters (assistance towing), and which is not inspected by the Coast Guard under any other 46 CFR subchapter.

NOTE: As an example, a vessel on a voyage involving catching fish which are to be sold, is a commercial fishing industry vessel for the purposes of the EPIRB regulations in this section, even if there are passengers on board during the voyage.

§ 25.26-5 Commercial fishing industry vessels.

(a) The owner of a fishing vessel, a fish processing vessel, or a fish tender vessel, 11 meters (36 feet) or more in length, except for vessels described in paragraph (b) or (c) of this section, shall ensure that the vessel does not operate on the high seas or beyond three miles from the coastline of the Great Lakes unless it has on board a float-free, automatically activated Category 1 406 MHz EPIRB stowed in a manner so that it will float-free if the vessel sinks.

(b) The owner of a fishing vessel, fish processing vessel, or a fish tender vessel less than 11 meters (36 feet) in length, or 11 meters or more in length which has a builder's certification that the vessel is constructed with sufficient inherently buoyant material to keep the flooded vessel afloat, shall ensure that the vessel does not operate

§ 25.26-10

on the high seas or beyond three miles from the coastline of the Great Lakes, unless it has installed in a readily accessible location at or near the principal steering station—

(1) A manually activated Category 2 406 MHz EPIRB; or

(2) A float-free, automatically activated Category 1 406 MHz EPIRB.

(3) Until February 1, 1998, a 121.5/243.0 MHz EPIRB meeting § 25.26-30.

(c) The owner of a fishing vessel, fish processing vessel or a fish tender vessel 11 meters (36 feet) or more in length that does not have installed galley or berthing facilities, shall ensure that the vessel does not operate on the high seas or beyond three miles from the coastline of the Great Lakes unless it has on board a float-free, automatically activated Category 1 406 MHz EPIRB stowed in a manner so that it will float free if the vessel sinks.

[CGD 87-016a, 58 FR 13367, Mar. 10, 1993; 58 FR 27658, May 11, 1993, as amended by CGD 95-028, 62 FR 51196, Sept. 30, 1997; USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

§ 25.26-10 Uninspected passenger vessels.

An uninspected passenger vessel is not required to carry an EPIRB.

§ 25.26-20 Other manned uninspected commercial vessels.

(a) The owner of a manned uninspected commercial vessel 11 meters (36 feet) or more in length, other than a vessel under § 25.26-5 or § 25.26-10 or under paragraph (b) of this section, shall ensure that the vessel does not operate on the high seas or beyond three miles from the coastline of the Great Lakes, unless it has on board a float-free, automatically activated Category 1 406 MHz EPIRB stowed in a manner so that it will float free if the vessel sinks.

(b) The owner of a manned uninspected commercial vessel less than 11 meters (36 feet) in length, or 11 meters or more in length which has a builder's certification that the vessel is constructed with sufficient inherently buoyant material to keep the flooded vessel afloat, shall ensure that the vessel does not operate on the high seas or beyond three miles from the coastline of the Great Lakes, unless it has in-

46 CFR Ch. I (10-1-00 Edition)

stalled in a readily accessible location at or near the principal steering station—

(1) A manually activated Category 2 406 MHz EPIRB; or

(2) A float-free, automatically activated Category 1 406 MHz EPIRB.

[CGD 87-016a, 58 FR 13367, Mar. 10, 1993; 58 FR 27658, May 11, 1993, as amended by CGD 95-028, 62 FR 51196, Sept. 30, 1997; USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

§ 25.26-50 Servicing of EPIRBs.

(a) The master of each vessel required to have an EPIRB under this subpart shall ensure that each EPIRB on board is tested and serviced as required by this section.

(b) The EPIRB must be tested immediately after installation and at least once each month thereafter, unless it is an EPIRB installed in a Coast Guard approved inflatable liferaft that is tested annually during the servicing of the liferaft by an approved servicing facility. The test shall be conducted in accordance with the manufacturer's instructions, using the visual or audio indicator on the EPIRB. If the EPIRB is not operating, it must be repaired or replaced with an operating EPIRB.

(c) The battery of the EPIRB must be replaced—

(1) Immediately after the EPIRB is used for any purpose other than being tested; and

(2) Before the expiration date that is marked on the battery.

[CGD 87-016a, 58 FR 13367, Mar. 10, 1993; 58 FR 27658, May 11, 1993]

§ 25.26-60 Exemptions.

(a) A skiff or work boat is not required to carry an EPIRB if—

(1) Its "mother ship" is required to carry an EPIRB under this subpart; and

(2) When not in use, the skiff or work boat is carried on board the mother ship.

(b) Each Coast Guard District Commander may, on a case-by-case basis, grant exemptions from the carriage requirements of EPIRBs in this subpart for certain geographic areas within the boundaries of his or her own district if the District Commander determines that an EPIRB will not significantly enhance the overall safety of the vessel

and crew. Exemptions may be limited to specific time periods. Exemptions granted under this paragraph must be:

(1) Issued in writing by the cognizant Coast Guard District Commander for each individual application; and

(2) For geographic locations and may be limited to specific time periods.

Subpart 25.30—Fire Extinguishing Equipment

§ 25.30-1 Application.

(a) The provisions of this subpart, with the exception of § 25.30-90, shall apply to all vessels contracted for on or after November 19, 1952. Vessels contracted for prior to that date shall meet the requirements of § 25.30-90.

§ 25.30-5 General provisions.

(a) Where equipment in this subpart is required to be of an approved type, such equipment requires the specific approval of the Commandant. Such approvals are published in the FEDERAL REGISTER, and in addition, are contained in Coast Guard publication COMDTINST M16714.3 (Series), Equipment Lists.

(b) All hand portable fire extinguishers, semiportable fire extinguishing systems, and fixed fire extinguishing systems shall be of an approved type.

[CGFR 65-50, 30 FR 16653, Dec. 30, 1965, as amended by CGD 96-041, 61 FR 50726, Sept. 27, 1996]

§ 25.30-10 Hand portable fire extinguishers and semiportable fire extinguishing systems.

(a) Hand portable fire extinguishers and semiportable fire extinguishing systems are classified by a combination letter and number symbol. The letter indicating the type of fire which the unit could be expected to extinguish, and the number indicating the relative size of the unit.

(b) For the purpose of this subchapter, all required hand portable fire extinguishers and semiportable fire extinguishing systems are of the "B" type; i.e., suitable for extinguishing fires involving flammable liquids, greases, etc.

(c) The number designations for size will start with "I" for the smallest to

"V" for the largest. For the purpose of this subchapter, only sizes I through III will be considered. Sizes I and II are considered hand portable fire extinguishers and sizes III, IV, and V are considered semiportable fire extinguishing systems which shall be fitted with suitable hose and nozzle or other practicable means so that all portions of the space concerned may be covered. Examples of size graduations for some of the typical hand portable fire extinguishers and semiportable fire extinguishing systems are set forth in Table 25.30-10(c).

TABLE 25.30-10(c)

Classification		Foam, gallons	Carbon Dioxide, pounds	Dry chemical, pounds
Type	Size			
B	I	1¾	4	2
B	II	2½	15	10
B	III	12	35	20

(d) All hand portable fire extinguishers and semiportable fire extinguishing systems shall have permanently attached thereto a metallic name plate giving the name of the item, the rated capacity in gallons, quarts, or pounds, the name and address of the person or firm for whom approved, and the identifying mark of the actual manufacturer.

(e) Vaporizing-liquid type fire extinguishers containing carbon tetrachloride or chlorobromomethane or other toxic vaporizing liquids are not acceptable as equipment required by this subchapter.

(f) Hand portable or semiportable extinguishers which are required on their name plates to be protected from freezing shall not be located where freezing temperatures may be expected.

(g) The use of dry chemical, stored pressure, fire extinguishers not fitted with pressure gauges or indicating devices, manufactured prior to January 1, 1965, may be permitted on motorboats and other vessels so long as such extinguishers are maintained in good and serviceable condition. The following maintenance and inspections are required for such extinguishers:

(1) When the date on the inspection record tag on the extinguishers shows that 6 months have elapsed since last

§ 25.30-15

weight check ashore, then such extinguisher is no longer accepted as meeting required maintenance conditions until reweighed ashore and found to be in a serviceable condition and within required weight conditions.

(2) If the weight of the container is $\frac{1}{4}$ ounce less than that stamped on container, it shall be serviced.

(3) If the outer seal or seals (which indicate tampering or use when broken) are not intact, the boarding officer or marine inspector will inspect such extinguisher to see that the frangible disc in neck of the container is intact; and if such disc is not intact, the container shall be serviced.

(4) If there is evidence of damage, use, or leakage, such as dry chemical powder observed in the nozzle or elsewhere on the extinguisher, the container shall be replaced with a new one and the extinguisher properly serviced or the extinguisher replaced with another approved extinguisher.

(h) The dry chemical, stored pressure, fire extinguishers without pressure gauges or indicating devices manufactured after January 1, 1965, shall not be labeled with the marine type label bed in §162.028-4 of this title nor shall such extinguishers manufactured after January 1, 1965, be carried on board motorboats or other vessels as required equipment.

[CGFR 65-50, 30 FR 16653, Dec. 30, 1965, as amended by CGFR 68-32, 33 FR 5711, Apr. 12, 1968; CGFR 69-18, 34 FR 5723, Mar. 27, 1969]

§ 25.30-15 Fixed fire extinguishing systems.

(a) When a fixed fire extinguishing system is installed, it shall be of an approved carbon dioxide type, designed and installed in agreement with the applicable provisions of subpart 76.15 of subchapter H (Passenger Vessels) of this chapter.

§ 25.30-20 Fire extinguishing equipment required.

(a) *Motorboats.* (1) All motorboats shall carry at least the minimum number of hand portable fire extinguishers set forth in Table 25.30-20(a)(1), except that motorboats less than 26 feet in length, propelled by outboard motors

46 CFR Ch. I (10-1-00 Edition)

and not carrying passengers for hire, need not carry such portable fire extinguishers if the construction of such motorboats will not permit the entrapment of explosive or flammable gases or vapors.

TABLE 25.30-20(a)(1)

Length, feet	Minimum number of B-1 hand portable fire extinguishers required ¹	
	No fixed fire extinguishing system in machinery space	Fixed fire extinguishing system in machinery space
Under 16	1	0
16 and over, but under 26	1	0
26 and over, but under 40	2	1
40 and over, but not over 65	3	2

¹One B-11 hand portable fire extinguisher may be substituted for two B-1 hand portable fire extinguishers.

(2) The intent of this regulation is illustrated in Figure 25.30-20(a1) where fire extinguishers are required if any one or more of the specified conditions exist, and in Figure 25.30-20(a2) where specified conditions do not, in themselves, require that fire extinguishers be carried.




FIGURE 25.30-20(a1)

Fire extinguishers are required if any one or more of the following conditions exist (numbers identifying conditions are the same as those placed in Figure 25.30-20 (a1)):

1. Closed compartment under thwarts and seats wherein portable fuel tanks may be stored.
2. Double bottoms not sealed to the hull or which are not completely filled with flotation material.
3. Close living spaces.
4. Closed stowage compartments in which combustible or flammable materials are stowed.
5. Permanently installed fuel tanks.




FIGURE 25.30-20(a2).

The following conditions do not, in themselves, require that fire extinguishers be carried (numbers identifying conditions are the same as those placed in Figure 25.30-20(a2)):

1. Bait wells.
2. Glove compartments.
3. Buoyant flotation material.
4. Open slatted flooring.
5. Ice chests.

(b) *Motor vessels.* (1) All motor vessels shall carry at least the minimum number of hand portable fire extinguishers set forth in Table 25.30-20(b) (1).

TABLE 25.30-20(b)(1)

Gross tonnage—		Minimum number of B-II hand portable fire extinguishers
Over	Not over	
.....	50	1
50	100	2
100	500	3
500	1,000	6
1,000	8

(2) In addition to the hand portable fire extinguishers required by paragraph (b)(1) of this section, the following fire-extinguishing equipment shall be fitted in the machinery space:

(i) One Type B-II hand portable fire extinguisher shall be carried for each 1,000 B. H. P. of the main engines or fraction thereof. However, not more than 6 such extinguishers need be carried.

(ii) On motor vessels of over 300 gross tons, either one Type B-III semiportable fire-extinguishing system shall be fitted, or alternatively, a fixed fire-extinguishing system shall be fitted in the machinery space.

(3) The frame or support of each Type B-III fire extinguisher required by paragraph (b)(2)(ii) of this section must be welded or otherwise permanently attached to a bulkhead or deck.

(4) If an approved semiportable fire extinguisher has wheels and is not required by this section, it must be securely stowed when not in use to pre-

vent it from rolling out of control under heavy sea conditions.

(c) *Barges carrying passengers.* (1) Every barge of 65 feet in length or less while carrying passengers when towed or pushed by a motorboat, motor vessel, or steam vessel shall be fitted with hand portable fire extinguishers as required by Table 25.30-20(a)(1), depending upon the length of the barge.

(2) Every barge of over 65 feet in length while carrying passengers when towed or pushed by a motorboat, motor vessel, or steam vessel shall be fitted with hand portable fire extinguishers as required by Table 25.30-20(b)(1), depending upon the gross tonnage of the barge.

[CGFR 65-50, 30 FR 16653, Dec. 30, 1965, as amended by CGD 77-039, 44 FR 34132, June 14, 1979; CGD 97-057, 62 FR 51042, Sept. 30, 1997]

§ 25.30-90 Vessels contracted for prior to November 19, 1952.

(a) Vessels contracted for prior to November 19, 1952, shall meet the applicable provisions of §§ 25.30-5 through 25.30-20 insofar as the number and general type of equipment is concerned. Existing items of equipment and installations previously approved but not meeting the applicable requirements for type approval may be continued in service so long as they are in good condition. All new installations and replacements shall meet the requirements of §§ 25.30-5 through 25.30-20.

(b) [Reserved]

Subpart 25.35—Backfire Flame Control

§ 25.35-1 Requirements.

(a) Every gasoline engine installed in a motorboat or motor vessel after April 25, 1940, except outboard motors, shall be equipped with an acceptable means of backfire flame control.

(b) Installations made before November 19, 1952, need not meet the detailed requirements of this subpart and may be continued in use as long as they are serviceable and in good condition. Replacements shall meet the applicable conditions in this section.

(c) Installations consisting of backfire flame arresters bearing basic Approval Nos. 162.015 or 162.041 or engine air and fuel induction systems bearing

§ 25.40-1

basic Approval Nos. 162.015 or 162.042 may be continued in use as long as they are serviceable and in good condition. New installations or replacements must meet applicable requirements of subpart 58.10 of this chapter.

[CGFR 65-50, 30 FR 16653, Dec. 30, 1965, as amended by CGD 88-032, 56 FR 35820, July 29, 1991]

Subpart 25.40—Ventilation

§ 25.40-1 Tanks and engine spaces.

(a) All motorboats or motor vessels, except open boats and as provided in paragraphs (d) and (e) of this section, the construction or decking over of which is commenced after April 25, 1940, and which use fuel having a flashpoint of 110° F., or less, shall have at least two ventilator ducts, fitted with cowls or their equivalent, for the efficient removal of explosive or flammable gases from the bilges of every engine and fuel tank compartment. There shall be at least one exhaust duct installed so as to extend from the open atmosphere to the lower portion of the bilge and at least one intake duct installed so as to extend to a point at least midway to the bilge or at least below the level of the carburetor air intake. The cowls shall be located and trimmed for maximum effectiveness and in such a manner so as to prevent displaced fumes from being recirculated.

(b) As used in this section, the term *open boats* means those motorboats or motor vessels with all engine and fuel tank compartments, and other spaces to which explosive or flammable gases and vapors from these compartments may flow, open to the atmosphere and so arranged as to prevent the entrapment of such gases and vapors within the vessel.

(c) Boats built after July 31, 1980, which are manufactured or used primarily for noncommercial use; which are leased, rented, or chartered to another for the latter's noncommercial use; which are engaged in the carriage of six or fewer passengers; or which are in compliance with the requirements of 33 CFR part 183 are exempted from these requirements.

(d) Boats built after July 31, 1978, which are manufactured or used pri-

46 CFR Ch. I (10-1-00 Edition)

marily for noncommercial use; which are rented, leased, or chartered to another for the latter's noncommercial use; or which engage in conveying six or fewer passengers are exempted from the requirements of paragraph (a) for fuel tank compartments that:

(1) Contain a permanently installed fuel tank if each electrical component is ignition protected in accordance with 33 CFR 183.410(a); and

(2) Contain fuel tanks that vent to the outside of the boat.

[CGFR 65-50, 30 FR 16653, Dec. 30, 1965, as amended by CGD 76-082A, 44 FR 73047, Dec. 17, 1979; CGD 76-082A, 45 FR 7551, Feb. 4, 1980; CGD 95-012, 60 FR 48048, Sept. 18, 1995; CGD 95-028, 62 FR 51196, Sept. 30, 1997]

Subpart 25.45—Cooking, Heating, and Lighting Systems

§ 25.45-1 Heating and lighting systems on vessels carrying passengers for hire.

(a) No fuel may be used in any heating or lighting system on any vessel carrying passengers for hire without the approval of Commandant (G-MSE), except—

- (1) Alcohol, solid,
- (2) Alcohol, liquid, combustible,
- (3) Fuel oil, No. 1, No. 2, or No. 3,
- (4) Kerosene,
- (5) Wood or,
- (6) Coal.

(b) Heating and lighting systems using alcohol must meet the following requirements:

(1) Containers of solidified alcohol must be properly secured to a fixed base.

(2) Fluid alcohol burners, where wet priming is used, must have—

(i) A catch pan of not less than ¾" depth secured inside the frame of the stove; or

(ii) The metal protection under the stove flanged up at least ¾" to form a pan.

(c) Heating and lighting systems using kerosene or fuel oil must meet the following requirements:

(1) Where wet priming is used, each system must have—

(i) A catch pan of not less than ¾" depth secured inside the frame of the stove; or

(ii) The metal protection under the stove flanged up at least $\frac{3}{4}$ " to form a pan.

(2) Fuel tanks must be—

(i) Separated from the stove that they serve;

(ii) Mounted in a location open to the atmosphere or mounted inside a compartment that is vented to the atmosphere; and

(iii) Fitted with an outside fill and vent.

(d) Heating systems using wood or coal installed after August 9, 1989, shall be installed in accordance with the guidelines in chapter 6 of NFPA 302.

[CGD 83-013, 54 FR 6402, Feb. 10, 1989 and CGD 83-013, 55 FR 3959, Feb. 6, 1990; CGD 95-072, 60 FR 50461, Sept. 29, 1995; CGD 96-041, 61 FR 50726, Sept. 27, 1996]

§ 25.45-2 Cooking systems on vessels carrying passengers for hire.

(a) No fuel may be used in any cooking system on any vessel carrying passengers for hire without the approval of Commandant (G-MSE) except those listed in § 25.45-1, subject to the requirements stated therein, and liquefied petroleum gas (LPG), or compressed natural gas (CNG).

(b) Cooking systems using LPG or CNG must meet the following requirements:

(1) The design, installation, and testing of each LPG system must meet ABYC A-1-78 or chapter 6 of NFPA 302.

(2) The design, installation, and testing of each CNG system must meet ABYC A-22-78 or chapter 6 of NFPA 302.

(3) Cooking systems using chapter 6 of NFPA 302 as the standard must meet the following additional requirements:

(i) The storage or use of CNG containers within the accommodation area, machinery spaces, bilges, or other enclosed spaces is prohibited.

(ii) LPG or CNG must be odorized in accordance with ABYC A-1.5.d or A-22.5.b, respectively.

(iii) The marking and mounting of LPG cylinders must be in accordance with ABYC A-1.6.b.

(iv) LPG cylinders must be of the vapor withdrawal type as specified in ABYC A-1.5.b.

(4) Continuous pilot lights or automatic glow plugs are prohibited for an LPG or CNG installation using ABYC A-1 or A-22 as the standard.

(5) CNG installations using ABYC A-22 as the standard must meet the following additional requirements:

(i) The stowage or use of CNG containers within the accommodation area, machinery spaces, bilges, or other enclosed spaces is prohibited.

(ii) The CNG cylinders, regulating equipment, and safety equipment must meet the installation, stowage, and testing requirements specified in paragraph 6-5.12 of NFPA 302.

(iii) The use of stowage of stoves with attached CNG cylinders is prohibited as specified in paragraph 6-5.1 of NFPA 302.

(6) If the fuel supply line of an LPG or CNG system enters an enclosed space on the vessel, a remote shut-off valve must be installed that can be operated from a position adjacent to the appliance. The valve must be located between the fuel tank and the point where the fuel supply line enters the enclosed portion of the vessel. A power operated valve installed to meet this requirement must be of a type that will fail closed.

(7) The following variances from ABYC A-1.11.b(1) are allowed for CNG:

(i) The storage locker or housing access opening need not be in the top.

(ii) The locker or housing need not be above the waterline.

(8) The following variances from NFPA 302 are allowed:

(i) The storage locker or housing for CNG tank installations need not be above the waterline as required by paragraph 6-5.12.1.1(a).

(ii) Ignition protection need not be provided as required by paragraph 6-5.4.

NOTE TO § 25.45-2: The ABYC and NFPA standards referenced in this section require the posting of placards containing safety precautions for gas cooking systems.

[CGD 83-013, 54 FR 6402, Feb. 10, 1989, as amended by CGD 83-013, 55 FR 3960, Feb. 6, 1990; CGD 95-072, 60 FR 50461, Sept. 29, 1995; CGD 96-041, 61 FR 50726, Sept. 27, 1996; USCG-2000-7790, 65 FR 58458, Sept. 29, 2000]

§ 25.50-1

Subpart 25.50—Garbage Retention

§ 25.50-1 Criteria.

Each uninspected vessel must meet the garbage discharge, waste management plan, and placard requirements of 33 CFR part 151 applicable to the vessel.

NOTE: 33 CFR 151.67 prohibits the discharge of plastic or garbage mixed with plastic into the sea or the navigable waters of the United States. "Plastic" and "garbage" are defined in 33 CFR 151.05.

[CGD 88-002A, 56 FR 8880, Mar. 1, 1991]

PART 26—OPERATIONS

Subpart 26.01—Application

Sec.

26.01-1 Applicable to all vessels.

Subpart 26.03—Special Operating Requirements

26.03-1 Safety orientation.

26.03-2 Emergency instructions.

26.03-5 Action required after accident.

26.03-8 Marine Event of National Significance special permits.

26.03-10 Signaling light.

Subpart 26.08—Notice and Reporting of Casualty and Voyage Records

26.08-1 Notice and reporting of casualty and voyage records.

Subpart 26.15—Boarding

26.15-1 May board at any time.

Subpart 26.20—Exhibition of Motorboat Operator's License

26.20-1 Must be available.

Subpart 26.25 [Reserved]

Subpart 26.30—Work Vest

26.30-1 Approved unicellular plastic foam work vests.

26.30-5 Use.

26.30-10 Stowage.

AUTHORITY: 46 U.S.C. 3306, 4104, 6101, 8105; E.O. 12234, 45 FR 58801, 3 CFR, 1980 Comp., p. 277; 49 CFR 1.46.

SOURCE: CGFR 65-50, 30 FR 16656, Dec. 30, 1965, unless otherwise noted.

46 CFR Ch. I (10-1-00 Edition)

Subpart 26.01—Application

§ 26.01-1 Applicable to all vessels.

(a) The provisions of this part shall apply to all vessels except as specifically noted.

Subpart 26.03—Special Operating Requirements

§ 26.03-1 Safety orientation.

(a) Before getting underway in any vessel carrying 6 or fewer passengers for hire, the operator in charge shall ensure that suitable public announcements, instructive placards or both are provided in a manner which affords all passengers the opportunity to become acquainted with:

(1) Stowage locations of life preservers;

(2) Proper method of donning and adjusting life preservers of the type(s) carried on the vessel;

(3) The type and location of all life-saving devices carried on the vessel; and

(4) The location and contents of the *Emergency Checkoff List* required by § 26.03-2.

(b) Vessels subject to this subpart engaged in tender service at yacht clubs and marinas, and vessels being demonstrated for a potential purchaser by a yacht broker, are excluded from the requirements of § 26.03-1 and § 26.03-2.

[CGD 78-009, 45 FR 11109, Feb. 19, 1980]

§ 26.03-2 Emergency instructions.

(a) The operator in charge of each vessel carrying 6 or fewer passengers for hire shall ensure that an emergency checkoff list is posted in a conspicuous, continuously accessible place to serve as a notice to the passengers and a reminder to the crew of precautionary measures which may be necessary in the event of an emergency situation.

(b) Except where any part of the emergency instructions are deemed unnecessary by the Officer in Charge, Marine Inspection, the emergency checkoff list must contain not less than the applicable portions of the sample emergency checkoff list which follows:

Coast Guard, DOT

§ 26.03-8

SAMPLE EMERGENCY CHECKOFF LIST

Measures to be considered in the event of:

(a) *Rough weather at sea or crossing hazardous bars.*

- ☐ All weathertight and watertight doors, hatches and airports closed to prevent taking water aboard.
- ☐ Bilges kept dry to prevent loss of stability.
- ☐ Passengers seated and evenly distributed.
- ☐ All passengers wearing life preservers in conditions of very rough seas or if about to cross a bar under hazardous conditions.
- ☐ An international distress call and a call to the Coast Guard over radiotelephone made if assistance is needed (if radiotelephone equipped).

(b) *Man overboard.*

- ☐ Ring buoy thrown overboard as close to the victim as possible.
- ☐ Lookout posted to keep the victim in sight.
- ☐ Crewmember, wearing a life preserver and lifeline, standing by ready to jump into the water to assist the victim back aboard.
- ☐ Coast Guard and all vessels in the vicinity notified by radiotelephone (if radiotelephone equipped).
- ☐ Search continued until after radiotelephone consultation with the Coast Guard, if at all possible.

(c) *Fire at Sea.*

- ☐ Air supply to the fire cut off by closing hatches, ports, doors, and ventilators, etc.
- ☐ Portable extinguishers discharged at the base of the flames of flammable liquid or grease fires or water applied to fires in combustible solids.
- ☐ If fire is in machinery spaces, fuel supply and ventilation shut off and any installed fixed firefighting system discharged.
- ☐ Vessel maneuvered to minimize the effect of wind on the fire.
- ☐ Coast Guard and all vessels in the vicinity notified by radiotelephone of the fire and vessel location (if radiotelephone equipped).
- ☐ Passengers moved away from fire and wearing life preservers.

(c) When in the judgment of the cognizant Officer in Charge, Marine Inspection, the operation of any vessel subject to this section does not present the hazards listed on the emergency checkoff list or when any vessel has no suitable mounting surface, an exclusion from the requirements of § 26.03-2(a) and (b) is granted by letter.

[CGD 78-009, 45 FR 11109, Feb. 19, 1980]

§ 26.03-5 Action required after accident.

(a) Whenever an undocumented vessel is involved in a marine casualty, the master or individual in charge shall:

(1) Render necessary assistance to each individual affected to save that affected individual from danger caused by a marine casualty, so far as the master or individual in charge can do so without serious danger to the master's or the individual's vessel or to individuals on board; and

(2) Give the master's or individual's name and address and identification of the vessel to the master or individual in charge of any other vessel involved in the casualty, to any individual injured, and to the owner of any property damaged.

(b) Undocumented vessels involved in marine casualties shall report the casualty in accordance with the requirements of 33 CFR part 173, subpart C.

[CGD 95-028, 62 FR 51197, Sept. 30, 1997, as amended by USCG-1998-4442, 63 FR 52189, Sept. 30, 1998]

§ 26.03-8 Marine Event of National Significance special permits.

(a) For a Marine Event of National Significance, as determined by the Commandant, U.S. Coast Guard, a vessel may be permitted to engage in excursions while carrying passengers-for-hire for the duration of the event. Event sponsors seeking this determination must make written request to the Commandant (G-M) at least one year prior to the event.

(b) The owner, operator, or agent of a vessel that is registered as a participant in a Marine Event of National Significance, may apply for a special permit to carry passengers-for-hire for the duration of the event. The master, owner, or agent of the vessel must apply to the Coast Guard OCMi who has jurisdiction over the vessel's first United States port of call. The OCMi may issue a Form CG-949 "Permit to Carry Excursion Party" if in the opinion of the OCMi the operation can be undertaken safely. The OCMi may require an inspection prior to issuance of a special permit to insure that the vessel can safely operate under the conditions for which the permit is issued.

§ 26.03-10

(c) The permit will state the conditions under which it is issued. These conditions must include the number of passengers-for-hire the vessel may carry, the crew required, the number and type of lifesaving and safety equipment required, the route and operating details for which the permit is issued, and the dates for which the permit will be valid.

(d) The permit must be displayed in a location visible to passengers.

(e) The carrying of passengers-for-hire during a Marine Event of National Significance must comply with the regulations governing coastwise transportation of passengers under 19 CFR 4.50 (b) and 19 CFR 4.80 (a).

[USCG-1999-5040, 65 FR 24881, Apr. 28, 2000]

§ 26.03-10 Signaling light.

All vessels of over 150 gross tons, when engaged on an international voyage, shall be equipped with an efficient daylight signaling lamp in accordance with the requirements of subchapter J (Electrical Engineering) of this chapter.

[CGFR 68-32, 33 FR 5711, Apr. 12, 1968, as amended by CGD 97-057, 62 FR 51042, Sept. 30, 1997]

Subpart 26.08—Notice and Reporting of Casualty and Voyage Records

AUTHORITY: 46 U.S.C. 6101; 46 CFR 1.46.

§ 26.08-1 Notice and reporting of casualty and voyage records.

The requirements for providing notice and reporting of marine casualties and for retaining voyage records are contained in part 4 of this chapter.

[CGD 84-099, 52 FR 47535, Dec. 14, 1987; 53 FR 13117, Apr. 21, 1988]

Subpart 26.15—Boarding

§ 26.15-1 May board at any time.

(a) To facilitate the boarding of vessels by the commissioned, warrant, and petty officers of the U.S. Coast Guard in the exercise of their authority, every uninspected vessel, as defined in 46 U.S.C. 2101(43), if underway and upon being hailed by a Coast Guard vessel,

46 CFR Ch. I (10-1-00 Edition)

must stop immediately and lay to, or must maneuver in such a way to permit the Coast Guard boarding officer to come aboard. Failure to permit a Coast Guard boarding officer to board a vessel or refusal to comply will subject the operator or owner of the vessel to the penalties provided in law.

(b) Coast Guard boarding vessels will be identified by the display of the Coast Guard ensign as a symbol of authority and the Coast Guard personnel will be dressed in Coast Guard uniform. The Coast Guard boarding officer upon boarding a vessel will identify himself to the master, owner, or operator and explain his mission.

[CGFR 65-50, 30 FR 16656, Dec. 30, 1965, as amended by CGD 72-132R, 38 FR 5750, Mar. 2, 1973; CGD 95-027, 61 FR 25997, May 23, 1996]

Subpart 26.20—Exhibition of Motorboat Operator's License

§ 26.20-1 Must be available.

(a) Any person to whom a license as a motorboat operator has been issued shall have such license in his possession and available for immediate production to any Coast Guard boarding officer at all times during which any vessel which he is operating is carrying passengers for hire.

Subpart 26.25 [Reserved]

Subpart 26.30—Work Vest

SOURCE: CGFR 68-65, 33 FR 19982, Dec. 28, 1968, unless otherwise noted.

§ 26.30-1 Approved unicellular plastic foam work vests.

(a) Buoyant work vests carried under the permissive authority of this subpart shall be of an approved type, and shall be constructed, listed, and labeled in accordance with subpart 160.053 of subchapter Q (Specifications) of this chapter.

§ 26.30-5 Use.

(a) Approved buoyant work vests are considered to be items of safety apparel and may be carried aboard vessels to be worn by crew members when working near or over the water under favorable working conditions.

Coast Guard, DOT

§ 27.100

(b) When carried, approved buoyant work vests shall not be accepted in lieu of any portion of the required number of approved lifesaving appliances required by § 25.25–10 of this subchapter.

§ 26.30–10 Stowage.

(a) The approved buoyant work vests shall be stowed separately from the regular stowage of required lifesaving equipment.

PART 27—TOWING VESSELS

Subpart A—General Provisions for Fire Protection on Towing Vessel

Sec.

27.100 What towing vessels does this part affect?

27.101 Definitions.

27.102 Incorporation by reference.

Subpart B—Fire Protection Measures for Existing Towing Vessels

27.200 What are the requirements for an existing towing vessel?

27.205 What are the requirements for a general alarm on an existing towing vessel?

27.210 What are the requirements for fire detection on an existing towing vessel?

27.215 What are the requirements for internal communication on an existing towing vessel?

27.220 If an existing towing vessel is 24 meters (79 feet) *or longer* in length, what are the requirements for fire pump, fire main, and fire hose? [Reserved]

27.221 If an existing towing vessel is *less* than 24 meters (79 feet) in length, what are the requirements for fire pump and fire hose? [Reserved]

27.225 What type of portable fire-extinguisher is required on an existing towing vessel? [Reserved]

27.230 What are the requirements for a fuel shutoff on an existing towing vessel?

27.235 Is a fire axe required on an existing towing vessel? [Reserved]

27.240 What are the requirements for a muster list on an existing towing vessel? [Reserved]

27.245 What are the requirements for the instruction, drills, and safety orientations conducted on an existing towing vessel?

Subpart C—Fire Protection Measures for New Towing Vessels

27.300 What are the requirements for a new towing vessel?

27.305 What are the requirements for a general alarm on a new towing vessel?

27.310 What are the requirements for fire detection on a new towing vessel?

27.315 What are the requirements for internal communication on a new towing vessel?

27.320 If a new towing vessel is 24 meters (79 feet) *or longer* in length, what are the requirements for fire pump, fire main, and fire hose? [Reserved]

27.321 If a new towing vessel is *less* than 24 meters (79 feet) in length, what are the requirements for fire pump and fire hose? [Reserved]

27.325 If a new towing vessel is 24 meters (79 feet) *or longer* in length, what type of fire-extinguishing equipment must it carry? [Reserved]

27.326 If a new towing vessel is *less* than 24 meters (79 feet) in length, what type of fire-extinguishing equipment must it carry? [Reserved]

27.340 What are the requirements for a fuel system on a new towing vessel?

27.345 Is a fire axe required on a new towing vessel? [Reserved]

27.350 What are the requirements for a muster list on a new towing vessel? [Reserved]

27.355 What are the requirements for the instruction, drills, and safety orientations conducted on a new towing vessel?

AUTHORITY: 46 U.S.C. 3306, 4102 (as amended by Pub. L. 104-324, 110 Stat. 3947); 49 CFR 1.46.

SOURCE: USCG-1998-4445, 64 FR 56266, Oct. 19, 1999, unless otherwise noted.

Subpart A—General Provisions for Fire Protection on Towing Vessels

§ 27.100 What towing vessels does this part affect?

(a) You must comply with this part if your towing vessel operates on the navigable waters of the United States, unless your towing vessel is described in paragraph (b) of this section.

(b) This part does not apply to you if your towing vessel is—

(1) Used solely within a limited geographic area, such as a fleeting-area for barges or a commercial facility, or used solely for restricted service, such as making up or breaking up larger tows;

(2) Used solely for assistance towing as defined by 46 CFR 10.103;

(3) Used solely for pollution response;

(4) Exempted by the Captain of the Port (COTP);

(5) A public vessel that is owned, or demise chartered, and operated by the

§ 27.101

United States Government or by a government of a foreign country; and that is not engaged in commercial service; or

(6) A foreign vessel engaged in innocent passage.

(c) If you think your towing vessel should be exempt from these requirements for a specified route, you should submit a written request to the appropriate COTP. The COTP will provide you with a written response granting or denying your request. The COTP will consider the extent to which unsafe conditions would result if your towing vessel lost propulsion because of a fire in the engine room.

§ 27.101 Definitions.

As used in this part—Accommodations includes any:

- (1) Messrooms.
- (2) Lounges.
- (3) Sitting areas.
- (4) Recreation rooms.
- (5) Quarters.
- (6) Toilet spaces.
- (7) Shower rooms.
- (8) Galleys.
- (9) Berthing facilities.
- (10) Clothing-changing rooms.

Engine room means the enclosed area where any main-propulsion engine is located. It comprises all deck levels within that area.

Existing Towing Vessel means a towing vessel that is not a new towing vessel.

Fixed fire-extinguishing system means a carbon-dioxide system that satisfies 46 CFR subpart 76.15; a manually-operated clean-agent system that satisfies NFPA 2001 and is approved by the Commandant; or a manually-operated water-mist system that satisfies NFPA 750 and is approved by the Commandant.

New Towing Vessel means a towing vessel the construction of which was contracted for on or after January 18, 2000.

Operating Station means the principal steering station on the vessel, from which the vessel is normally navigated.

Towing Vessel means a commercial vessel engaged in, or intending to engage in, pulling, pushing, or hauling alongside, or any combination of pulling, pushing, or hauling alongside.

46 CFR Ch. I (10–1–00 Edition)

We means the United States Coast Guard.

Working area means any area on the vessel where the crew could be present while on duty and performing their assigned tasks.

You means the owner of a towing vessel, unless otherwise specified.

§ 27.102 Incorporation by reference.

(a) Certain material is incorporated by reference into this part with the approval of the Director of the Federal Register in accordance with 5 U.S.C. 552(a) and 1 CFR part 51. To enforce any edition other than that specified in paragraph (b) of this section, the Coast Guard must publish notice of the change in the FEDERAL REGISTER and make the material available for inspection. All approved material is so available at the Office of the Federal Register, 800 North Capitol Street, NW., suite 700, Washington, DC and at the U.S. Coast Guard, Office of Design and Engineering Standards (G-MSE), 2100 Second Street SW., Washington DC 20593-0001 and is available from the sources indicated in paragraph (b) of this section.

(b) The material approved for incorporation by reference in this part and the sections affected are:

American Boat and Yacht Council (ABYC), 3069 Solomons Island Road, Edgewater, MD 21037-1416	
H-25-1986—Portable Fuel Systems for Flammable Liquids	27.340
H-33-1989—Diesel Fuel Systems	27.340
National Fire Protection Association (NFPA), 1 Batterymarch Park, Quincy, MA 02269-9101	
302-1989—Pleasure and Commercial Motorcraft	27.340
Society of Automotive Engineers (SAE), 400 Commonwealth Drive, Warrendale, PA 15096-0001	
SAE J1475-1984—Hydraulic Hose Fitting for Marine Applications	27.340
SAE J1942-1989—Hose and Hose Assemblies for Marine Applications	27.340

Subpart B—Fire Protection
Measures for Existing Towing Vessels

§ 27.200 What are the requirements for an existing towing vessel?

If your existing towing vessel operates as described in § 27.100(a), you must ensure that it complies with §§ 27.205 through 27.245 of this part.

§ 27.205 What are the requirements for a general alarm on an existing towing vessel?

(a) By October 8, 2001, you must ensure that your vessel is fitted with a general alarm that:

- (1) Has a contact maker at the operating station that can notify persons on board in the event of an emergency.
- (2) Is capable of notifying persons in any accommodation, work space, and the engine room.
- (3) In the engine room and any other area where background noise makes a general alarm hard to hear, has a supplemental flashing red light identified with a sign that reads:

Attention

General Alarm—When Alarm Sounds or Flashes Go to Your Station.

- (4) Is tested at least once each week.
- (b) You or the operator may use a public-address (PA) system or other means of alerting all persons on your towing vessel instead of a general alarm, if—
 - (1) The PA system is capable of notifying persons in any accommodation or work space or the engine room;
 - (2) It is tested at least once each week;
 - (3) It can be activated from the operating station; and
 - (4) It complies with paragraph (a)(3) of this section.

§ 27.210 What are the requirements for fire detection on an existing towing vessel?

By October 8, 2001, there must be a fire-detection system installed on your vessel to detect engine-room fires. It may be a new system, an existing fire-detection system, or an existing engine-room-monitoring system (with fire-detection capability), if it is oper-

able and complies with this section. You must ensure that—

(a) Each detector, each control panel, and each fire alarm are approved under 46 CFR subpart 161.002 or listed by an independent testing laboratory; except that, if you use an existing engine-room-monitoring system (with fire-detection capability), each detector must be listed by an independent testing laboratory;

(b) The system is installed, tested, and maintained in line with the manufacturer's design manual;

(c) The system is arranged and installed so a fire in the engine room automatically sets off alarms on a control panel at the operating station;

(d) The control panel includes—

- (1) A power-available light;
- (2) An audible alarm to notify crew at the operating station of fire and visible alarms to identify the zone or zones of origin of the fire;
- (3) A means to silence audible alarms while maintaining indication by visible alarm;
- (4) A circuit-fault detector test-switch; and
- (5) Labels for all switches and indicator lights, indicating their functions;

(e) The system draws power from two sources, switchover from the primary power source to the secondary source being either manual or automatic;

(f) The system serves no other purpose, unless it is an existing engine-room-monitoring system (with fire-detection capability); and

(g) The system is certified by a Registered Professional Engineer, or by a recognized classification society (under 46 CFR part 8), to comply with paragraphs (a) through (f) of this section.

[USCG 1998-4445, 65 FR 52046, Aug. 28, 2000]

§ 27.215 What are the requirements for internal communication on an existing towing vessel?

(a) By October 8, 2001, you must ensure that your vessel is fitted with a communication system between the engine room and operating station that—

- (1) Is comprised of either fixed or portable equipment, such as a sound-powered telephone, portable radios, or other reliable method of voice communication, with a main or reserve power

§ 27.220

supply that is independent of the electrical system on your towing vessel; and

(2) Provides two-way voice communication and calling between the operating station and either—

(i) The engine room; or
(ii) A location immediately adjacent to an exit from the engine room.

(b) Twin-screw vessels with operating station control for both engines are not required to have an internal communication system.

(c) When the operating station control station and the engine room access are within 3 meters (10 feet) of each other and allow unobstructed visual contact between them, direct voice communication is acceptable instead of a communication system.

§ 27.220 If an existing towing vessel is 24 meters (79 feet) or longer in length, what are the requirements for fire pump, fire main, and fire hose? [Reserved]

§ 27.221 If an existing towing vessel is less than 24 meters (79 feet) in length, what are the requirements for fire pump and fire hose? [Reserved]

§ 27.225 What type of portable fire-extinguisher is required on an existing towing vessel? [Reserved]

§ 27.230 What are the requirements for a fuel shutoff on an existing towing vessel?

By October 8, 2001, you must have a remote fuel shutoff that meets § 27.340(f) installed on your vessel.

§ 27.235 Is a fire axe required on an existing towing vessel? [Reserved]

§ 27.240 What are the requirements for a muster list on an existing towing vessel? [Reserved]

§ 27.245 What are the crew-training requirements for fire emergencies on an existing towing vessel?

By January 19, 2000, you must ensure that drills, instruction and safety orientations that satisfy § 27.355 are performed on your vessel.

46 CFR Ch. I (10–1–00 Edition)

Subpart C—Fire Protection Measures for New Towing Vessels

§ 27.300 What are the requirements for a new towing vessel?

If your new towing vessel operates as described in § 27.100(a), then you must ensure that it complies with §§ 27.305 through 27.355 of this part.

§ 27.305 What are the requirements for a general alarm on a new towing vessel?

(a) You must ensure that your vessel is fitted with a general alarm system that:

(1) Has a contact maker at the operating station that can notify persons on board in the event of an emergency.

(2) Is capable of notifying persons in any accommodation, work space, and the engine room.

(3) In the engine room and any other area where background noise makes a general alarm hard to hear, has a supplemental flashing red light identified with a sign that reads:

Attention

General Alarm—When Alarm Sounds or Flashes Go to Your Station.

(4) Is tested at least once each week.

(b) You or the operator may use a PA system or other means of alerting all persons on your towing vessel instead of a general alarm, if—

(1) The PA system is capable of notifying persons in any accommodation or work space or the engine room;

(2) It is tested at least once each week;

(3) It can be activated from the operating station; and

(4) It complies with paragraph (a)(3) of this section.

§ 27.310 What are the requirements for fire detection on a new towing vessel?

A fire-detection system must be installed on your vessel to detect engine room fires. You must ensure that—

(a) Detectors, control units, and fire alarms are approved under 46 CFR subpart 161.002, or are listed by an independent testing laboratory;

(b) The system is installed, tested, and maintained per the manufacturer's design manual;

(c) The system is arranged and installed so a fire in the engine room automatically sets off alarms on a control panel at the operating station;

(d) The control panel includes—

(1) A power-available light;

(2) An audible alarm to notify crew at the operating station of fire and visible alarms to identify the zone or zones of origin of the fire;

(3) A means to silence audible alarms while maintaining indication by visible alarm;

(4) A circuit-fault detector test-switch; and

(5) Labels for all switches and indicator lights, indicating their functions.

(e) The system is powered from two sources, switchover from the primary power source to the secondary source being either manual or automatic;

(f) The system is used for no other purpose; and

(g) The system is certified by a Registered Professional Engineer, or by a recognized classification society (under 46 CFR part 8), to meet the criteria listed in paragraphs (a) through (f) of this section.

[USCG-1998-4445, 64 FR 56266, Oct. 19, 1999, as amended by USCG 1998-4445, 65 FR 52047, Aug. 28, 2000]

§ 27.315 What are the requirements for internal communication on a new towing vessel?

(a) You must ensure that your vessel has a communication system between the engine room and operating station that—

(1) Is comprised of either fixed or portable equipment, such as a sound-powered telephone, portable radios, or other reliable voice communication method, with a main or reserve power supply that is independent of the electrical system on your towing vessel; and

(2) Provides two-way calling and voice communication between the operating station and either—

(i) The engine room; or

(ii) A location immediately adjacent to an exit from the engine room.

(b) Twin-screw vessels with operating station control for both engines are not required to have an internal communication system.

(c) When the operating station control station and the engine room access are within 3 meters (10 feet) of each other and allow unobstructed visual contact between them, direct voice communication is acceptable instead of a communication system.

§ 27.320 If a new towing vessel is 24 meters (79 feet) or longer in length, what are the requirements for fire pump, fire main, and fire hose? [Reserved]

§ 27.321 If a new towing vessel is less than 24 meters (79 feet) in length, what are the requirements for fire pump and fire hose? [Reserved]

§ 27.325 If a new towing vessel is 24 meters (79 feet) or longer in length, what type of fire-extinguishing equipment must it carry? [Reserved]

§ 27.326 If a new towing vessel is less than 24 meters (79 feet) in length, what type of fire-extinguishing equipment must it carry? [Reserved]

§ 27.340 What are the requirements for a fuel system on a new towing vessel?

(a) You must ensure that, except for the components of an outboard engine or of a portable bilge pump or fire pump, each fuel system installed on board the vessel meets the requirements of this section.

(b) *Portable fuel systems.* The vessel must not incorporate or carry portable fuel systems, including portable tanks and related fuel lines and accessories, except when used for outboard engines or when permanently attached to portable equipment such as portable bilge or fire pumps. The design, construction, and stowage of portable tanks and related fuel lines and accessories must meet the requirements of ABYC H-25 (incorporated by reference at § 27.102(b)).

(c) *Fuel restrictions.* Neither you nor the operator may use fuel other than bunker C or diesel, except for outboard engines, or where otherwise accepted by the Commandant (G-MSE). An installation that uses bunker C must comply with the requirements of subchapter F of this chapter.

§ 27.345

46 CFR Ch. I (10–1–00 Edition)

(d) *Vent pipes for integral fuel tanks.* Each integral fuel tank must meet the requirements of this paragraph as follows:

(1) Each fuel tank must have a vent that connects to the highest point of the tank, discharges on a weather deck through a bend of 180 degrees (3.14 radians), and is fitted with a 30-by-30 mesh corrosion-resistant flame screen. Vents from two or more fuel tanks may combine in a system that discharges on a weather deck.

(2) The net cross-sectional area of the vent pipe for the tank must be—

(i) Not less than 312.3 square millimeters (0.484 square inches) for any tank filled by gravity; or

(ii) Not less than that of the fill pipe for any tank filled under pressure.

(e) *Fuel piping.* Except as permitted in paragraphs (e)(1) and (2) of this section, each fuel line must be seamless and made of steel, annealed copper, nickel-copper, or copper-nickel. Each fuel line must have a wall thickness of not less than 0.9 millimeters (0.035 inch) except that—

(1) Aluminum piping is acceptable on an aluminum-hull vessel if it is installed outside the engine room and is at least Schedule 80 in thickness; and

(2) Nonmetallic flexible hose is acceptable if it—

(i) Is used in lengths of not more than 0.76 meters (30 inches);

(ii) Is visible and easily accessible;

(iii) Does not penetrate a watertight bulkhead;

(iv) Is fabricated with an inner tube and a cover of synthetic rubber or other suitable material reinforced with wire braid; and

(v) Either—

(A) If it is designed for use with compression fittings, is fitted with suitable, corrosion-resistant, compression fittings, or fittings compliant with SAE J1475 (incorporated by reference at § 27.102(b)); or

(B) If it is designed for use with clamps, is installed with two clamps at each end of the hose. Clamps must not rely on spring tension and must be installed beyond the bead or flare or over the serrations of the mating spud, pipe, or hose fitting. Installations complying with SAE J1475 are also acceptable.

(3) Nonmetallic flexible hose is also acceptable if it complies with SAE J1942 (incorporated by reference at § 27.102(b)).

(f) A positive shut-off valve must be fitted on any fuel line that supplies fuel directly to an engine or generator to stop the flow of fuel in the event of a break in the fuel line. The valve must be located near the source of supply (for instance, at the day tank, storage tank, or fuel-distribution manifold). Furthermore, the positive shut-off valve must be operable from a safe place outside the space in which the valve is located. Each remote station for fuel shut-off should be marked in clearly legible letters at least 25 millimeters (1 inch) high indicating the purpose of the valve and the way to operate it.

(g) A new towing vessel less than 24 meters (79 feet) in length may comply with any of the following standards for fuel systems instead of the requirements of paragraph (e) of this section:

(1) ABYC H-33 (incorporated by reference at § 27.102(b)).

(2) Chapter 5 of NFPA 302 (incorporated by reference at § 27.102(b)).

(3) 33 CFR Chapter I, subchapter S (Boating Safety).

[USCG–1998–4445, 64 FR 56266, Oct. 19, 1999, as amended by USCG 1998–4445, 65 FR 52047, Aug. 28, 2000]

§ 27.345 Is a fire axe required on a new towing vessel? [Reserved]

§ 27.350 What are the requirements for a muster list on a new towing vessel? [Reserved]

§ 27.355 What are the requirements for instruction, drills, and safety orientations conducted on a new towing vessel?

(a) *Drills and instruction.* The master or person in charge of a vessel must ensure that each crewmember participates in drills and receives instruction at least once each month. The instruction may coincide with the drills, but need not. It must ensure that all crewmembers are familiar with their fire-fighting duties, and specifically, the following contingencies:

(1) Fighting a fire in the engine room and other locations on board the vessel, including how to—

(i) Operate all of the fire-extinguishing equipment on board the vessel;

(ii) Stop the mechanical ventilation system for the engine room if provided, and effectively seal all natural openings to the space to prevent leakage of the extinguishing agent; and

(iii) Operate the fuel shutoff for the engine room.

(2) Activating the general alarm.

(3) Reporting inoperative alarm systems and fire-detection systems.

(4) Putting on a fireman's outfit and a self-contained breathing apparatus, if the vessel is so equipped.

(b) *Alternative form of instruction.* The master or person in charge of a vessel may substitute, for the requirement of instruction in paragraph (a) of this section, the viewing of videotapes concerning at least the contingencies listed in paragraph (a), followed by a discussion led by someone familiar with these contingencies. This instruction may occur either on or off the vessel.

(c) *Participation in drills.* Drills must take place on board the vessel, as if there were an actual emergency. They must include—

(1) Participation by all crewmembers;

(2) Breaking out and using, or simulating the use of, emergency equipment;

(3) Testing of all alarm and detection systems; and

(4) At least one person putting on protective clothing, if the vessel is so equipped.

(d) *Safety Orientation.* The master or person in charge of a vessel must ensure that each crewmember who has not both participated in the drills required by paragraph (a) of this section and received the instruction required by that paragraph receives a safety orientation within 24 hours of reporting for duty.

(e) The safety orientation must cover the specific contingencies listed in paragraph (a) of this section.

[USCG-1998-4445, 64 FR 56266, Oct. 19, 1999, as amended by USCG 1998-4445, 65 FR 52047, Aug. 28, 2000]

PART 28—REQUIREMENTS FOR COMMERCIAL FISHING INDUSTRY VESSELS

Subpart A—General Provisions

Sec.	
28.10	Authority.
28.20	OMB control numbers.
28.30	Applicability.
28.40	Incorporation by reference.
28.50	Definition of terms used in this part.
28.60	Exemption letter.
28.65	Termination of unsafe operations.
28.70	Approved equipment and material.
28.73	Accepted organizations.
28.76	Similarly qualified organizations.
28.80	Report of casualty.
28.90	Report of injury.
28.95	Right of appeal.

Subpart B—Requirements for All Vessels

28.100	Applicability.
28.105	Lifesaving equipment—general requirements.
28.110	Life preservers or other personal flotation devices.
28.115	Ring life buoys.
28.120	Survival craft.
28.125	Stowage of survival craft.
28.130	Survival craft equipment.
28.135	Lifesaving equipment markings.
28.140	Operational readiness, maintenance, and inspection of lifesaving equipment.
28.145	Distress signals.
28.150	Emergency Position Indicating Radio Beacons (EPIRBs).
28.155	Excess fire detection and protection equipment.
28.160	Portable fire extinguishers.
28.165	Injury placard.

Subpart C—Requirements for Documented Vessels That Operate Beyond the Boundary Lines or With More Than 16 Individuals On Board, or for Fish Tender Vessels Engaged in the Aleutian Trade

28.200	Applicability.
28.205	Fireman's outfit and self-contained breathing apparatus.
28.210	First aid equipment and training.
28.215	Guards for exposed hazards.
28.225	Navigational information.
28.230	Compasses.
28.235	Anchors and radar reflectors.
28.240	General alarm system.
28.245	Communication equipment.
28.250	High water alarms.
28.255	Bilge pumps, bilge piping, and dewatering systems.
28.260	Electronic position fixing devices.
28.265	Emergency instructions.
28.270	Instruction, drills, and safety orientation.

§ 28.10

28.275 Acceptance criteria for instructors and course curricula.

Subpart D—Requirements for Vessels Which Have Their Keel Laid or Are at a Similar Stage of Construction on or After or Which Undergo a Major Conversion Completed on or After September 15, 1991, and That Operate With More Than 16 Individuals on Board

28.300 Applicability and general requirements.
28.305 Lifesaving and signaling equipment.
28.310 Launching of survival craft.
28.315 Fire pumps, fire mains, fire hydrants, and fire hoses.
28.320 Fixed gas fire extinguishing systems.
28.325 Fire detection systems.
28.330 Galley hood and other fire protection equipment.
28.335 Fuel systems.
28.340 Ventilation of enclosed engine and fuel tank spaces.
28.345 Electrical standards for vessels less than 79 feet (24 meters) in length.
28.350 General requirements for electrical systems.
28.355 Main source of electrical power.
28.360 Electrical distribution systems.
28.365 Overcurrent protection and switched circuits.
28.370 Wiring methods and materials.
28.375 Emergency source of electrical power.
28.380 General structural fire protection.
28.385 Structural fire protection for vessels that operate with more than 49 individuals on board.
28.390 Means of escape.
28.395 Embarkation stations.
28.400 Radar and depth sounding devices.
28.405 Hydraulic equipment.
28.410 Deck rails, lifelines, storm rails, and hand grabs.

Subpart E—Stability

28.500 Applicability.
28.501 Substantial alterations.
28.505 Vessel owner's responsibility.
28.510 Definitions of stability terms.
28.515 Submergence test as an alternative to stability calculations.
28.520–28.525 [Reserved]
28.530 Stability instructions.
28.535 Inclining test.
28.540 Free surface.
28.545 Intact stability when using lifting gear.
28.550 Icing.
28.555 Freeing ports.
28.560 Watertight and weathertight integrity.
28.565 Water on deck.
28.570 Intact righting energy.
28.575 Severe wind and roll.
28.580 Unintentional flooding.

46 CFR Ch. I (10–1–00 Edition)

28.590–28.630 [Reserved]

Subpart F—Fish Processing Vessels

28.700 Applicability.
28.710 Examination and certification of compliance.
28.720 Survey and classification.

Subpart G—Aleutian Trade Act Vessels

28.800 Applicability and general requirements.
28.805 Launching of survival craft.
28.810 Deck rails, lifelines, storm rails and hand grabs.
28.815 Bilge pumps, bilge piping, and dewatering systems.
28.820 Fire pumps, fire mains, fire hydrants, and fire hoses.
28.825 Excess fire detection and protection equipment.
28.830 Fire detection system.
28.835 Fuel systems.
28.840 Means for stopping pumps, ventilation, and machinery.
28.845 General requirements for electrical systems.
28.850 Main source of electrical power.
28.855 Electrical distribution systems.
28.860 Overcurrent protection and switched circuits.
28.865 Wiring methods and materials.
28.870 Emergency source of electrical power.
28.875 Radar, depth sounding, and autopilot.
28.880 Hydraulic equipment.
28.885 Cargo gear.
28.890 Examination and certification of compliance.
28.895 Loadlines.
28.900 Post accident inspection.
28.905 Repairs and alterations.

AUTHORITY: 46 U.S.C. 3316, 4502, 4505, 4506, 6104, 10603; 49 CFR 1.46.

SOURCE: CGD 88–079, 56 FR 40393, Aug. 14, 1991, unless otherwise noted.

Subpart A—General Provisions

§ 28.10 Authority.

The regulations in this part are prescribed by the Commandant of the Coast Guard, pursuant to a delegation of authority by the Secretary of Transportation set forth in 49 CFR 1.46(b), to carry out the intent and purpose of 46 U.S.C. 3316 which authorizes the Secretary to rely on reports, documents, and certificates issued by the American Bureau of Shipping (ABS) or a similar United States classification society, or an agent of the ABS or similar society; sections 4502 and 4506 which require

Coast Guard, DOT

§ 28.40

safety equipment and operational stability for certain vessels in the commercial fishing industry; section 6104 which requires the Secretary of Transportation to compile statistics concerning marine casualties compiled from vessel insurers and to delegate that authority to compile statistics from insurers to a qualified person; and section 10603 which requires seamen on commercial fishing industry vessels to give notice of illness, injury, or disability to their employer.

§ 28.20 OMB control numbers.

(a) This section collects and displays the control numbers assigned to information collection and recordkeeping requirements in this part by the Office of Management and Budget (OMB) pursuant to the Paperwork Reduction Act of 1980 (44 U.S.C. 3501 *et seq.*). This section complies with the requirements of 44 U.S.C. 3507(f) which requires that agencies display a current control number assigned by the Director of the OMB for each approved agency information collection requirement.

(b) Display.

46 CFR part or section where identified or described	Current OMB control No.
§ 28.80	2115-0582
§ 28.90	2115-0582
§ 28.135	2115-0582
§ 28.165	2115-0582
§ 28.530	2115-0582
§ 28.710	2115-0582
§ 28.720	2115-0582

§ 28.30 Applicability.

(a) Except as provided in paragraph (b) of this section, this part is applicable to all United States flag vessels not inspected under this chapter that are

commercial fishing, fish processing, or fish tender vessels. This includes vessels documented under the provisions of subchapter G of this chapter and vessels numbered by a State or the Coast Guard under the provisions of 33 CFR subchapter S of this chapter. Certain regulations in this part apply only to limited categories of vessels. Specific applicability statements are provided at the beginning of those regulations.

(b) This part does not apply to a small boat or auxiliary craft that is deployed from a fishing industry vessel for the purpose of handling fishing gear.

[CGD 88-079, 56 FR 40393, Aug. 14, 1991; 56 FR 49822, Oct. 1, 1991]

§ 28.40 Incorporation by reference.

(a) Certain material is incorporated by reference into this part with the approval of the Director of the Federal Register in accordance with 5 U.S.C. 552(a). To enforce any edition other than that specified in paragraph (b) of this section, the Coast Guard must publish notice of change in the FEDERAL REGISTER and make the material available to the public. All approved material is on file at the Office of the Federal Register, 800 North Capitol Street, NW., suite 700, Washington, DC and at the U.S. Coast Guard, Office of Design and Engineering Standards (G-MSE), 2100 Second Street SW., Washington, DC 20593-0001 and is available from the sources indicated in paragraph (b) of this section.

(b) The material approved for incorporation by reference in this part and the sections affected are:

American Boat and Yacht Council (ABYC), 3069 Solomons Island Road, Edgewater, MD 21037		
E-1-1972—Bonding of Direct Current Systems	28.345	
E-8-1985—Alternating Current (AC) Electrical Systems on Boats.	28.345	
E-9-1981—Recommended Practices and Standards Covering Direct Current (DC) Electrical Systems on Boats.	28.345	
H-2-1989—Ventilation of Boats Using Gasoline	28.340	
H-25-1986—Portable Fuel Systems for Flammable Liquids	28.335	
H-33-1989—Diesel Fuel Systems	28.335	
P-1-1986—Installation of Exhaust Systems for Propulsion and Auxiliary Engines.	28.380	

American Society for Testing and Materials (ASTM),

§ 28.50

46 CFR Ch. I (10–1–00 Edition)

100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.	
ASTM F 1321-92, Standard Guide for Conducting a Stability Test (Lightweight Survey and Inclining Experiment) to Determine the Light Ship Displacement and Centers of Gravity of a Vessel.	28.535
International Maritime Organization (IMO), Publications Section, 4 Albert Embankment, London SE1 7SR, United Kingdom:	
Resolution A.658(16) "Use and Fitting of Retro-Reflective Materials on Life-Saving Appliances", dated November 1989.	28.135
National Fire Protection Association (NFPA), 1 Batterymarch Park, Quincy, MA 02269:	
70-1990—National Electrical Code (also known as ANSI/NFPA 70-1990).	28.350; 28.370; 28.865
302-1989—Pleasure and Commercial Motor Craft	28.335; 28.340; 28.345
17-1985—Dry Chemical Extinguishing Systems	28.330
17A-1986—Wet Chemical Extinguishing Systems	28.330
Society of Automotive Engineers (SAE), 400 Commonwealth Drive, Warrendale, PA 15096:	
SAE J 1475-1984—Hydraulic Hose Fitting for Marine Applications.	28.880
SAE J 1942-1989—Hose and Hose Assemblies for Marine Applications.	28.405
Underwriters Laboratories, Inc. (UL), 12 Laboratory Drive, Research Triangle Park, NC 27709-3995	
UL 217-1985—Single and Multiple Station Smoke Detectors	28.325; 28.830
UL 710-1990—Exhaust Hoods for Commercial Cooking Equipment.	28.330

[CGD 88-079, 56 FR 40393, Aug. 14, 1991, as amended by CGD 95-072, 60 FR 50461, Sept. 29, 1995; CGD 94-025, 60 FR 54444, Oct. 24, 1995; CGD 96-041, 61 FR 50726, Sept. 27, 1996; CGD 97-057, 62 FR 51042, Sept. 30, 1997; USCG-1999-5151, 64 FR 67176, Dec. 1, 1999]

§ 28.50 Definition of terms used in this part.

Accepted organization means an organization which has been designated by the Commandant for the purpose of examining commercial fishing industry vessels under the provisions of § 28.073.

Accommodations include:

- (1) A messroom.
- (2) A lounge.
- (3) A sitting area.
- (4) A recreation room.
- (5) Quarters.
- (6) A toilet space.
- (7) A shower room.
- (8) A galley.
- (9) Berthing facilities.
- (10) A clothing changing room.

Alcohol concentration means either grams of alcohol per 100 milliliters of blood, or grams of alcohol per 210 liters of breath.

Aleutian trade means the transportation of cargo, including fishery related products, for hire on board a fish tender vessel to or from a place in Alaska west of 153 degrees West longitude and east of 172 degrees East longitude if that place receives weekly

common carrier service by water, to or from a place in the United States, except a place in Alaska.

Approved means approved by the Commandant unless otherwise stated.

Auxiliary Craft means a vessel that is carried onboard a commercial fishing vessel and is normally used to support fishing operations.

Boundary lines means the lines set forth in 46 CFR part 7. In general, they follow the trend of the seaward high water shorelines and cross entrances to small bays, inlets and rivers. In some areas, they are along the 12 mile line which marks the seaward limits of the contiguous zone and in other areas they come ashore.

Buoyant Apparatus means a buoyant apparatus approved by the Commandant.

Coast Guard Boarding Officer means a commissioned, warrant, or petty officer of the Coast Guard having authority to board any vessel under the Act of August 4, 1949, 63 Stat. 502, as amended (14 U.S.C. 89).

Coast Guard Representative means a person employed at the cognizant U.S.

Coast Guard Marine Safety Office or Marine Inspection Office, or an accepted organization, or a similarly qualified organization approved in examining commercial fishing industry vessels. Contact Chief, Vessel and Facility Operating Standards Division, Commandant (G-MSO-2), U.S. Coast Guard, 2100 Second Street S.W., Washington, DC 20593-0001 for a current list of accepted organizations or similarly qualified organizations.

Coastal Service Pack means equipment provided in liferafts approved by the Commandant for coastal service.

Coastal waters means coastal waters as defined in 33 CFR 175.105.

Coastline means the Territorial Sea Baseline as defined in 33 CFR 2.05-10.

Cold water means water where the monthly mean low water temperature is normally 59 °F (15 °C) or less.

Commandant means the Commandant of the Coast Guard or an authorized representative of the Commandant of the Coast Guard.

Commercial fishing industry vessel means a fishing vessel, fish tender vessel, or a fish processing vessel.

Currently corrected means corrected with changes contained in all Notice to Mariners published by the Defense Mapping Agency Hydrographic/Topographic Center.

Custom engineered means, when referring to a fixed gas fire extinguishing system, a system that is designed for a specific space requiring individual calculations for the extinguishing agent volume, flow rate, and piping, among other factors, for the space.

District Commander means an officer of the Coast Guard designated as such by the Commandant to command all Coast Guard activities within a district.

Documented vessel means a vessel for which a Certificate of Documentation has been issued under the provisions of 46 CFR part 67.

Equipment Packs means equipment provided in liferafts approved by the Commandant.

Especially hazardous condition means a condition which may be life threatening or lead to serious injury if continued.

Fish means finfish, mollusks, crustaceans, and all other forms of marine

animal and plant life, except marine mammals and birds.

Fish processing vessel means a vessel that commercially prepares fish or fish products other than by gutting, decapitating, gilling, skinning, shucking, icing, freezing, or brine chilling.

Fish tender vessel means a vessel that commercially supplies, stores, refrigerates, or transports fish, fish products, or materials directly related to fishing or the preparation of fish to or from a fishing, fish processing or fish tender vessel or a fish processing facility.

Fishing vessel means a vessel that commercially engages in the catching, taking, or harvesting of fish or an activity that can reasonably be expected to result in the catching, taking, or harvesting of fish.

Fishing Vessel Drill Conductor means an individual who meets the training requirements of 46 CFR 28.270(c) for conducting drills and providing instruction once a month to each individual on board those vessels to which Subpart C of this section applies.

Fishing Vessel Safety Instructor means an individual or organization that has been accepted by the local Officer-in-Charge, Marine Inspection to train Fishing Vessel Drill Conductors to conduct drills and provide instruction on those vessels to which subpart C of this part applies.

Gasoline as used in this part includes gasoline-alcohol blends and any other fuel having a flash point of 110 °F (43.3 °C) or lower.

Inflatable Buoyant Apparatus means an inflatable buoyant apparatus approved by the Commandant.

Inflatable Liferaft means an inflatable liferaft that is approved by the Commandant.

Length means the length listed on the vessel's Certificate of Documentation or Certificate of Number.

Lifeboat means a lifeboat approved by the Commandant.

Liferaft means a liferaft approved by the Commandant.

Major conversion means a conversion of a vessel that—

- (1) Substantially changes the dimensions or carrying capacity of the vessel;
- (2) Changes the type of the vessel;

§ 28.60

(3) Substantially prolongs the life of the vessel; or

(4) Otherwise so changes the vessel that it is essentially a new vessel, as determined by the Commandant.

Mile means a nautical mile.

North Pacific Area means all waters of the North Pacific Ocean and Bering Sea north of 48°30' north latitude including waters in contiguous bays, inlets, rivers, and sounds.

Officer in Charge, Marine Inspection (OCMI) means an officer of the Coast Guard who commands a Marine Inspection Zone described in 33 CFR part 3 or an authorized representative of that officer.

Open to the atmosphere means a space that has at least 15 square inches (9680 square millimeters) of open area directly exposed to the atmosphere for each cubic foot (0.0283 cubic meters) of net volume of the space.

Operating station means the principal steering station on the vessel from which the vessel is normally navigated.

Pre-engineered means, when referring to a fixed gas fire extinguishing system, a system that is designed and tested to be suitable for installation as a complete unit in a space of a set volume, without modification, regardless of the vessel on which installed.

Similarly qualified organization means an organization which has been designated by the Commandant for the purpose of classing or examining commercial fishing industry vessels under the provisions of § 28.76.

Switchboard means an electrical panel which receives power from a generator, battery, or other electrical power source and distributes power directly or indirectly to all equipment supplied by the power source.

Warm water means water where the monthly mean low water temperature is normally more than 59° F. (15° C.).

Watertight means designed and constructed to withstand a static head of water without any leakage, except that "watertight" for the purposes of electrical equipment means enclosed so that equipment does not leak when a stream of water from a hose with a nozzle one inch (25.4 millimeters) in diameter that delivers at least 65 gallons (246 liters) per minute is played on the enclosure from any direction from a

46 CFR Ch. I (10–1–00 Edition)

distance of 10 feet (3 meters) for five minutes.

Weather deck means the uppermost deck exposed to the weather to which a weathertight sideshell extends.

Weathertight means that water will not penetrate into the unit in any sea condition.

[CGD 88-079, 56 FR 40393, Aug. 14, 1991, as amended by CGD 94-025, 60 FR 54444, Oct. 24, 1995; CGD 96-041, 61 FR 50726, Sept. 27, 1996; CGD 96-046, 61 FR 57272, Nov. 5, 1996]

§ 28.60 Exemption letter.

(a) *Types of exemptions.* (1) *Specific exemption* means an exemption for an individual commercial fishing industry vessel.

(2) *Class exemption* means an exemption for a class or fleet of commercial fishing industry vessels.

(b) *Exemption procedure.* A request for an exemption of either type must be in writing, have specific reasons for the request, and be sent to the Coast Guard District Office having jurisdiction over the waters where the vessel(s) will be operating. Coast Guard District geographical areas are described in 33 CFR part 3. The District Commander will review the request to determine that:

(1) Good cause exists for granting an exemption; and

(2) The safety of the vessel and those on board will not be adversely affected.

(c) The District Commander will either approve or deny the request in writing. In granting a request, the District Commander will specify the terms under which the exemption is granted and distribute the letter describing these terms to the party or parties requesting the exemption.

(d) *Exemption letter.* Exemption letters, or suitable copies, describing the terms under which the exemption is granted shall be maintained at all times on board each vessel to which any exemption applies.

(e) *Right of appeal.* Any person directly affected by a decision or action taken under this part may appeal in accordance with § 1.03 of this chapter.

(f) *Rescinding an exemption letter.* Exemptions granted may be rescinded by the District Commander if it is subsequently determined that the safety of

Coast Guard, DOT

§ 28.73

the vessel and those onboard is adversely affected.

[CDG 96-046, 62 FR 46675, Sept. 4, 1997]

§ 28.65 Termination of unsafe operations.

(a) A Coast Guard Boarding Officer may direct the master or individual in charge of a vessel, with the concurrence of the District Commander, or staff authorized by the District Commander, to immediately take reasonable steps necessary for the safety of individuals on board the vessel if the Boarding Officer observes the vessel being operated in an unsafe manner and determines that an especially hazardous condition exists. This may include directing the master or individual in charge of the vessel to return the vessel to a mooring and remain there until the situation creating the especially hazardous condition is corrected or other specific action is taken.

(b) Hazardous conditions include, but are not limited to, operation with—

(1) An insufficient number of life-saving equipment on board, to include serviceable Personal Flotation Devices (PFDs), serviceable immersion suits, or adequate survival craft capacity.

(2) An inoperable Emergency Position Indicating Radio Beacon (EPIRB) or radio communication equipment when required by regulation. There should be at least one operable means of communicating distress. When both are required, then at least one must be in operable condition to avoid termination of the voyage;

(3) Inadequate firefighting equipment on board;

(4) Excessive volatile fuel (gasoline or solvents) or volatile fuel vapors in bilges;

(5) Instability resulting from overloading, improper loading or lack of freeboard;

(6) Inoperable bilge system;

(7) Intoxication of the master or individual in charge of a commercial fishing vessel. An individual is intoxicated when he/she is operating a commercial fishing vessel and has an alcohol concentration of .04 percent, or the intoxicant's effect on the person's manner, disposition, speech, muscular movement, general appearance or behavior is apparent by observation;

(8) A lack of adequate operable navigation lights during periods of reduced visibility;

(9) Watertight closures missing or inoperable;

(10) Flooding or uncontrolled leakage in any space; or

(11) A missing or expired certificate of class, as required by 46 U.S.C. 4503(1), for a fish processing vessel.

(c) A Coast Guard Boarding Officer may direct the individual in charge of a fish processing vessel that is missing a Load Line Certificate, or that does not comply with the provisions of the Load Line Certificate issued by the American Bureau of Shipping or a similarly qualified organization, to return the vessel to a mooring and to remain there until the vessel obtains such a certificate.

[CGD 96-046, 61 FR 57273, Nov. 5, 1996, as amended at CGD 96-046, 62 FR 46676, Sept. 4, 1997]

§ 28.70 Approved equipment and material.

(a) Equipment and material that is required by this subchapter to be approved or of an approved type, must have been manufactured and approved in accordance with the design and testing requirements in Subchapter Q of this chapter or as otherwise specified by the Commandant.

(b) Notice regarding equipment approvals is published in the FEDERAL REGISTER. Coast Guard publication COMDTINST M16714.3, "Equipment Lists, Items Approved, Certificated or Accepted under Marine Inspection and Navigation Laws," lists approved equipment by type and manufacturer. COMDTINST M16714.3 may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. Each OCM may be contacted for information concerning approved equipment.

§ 28.73 Accepted organizations.

An organization desiring to be designated by the Commandant as an accepted organization must request such designation in writing. As a minimum the organization must verify that it is an organization—

(a) With a Code of Ethics;

§ 28.76

46 CFR Ch. I (10–1–00 Edition)

(b) Whose surveyors are familiar with the requirements of this chapter related to commercial fishing industry vessels;

(c) Whose surveyors are familiar with the operations and equipment on board commercial fishing industry vessels;

(d) Whose only interest in the fishing industry is in ensuring the safety of commercial fishing industry vessels and surveying commercial fishing industry vessels;

(e) That has grievance procedures;

(f) That has procedures for accepting and terminating membership of an individual, including minimum professional qualifications for surveyors;

(g) That maintains a roster of present and past accepted members and surveyors; and

(h) That has an Apprentice/Associate program for surveyors.

§ 28.76 Similarly qualified organizations.

An organization desiring to be designated by the Commandant as a similarly qualified organization must request such designation in writing. As a minimum the organization must verify that it—

(a) Publishes standards for vessel design and construction which are as widely available as and which are of similar content to the standards published by the ABS;

(b) Performs periodic surveys in a wide range of localities during and after construction to ensure compliance with published standards, including drydock examinations, in a manner similar to the ABS;

(c) Issues certificates testifying to compliance with the published standards;

(d) Has as its primary concern the survey and classification of vessels;

(e) Has no interest in owning or operating fishing, fish processing, or fish tender vessels; and

(f) Maintains records of surveys and makes such records available to the Coast Guard upon request in a manner similar to the ABS.

§ 28.80 Report of casualty.

(a) Except for a casualty which is required to be reported to the Coast Guard on Form CG 2692 in accordance

with part 4 of this chapter, the owner, agent, operator, master, or individual in charge of a vessel involved in a casualty must submit a report in accordance with paragraph (c) of this section, as soon as possible after the casualty, to the underwriter of primary insurance for the vessel or to an organization listed in paragraph (d) of this section whenever the casualty involves any of the following.

(1) Loss of life.

(2) An injury that requires professional medical treatment (treatment beyond first aid) and that renders the individual unfit to perform his or her routine duties.

(3) Loss of a vessel.

(4) Damage to or by a vessel, its cargo, apparel or gear, except for fishing gear while not on board a vessel, or that impairs the seaworthiness of the vessel, or that is initially estimated at \$2,500.00 or more.

(b) Each underwriter of primary insurance for a commercial fishing industry vessel must submit a report of each casualty involving that vessel to an organization listed in paragraph (d) of this section within 90 days of receiving notice of the casualty and whenever it pays a claim resulting from the casualty. Initial reports must be in accordance with paragraph (c) of this section. Subsequent reports must contain sufficient information to identify the casualty and any new or corrected casualty data.

(c) Each report of casualty must include the following information:

(1) The name and address of the vessel owner and vessel operator, if different than the vessel owner;

(2) The name and address of the underwriter of primary insurance for the vessel;

(3) The name, registry number, call sign, gross tonnage, year of build, length, and hull material of the vessel;

(4) The date, location, primary cause, and nature of the casualty;

(5) The specific fishery, intended catch, and length of fishery opening when applicable;

(6) The date that the casualty was reported to the underwriter of primary insurance for the vessel, or to an organization acceptable to the Commandant;

(7) The activity of the vessel at the time of the casualty;

(8) The weather conditions at the time of the casualty, if the weather caused or contributed to the cause of the casualty;

(9) The damages to or by the vessel, its apparel, gear, or cargo;

(10) The monetary amounts paid for damages;

(11) The name, birth date, social security number, address, job title, length of disability, activity at the time of injury, type of injury, and medical treatment required for each individual incapacitated for more than 72 hours, or deceased as a result of the casualty;

(12) The name, registry number, and call sign of every other vessel involved in the casualty; and

(13) The monetary amount paid for an injury or a death.

(d) A casualty to a commercial fishing industry vessel must be reported to an organization that has knowledge and experience in the collection and processing of statistical insurance data and that has been accepted by the Commandant to receive and process casualty data under this part. The Commandant has accepted for this purpose:

(1) Marine Index Bureau, Inc., 67 Scotch Road, Ewing, NJ, 08628-2504.

(2) [Reserved]

NOTE: The Coast Guard intends to treat information collected under this section from underwriters of primary insurance as exempt from disclosure under the Freedom of Information Act because it is commercial and financial information which, if disclosed, would be likely to cause substantial harm to the competitive position of the underwriter.

[CGD 88-079, 56 FR 40393, Aug. 14, 1991, as amended by CGD 96-046, 61 FR 57273, Nov. 5, 1996]

§ 28.90 Report of injury.

Each individual employed on a commercial fishing industry vessel must notify the master, individual in charge of the vessel, or other agent of the employer of each illness, disability, or injury suffered while in service to the vessel not later than seven days after the date on which the illness, disability, or injury arose.

§ 28.95 Right of appeal.

Any person directly affected by a decision or action taken under this part, by or on behalf of the Coast Guard, may appeal therefrom in accordance with part 1, subpart 1.03 of this chapter.

Subpart B—Requirements for All Vessels

§ 28.100 Applicability.

Each commercial fishing industry vessel must meet the requirements of this subpart, in addition to the requirements of parts 24, 25, and 26 of this chapter.

§ 28.105 Lifesaving equipment—general requirements.

(a) In addition to the requirements of this subpart, each commercial fishing industry vessel must comply with the requirements of part 25, subpart 25.25 of this chapter.

(b) Except as provided in § 28.120(d), each item of lifesaving equipment carried on board a vessel to meet the requirements of this part must be approved by the Commandant. Equipment for personal use which is not required by this part need not be approved by the Commandant.

§ 28.110 Life preservers or other personal flotation devices.

(a) Except as provided by § 28.305 of this chapter, each vessel must be equipped with at least one immersion suit, exposure suit, or wearable personal flotation device of the proper size for each individual on board as specified in table 28.110 and part 25, subpart 25.25 of this chapter. Notwithstanding the provisions of paragraphs (c) and (d) of § 25.25-1 of this chapter, each commercial fishing industry vessel propelled by sail or a manned barge employed in commercial fishing activities must meet the requirements of this paragraph.

(b) Each wearable personal flotation device must be stowed so that it is readily accessible to the individual for whom it is intended, from both the individual's normal work station and berthing area. If there is no location accessible to both the work station and

the berthing area, an appropriate device must be stowed in both locations.

TABLE 28.110.—PERSONAL FLOTATION DEVICES AND IMMERSION SUITS

Applicable waters	Vessel type	Devices required	Other regulations
Seaward of the Boundary Line and North of 32°N or South of 32°S; and Lake Superior.	Documented Vessel ..	Immersion suit or exposure suit.	28.135; 25.25–9(a); 25.25–13; 25.25–15.
Coastal Waters on the West Coast of the United States north of Point Reyes, CA; Beyond Coastal Waters, cold water; and Lake Superior.	All vesselsdo	Do.
All other waters (Includes all Great Lakes except Lake Superior).	40 feet (12.2 meters) or more in length.	Type I, Type V commercial hybrid, immersion suit, or exposure suit. ¹	28.135; 25.25–5(e); 25.25–5(f); 25.25–9(a); 25.25–13; 25.25–15.
	Less than 40 feet (12.2 meters) in length.	Type I, Type II, Type III, Type V commercial hybrid, immersion suit, or exposure suit. ¹	Do.

¹ Certain Type V personal flotation devices are approved for substitution for Type I, II, or III personal flotation devices when used in accordance with the conditions stated in the Coast Guard approval table.

[CGD 88–079, 56 FR 40393, Aug. 14, 1991, as amended by CGD 88–079b, 57 FR 34189, Aug. 3, 1992; CGD 95–012, 60 FR 48048, Sept. 18, 1995; USCG–2000–7790, 65 FR 58458, Sept. 29, 2000]

§ 28.115 Ring life buoys.

(a) Except as provided in paragraph (b) of this section and § 28.305, each vessel must be equipped with a throwable flotation device or a ring life buoy as specified in table 28.115. If the vessel is equipped with a ring life buoy, at least one ring life buoy must be equipped with a line which is at least:

(1) 60 feet (18.3 meters) in length for a vessel less than 65 feet (19.8 meters) in length; or

(2) 90 feet (27.4 meters) in length for a vessel 65 feet (19.8 meters) or more in length.

(b) For each vessel less than 65 feet (19.8 meters) in length, an approved 20 inch (0.51 meters) or larger ring life buoy which is in serviceable condition and which was installed on board before September 15, 1991, may be used to meet the requirements of paragraph (a) of this section.

TABLE 28.115.—THROWABLE FLOTATION DEVICES

Vessel length	Devices required
Less than 16 feet (4.9 meters).	None.
16 feet (4.9 meters) or more, but less than 26 feet (7.9 meters).	1 buoyant cushion, or ring life buoy (Type IV PFD).

TABLE 28.115.—THROWABLE FLOTATION DEVICES—Continued

Vessel length	Devices required
26 feet (7.9 meters) or more, but less than 65 feet (19.8 meters).	1 ring life buoy approval number starting with 160.009 or 160.050; orange; at least 24 inch (0.61 meters) size.
65 feet (19.8 meters) or more.	3 ring life buoys, approval number 160.050; orange; at least 24 inch (0.61 meters) size.

NOTE: Certain Type V PFDs are approved for use in substitution for Type IV PFDs, when used in accordance with the conditions stated in the Coast Guard approval label.

[CGD 88–079, 56 FR 40393, Aug. 14, 1991; 56 FR 47679, Sept. 20, 1991; 56 FR 49822, Oct. 1, 1991; CGD 95–012, 60 FR 48048, Sept. 18, 1995]

§ 28.120 Survival craft.

(a) Except as provided in paragraphs (b) through (h) of this section and 28.305, each vessel must carry the survival craft specified in Table 28.120(a), Table 28.120(b), or Table 28.120(c), as appropriate for the vessel, in an aggregate capacity to accommodate the total number of individuals on board.

(b) The requirements of this section do not apply to vessels less than 10.97 meters (36 feet) in length with 3 or fewer individuals on board which operate within 12 miles of the coastline.

(c) A buoyant apparatus may be substituted instead of the requirements in this section for vessels 10.97 meters (36 feet) or more in length with 3 or fewer

Coast Guard, DOT

§ 28.120

individuals on board which operate within 12 miles of the coastline.

(d) Each survival craft installed on board a vessel before September 15, 1991, may continue to be used to meet the requirements of this section provided the survival craft is—

(1) Of the same type as required in Tables 28.120(a), 28.120(b), or 28.120(c), as appropriate for the vessel type; and

(2) Maintained in good and serviceable condition.

(e) Each inflatable liferaft installed on board a vessel before September 15, 1991, may continue to be used to meet the requirements for an approved inflatable liferaft, provided the existing liferaft is—

(1) Maintained in good and serviceable condition as required by Table 28.140; and

(2) Equipped with the equipment pack required by Tables 28.120(a), 28.120(b), or 28.120(c), as appropriate for the vessel type. Where no equipment pack is specified in Tables 28.120(a), 28.120(b), or 28.120(c), a coastal service pack is the minimum required.

(f) A lifeboat may be substituted for any survival craft required by this section, provided it is arranged and equipped in accordance with part 199 of this chapter.

(g) The capacity of an auxiliary craft carried on board a vessel that is integral to and necessary for normal fishing operations will satisfy the requirements of this section for survival craft, except for an inflatable liferaft, provided the craft is readily accessible during an emergency and is capable of safely holding all individuals on board the vessel. If the auxiliary craft is equipped with a Coast Guard required capacity plate, the boat must not be loaded so as to exceed the rated capacity.

(h) A vessel less than 10.97 meters (36 feet) in length that meets the flotation provisions of 33 CFR part 183 is exempt from the requirement for survival craft in paragraph (a) of this section for operation on—

(1) Any waters within 12 miles of the coastline.

(2) Rivers.

TABLE 28.120(a).—SURVIVAL CRAFT FOR DOCUMENTED VESSELS

Area	Vessel type	Survival craft required
Beyond 50 miles of coastline	All	Inflatable liferaft with SOLAS A pack.
Between 20–50 miles of coastline, <i>cold</i> waters	All	Inflatable liferaft with SOLAS B pack.
Between 20–50 miles of coastline, <i>warm</i> waters	All	Inflatable liferaft.
Beyond Boundary Line, between 12–20 miles of coastline, <i>cold</i> waters.	All	Inflatable liferaft.
Beyond Boundary Line, within 12 miles of coastline, <i>cold</i> waters.	10.97 meters (36 feet) or more in length.	Inflatable buoyant apparatus. See note 2.
Beyond Boundary Line, within 12 miles of coastline, <i>cold</i> waters.	Less than 10.97 meters (36 feet) in length.	Buoyant apparatus. See note 2.
Beyond Boundary Line, within 20 miles of coastline, <i>warm</i> waters.	All	Life float. See note 2.
Inside Boundary Line, <i>cold</i> waters; or Lakes, bays, sounds, <i>cold</i> waters; or Rivers, <i>cold</i> waters.	10.97 meters (36 feet) or more in length.	Inflatable buoyant apparatus. See note 2.
Inside Boundary Line, <i>cold</i> waters; or Lakes, bays, sounds, <i>cold</i> waters; or Rivers, <i>cold</i> waters.	Less than 10.97 meters (36 feet) in length.	Buoyant apparatus. See note 2.
Inside Boundary Line, <i>warm</i> waters; or Lakes, bays, sounds, <i>warm</i> waters; or Rivers, <i>warm</i> waters.	All	None.
Great Lakes, <i>cold</i> waters	10.97 meters (36 feet) or more in length.	Inflatable buoyant apparatus. See note 2.
Great Lakes, <i>cold</i> waters	Less than 10.97 meters (36 feet) in length.	Buoyant apparatus. See note 2.
Great Lakes, beyond 3 miles of coastline, <i>warm</i> waters	All	Buoyant apparatus. See note 2.
Great Lakes, within 3 miles of coastline, <i>warm</i> waters	All	None.

NOTE: 1. The hierarchy of survival craft in descending order is lifeboat, inflatable liferaft with SOLAS A pack, inflatable liferaft with SOLAS B pack, inflatable liferaft with coastal service pack, inflatable buoyant apparatus, life float, buoyant apparatus. A survival craft higher in the hierarchy may be substituted for any survival craft required in this table.

2. If a vessel carries 3 or fewer individuals within 12 miles of the coastline, see § 28.120 (b) and (c) for carriage substitution.

TABLE 28.120(b).—SURVIVAL CRAFT FOR UNDOCUMENTED VESSELS WITH NOT MORE THAN 16 INDIVIDUALS ON BOARD

Area	Vessel type	Survival craft required
Beyond 20 miles of coastline	All	Inflatable buoyant apparatus.

TABLE 28.120(b).—SURVIVAL CRAFT FOR UNDOCUMENTED VESSELS WITH NOT MORE THAN 16 INDIVIDUALS ON BOARD—Continued

Area	Vessel type	Survival craft required
Beyond Boundary Line, between 12–20 miles of coastline, <i>cold</i> waters.	All	Inflatable buoyant apparatus.
Beyond Boundary Line, within 12 miles of coastline, <i>cold</i> waters.	10.97 meters (36 feet) or more in length.	Buoyant apparatus.
Beyond Boundary Line, within 12 miles of coastline, <i>cold</i> waters.	Less than 10.97 meters (36 feet) in length.	Buoyant apparatus. See note 2.
Beyond Boundary Line, within 20 miles of coastline, <i>warm</i> waters.	All	Life float. See note 2.
Inside Boundary Line, <i>cold</i> waters; or Lakes, bays, sounds, <i>cold</i> waters; or rivers, <i>cold</i> water.	10.97 meters (36 feet) or more in length.	Buoyant apparatus.
Inside Boundary Line, <i>cold</i> waters; or Lakes, bays, sounds, <i>cold</i> waters; or Rivers, <i>cold</i> water.	Less than 10.97 meters (36 feet) in length.	Buoyant apparatus. See note 2.
Inside Boundary Line, <i>warm</i> waters; or Lakes, bays, sounds, <i>warm</i> waters; or Rivers, <i>warm</i> waters.	All	None.
Great Lakes, <i>cold</i> waters	All	Buoyant apparatus. See note 2.
Great Lakes, beyond 3 miles of coastline <i>warm</i> waters	All	Buoyant apparatus. See note 2.
Great Lakes, within 3 miles of coastline <i>warm</i> waters ..	All	None.

NOTE: 1. The hierarchy of survival craft in descending order is lifeboat, inflatable liferaft with SOLAS A pack, inflatable liferaft with SOLAS B pack, inflatable liferaft with coastal service pack, inflatable buoyant apparatus, life float, buoyant apparatus. A survival craft higher in the hierarchy may be substituted for any survival craft required in this table.

2. If a vessel carries 3 or fewer individuals within 12 miles of the coastline, see § 28.120 (b) and (c) for carriage substitution.

TABLE 28.120(c).—SURVIVAL CRAFT FOR UNDOCUMENTED VESSELS WITH MORE THAN 16 INDIVIDUALS ON BOARD

Area	Vessel type	Survival craft required
Beyond 50 miles of coastline	All	Inflatable liferaft with Solas A pack.
Between 20–50 miles of coastline, <i>cold</i> waters	All	Inflatable liferaft with SOLAS B pack.
Between 20–50 miles of coastline, <i>warm</i> waters	All	Inflatable liferaft.
Beyond Boundary Line, between 12–20 miles of coastline, <i>cold</i> waters.	All	Inflatable liferaft.
Beyond Boundary Line, within 12 miles of coastline, <i>cold</i> waters.	10.97 meters (36 feet) or more in length.	Inflatable buoyant apparatus.
Beyond Boundary Line, within 12 miles of coastline, <i>cold</i> waters.	Less than 10.97 meters (36 feet) in length.	Buoyant apparatus.
Beyond Boundary Line, within 20 miles of coastline, <i>warm</i> waters.	All	Life float.
Inside Boundary Line, <i>cold</i> waters; or Lakes, bays, sounds, <i>cold</i> waters; or Rivers, <i>cold</i> waters.	10.97 meters (36 feet) or more in length.	Inflatable buoyant apparatus.
Inside Boundary Line, <i>cold</i> waters; or Lakes, bays, sounds, <i>cold</i> waters; or Rivers, <i>cold</i> waters.	Less than 10.97 meters (36 feet) in length.	Buoyant apparatus.
Inside Boundary Line, <i>warm</i> waters; or Lakes, bays, sounds, <i>warm</i> waters; or Rivers, <i>warm</i> waters.	All	None.
Great Lakes, <i>cold</i> waters	10.97 meters (36 feet) or more in length.	Inflatable buoyant apparatus.
Great Lakes, <i>cold</i> waters	Less than 10.97 meters (36 feet) in length.	Buoyant apparatus.
Great Lakes, beyond 3 miles of coastline <i>warm</i> waters	All	Buoyant apparatus.
Great Lakes, within 3 miles of coastline <i>warm</i> waters ..	All	None.

NOTE: 1. The hierarchy of survival craft in descending order is lifeboat, liferaft with SOLAS A pack, Inflatable liferaft with SOLAS A pack, liferaft with SOLAS B pack, Inflatable liferaft with SOLAS B pack, Inflatable liferaft with coastal service pack, inflatable buoyant apparatus, life float, buoyant apparatus. A survival craft higher in the hierarchy may be substituted for any survival craft required in this table.

[CGD 96–046, 61 FR 57273, Nov. 5, 1996; CGD 96–046, 61 FR 68162, Dec. 27, 1996, as amended by CGD 96–046, 62 FR 46676, Sept. 4, 1997]

§ 28.125 Stowage of survival craft.

(a) Each inflatable liferaft required to be equipped with a SOLAS A or a SOLAS B equipment pack must be

stowed so as to float free and automatically inflate in the event the vessel sinks.

(b) Each inflatable liferaft, inflatable buoyant apparatus, and any auxiliary craft used in their place, must be kept readily accessible for launching or be

stowed so as to float free in the event the vessel sinks.

(c) Each hydrostatic release unit used in a float-free arrangement must be approved under part 160, subpart 160.062 of this chapter.

(d) Each float-free link used with a buoyant apparatus or with a life float must be certified to meet part 160, subpart 160.073 of this chapter.

§ 28.130 Survival craft equipment.

(a) *General.* Each item of survival craft equipment must be of good quality, effective for the purpose it is intended to serve, and secured to the craft.

(b) *Inflatable liferafts.* Each inflatable liferaft must have one of the following equipment packs as shown by the markings on its container:

(1) Coastal Service;

(2) SOLAS B Pack (formerly "Limited Service"); or

(3) SOLAS A Pack (formerly "Ocean Service").

(c) Each life float and buoyant apparatus must be fitted with a lifeline, pendants, a painter, and a floating electric water light approved under part 161 subpart 161.010 of this chapter.

(d) *Other survival craft.* A vessel must not carry survival craft other than inflatable liferafts, life floats, inflatable

buoyant apparatus, or buoyant apparatus, such as lifeboats or rigid liferafts, unless the survival craft and launching equipment comply with the requirements for installation, arrangement, equipment, and maintenance contained in 46 CFR part 199.

[CGD 88-079, 56 FR 40393, Aug. 14, 1991, as amended by CGD 84-069, 63 FR 52813, Oct. 1, 1998]

§ 28.135 Lifesaving equipment markings.

(a) Except as provided in paragraph (d) of this section, lifesaving equipment carried aboard a vessel pursuant to the requirements of this subpart or part 25, subpart 25.25 of this chapter must be marked as specified in table 28.135.

(b) Lettering used in lifesaving equipment markings must be in block capital letters.

(c) Retroreflective markings required by this section must be with material approved under part 164, subpart 164.018 of this chapter. The arrangement of the retroreflective material must meet IMO Resolution A.658(16).

(d) A wearable personal flotation device must be marked with the name of either the vessel, the owner of the device, or the individual to whom it is assigned.

TABLE 28.135.—LIFESAVING EQUIPMENT MARKINGS

Item	Markings Required	
	Name of vessel	Retroreflective material
Wearable personal flotation device (Type I, II, III, or wearable Type V); Immersion suit or exposure suit.	See § 28.135(d)	Type I or Type II.
Ring life buoy	X	Type II.
Inflatable liferaft	See note	See note.
Inflatable buoyant apparatus	See note	See note.
Life float	X	Type II.
Buoyant apparatus	X	Type II.
Auxiliary craft	X	Type II.
EPIRB	X	Type II.

NOTE: No marking other than that provided by the manufacturer and the servicing facility is required.

[CGD 88-079, 56 FR 40393, Aug. 14, 1991; 56 FR 49822, Oct. 1, 1991, as amended by CGD 95-012, 60 FR 48048, Sept. 18, 1995]

§ 28.140 Operational readiness, maintenance, and inspection of lifesaving equipment.

(a) The master or individual in charge of a vessel must ensure that each item of lifesaving equipment must be in good working order, ready for immediate use, and readily accessible before the vessel leaves port and at all times when the vessel is operated.

§ 28.145

46 CFR Ch. I (10–1–00 Edition)

(b) Except for an inflatable liferaft or an inflatable buoyant apparatus less than two years of age, each item of lifesaving equipment, including unapproved equipment, must be maintained and inspected in accordance with:

(1) Table 28.140;

(2) The servicing procedure under the subpart of this chapter applicable to the item's approval; and

(3) The manufacturer's guidelines.

(c) An inflatable liferaft or inflatable buoyant apparatus must be serviced at a facility specifically approved by the Commandant.

(d) An escape route from a space where an individual may be employed or an accommodation space must not be obstructed.

TABLE 28.140.—SCHEDULED MAINTENANCE AND INSPECTION OF LIFESAVING EQUIPMENT

Item	Interval		Regulation
	Monthly	Annually	
Inflatable wearable personal flotation device (Type V commercial hybrid)	Servicing	28.140
Personal flotation devices, exposure suits and immersion suits	Inspect, clean and repair as necessary.	28.140
Buoyant apparatus and life floats	Inspect, clean and repair as necessary.	28.140
Inflatable liferaft	Servicing	28.140
Inflatable buoyant apparatus	Servicing	28.140
Hydrostatic release	Servicing	28.140
Disposable hydrostatic release	Replace on or before expiration date.	28.140
Undated batteries	Replace	28.140
Dated batteries ¹ and other items	Replace on or before expiration date.	25.26–5, 28.140
EPIRB	Test	25.26–5

¹ Water activated batteries must be replaced whenever they are used.

[CGD 88–079, 56 FR 40393, Aug. 14, 1991; 56 FR 49822, Oct. 1, 1991]

§ 28.145 Distress signals.

Except as provided by 28.305, each vessel must be equipped with the distress signals specified in table 28.145.

TABLE 28.145.—DISTRESS SIGNALS

Area	Devices required
Ocean, more than 50 miles from coastline.	3 parachute flares, approval series 160.136; plus 6 hand flares, approval series 160.121; plus 3 smoke signals, approval series 160.122.
Ocean, 3–50 miles from the coastline; or more than 3 miles from the coastline on the Great Lakes.	3 parachute flares, approval series 160.136, or 160.036; plus 6 hand flares, approval series 160.121 or 160.021; plus 3 smoke signals, approval series 160.122, 160.022, or 160.037.

TABLE 28.145.—DISTRESS SIGNALS—Continued

Area	Devices required
Coastal waters, excluding the Great Lakes; or within 3 miles of the coastline on the Great Lakes.	Night visual distress signals consisting of one electric distress light, approval series 161.013 or 3 approved flares; plus Day visual distress signals consisting of one distress flag, approval series 160.072, or 3 approved flares, or 3 approved smoke signals. ¹

¹ If flares are carried, the same 3 flares may be counted toward meeting both the day and night requirement.

[CGD 88–079, 56 FR 40393, Aug. 14, 1991, as amended at 60 FR 48048, Sept. 18, 1995; USCG–2000–7790, 65 FR 58458, Sept. 29, 2000]

§ 28.150 Emergency Position Indicating Radio Beacons (EPIRBs).

Each vessel must be equipped with an emergency position indicating radio beacon (EPIRB) as required by 46 CFR part 25, subpart 25.26.

NOTE: Each vessel which uses radio communication equipment must have a Ship Radio Station License issued by the Federal

Coast Guard, DOT

§ 28.200

Communications Commission, as set forth in 47 CFR part 80.

§ 28.155 Excess fire detection and protection equipment.

Installation of fire detection and protection equipment in excess of that required by the regulations in this subchapter is permitted provided that the excess equipment does not endanger the vessel or individuals on board in any way. The excess equipment must, at a minimum, be listed and labeled by an independent, nationally recognized

testing laboratory and be in accordance with an appropriate industry standard for design, installation, testing, and maintenance.

§ 28.160 Portable fire extinguishers.

(a) Each vessel must meet the requirements of part 25, subpart 25.30 of this chapter.

(b) Each vessel 65 feet (19.8 meters) or more in length must be equipped with the minimum number, location, and type of portable fire extinguishers specified in table 28.160.

TABLE 28.160.—PORTABLE FIRE EXTINGUISHERS FOR VESSELS 65 FEET (19.8 METERS) OR MORE IN LENGTH

Space	Classification	Quantity and location
Safety areas, communicating corridors	A-II	1 in each main corridor not more than 150 feet (49.2 meters) apart. (May be located in stairways.)
Pilothouse	C-I	2 in vicinity of exit.
Service spaces, galleys	B-II or C-II	1 for each 2,500 square feet (269.1 sq. meters) or fraction thereof suitable for hazards involved.
Paint lockers	B-II	1 outside space in vicinity of exit.
Accessible baggage and storerooms	A-II	1 for each 2,500 square feet (269.1 sq. meters) or fraction thereof located in the vicinity of exits, either inside or outside the spaces.
Work shops and similar spaces	A-II	1 outside the space in vicinity of exit.
Machinery spaces; Internal combustion propelling machinery	B-II	1 for each 1,000 brake horsepower or fraction thereof but not less than 2 nor more than 6.
Electric propulsion motors or generator unit of open type	C-II	1 for each propulsion motor generator unit.
Auxiliary spaces	B-II	1 outside the space in the vicinity of exit.
Internal combustion machinery	B-II	1 outside the space in the vicinity of exit.
Electric emergency motors or generators	C-II	1 outside the space in the vicinity of exit.

[CGD 88-079, 56 FR 40393, Aug. 14, 1991; 56 FR 47679, Sept. 20, 1991]

§ 28.165 Injury placard.

Each vessel must have posted in a highly visible location accessible to the crew a placard measuring at least 5 inches by 7 inches (127 millimeters by 178 millimeters) which reads:

Notice

Report All Injuries

United States law, 46 United States Code 10603, requires each seaman on a fishing vessel, fish processing vessel, or fish tender vessel to notify the master or individual in charge of the vessel or other agent of the employer regarding any illness, disability, or injury suffered by the seaman when in service to the vessel not later than seven days after the date on which the illness, disability, or injury arose.

Subpart C—Requirements for Documented Vessels That Operate Beyond the Boundary Lines or With More Than 16 Individuals On Board, or for Fish Tender Vessels Engaged in the Aleutian Trade

§ 28.200 Applicability.

Each documented commercial fishing industry vessel must meet the requirements of this subpart in addition to the requirements of subparts A and B of this part if it:

- (a) Operates beyond the Boundary Lines;
- (b) Operates with more than 16 individuals on board; or

§ 28.205

(c) Is a fish tender vessel engaged in the Aleutian trade.

[CGD 94-025, 60 FR 54444, Oct. 24, 1995]

§ 28.205 Fireman's outfits and self-contained breathing apparatus.

(a) Each vessel that operates with more than 49 individuals on board must be equipped with at least two fireman's outfits stowed in widely separated locations.

(b) Each vessel that uses ammonia as a refrigerant must be equipped with at least two self-contained breathing apparatuses.

(c) A fireman's outfit must consist of one self-contained breathing apparatus with lifeline attached, one flashlight, a rigid helmet, boots, gloves, protective clothing, and one fire axe.

(d) At least one spare air bottle must be provided for each self-contained breathing apparatus.

(e) Each self-contained breathing apparatus must be approved by the Mine Safety and Health Administration (MSHA) and by the National Institute for Occupational Safety and Health (NIOSH), have as a minimum a 30 minute air supply, and a full facepiece.

§ 28.210 First aid equipment and training.

(a) Each vessel must have on board a complete first aid manual and medicine chest of a size suitable for the number of individuals on board in a readily accessible location.

(b) *First aid and cardiopulmonary resuscitation (CPR) course certification.* Certification in first aid and CPR must be as described in this paragraph.

(1) First aid—a certificate indicating completion of a first aid course from:

(i) The American National Red Cross "Standard First Aid and Emergency Care" or "Multi-media Standard First Aid" course; or

(ii) A course approved by the Coast Guard under § 10.205(h)(1)(ii) of this chapter.

(2) CPR—A certificate indicating completion of course from:

(i) The American National Red Cross;
(ii) The American Heart Association;
or

(iii) A course approved by the Coast Guard under § 10.205(h)(2)(iii) of this chapter.

46 CFR Ch. I (10-1-00 Edition)

(c) Each vessel that operates with more than 2 individuals on board must have at least 1 individual certified in first aid and at least 1 individual certified in CPR. An individual certified in both first aid and CPR will satisfy both of these requirements.

(d) Each vessel that operates with more than 16 individuals on board must have at least 2 individuals certified in first aid and at least 2 individuals certified in CPR. An individual certified in both first aid and CPR may be counted for both requirements.

(e) Each vessel that operates with more than 49 individuals on board must have at least 4 individuals certified in first aid and at least 4 individuals certified in CPR. An individual certified in both first aid and CPR may be counted for both requirements.

[CGD 88-079, 56 FR 40393, Aug. 14, 1991, as amended by CGD 95-012, 60 FR 48048, Sept. 18, 1995]

§ 28.215 Guards for exposed hazards.

(a) Each space on board a vessel must meet the requirements of this section.

(b) Suitable hand covers, guards, or railing must be installed in way of machinery which can cause injury to personnel, such as gearing, chain or belt drives, and rotating shafting. This is not meant to restrict necessary access to fishing equipment such as winches, drums, or gurdies.

(c) Each exhaust pipe from an internal combustion engine which is within reach of personnel must be insulated or otherwise guarded to prevent burns.

§ 28.225 Navigational information.

(a) Each vessel must have at least the following navigational information on board:

(1) Marine charts of the area to be transited, published by the National Ocean Service, Defense Mapping Agency Hydrographic/Topographic Center, U.S. Army Corps of Engineers, or a river authority that—

(i) Are of a large enough scale and have enough detail to make safe navigation of the area possible; and
(ii) Are currently corrected.

(2) For the area to be transited, a currently corrected copy of, or applicable currently corrected extract from, each of the following publications:

Coast Guard, DOT

§ 28.245

- (i) U.S. Coast Pilot; and
- (ii) Coast Guard Light List.

(3) For the area to be transited, the current edition of, or applicable current extract from, each of the following publications:

(i) Tide tables promulgated by the National Ocean Service; and

(ii) Tidal current tables promulgated by the National Ocean Service, or a river current publication issued by the U.S. Corps of Engineers or a river authority.

(b) Each vessel of 39.4 feet (12 meters) or more in length that operates shoreward of the COLREG Demarcation Lines, as set forth in 33 CFR part 80, must carry on board and maintain for ready reference a copy of the Inland Navigation Rules, as set forth in 33 CFR chapter I, subchapter E.

[CGD 88-079, 59 FR 40393, Aug. 14, 1991, as amended by CGD 96-046, 61 FR 57275, Nov. 5, 1996; CGD 96-046, 62 FR 46677, Sept. 4, 1997]

§ 28.230 Compasses.

Each vessel must be equipped with an operable magnetic steering compass with a compass deviation table at the operating station.

§ 28.235 Anchors and radar reflectors.

(a) Each vessel must be fitted with an anchor(s) and chain(s), cable, or rope appropriate for the vessel and the waters of the intended voyage.

(b) Except for a vessel rigged with gear that provides a radar signature from a distance of 6 miles, each non-metallic hull vessel must have a radar reflector.

§ 28.240 General alarm system.

(a) Except as provided in paragraph (f) of this section, each vessel with an accommodation space or a work space which is not adjacent to the operating station, must have an audible general alarm system with a contact-maker at the operating station suitable for notifying individuals on board in the event of an emergency.

(b) The general alarm system must be capable of notifying an individual in any accommodation space or work space where they may normally be employed.

(c) In a work space where background noise makes a general alarm system

difficult to hear, a flashing red light must also be installed.

(d) Each general alarm bell and flashing red light must be identified with red lettering at least ½ inch (13 millimeters) high as follows:

Attention

General Alarm—When Alarm Sounds Go to Your Station.

(e) A general alarm system must be tested prior to operation of the vessel and at least once each week thereafter.

(f) A public address system or other means of alerting all individuals on board may be used in lieu of a general alarm system provided it complies with paragraphs (b), (c), and (e) of this section and can be activated from the operating station.

[CGD 88-079, 56 FR 40393, Aug. 14, 1991, as amended by CGD 95-012, 60 FR 48048, Sept. 18, 1995]

§ 28.245 Communication equipment.

(a) Except as provided in paragraphs (b) through (e) of this section, each vessel must be equipped as follows.

(1) Each vessel must be equipped with a VHF radiotelephone capable of transmitting and receiving on the frequency or frequencies within the 156-162 MHz band necessary to communicate with a public coast station or U.S. Coast Guard station serving the area in which the vessel is operating.

(2) Each vessel that operates more than 20 miles from the coastline, in addition to the VHF radiotelephone required by paragraph (a)(1) of this section, must be equipped with a radiotelephone transceiver capable of transmitting and receiving on frequencies in the 2-4 MHz band necessary to communicate with a public coast station or U.S. Coast Guard station serving the area in which the vessel is operating.

(3) Each vessel that operates more than 100 miles from the coastline, in addition to the communication equipment required by paragraph (a)(1) of this section must be equipped with a radiotelephone transceiver capable of transmitting and receiving on frequencies in the 2-27.5 MHz band necessary to communicate with a public coast station or U.S. Coast Guard station serving the area in which the vessel is operating.

§ 28.250

(4) Each vessel that operates in waters contiguous to Alaska where no public coast station or U.S. Coast Guard station is within communications range of a VHF radio transceiver operating on the 156–162 MHz band or the 2–4 MHz band, in addition to the VHF radio communication equipment required by paragraph (a)(1) of this section, must be equipped with a radio-telephone transceiver capable of transmitting and receiving on frequencies in the 2–27.5 MHz band necessary to communicate with a public coast station or a U.S. Coast Guard station serving the area in which the vessel is operating.

(b) A single radio transceiver capable of meeting the requirements of paragraphs (a) (2) and (3), or paragraphs (a) (2), (3), and (4) of this section, is acceptable.

(c) Satellite communication capability with the system servicing the area in which the vessel is operating is acceptable as an alternative to the requirements of paragraphs (a)(2), (a)(3), or (a)(4) of this section.

(d) A cellular telephone capable of communicating with a public coast station or a U.S. Coast Guard station serving the area in which the vessel is operating is acceptable as an alternative to the requirements of paragraphs (a)(2), (a)(3), or (a)(4) of this section.

(e) A radiotelephone transceiver installed on board a vessel before September 15, 1991, capable of transmitting and receiving on frequencies on the 4–20 MHz band may continue to be used to satisfy the requirements of paragraphs (a)(3) and (a)(4) of this section.

(f) The principle operating position of the communication equipment must be at the operating station.

(g) Communication equipment must be installed to ensure safe operation of the equipment and to facilitate repair. It must be protected against vibration, moisture, temperature, and excessive currents and voltages. It must be located so as to minimize the possibility of water intrusion from windows broken by heavy seas.

(h) Communication equipment must comply with the technical standards and operating requirements issued by the Federal Communications Commission, as set forth in 47 CFR part 80.

46 CFR Ch. I (10–1–00 Edition)

NOTE: Each vessel which uses radio equipment to meet the communication requirements of this section must have a Ship Radio Station License issued by the Federal Communications Commission, as set forth in 47 CFR part 80.

(i) All communication equipment must be provided with an emergency source of power that complies with §28.375.

§ 28.250 High water alarms.

On a vessel 36 feet (11.8 meters) or more in length, a visual and audible alarm must be provided at the operating station to indicate high water level in each of the following normally unmanned spaces:

(a) A space with a through-hull fitting below the deepest load waterline, such as the lazarette;

(b) A machinery space bilge, bilge well, shaft alley bilge, or other space subject to flooding from sea water piping within the space; and

(c) A space with a non-watertight closure, such as a space with a non-watertight hatch on the main deck.

§ 28.255 Bilge pumps, bilge piping, and dewatering systems.

(a) Each vessel must be equipped with a bilge pump and bilge piping capable of draining any watertight compartment, other than tanks and small buoyancy compartments, under all service conditions. Large spaces, such as engine rooms must be fitted with more than one suction line.

(b) In addition to the requirements of paragraph (a) of this section, a space used in the sorting or processing of fish in which water is used must be fitted with dewatering system capable of dewatering the space under normal conditions of list and trim at the same rate as water is introduced. Pumps used as part of the processing of fish do not count for meeting this requirement. The dewatering system must be interlocked with the pump(s) supplying water to the space, so that in the event of failure of the dewatering system, the water supply is inactivated.

(c) Except as provided by paragraph (f) of this section, each vessel 79 feet (24 meters) or more in length must be equipped with a fixed, self-priming,

powered, bilge pump connected to a bilge manifold.

(d) If a bilge pump required by paragraph (a) of this section is portable, it must be provided with a suitable suction hose of adequate length to reach the bilges of each watertight compartment it must serve and with a discharge hose of adequate length to ensure overboard discharge. A portable pump must be capable of dewatering each space it serves at a rate of at least 2 inches (51 millimeters) of water depth per minute.

(e) Except for a fire pump required by § 28.315, a bilge pump may be used for other purposes.

(f) Except where an individual pump is provided for a separate space or for a portable pump, each individual bilge suction line must be led to a manifold. Each bilge suction line must be provided with a stop valve at the manifold and a check valve at some accessible point in the bilge line to prevent unintended flooding of a space.

(g) Each bilge suction line and dewatering system suction must be fitted with a suitable strainer to prevent clogging of the suction line. Strainers must have an open area of not less than three times the open area of the suction line.

(h) Each vessel must comply with the oil pollution prevention requirements of 33 CFR parts 151 and 155.

§ 28.260 Electronic position fixing devices.

Each vessel 79 feet (24 meters) or more in length must be equipped with an electronic position fixing device capable of providing accurate fixes for the area in which the vessel operates.

§ 28.265 Emergency instructions.

(a) Except as provided in paragraphs (b) and (c) of this section, each vessel must have emergency instructions posted in conspicuous locations accessible to the crew.

(b) The instructions identified in paragraphs (d)(6), (d)(7), (d)(8), and (d)(9) of this section, may be kept readily available as an alternative to posting.

(c) On a vessel which operates with less than 4 individuals on board, the emergency instructions may be kept

readily available as an alternative to posting.

(d) The emergency instructions required by this section must identify at least the following information, as appropriate for the vessel:

(1) The survival craft embarkation stations aboard the vessel and the survival craft to which each individual is assigned;

(2) The fire and emergency signal and the abandon ship signal;

(3) If immersion suits are provided, the location of the suits and illustrated instructions on the method for donning the suits;

(4) Procedures for making a distress call, such as:

(i) Make sure your communication equipment is on.

(ii) Select 156.8 MHz (VHF channel 16), 2182 kHz, or other distress frequency used in your area of operation. Note: VHF channel 16 and 2182 kHz on SSB are for emergency and calling purposes only.

(iii) Press microphone button and speaking slowly—clearly—calmly say: “Mayday—Mayday—Mayday”

(iv) Say: “This is the M/V (Insert name of your vessel), (Insert name of your vessel), (Insert name of your vessel), Over.”

(v) Release the microphone button briefly and listen for acknowledgment. If no one answers, repeat steps in paragraphs (d)(4) (iii) and (iv) of this section.

(vi) If there is still no answer, or if the Coast Guard or another vessel responds, say: “Mayday—This is the M/V (Insert Name of Your Vessel).”

(vii) Describe your position using latitude and longitude coordinates, LORAN coordinate, or range and bearing from a known point.

(viii) State the nature of the distress.

(ix) Give number of individuals aboard and the nature of any injuries.

(x) Estimate the present seaworthiness of your vessel.

(xi) Describe your vessel: (Insert length, color, hull type, trim, masts, power, and any additional distinguishing features).

(xii) Say: “I will be listening on Channel 16/2182 (or other channel monitored).”

§ 28.270

46 CFR Ch. I (10–1–00 Edition)

(xiii) End message by saying: “This is (insert vessel’s name and call sign).”

(xiv) If your situation permits, stand by the radio to await further communication with the Coast Guard or another vessel. If no answer, repeat, then try another channel.

(5) Essential action that must be taken in an emergency by each individual, such as:

(i) Making a distress call.

(ii) Closing of hatches, airports, watertight doors, vents, scuppers, and valves for intake and discharge lines which penetrate the hull, stopping of fans and ventilation systems, and operation of all safety equipment.

(iii) Preparing and launching of survival craft and rescue boats.

(iv) Fighting a fire.

(v) Mustering of personnel including—

(A) Seeing that they are properly dressed and have put on their lifejackets or immersion suits; and

(B) Assembling personnel and directing them to their appointed stations.

(vi) Manning of fire parties assigned to deal with fires.

(vii) Special duties required for the operation of fire fighting equipment.

(6) The procedures for rough weather at sea, crossing hazardous bars, flooding, and anchoring of the vessel, such as:

(i) Close all watertight and weather-tight doors, hatches and airports to prevent taking water aboard or further flooding in the vessel.

(ii) Keep bilges dry to prevent loss of stability due to water in bilges. Use power driven bilge pump, hand pump, and buckets to dewater.

(iii) Align fire pumps to use as bilge pumps, if possible.

(iv) Check all intake and discharge lines which penetrate the hull for leakage.

(v) Personnel should remain stationary and evenly distributed.

(vi) Personnel should don lifejackets and immersion suits if the going becomes very rough, the vessel is about to cross a hazardous bar, or when otherwise instructed by the master or individual in charge of the vessel.

(7) The procedures for anchoring the vessel.

(8) The procedures to be used in the event an individual falls overboard, such as:

(i) Throw a ring life buoy as close to the individual as possible;

(ii) Post a lookout to keep the individual in the water in sight;

(iii) Launch the rescue boat and maneuver it to pick up the individual in the water;

(iv) Have a crewmember put on a life-jacket or immersion suit, attach a safety line to the crewmember, and have the crewmember standby to jump into the water to assist in recovering the individual in the water if necessary;

(v) If the individual overboard is not immediately located, notify the Coast Guard and other vessels in the vicinity; and

(vi) Continue searching until released by the Coast Guard.

(9) Procedures for fighting a fire, such as:

(i) Shut off air supply to the fire—close hatches, ports, doors, ventilators, and similar openings.

(ii) Deenergize the electrical systems supplying the affected space, if possible.

(iii) Immediately use a portable fire extinguisher or use water for fires in ordinary combustible materials. Do not use water on electrical fires.

(iv) If the fire is in a machinery space, shut off the fuel supply and ventilation system and activate the fixed extinguishing system, if installed.

(v) Maneuver the vessel to minimize the effect of wind on the fire.

(vi) If unable to control the fire, immediately notify the Coast Guard and other vessels in the vicinity.

(vii) Move personnel away from the fire, have them put on lifejackets, and if necessary, prepare to abandon the vessel.

§ 28.270 Instruction, drills, and safety orientation.

(a) *Drills and instruction.* The master or individual in charge of each vessel must ensure that drills are conducted and instruction is given to each individual on board at least once each month. Instruction may be provided in conjunction with drills or at other times and places provided it ensures

Coast Guard, DOT

§ 28.275

that each individual is familiar with their duties and their responses to at least the following contingencies:

- (1) Abandoning the vessel;
- (2) Fighting a fire in different locations on board the vessel;
- (3) Recovering an individual from the water;
- (4) Minimizing the affects of unintentional flooding;
- (5) Launching survival craft and recovering lifeboats and rescue boats;
- (6) Donning immersion suits and other wearable personal flotation devices;
- (7) Donning a fireman's outfit and a self-contained breathing apparatus, if the vessel is so equipped;
- (8) Making a voice radio distress call and using visual distress signals;
- (9) Activating the general alarm; and
- (10) Reporting inoperative alarm systems and fire detection systems.

(b) *Participation in drills.* Drills must be conducted on board the vessel as if there were an actual emergency and must include participation by all individuals on board, breaking out and using emergency equipment, testing of all alarm and detection systems, donning protective clothing, and donning immersion suits, if the vessel is so equipped.

(c) *Training.* No individual may conduct the drills or provide the instructions required by this section unless that individual has been trained in the proper procedures for conducting the activity.

(d) The viewing of videotapes concerning at least the contingencies listed in paragraph (a) of this section, whether on board the vessel or not, followed by a discussion led by an individual familiar with these contingencies will satisfy the requirement for instruction but not the requirement for drills in paragraph (b) of this section or for the safety orientation in paragraph (e) of this section.

(e) *Safety orientation.* The master or individual in charge of a vessel must ensure that a safety orientation is given to each individual on board that has not received the instruction and has not participated in the drills required by paragraph (a) of this section before the vessel may be operated.

(f) The safety orientation must explain the emergency instructions required by § 28.265 and cover the specific evolutions listed in paragraph (a) of this section.

NOTE: The individual conducting the drills and instruction need not be the master, individual in charge of the vessel, or a member of the crew.

[CGD 88-079, 56 FR 40393, Aug. 14, 1991, as amended by CGD 95-012, 60 FR 48048, Sept. 18, 1995; CGD 96-046, 61 FR 57275, Nov. 5, 1996, CGD 96-046, 62 FR 46677, Sept. 4, 1997]

§ 28.275 Acceptance criteria for instructors and course curricula.

(a) A Fishing Vessel Safety Instructor shall submit a detailed course curriculum that relates directly to the contingencies listed in § 28.270(a), or a letter certifying the use of the "Personal Survival and Emergency Drills Course," a national standard curriculum, to the cognizant OCMI. This document can be ordered through the United States Marine Safety Association (USMSA), 1900 Arch Street, Philadelphia, PA 19103-1498. For the criteria of Fishing Vessel Safety Instructor, the following documentation shall be provided to the cognizant OCMI:

(1) Proof of at least 1 year of experience in a marine related field and experience that relates directly to the contingencies listed in § 28.270(a) including—

- (i) Experience as an instructor; or
- (ii) Training received in instructional methods; or

(2) A valid merchant mariner's license issued by the Coast Guard authorizing service as master of unspected fishing industry vessels and proof of experience that relates directly to the contingencies listed in 64 CFR 28.270(a) including—

- (i) Experience as an instructor; or
- (ii) Training received in instructional methods; or

(3) A valid merchant mariner's license issued by the Coast Guard authorizing service as a master of inspected vessels of 100 gross tons or more and proof of experience that relates directly to the contingencies listed in 46 CFR 28.270(a) including—

- (i) Experience as an instructor; or
- (ii) Training received in instructional methods. (See note 1.)

§ 28.300

NOTE 1: Persons holding a license authorizing service as a master of inspected vessels of 100 gross tons or higher with an original issue date prior to May 1, 1997, have until September 15, 1998, to comply with the provisions listed in § 28.275(a)(3).

(b) Each OCMI will issue a letter of acceptance to all qualified individuals and will maintain a list of accepted instructors in his/her zone.

(c) Letters of acceptance shall be valid for a period of 5 years.

(d) Fishing Vessel Safety Instructors or the organization providing training shall issue documents to Fishing Vessel Drill Conductors upon successful completion of all required training.

[CGD 96-046, 61 FR 57275, Nov. 5, 1996, as amended by CGD 96-046, 62 FR 46677, Sept. 4, 1997]

Subpart D—Requirements for Vessels Which Have Their Keel Laid or Are at a Similar Stage of Construction on or After or Which Undergo a Major Conversion Completed on or After September 15, 1991, and That Operate With More Than 16 Individuals on Board

§ 28.300 Applicability and general requirements.

Each commercial fishing industry vessel which has its keel laid or is at a similar stage of construction on or after or which undergoes a major conversion completed on or after September 15, 1991, and that operates with more than 16 individuals on board must comply with the requirements of this subpart in addition to the requirements of subparts A, B, and C of this part.

§ 28.305 Lifesaving and signaling equipment.

Each vessel to which this subpart applies must meet the requirements for life preservers, immersion suits, ring life buoys, distress signals, and survival craft in §§ 28.110, 28.115, 28.145 and table 28.120 (a), (b), or (c), as appropriate for the vessel type, on the date that its construction or major conversion is completed.

46 CFR Ch. I (10-1-00 Edition)

§ 28.310 Launching of survival craft.

A gate or other opening must be provided in the deck rails, lifelines, or bulwarks adjacent to the stowage location of each survival craft which weighs more than 110 pounds (489 Newtons), to allow the survival craft to be manually launched.

§ 28.315 Fire pumps, fire mains, fire hydrants, and fire hoses.

(a) Each vessel 36 feet (11.8 meters) or more in length must be equipped with a self-priming, power driven fire pump connected to a fixed piping system.

(1) A fire pump on a vessel 79 feet (24 meters) or more in length must be capable of delivering water simultaneously from the two highest hydrants, or from both branches of the fitting if the highest hydrant has a siamese fitting, at a pitot tube pressure of at least 50 psi (0.345 Newtons per square millimeter) and a flow rate of at least 80 gpm (303 liters per minute).

(2) Each vessel with a power driven fire pump must be equipped to permit energizing the fire main from the operating station and from the pump.

(b) *Fire main, hydrants, hoses and nozzles.*

(1) A vessel required to have a fixed fire main system must have a sufficient number of fire hydrants to reach any part of the vessel using a single length of fire hose.

(2) A fire hose must be connected to each fire hydrant at all times the vessel is operating.

(3) A fire hose on a vessel less than 79 feet (24 meters) in length must be at least $\frac{5}{8}$ inch (16 millimeters) nominal diameter, be of good commercial grade and be fitted with a nozzle of corrosion resistant material capable of providing a solid stream and a spray pattern.

(4) A fire hose on a vessel 79 feet (24 meters) or more in length must be lined commercial fire hose and be fitted with a nozzle made of corrosion resistant material capable of providing a solid stream and a spray pattern.

§ 28.320 Fixed gas fire extinguishing systems.

(a) *Requirements for vessels 79 feet (24 meters) or more in length.* A vessel 79 feet (24 meters) or more in length must be

fitted with a fixed gas fire extinguishing system in the following enclosed spaces:

- (1) A space containing an internal combustion engine of more than 50 horsepower;
- (2) A space containing an oil fired boiler;
- (3) An incinerator and;
- (4) A space containing a gasoline storage tank.

(b) *System types and alternatives.*

(1) A pre-engineered fixed gas fire extinguishing system may be installed only in a normally unoccupied machinery space, paint locker, or space containing flammable liquid stores that has a gross volume of not more than 33.98 cubic meters (1200 cubic feet).

(2) A fixed gas fire extinguishing system that is capable of automatic discharge upon heat detection may be installed only in a normally unoccupied space with a gross volume of not more than 169.92 cubic meters (6000 cubic feet).

(3) A space with a gross volume exceeding 169.92 cubic meters (6000 cubic feet) must be fitted with a manually actuated and alarmed fixed gas fire extinguishing system.

(c) *General requirements.*

(1) A fixed gas fire extinguishing system aboard a vessel must be approved by the Commandant and be custom engineered, unless the system meets the requirements for a pre-engineered fixed gas fire extinguishing system in paragraph (d) of this section.

(2) System components must be listed and labeled by an independent, nationally recognized testing laboratory for the system being installed.

(3) System design and installation must be in accordance with the Manufacturer's Marine Design, Installation, Operation, and Maintenance Manual approved for the system by the Commandant.

(4) A fixed gas fire extinguishing system may protect more than one space. The quantity of extinguishing agent must be at least sufficient for the largest space protected by the system.

(d) *Pre-engineered fixed gas fire extinguishing systems.*

(1) A pre-engineered fixed gas fire extinguishing system must:

- (i) Be approved by the Commandant;

- (ii) Be capable of manual actuation from outside the space in addition to any automatic actuation devices; and

- (iii) Automatically shut down all power ventilation systems serving the protected space and all engines that draw intake air from within the protected space.

(2) A vessel on which a pre-engineered fixed gas fire extinguishing system is installed must have the following equipment at the operating station:

- (i) A visual alarm to indicate the discharge of the extinguishing agent;

- (ii) An audible alarm to sound upon discharge of the extinguishing agent; and

- (iii) A means to reset devices used to automatically shut down ventilation systems and engines as required by paragraph (d)(1)(iii) of this section.

[CGD 88-079, 56 FR 40393, Aug. 14, 1991, as amended by CGD 96-046, 61 FR 57275, Nov. 5, 1996]

§ 28.325 Fire detection systems.

(a) Each accommodation space must be equipped with an independent modular smoke detector or a smoke actuated fire detecting unit installed in accordance with 46 CFR part 76, subpart 76.33.

(b) An independent modular smoke detector must meet UL 217 and be listed as a "Single Station Smoke Detector—Also suitable for use in Recreational Vehicles."

§ 28.330 Galley hood and other fire protection equipment.

(a) Each vessel must be fitted with a grease extraction hood complying with UL 710 above each grill, broiler, and deep fat fryer.

(b) Each grease extraction hood must be equipped with a pre-engineered dry or wet chemical fire extinguishing system meeting the applicable sections of NFPA 17 or 17A and must be listed by an independent laboratory.

(c) A vessel 79 feet (24 meters) or more in length must have at least one fire axe located in or adjacent to the operating station.

§ 28.335

46 CFR Ch. I (10–1–00 Edition)

§ 28.335 Fuel systems.

(a) *Applicability.* Except for the components of an outboard engine or portable bilge pump, each vessel must meet the requirements of this section.

(b) *Portable fuel systems.* Portable fuel systems including portable tanks and related fuel lines and accessories are prohibited except where used for outboard engines or portable bilge pumps. The design, construction, and stowage of portable tanks and related fuel lines and accessories must meet the requirements of ABYC H-25.

(c) *Fuel restrictions.* Except for outboard engines, the use of fuel other than bunker C or diesel is prohibited. An installation using bunker C must comply with the requirements of subchapter F of this chapter.

(d) *Vent pipes for integral fuel tanks.* Each integral fuel tank must meet the requirements of this paragraph.

(1) Each fuel tank must be fitted with a vent pipe connected to the highest point of the tank terminating in a 180 degree (3.14 radians) bend on a weather deck and fitted with a flame screen.

(2) Except where provision is made to fill a tank under pressure, the net cross-sectional area of the vent pipe for a fuel tank must not be less than 0.484 square inches (312.3 square millimeters).

(3) Where provision is made to fill a tank under pressure, the net cross-sectional area of the vent pipe must not be less than that of the fill pipe.

(e) *Fuel piping.* Except as permitted in paragraph (e)(1) and (e)(2) of this section, each fuel line must be seamless and must be of steel, annealed copper, nickel-copper, or copper-nickel. Each fuel line must have a wall thickness of not less than that of 0.035 inch (0.9 millimeters) except that:

(1) Aluminum piping is acceptable on an aluminum hull vessel provided it is installed outside the machinery space and is at least Schedule 80 in thickness; and

(2) Nonmetallic flexible hose is acceptable but must—

(i) Not be used in lengths of more than 30 inches (0.82 meters);

(ii) Be visible, easily accessible, and must not penetrate a watertight bulkhead;

(iii) Be fabricated with an inner tube and a cover of synthetic rubber or other suitable material reinforced with wire braid.

(iv) Be fitted with suitable, corrosion resistant, compression fittings; and

(v) Be installed with two clamps at each end of the hose, if designed for use with clamps. Clamps must not rely on spring tension and must be installed beyond the bead or flare or over the serrations of the mating spud, pipe, or hose fitting.

(f) A fuel line subject to internal head pressure from fuel in the tank must be fitted with a positive shutoff valve located at the tank which is operable from a safe location outside the space in which the valve is located.

(g) A vessel less than 79 feet (24 meters) in length may comply with one of the following standards in lieu of the requirements of paragraphs (e) and (f) of this section.

(1) ABYC H-33.

(2) Chapter 5 of NFPA 302.

(3) 33 CFR Chapter I, subchapter S (Boating Safety).

§ 28.340 Ventilation of enclosed engine and fuel tank spaces.

(a) *Applicability.* Each vessel with a gasoline outboard engine or gasoline storage tank must comply with the requirements of this section.

(b) *Ventilation of spaces containing gasoline.* Each space that contains a gasoline engine, a gasoline storage tank, or gasoline piping connected to an integral gasoline tank must be open to the atmosphere and so arranged as to prevent the entrapment of vapors or be ventilated by a mechanical exhaust system with a nonsparking fan. The fan motor must comply with 46 CFR 111.105-23.

(c) *Alternative standards.* A vessel less than 65 feet in length with ventilation installations in accordance with NFPA 302, chapter 2, section 2-2, or ABYC H-2 and 33 CFR part 183, subpart K, will be considered as meeting the requirements of this section.

§ 28.345 Electrical standards for vessels less than 79 feet (24 meters) in length.

(a) A vessel less than 79 feet (24 meters) in length with an alternating current electrical distribution system may comply with the requirements of ABYC E-8 and either paragraph (c) or (d) of this section, as applicable, in lieu of meeting the requirements of §§ 28.350 through 28.370.

(b) A vessel less than 79 feet (24 meters) in length with a direct current system may comply with the requirements of ABYC E-1, ABYC E-9, and either paragraph (c) or (d) of this section, as applicable, in lieu of meeting the requirements of §§ 28.350 through 28.370.

(c) In addition to paragraph (a) or (b) of this section, the vessel may comply with the requirements of NFPA 302, chapters 7 and 8.

(d) In addition to paragraph (a) or (b) of this section, the vessel may comply with the requirements of 33 CFR part 183, subpart I and § 28.370.

§ 28.350 General requirements for electrical systems.

(a) Electrical equipment exposed to the weather or in a location exposed to seas must be waterproof, watertight, or enclosed in a watertight housing.

(b) Aluminum must not be used for current carrying parts of electrical equipment or wiring.

(c) As far as practicable, electrical equipment must not be installed in lockers used to store paint, oil, turpentine, or other flammable or combustible liquid. If electrical equipment, such as lighting, is necessary in these spaces, it must be explosion-proof or intrinsically safe.

(d) Explosion-proof and intrinsically safe equipment must meet the requirements of 46 CFR part 111, subpart 111.105.

(e) Metallic enclosures and frames of electrical equipment must be grounded.

(f) Each vessel with a nonmetallic hull must have a continuous, non-current carrying grounding conductor which connects together the enclosures and frames of electrical equipment and which connects metallic items such as engines, fuel tanks, and equipment enclosures to a common ground point.

(g) The equipment grounding conductor must be sized in accordance with section 250-95 of NFPA Standard 70.

§ 28.355 Main source of electrical power.

(a) *Applicability.* Each vessel that relies on electricity to power any of the following essential loads must have at least two electrical generators to supply these loads:

- (1) The propulsion system and its necessary auxiliaries and controls;
- (2) Interior lighting;
- (3) Steering systems;
- (4) Communication systems;
- (5) Navigation equipment and navigation lights;
- (6) Fire protection or detection equipment;
- (7) Bilge pumps; or
- (8) General alarm system.

(b) Each generator must be attached to an independent prime mover.

§ 28.360 Electrical distribution systems.

(a) Each electrical distribution system which has a neutral bus or conductor must have the neutral bus or conductor grounded.

(b) A grounded electrical distribution system must have only one connection to ground. This ground connection must be at the switchboard or, on a nonmetallic vessel, at the common ground point.

§ 28.365 Overcurrent protection and switched circuits.

(a) Each power source must be protected against overcurrent. Overcurrent devices for generators must be set at a value not exceeding 115 percent of the generator full load rating.

(b) Except for a steering circuit, each circuit must be protected against both overload and short circuit. Each overcurrent device in a steering system power and control circuit must provide short circuit protection only.

(c) Each ungrounded current carrying conductor must be protected in accordance with its current carrying capacity by a circuit breaker or fuse at the connection to the switchboard or distribution panel bus.

§ 28.370

(d) Each circuit breaker and each switch must simultaneously open all ungrounded conductors.

(e) The grounded conductor of a circuit must not be disconnected by a switch or an overcurrent device unless all ungrounded conductors of the circuit are simultaneously disconnected.

(f) Navigation light circuits must be separate, switched circuits having fused disconnect switches or circuit breakers so that only the appropriate navigation lights can be switched on.

(g) A separate circuit with overcurrent protection at the main distribution panel or switchboard must be provided for each radio installation.

§ 28.370 Wiring methods and materials.

(a) All cable and wire must have insulated, stranded copper conductors of the appropriate size and voltage rating for the circuit.

(b) Each conductor must be No. 22 AWG or larger. Conductors in power and lighting circuits must be No. 14 AWG or larger. Conductors must be sized so that the voltage drop at the load terminals is not more than 10 percent.

(c) Cable and wiring not serving equipment in a high risk fire area such as a galley, laundry, or machinery space must be routed as far as practicable from these spaces. As far as practicable, cables serving duplicated essential equipment must be separated so that a casualty that affects one cable does not affect the other.

(d) Cable and wire for power and lighting circuits must:

(1) For circuits of less than 50 volts, meet 33 CFR 183.425 and 183.430; and

(2) For circuits of 50 volts or greater:

(i) Meet sections 310-13 and 310-15 of NFPA 70, except that asbestos insulated cable and dry location cable must not be used;

(ii) Be listed by Underwriters Laboratories Inc. as UL Boat or UL Marine Shipboard cable; or

(iii) Meet 46 CFR part 111, subpart 111.60.

(e) All metallic cable armor must be electrically continuous and grounded to the metal hull or the common ground point at each end of the cable run, except that final sub-circuits

46 CFR Ch. I (10-1-00 Edition)

(those supplying loads) may be grounded at the supply end only.

(f) A wiring termination and connection must be made in a fire retardant enclosure such as a junction box, fixture enclosure, or panel enclosure. A fire retardant plastic enclosure is acceptable.

§ 28.375 Emergency source of electrical power.

(a) Each vessel must have an emergency source of electrical power which is independent of the main sources of electrical power and which is located outside the main machinery space.

(b) The emergency source of electrical power must be capable of supplying all connected loads continuously for at least 3 hours.

(c) Except as provided in paragraphs (d) and (e) of this section, the following electrical loads must be connected to the emergency source of power:

(1) Navigation lights;

(2) Steering systems;

(3) Bilge pumps;

(4) Fire protection and detection systems, including fire pumps;

(5) Communication equipment;

(6) General alarm system and;

(7) Emergency lighting.

(d) A vessel less than 36 feet (11.0 meters) in length need only supply communication equipment by an emergency source of electrical power if flashlights are provided.

(e) A vessel less than 79 feet (24 meters) in length which is not dependent upon electrical power for propulsion, including propulsion control systems or steering, need only supply emergency lighting, navigation equipment, general alarm system, and communication systems by the emergency source of power.

(f) Where the emergency source of power is a generator, the generator prime mover must have a fuel supply which is independent of other prime movers.

[CGD 88-079; 56 FR 40393, Aug. 14, 1991; 56 FR 49822, Oct. 1, 1991]

§ 28.380 General structural fire protection.

(a) *Fire hazards to be minimized.* Each vessel must be constructed so as to

minimize fire hazards insofar as is reasonable and practicable.

(b) *Combustibles insulated from heated surfaces.* An internal combustion engine exhaust, galley uptake, electrical heating tape, or similar source of ignition must be kept clear of and suitably insulated from combustible material. A dry exhaust system for an internal combustion engine on a wooden or fiber reinforced plastic vessel must be installed in accordance with ABYC P-1.

(c) *Separation of machinery and fuel tank spaces from accommodation spaces.*

(1) Each accommodation space must be separated from machinery and fuel tank spaces by a fire resistant boundary which will prevent the passage of vapors.

(2) Each pipe and cable penetration between an accommodation space and a machinery or a fuel tank storage space must be sealed.

(d) *Paint and flammable liquid lockers.* Each vessel carrying paint and flammable liquids must be equipped with a steel or a steel lined storage locker.

(e) *Insulation.* Except as provided in paragraphs (e)(1) and (e)(2) of this section, insulation must be noncombustible.

(1) In machinery spaces, combustible insulation may be used for pipe and machinery lagging.

(2) In cargo spaces and refrigerated compartments of service spaces, combustible insulation may be used.

(f) *Vapor barrier.* Where insulation of any type is used in spaces where flammable and combustible liquids or vapors are present, e.g., machinery spaces and paint lockers, a vapor barrier which covers the insulation must be provided.

(g) *Paint.* Nitrocellulose or other highly flammable or noxious fume producing paints or lacquers must not be used on the vessel.

(h) *Mattresses.* Polyurethane foam mattresses are prohibited.

NOTE: The U.S. Department of Commerce Standard for Mattress Flammability (FF4-72.16) in 16 CFR part 1632, subpart A, applies to each mattress.

(i) *Fiber reinforced plastic.* When the hull, a deck, deckhouse, or superstructure of a vessel is partially or completely constructed of fiber rein-

forced plastic, the resin used must be fire retardant.

(j) *Cooking areas.* Vertical or horizontal surfaces within 0.9144 meters (3 feet) of cooking appliances must be composed of noncombustible material or covered by noncombustible material. Curtains, draperies, or free hanging fabrics are not permitted within 0.9144 meters (3 feet) of cooking appliances.

[CGD 88-079, 56 FR 40393, Aug. 14, 1991; 56 FR 49822, Oct. 1, 1991, as amended by CGD 96-046, 61 FR 57275, Nov. 5, 1996; CGD 95-028, 62 FR 51197, Sept. 30, 1997]

§ 28.385 Structural fire protection for vessels that operate with more than 49 individuals on board.

(a) *Applicability.* Each vessel that operates with more than 49 individuals on board must comply with the requirements of this section in addition to the requirements of § 28.380.

(b) *Construction.* The hull, structural bulkheads, columns and stanchions must be composed of steel. Superstructures and deckhouses must be constructed of noncombustible material.

(c) *Protection of accommodation spaces.* A bulkhead or deck separating an accommodation space from a control station, machinery space, cargo space, or service space must be constructed of noncombustible material.

[CGD 88-079, 56 FR 40393, Aug. 14, 1991; 56 FR 49822, Oct. 1, 1991]

§ 28.390 Means of escape.

(a) Each space which is used by an individual on a regular basis or which is generally accessible to an individual must have at least two widely separated means of escape. At least one of the means of escape must be independent of watertight doors. Subject to the restrictions of this section, means of escape include normal exits and emergency exits, passageways, stairways, ladders, deck scuttles, and windows.

(b) At least one of the means of escape from each space must provide a satisfactory route to weather.

(c) Each door, hatch or scuttle used as a means of escape must be capable of being opened by one individual, from

§ 28.395

either side, in both light and dark conditions, must open towards the expected direction of escape from the space served, and if a watertight door be of the quick acting type.

(d) Each deck scuttle which serves as a means of escape, must be fitted with a quick-acting release and a device to hold the scuttle in an open position.

(e) Each foothold, handhold, ladder, or similar structure, provided to aid escape, must be suitable for use in emergency conditions and must be of rigid construction.

(f) A window or windshield of sufficient size and proper accessibility may be used as one of the required means of escape from an enclosed space.

§ 28.395 Embarkation stations.

Each vessel must have at least one designated survival craft embarkation station and any additional embarkation stations necessary so that an embarkation station is readily accessible from each accommodation space and work space. Each embarkation station must be arranged to allow the safe boarding of survival craft.

§ 28.400 Radar and depth sounding devices.

(a) Each vessel must be fitted with a general marine radar system for surface navigation with a radar screen mounted at the operating station.

(b) Each vessel must be fitted with a suitable echo depth sounding device.

§ 28.405 Hydraulic equipment.

(a) Each hydraulic system must be so designed and installed that proper operation of the system is not affected by back pressure in the system.

(b) Piping and piping components must be designed with a burst pressure of not less than four times the system maximum operating pressure.

(c) Each hydraulic system must be equipped with at least one pressure relieving device set to relieve at the system's maximum operating pressure.

(d) All material in a hydraulic system must be suitable for use with the hydraulic fluid used and must be of such chemical and physical properties as to remain ductile at the lowest operating temperature likely to be encountered by the vessel.

46 CFR Ch. I (10–1–00 Edition)

(e) Except for hydraulic steering equipment, controls for hydraulic equipment must be located where the operator has an unobstructed view of the hydraulic equipment and the adjacent working area.

(f) Controls for hydraulic equipment must be so arranged that the operator is able to quickly disengage the equipment in an emergency.

(g) Hydraulically operated machinery must be equipped with a holding device to prevent uncontrolled movement due to loss of hydraulic system pressure.

(h) A nonmetallic flexible hose must only be used between two points of relative motion, including a pump and piping system, and must meet SAE J 1942.

(i) Each nonmetallic flexible hose and hose assembly must be installed in accordance with the manufacturer's rating and guidelines and must be limited to a length of not more than 30 inches (0.76 meters) in an application not subject to torsional loading.

§ 28.410 Deck rails, lifelines, storm rails, and hand grabs.

(a) Except as otherwise provided in paragraph (d) of this section, deck rails, lifelines, grab rails, or equivalent protection must be installed near the periphery of all weather decks accessible to individuals. Where space limitations make deck rails impractical, hand grabs may be substituted.

(b) The height of deck rail, lifelines, or bulwarks must be at least 39½ inches (1 meter) from the deck, except, where this height would interfere with the normal operation of the vessel, a lesser height may be substituted.

(c) All deck rails or lifelines must be permanently supported by stanchions at intervals of not more than 7 feet (2.3 meters). Stanchions must be through bolted or welded to the deck.

(d) Portable stanchions and lifelines may be installed in locations where permanently installed deck rails would impede normal fishing operations or emergency recovery operations.

(e) Deck rails or lifelines must consist of evenly spaced courses. The spacing between courses must not be greater than 15 inches (0.38 meters). The opening below the lowest course must not be more than 9 inches (0.23 meters).

Lower courses are not required where all or part of the space below the upper rail is fitted with a bulwark, chain link fencing, wire mesh, or an equivalent.

(f) A suitable storm rail or hand grab must be installed where necessary in a passageway, at a deckhouse side, at a ladder, and a hatch where an individual might have normal access.

(g) A stern trawler must have doors, gates, or other protective arrangements at the top of the stern ramp at least as high as adjacent bulwarks or 39½ inches (1 meter), whichever is less.

[CGD 88-079, 56 FR 40393, Aug. 14, 1991; 56 FR 49822, Oct. 1, 1991]

Subpart E—Stability

§ 28.500 Applicability.

This subpart applies to each commercial fishing industry vessel which is 79 feet (24 meters) or more in length that is not required to be issued a load line under subchapter E of this chapter and that—

(a) Has its keel laid or is at a similar stage of construction or undergoes a major conversion started on or after September 15, 1991;

(b) Undergoes alterations to the fishing or processing equipment for the purpose of catching, landing, or processing fish in a manner different than has previously been accomplished on the vessel—these vessels need only comply with § 28.501 of this subpart; or

(c) Has been substantially altered on or after September 15, 1991.

[CGD 88-079, 56 FR 40393, Aug. 14, 1991; 56 FR 47679, Sept. 20, 1991, as amended by CGD 88-079, 57 FR 364, Jan. 6, 1992]

§ 28.501 Substantial alterations.

(a) Except as provided in paragraph (b) of this section, a vessel that is substantially altered, including the cumulative effects of all alterations, need not comply with the remainder of this subpart, provided that it has stability instructions developed by a qualified individual which comply with § 28.530 (c) through (e).

(b) A vessel that is substantially altered in a manner which adversely affects its stability, including the cumulative effects of all alterations, need not comply with the remainder of this

subpart, provided the stability instructions required by paragraph (a) of this section are based on loading conditions or operating restrictions, or both, which compensate for the adverse affects of the alterations.

(c) The following changes to a vessel's lightweight characteristics are considered to adversely affect vessel stability:

(1) An increase in the vertical center of gravity at lightweight by more than 2 inches (51 millimeters) compared to the original lightweight value.

(2) An increase or decrease of lightweight displacement by more than 3 percent of the original lightweight displacement.

(3) A shift of the longitudinal center of gravity of more than 1 percent of the vessel's length.

(d) In determining whether or not a vessel's stability has been adversely affected, a qualified individual must, at a minimum, consider the net effects on stability of any:

(1) Reduction of the downflooding angle;

(2) Increase in the maximum heeling moment caused by fishing gear or weight lifted over the side due to changes in lifting arrangement or capacity;

(3) Reduction in freeing port area;

(4) Increase in free surface effects, including increased free surface effects due to water on deck associated with any increase in length or height of bulwarks;

(5) Increase in projected wind area;

(6) Decrease in the angle of maximum righting arm;

(7) Decrease in the area under the righting arm curve; and

(8) Increase in the surface area on which ice can reasonably be expected to accumulate.

§ 28.505 Vessel owner's responsibility.

(a) Where a test or calculations are necessary to evaluate stability, it is the owner's responsibility to select a qualified individual to perform the test or calculations.

(b) Test results and calculations developed in evaluating stability must be maintained by the owner.

§ 28.510 Definition of stability terms.

Downflooding means the entry of seawater through any opening into the hull or superstructure of an undamaged vessel due to heel, trim, or submergence of the vessel.

Downflooding angle means the static angle from the intersection of the vessel's centerline and the waterline in calm water to the first opening that cannot be closed weathertight and through which downflooding can occur.

Flush deck means a continuous weather deck located at the uppermost sheer line of the hull.

Forward perpendicular means a vertical line corresponding to the intersection of the forward side of the vessel's stem and the vessel's waterline at the vessel's deepest operating draft.

Open boat means a vessel not protected from entry of water by means of a complete deck, or by a combination of partial weather deck and superstructure which is seaworthy for the waters upon which the vessel operates.

Protected waters means sheltered waters presenting no special hazards such as most rivers, harbors, lakes, and similar waters as determined by the OCMI.

Qualified individual means an individual or an organization with formal training in and experience in matters dealing with naval architecture calculations.

Substantially altered means the vessel is physically altered in a manner that affects the vessel's stability and includes:

- (1) Alterations that result in a change of the vessel's lightweight vertical center of gravity of more than 2 inches (51 millimeters), a change in the vessel's lightweight displacement of more than 3 percent, or an increase of more than 5 percent in the vessel's projected lateral area, as determined by tests or calculations;
- (2) Alterations which change the vessel's underwater shape;
- (3) Alterations which change a vessel's angle of downflooding; and
- (4) Alterations which change a vessel's buoyant volume.

Well deck means a weather deck fitted with solid bulwarks that impede the drainage of water over the sides or an exposed recess in the weather deck

extending one-half or more of the length of the vessel.

§ 28.515 Submergence test as an alternative to stability calculations.

(a) A vessel may comply with this section in lieu of the remainder of the requirements in this subpart. A certification plate installed under 33 CFR part 183, subpart B, is acceptable evidence of compliance with this section.

(b) A vessel which is fitted with inboard engines and loaded as described in paragraph (e) of this section must float in calm water, after being submerged for 18 hours, so that—

(1) For a open vessel, any portion of the vessel's gunwale is above the water's surface; or

(2) For a decked vessel, any portion of the main deck is above the water's surface.

(c) A vessel which is fitted with an outboard engine must be loaded as described in paragraph (e) of this section and must float in calm water after being submerged for 18 hours so that—

(1) The vessel has an equilibrium heel angle of less than 10°;

(2) Any portion of the vessel's hull is above the water's surface; and

(3) Any portion of the lowest 3 feet (0.91 meters) of the vessel's hull is not more than 6 inches (152 millimeters) below the water's surface as measured at the lowest point on the following—

- (i) The gunwale, for an open boat; or
- (ii) The main deck, for a decked vessel.

(d) A vessel which is fitted with an outboard engine must be loaded as described in paragraph (f) of this section and must survive the submergence described in paragraph (c) of this section, except that the equilibrium heel angle must not exceed 30° and the vessel must float with the lower end of the vessel not more than 12 inches (0.31 meters) below the water's surface in calm water.

(e) For the tests described in paragraphs (b) and (c) of this section, a vessel must be complete in all respects, except that machinery which would be damaged by water may be replaced with equivalent fixed weight in the same location as the machinery it replaces. The vessel must be loaded with weight to represent the most adverse

loading condition. The most adverse loading condition normally includes the maximum weight of fish in its highest possible location. Weights must be substituted for operating personnel at 165 pounds (734 Newtons) per individual and may be substituted for fishing gear. The substitute weights may be located transversely so that the vessel floats level prior to being submerged. The two largest air chambers, or compartments of a decked vessel not used as fuel tanks, that contribute buoyancy to the vessel must be flooded.

(f) For the test described in paragraph (d) of this section, a vessel must be complete and loaded as described in paragraph (e) of this section, except that the center of gravity of the equivalent maximum fish load must be located to one side of the vessel's centerline by a distance equal to one-fifth of the maximum transverse dimension of the fish storage space.

§§ 28.520—28.525 [Reserved]

§ 28.530 Stability instructions.

(a) *Intent.* The intent of this section is to ensure that vessel masters and individuals in charge of vessels are provided with enough stability information to allow them to maintain their vessel in a satisfactory stability condition. The rules provide maximum flexibility for owners and qualified individuals to determine how this information is conveyed, taking into consideration decisions by operating personnel must be made quickly and that few operating personnel in the commercial fishing industry have had specialized training in stability. Therefore, stability instructions should take into account the conditions a vessel may reasonably be expected to encounter and provide simple guidance for the operating personnel to deal with these situations.

(b) Each vessel must be provided with stability instructions which provide the master or individual in charge of the vessel with loading constraints and operating restrictions which maintain the vessel in a condition which meets the applicable stability requirements of this subpart.

(c) Stability instructions must be developed by a qualified individual.

(d) Stability instructions must be in a format easily understood by the master or individual in charge of the vessel. Units of measure, language, and rigor of calculations in the stability instructions must be consistent with the ability of the master or the individual in charge of the vessel. The format of the stability instructions may include, at the owner's discretion, any of the following:

- (1) Simple loading instructions;
- (2) A simple loading diagram with instructions;
- (3) A stability booklet with sample calculations; or
- (4) Any other appropriate format for providing stability instructions.

(e) Stability instructions must be developed based on the vessel's individual characteristics and may include the following, as appropriate for the format chosen for presentation:

- (1) A general description of the vessel, including lightweight data;
- (2) Instructions on the use of the information;
- (3) General arrangement plans showing watertight compartments, closures, vents, downflooding angles, and allowable weights;
- (4) Loading restrictions, such as diagrams, tables, descriptions or maximum KG curves;
- (5) Sample loading conditions;
- (6) General precautions for preventing unintentional flooding;
- (7) Capacity plan or tank sounding tables showing tank and hold capacities, centers of gravity, and free surface effects;
- (8) A rapid and simple means for evaluating any specific loading condition;
- (9) The amount and location of fixed ballast;
- (10) Any other necessary guidance for maintaining adequate stability under normal and emergency conditions;
- (11) A general description of the stability criteria that are used in developing the instructions;
- (12) Guidance on the use of roll limitation devices such as stabilizers; and
- (13) Any other information the owner feels is important to the stability and operation of the vessel.

§ 28.535 Inclining test.

(a) Except as provided in paragraphs (b) and (c) of this section, each vessel for which the lightweight displacement and centers of gravity must be determined in order to do the calculations required in this subpart must have an inclining test performed.

(b) A deadweight survey may be substituted for the inclining test, if there is a record of an inclining test of a sister vessel. A vessel qualifies as a sister vessel if it is built to the same basic drawings and the undocumented weight difference between the two vessels is less than 3 percent of the lightweight displacement of the vessel which was inclined and the location of the longitudinal center of gravity differs less than 1 percent of the vessel's length.

(c) A deadweight survey may be substituted for the inclining test, or the inclining test may be dispensed with, if an accurate estimate of the vessel's lightweight characteristics can be made and the precise location of the position of the vessel's vertical center of gravity is not necessary to ensure that the vessel has adequate stability in all probable loading conditions.

(d) ASTM F 1321 (incorporated by reference, see § 28.40), with the exception of Annexes A and B, may be used as guidance for any inclining test or deadweight survey conducted under this section.

[CGD 88-079, 56 FR 40393, Aug. 14, 1991, as amended by USCG-1999-5151, 64 FR 67176, Dec. 1, 1999]

§ 28.540 Free surface.

(a) When doing the stability calculations required by this subpart, the virtual rise in the vessel's vertical center of gravity due to liquids in tanks must be considered by calculating the following—

(1) For each type of consumable liquid, the maximum free surface effect of a tank, or a transverse pair of tanks, having the greatest free surface effect, in addition to a correction for service tanks; and

(2) The free surface effect of each partially filled tank and hold containing a liquid that is not a consumable or containing fish or a fish product that can shift as the vessel heels. This should

include correction for any loose water within the vessel's hull associated with the processing of fish.

(b) The free surface effect of tanks fitted with cross connection piping must be calculated assuming the tanks are one common tank, unless valves that will be kept closed to prevent the transfer of liquids as the vessel heels are installed in the piping.

(c) The moment of transference method may be used in lieu of the inertia method when calculating free surface effects.

§ 28.545 Intact stability when using lifting gear.

(a) Each vessel which lifts a weight over the side, or that uses fishing gear that can impose an overturning moment on the vessel, such as trawls and seines, must meet the requirements of this section if that maximum heeling moment exceeds $0.67(W)(GM)(F/B)$, in foot-long tons (meter-metric tons), where:

W=displacement of the vessel with the lifted weight or the force on the fishing gear included, in long tons (metric tons);

GM=metacentric height with the lifted weight or force on the fishing gear included, in feet (meters);

F=freeboard to the lowest weather deck, measured at amidships in feet (meters); and

B=maximum beam, in feet (meters).

(b) Except as provided in paragraph (f) of this section, each vessel must meet the requirements of § 28.570 or have at least 15 foot-degrees (0.080 meter-radians) of area under the righting arm curve, after correcting the righting arms for the heeling arm caused by lifting or fishing gear, from the angle of equilibrium to the least of the following:

(1) The angle corresponding to the maximum righting arm;

(2) The angle of downflooding; or

(3) 40° (0.7 radians).

(c) The angle of intersection of the heeling arm curve resulting from the lifting moment or the moment of fishing gear and the righting arm curve must not be at an angle of more than 10° (0.17 radians).

(d) The heeling arm curve resulting from lifting must be calculated as the

resultant of the upright heeling moment divided by the vessel's displacement multiplied by the cosine of the angle of heel.

(e) For the purposes of this section, the weight of suspended loads must be assumed to act at the tip of the boom unless the suspended load's transverse movement is restricted, such as by the use of sideboards.

(f) A vessel that operates on protected waters, as defined in §170.050 of this chapter, must comply with the requirements of this section, except that the area described in paragraph (b) of this section must be at least 10 foot-degrees (0.053 meter-radians).

§ 28.550 Icing.

(a) *Applicability.* Each vessel that operates north of 42° North latitude between November 15 and April 15 or south of 42° South latitude between April 15 and November 15 must meet the requirements of this section.

(b) Except as provided in paragraph (d) of this section, the weight of assumed ice on each surface above the waterline of a vessel which operates north of 66°30' North latitude or south of 66° South latitude must be assumed to be at least:

(1) 6.14 pounds per square foot (30 Kilograms per square meter) of horizontal projected area which corresponds to a thickness of 1.3 inches (33 millimeters); and

(2) 3.07 pounds per square foot (15 Kilograms per square meter) of vertical projected area which corresponds to a thickness of 0.65 inches (16.5 millimeters).

(c) Except as provided in paragraph (d) of this section, the weight of assumed ice on a vessel that operates north of 42° North but south of 66°30' North latitude or south of 42° South but north of 66° South latitude must be assumed to be at least one-half of the values required by paragraphs (b)(1) and (b)(2) of this section.

(d) The height of the center of gravity of the accumulated ice should be calculated according to the position of each corresponding horizontal surface (deck and gangway) and each other continuous surface on which ice can reasonably be expected to accumulate. The projected horizontal and vertical

area of each small discontinuous surface such as a rail, a spar, and rigging with no sail can be accounted for by increasing the calculated area by 15 percent.

(e) The weight and location of ice must be included in the vessel's weight and centers of gravity in each condition of loading when performing the stability calculations required by this subpart.

[CGD 88-079, 56 FR 40393, Aug. 14, 1991; 56 FR 47679, Sept. 20, 1991]

§ 28.555 Freeing ports.

(a) Except as provided in paragraph (i) of this section, each decked vessel fitted with bulwarks must be fitted with freeing ports.

(b) Freeing ports must be located to allow the rapid clearing of water in all probable conditions of list and trim.

(c) Except as provided by paragraphs (d) through (h) of this section, the aggregate clear area of freeing ports on each side of the vessel must not be less than 0.71 plus 0.035 times the length of the bulwark, in meters, for area in square meters, or 7.6 plus 0.115 times the length of the bulwark, in feet, for the area in square feet. The length of bulwark need not exceed 0.7 times the overall length of the vessel.

(d) Except as provided in paragraphs (e) through (h) of this section, for bulwarks which exceed 20.11 meters (66 feet) in length, the aggregate clear area of freeing ports on each side of the vessel must not be less than 0.07 times the length of the bulwark, in meters, for an area in square meters (0.23 times the length of the bulwark in feet, for an area in square feet). The length of the bulwark need not exceed 0.7 times the overall length of the vessel.

(e) For a bulwark more than 4 feet (1.22 meters) in height, the freeing port area required by paragraphs (c) or (d) of this section must be increased in accordance with the following formula:

$i = [h - 4]0.04q$, $(i = [h - 1.722]0.04q$ for metric units), where:

i =increase in freeing port area, in square feet (square meters);

h =bulwark height, in feet (meters); and

q =length of bulwark exceeding 4 feet (1.22 meters) in height, in feet (meters).

§ 28.560

(f) For a bulwark less than 3 feet (0.91 meters) in height, the required freeing port area, required by paragraph (c) or (d) of this section, may be decreased in accordance with the following formula:

$$r = [3 - h]0.04q, \quad (r = [h - 0.91 - h]0.04q),$$

where:

r=permitted reduction in freeing port area, in square feet (square meters).

h=bulwark height, in feet (meters).

q=length of bulwark which is less than 3 feet (0.914 meters) in height, in feet (meters).

(g) For a vessel without sheer, the freeing port area must be increased by 50 percent.

(h) The area of the freeing ports on a vessel that operates on protected waters need only be 50 percent of the area required by paragraphs (c) or (d) of this section.

(i) Freeing port covers are permitted provided that the freeing port area required by this section is not diminished and the covers are constructed and fitted so that water will readily flow outboard but not inboard.

[CGD 88-079, 56 FR 40393, Aug. 14, 1991, as amended by CGD 96-046, 61 FR 57276, Nov. 5, 1996]

§ 28.560 Watertight and weathertight integrity.

(a) Each opening in a deck or a bulkhead that is exposed to weather must be fitted with a weathertight or a watertight closure device.

(b) Except as provided in paragraphs (c) through (f) of this section, each opening in a deck or a bulkhead that is exposed to weather must be fitted with a watertight coaming as follows:

(1) For a vessel 79 feet (24 meters) or more in length, the coaming must be at least 24 inches (0.61 meters) in height; or

(2) For a vessel less than 79 feet (24 meters) in length, the coaming must be at least 12 inches (0.30 meters) in height.

(c) A coaming to a fish hold that is under constant attention when the closure is not in place need only be 6 inches (0.15 meters) in height.

46 CFR Ch. I (10-1-00 Edition)

(d) The coaming of an opening fitted with a quick-acting watertight closure device need only be of sufficient height to accommodate the device.

(e) Except on an exposed forecastle deck, a coaming is not required on a deck above the lowest weather deck.

(f) Each window and portlight located below the first deck above the lowest weather deck must be provided with an inside deadlight. Each deadlight must be efficient, hinged, and arranged so that it can be effectively closed watertight.

(g) An opening in a vessel below the weather deck which is used for discharging water or debris resulting from processing or sorting operations must be fitted with a means to ensure the opening can be closed weathertight. This means of closing must be operable from a location which is outside the space containing the opening.

§ 28.565 Water on deck.

(a) Each vessel with bulwarks must comply with the requirements of this section.

(b) Except for a vessel that operates on protected waters, the residual righting energy, "b" in Figure 28.565, must not be less than the water on deck heeling energy, "a" in Figure 28.565.

(c) The water on deck heeling energy must be determined assuming the following:

(1) The deck well is filled to the top of the bulwark at its lowest point and the vessel heeled to the angle at which this point is immersed;

(2) Water does not run off through the freeing ports;

(3) Vessel trim and displacement are constant and equal to the values of the vessel without the water on deck; and

(4) Water in the well is free to run-off over the top of the bulwark.

(d) The residual righting energy is the righting energy from the value where the righting arm equals the water on deck heeling arm up to the lesser of the values of 40° (0.70 radians) of heel or the downflooding angle.

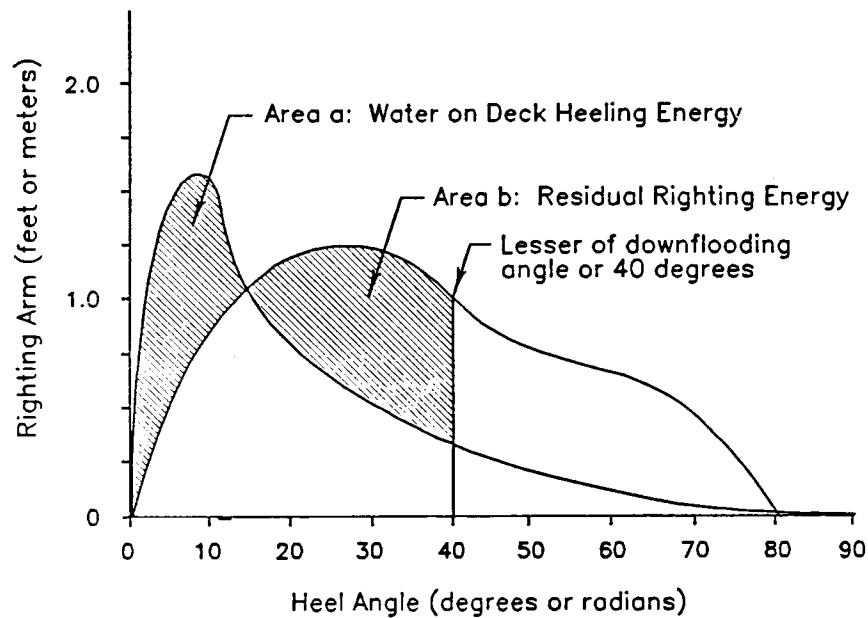


Figure 28.565

§ 28.570 Intact righting energy.

(a) Except as provided in paragraph (c) of this section, each vessel must have the following properties in each condition of loading:

(1) An initial metacentric height (GM) of at least 1.15 feet (0.35 meters);

(2) A righting arm (GZ) of at least 0.66 feet (0.2 meters) at an angle of heel not less than 30° (0.52 radians);

(3) A maximum righting arm that occurs at an angle of heel not less than 25° (0.44 radians);

(4) An area under each righting arm curve of at least 16.9 foot-degrees (0.090 meter-radians) up to the lesser of 40° (0.70 radians) or the angle of downflooding;

(5) An area under each righting arm curve of at least 10.3 foot-degrees (0.055 meter-radians) up to an angle of heel of 30° (0.52 radians);

(6) An area under each righting arm curve of at least 5.6 foot-degrees (0.030 meter-radians) between 30° (0.52 radi-

ans) and the lesser of 40° (0.70 radians) or the angle of downflooding; and

(7) Except as provided by paragraph (b) of this section, positive righting arms through an angle of heel of 60° (1.05 radians).

(b) In lieu of meeting the requirements of paragraph (a)(7) of this section, a vessel may comply with the following provisions:

(1) Hatches in the watertight/weathertight envelope must be normally kept closed at sea (e.g., the live tank hatch is only opened intermittently, under controlled conditions); or

(2) Unintentional flooding through these hatches must not result in progressive flooding to other spaces; and

(3) In all cases, a vessel must have positive righting arms through an angle of heel of at least 50° (0.87 radians) and the intact stability analysis must consider that spaces accessed by

§ 28.575

46 CFR Ch. I (10–1–00 Edition)

such hatches to be flooded full or flooded to the level having the most detrimental effect on stability when free surface effects are considered.

(c) In lieu of meeting the requirements of paragraph (a) of this section, a vessel may comply with the provisions of § 170.173(c) of this chapter, provided that righting arms are positive to an angle of heel of not less than 50° (0.87 radians).

(d) For the purpose of paragraphs (a) and (c) of this section, at each angle of heel a vessel's righting arm must be calculated assuming the vessel is permitted to trim free until the trimming moment is zero.

§ 28.575 Severe wind and roll.

(a) Each vessel must meet paragraphs (f) and (g) of this section when subjected to the gust wind heeling arm and the angle of roll to windward as specified in this section.

(b) The gust wind heeling arm, L_w in figure 28.575 of this chapter, must be calculated by the following formula:

$$0.00216E_n(V_n^2A_n Z_n)/W,$$

where:

E_n =series summation notation where n varies from 1 to the number of elements in the series;

$V_n=S[0.124LN(0.3048h_n)+0.772]$, in feet per second $S[0.127LN(h_n)+0.772]$, in meters per second and is the wind speed for profile element “ n ” on a vessel;

$S=64$ (19.5, if metric units are used) for a vessel that operates on protected waters; or 85.3 (26, if metric units are used) for a vessel that operates on waters other than protected waters;

LN =natural logarithm;

h_n =the vertical distance from the centroid of area A_n to the waterline for profile element n , in feet (meters);

A_n =projected lateral area for profile element n , in square feet (square meters);

Z_n =the vertical distance between the centroid of A_n and a point at the center of the underwater lateral area or a point at approximately one-half of the draft, for profile element n , in feet; and

W =displacement of the loaded vessel, in pounds (Newtons).

(c) The angle of roll to windward, A_1 , is measured from the equilibrium angle, A_{el} , and is calculated by the following formula:

$$A_1=109kXY[\text{Square root of } (rs)], \text{ in degrees,}$$

where:

s, X, Y =factors from table 28.575;

$r=0.73+0.6 Z_g/d$;

Z_g =distance between the center of gravity and the waterline (+ above, – below), in feet (meters);

$k=1.0$ for round bilged vessels with no bilge keels or bar keels; 0.7 for vessels with sharp bilges, or the value from table 28.575 for vessels with a bar keel, bilge keels, or both;

B =molded breadth of the vessel, in feet (meters);

d =mean molded draft of the vessel, in feet (meters);

C_b =block coefficient;

A_k =aggregate area of bilge keels, the area of the lateral projection of a bar keel, or the sum of these areas, in square feet (square meters);

L =length, in feet (meters);

$T=1.108 \text{ BC/square root of GM, in seconds;}$
2.0 BC/square root of GM, if metric units are used;

GM =metacentric height corrected for free surface effects, as explained in § 28.540, in feet (meters);

$C=0.373+0.023(B/d)-0.000131L$ or
 $0.373+0.023(B/D)-0.00043L$, if metric units are used.

(d) The angle of equilibrium, A_{el} in figure 28.575, is calculated by determining the lowest angle at which the gust wind heeling arm, L_w , is equal to the righting arm.

(e) The area “ b ” in figure 28.575 must be measured to the least of the following:

(1) The angle of downflooding, (A_d) ;

(2) The angle of the second intercept, A_{e2} in figure 28.575, of the wind heeling arm curve, L_w in figure 28.575, and the righting arm curve; or

(3) A heel angle of 50° (0.87 radians).

(f) The angle of equilibrium, A_{el} in figure 28.575, must not exceed 14° (0.24 radians).

(g) Area “ b ” in figure 28.575 must not be less than area “ a ” in figure 28.575.

TABLES 28.575.—ROLL FACTORS

B/d	X
2.4	1.0
2.5	0.98
2.6	0.96
2.7	0.95
2.8	0.93
2.9	0.91
3.0	0.90
3.1	0.88
3.2	0.86
3.3	0.84
3.4	0.82

Coast Guard, DOT

§ 28.580

TABLES 28.575.—ROLL FACTORS—Continued

B/d	X
3.5	0.80
Note. Intermediate values must be obtained by interpolation.	
C _b	Y
0.45	0.75
0.50	0.82
0.55	0.89
0.60	0.95
0.93	0.97
0.70	1.0
Note. Intermediate values must be obtained by interpolation.	
100A _k /(LB)	k
0	1.0
1.0	0.98

100A _k /(LB)	k
1.5	0.95
2.0	0.88
2.5	0.79
3.0	0.74
3.5	0.72
4.0	0.70
Note. Intermediate values must be obtained by interpolation.	
T	S
6	0.100
7	0.098
8	0.093
12	0.065
14	0.053
16	0.044
18	0.038
20	0.035
Note. Intermediate values must be obtained by interpolation.	

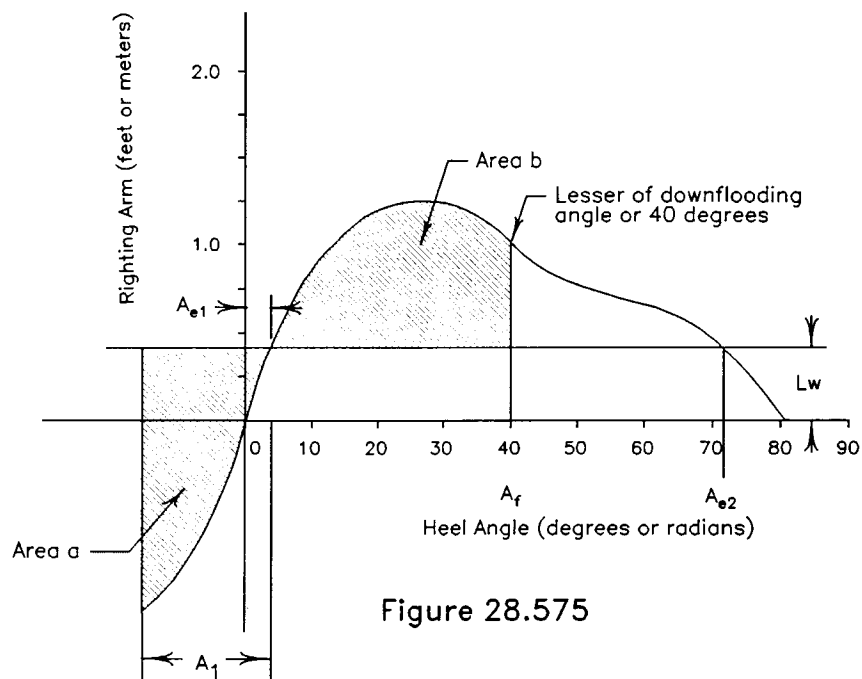


Figure 28.575

[56 FR 40393, Aug. 14, 1991, CGD 88-079; 56 FR 47679, Sept. 20, 1991, CGD 88-079, as amended by CGD 95-072, 60 FR 50461, Sept. 29, 1995]

§ 28.580 Unintentional flooding.

(a) *Applicability.* Except for an open boat that operates on protected waters

and as provided by paragraph (i) of this section, each vessel built on or after September 15, 1991 must comply with the requirements of this section.

(b) *Collision bulkhead.* A watertight collision bulkhead must be fitted and must meet the following:

(1) Openings in the collision bulkhead must be kept to a minimum, and each must be fitted with a watertight closure device;

(2) A collision bulkhead must not be fitted with a door below the bulkhead deck;

(3) A penetration or opening in a collision bulkhead must be—

(i) Located as high and as far inboard as practicable; and

(ii) Fitted with a means to rapidly make it watertight which is operable from a location aft of the collision bulkhead;

(4) The collision bulkhead must be located at least 5 percent of the length from the forward perpendicular unless the vessel has a bulbous bow, in which case the forward reference point will be extended by half the distance between the vessel's forward perpendicular and the forwardmost point of the bulbous bow as shown in figure 28.580; and

(5) The collision bulkhead must not be stepped below the bulkhead deck.

(c) Each vessel must meet the survival conditions in paragraph (f) of this section in each condition of loading and operation with the extent and character of damage specified in paragraphs (d) and (e) of this section.

(d) *Extent and character of damage.* Except where a lesser extent of damage or a smaller penetration would be more disabling, in evaluating the damage stability of a vessel the following penetration must be assumed:

(1) Longitudinal extent— $L/10$, or 10 feet (3.05 meters) plus $0.03L$, whichever is less. Transverse watertight bulkheads that are separated by at least this distance may be assumed to remain effective;

(2) Transverse extent—30 inches (0.76 meters) from the side measured at right angles to the centerline at the level of the deepest operating waterline; and

(3) Vertical extent—from the baseline upward without limit.

(e) Each space containing a through hull fitting, such as the lazarette and the engine room, must be assumed to be flooded.

(f) *Survival conditions.* A vessel is presumed to survive the assumed damage and unintentional flooding described in paragraphs (d) and (e) of this section if:

(1) The angle of equilibrium after flooding does not exceed 25° (0.44 radians); and

(2) Through an angle of 20° (0.35 radians) beyond the angle of equilibrium after flooding, the following are met—

(i) The righting arm curve is positive;

(ii) The maximum righting arm is at least 4 inches (102 millimeters);

(iii) Each submerged opening is capable of being made weathertight; and

(iv) The heeling arm caused by deploying all fully loaded davit-launched survival craft on one side of a vessel does not exceed the righting arm at any angle of heel beyond the equilibrium angle when launching is assumed on the damaged side.

(g) *Permeability.* The permeability of each space must not be less than the following:

(1) For an accommodations space—95 percent;

(2) For a propulsion machinery space—85 percent;

(3) For a tightly packed storage space—60 percent;

(4) For a void or an auxiliary machinery space—95 percent;

(5) For an empty fish hold—95 percent;

(6) For a full fish hold—50 percent; and

(7) For tanks—95 percent (less if a tank must be full to attain the draft under consideration.)

(h) *Buoyancy of superstructure.* A deckhouse or a superstructure may be included in the buoyant volume of a vessel provided it is:

(1) Sufficiently strong to withstand the impact of waves;

(2) Fitted with a weathertight or watertight closure device for each opening;

(3) Equipped with an efficient, hinged, inside deadlight, for each window and each portlight, arranged so that it can be effectively closed watertight; and


(4) Fitted with interior access from the spaces below.

(i) A vessel may obtain and maintain a Load Line Certificate under subchapter E of this chapter in lieu of

Coast Guard, DOT

§ 28.580

meeting the requirements of paragraphs (c) through (g) of this section.

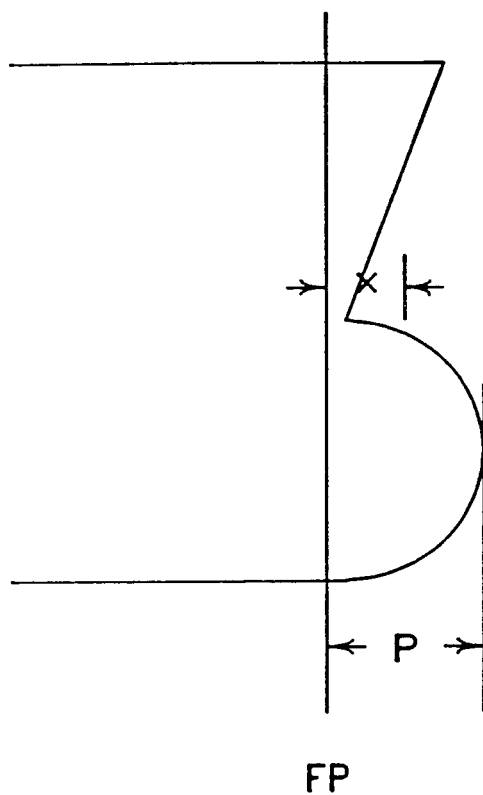

$$x = P/2$$

Figure 28.580

[CGD 88-079, 56 FR 40393, Aug. 14, 1991; 56 FR 47679, Sept. 20, 1991, as amended by CGD 88-079, 57 FR 364, Jan. 6, 1992]

§§ 28.590–28.630 [Reserved]

Subpart F—Fish Processing Vessel

§ 28.700 Applicability.

Each fish processing vessel which is not subject to inspection under the provisions of another subchapter of this chapter must meet the requirements of this subpart.

§ 28.710 Examination and certification of compliance.

(a) At least once in every two years each vessel must be examined for compliance with the regulations of this subchapter by the ABS, a similarly qualified organization, or a surveyor of an accepted organization.

(b) Each individual performing an examination under paragraph (a) of this section, upon finding the vessel to be in compliance with the requirements of this chapter, must provide a written certification of compliance to the owner or operator of the vessel.

(c) Each certification of compliance issued under paragraph (b) of this section must:

(1) Be signed by the individual that performed the examination;

(2) Include the name of the organization the individual performing the examination represents or the name of the accepted organization the individual belongs to; and

(3) State that the vessel has been examined and found to meet the specific requirements of this chapter.

(d) A certification of compliance issued under paragraph (b) of this section must be retained on board the vessel until superseded.

(e) A copy of the certification of compliance issued under paragraph (b) of this section must be forwarded by the organization under whose authority the examination was performed to the Coast Guard District Commander (Attention: Fishing Vessel Safety Coordinator) in charge of the district in which the examination took place.

§ 28.720 Survey and classification.

(a) Each vessel which is built after or which undergoes a major conversion completed after July 27, 1990, must be classed by the ABS, or a similarly qualified organization.

(b) Each vessel which is classed under paragraph (a) of this section must:

(1) Have on board a certificate of class issued by the organization that classed the vessel.

(2) Meet all survey and classification requirements prescribed by the organization that classed the vessel.

Subpart G—Aleutian Trade Act Vessels

SOURCE: CGD 94–025, 60 FR 54444, Oct. 24, 1995, unless otherwise noted.

§ 28.800 Applicability and general requirements.

(a) This subpart applies to each fish tender vessel engaged in the Aleutian trade that has not undergone a major conversion and:

(1) Was operated in Aleutian trade before September 8, 1990; or

(2) Was purchased to be used in the Aleutian trade before September 8, 1990, and entered into service in the Aleutian trade before June 1, 1992.

(b) Except as noted otherwise in this subpart, a vessel subject to this subpart must also comply with the requirements of subparts A, B, and C of this part.

(c) Each fish tender vessel engaged in the Aleutian trade that undergoes a major conversion after September 15, 1991 must comply with the additional requirements of subpart D.

(d) A fish tender vessel engaged in the Aleutian trade is subject to inspection under the provisions of 46 U.S.C. 3301 (1), (6), or (7) unless it:

(1) Is not more than 500 gross tons;

(2) Has an incline test performed by a marine surveyor; and

(3) Has written stability instructions posted on board the vessel.

§ 28.805 Launching of survival craft.

In addition to the survival craft requirements in subpart B, each vessel must have a gate or other opening in the deck rails, lifelines, or bulwarks adjacent to the stowage location of each survival craft which has a mass of more than 50 kilograms (110 pounds), so that the survival craft can be manually launched.

§ 28.810 Deck rails, lifelines, storm rails and hand grabs.

(a) Except as otherwise provided in paragraph (d) of this section, deck rails, lifelines, grab rails, or equivalent protection must be installed near the periphery of all weather decks accessible to individuals. Where space limitations make deck rails impractical, hand grabs may be substituted.

(b) The height of deck rails, lifelines, or bulkheads must be at least 1 meter (39½ inches) from the deck, except where this height will interfere with the normal operation of the vessel, a lesser height may be substituted.

(c) All deck rails or lifelines must be permanently supported by stanchions at intervals of not more than 2.3 meters (7 feet). Stanchions must be through bolted or welded to the deck.

(d) Portable stanchions and lifelines may be installed in locations where permanently installed deck rails will impede normal cargo operations or emergency recovery operations.

(e) Deck rails or lifelines must consist of evenly spaced courses. The spacing between courses must not be greater than 0.38 meters (15 inches). The opening below the lowest course must not be more than 0.23 meters (9 inches). Lower courses are not required where all or part of the space below the upper rail is fitted with a bulwark, chain link fencing, wire mesh, or an equivalent.

(f) A suitable storm rail or hand grab must be installed where necessary in a passageway, at a deckhouse side, at a ladder, and a hatch where an individual might have access.

§ 28.815 Bilge pumps, bilge piping, and dewatering systems.

Instead of meeting the requirements of § 28.255, each vessel to which this subpart applies must meet the following requirements:

(a) Each vessel must be equipped with a fixed, self priming, powered, bilge pump, having a minimum capacity rating of 50 gallons per minute, connected to a bilge manifold and piping capable of draining any watertight compartment, other than tanks and small buoyancy compartments, under all service conditions. Large spaces, such as engine rooms and cargo holds

must be fitted with more than one suction line.

(b) In addition, each vessel must be fitted with a fixed secondary or backup bilge pump having an independent and separate source of power from the pump required in paragraph (a) of this section. One of the bilge pumps may be attached to the propelling engine.

(c) A portable bilge pump may substitute for the secondary pump required above, as long as it meets the following:

(1) It must be self priming and provided with a suitable suction hose of adequate length to reach the bilges of each watertight compartment it must serve and be fitted with a built-in check valve and strainer.

(2) The portable pump must be of at least the same minimum capacity as that listed in paragraph (a) of this section and fitted with a discharge hose of adequate length to ensure overboard discharge from the lowest compartment in which it can serve.

(3) The portable pump must also be capable of being quickly and efficiently attached to the vessel's fixed bilge suction main and/or discharge piping (such as with "camlocks", etc.) for alternate emergency use.

(d) Except for suction lines attached to an individual pump provided for a separate space, or for a portable pump, each individual bilge suction line must be provided with a stop valve at the manifold and a check valve at some accessible point in the bilge line to prevent unintended flooding of a space.

(e) Each bilge suction line and dewatering system must be fitted with a suitable strainer to prevent clogging of the suction line. Strainers must have an open area of not less than three times the open area of the suction line.

(f) Except for a fire pump required by 46 CFR 28.820, a bilge pump may be used for other purposes.

(g) Each vessel must comply with the oil pollution prevention requirements of 33 CFR parts 151 and 155.

§ 28.820 Fire pumps, fire mains, fire hydrants, and fire hoses.

(a) Each vessel must be equipped with a self-priming, power driven fire

§ 28.825

46 CFR Ch. I (10–1–00 Edition)

pump connected to a fixed piping system. This pump must be capable of delivering an effective stream of water from a hose connected to the highest outlet. The minimum capacity of the power fire pump shall be 50 gallons per minute at a pressure of not less than 60 pounds per square inch at the pump outlet.

(1) If multiple pumps are installed, they may be used for other purposes provided at least one pump is kept available for use on the fire system at all times.

(2) In addition, each vessel must be fitted with a portable fire pump having a minimum capacity of that specified in paragraph (a) of this section, capable of producing a stream of water having a throw of at least 12 meters (39.4 feet) from the nozzle, and capable of being connected to National Standard Fire Hose of the size utilized on board the vessel. If a vessel already has on board a portable pump satisfying the bilge system requirements of § 28.760(c), no additional portable pump is required as long as the portable pump is of sufficient size/capacity, and is properly equipped to handle both fire fighting and flood control.

(b) Each vessel must have a sufficient number of fire hydrants to reach any part of the vessel using a single length of hose.

(c) Each fire hydrant must have at least one length of fire hose connected to the outlet at all times, a spanner, and a hose rack or other device for stowing the hose at all times.

(1) All parts of the firemain located on exposed decks shall either be protected against freezing or be fitted with cutout valves and drain valves.

(2) Firehose shall not be used for any other purpose other than fire extinguishing, drills, and testing.

(3) Each length of fire hose must be a minimum of 3.83 centimeters (1½") diameter lined commercial fire hose and be fitted with a nozzle made of corrosion resistant material capable of providing a solid stream and a spray pattern.

§ 28.825 Excess fire detection and protection equipment.

Instead of meeting the requirements of § 28.155, each vessel to which this

subpart applies must meet the following requirements:

(a) Installation of fire detection and protection equipment in excess of that required by the regulations in this Subchapter is permitted provided that the excess equipment does not endanger the vessel or individuals on board in any way. The excess equipment must, at a minimum, be listed and labeled by an independent, nationally recognized testing laboratory and be in accordance with an appropriate industry standard for design, installation, testing, and maintenance.

(b) An existing fixed gas fire extinguishing system that is in excess of the required fire protection equipment required by subparts A, B, and C of this part, may remain in place and continue in service as long as all parts of the system are maintained in good condition to the satisfaction of the Coast Guard Representative, and subject to the following:

(1) A fixed fire extinguishing system capable of automatic discharge upon heat detection, may only be installed in a normally unoccupied space. For the purpose of this section, the machinery space aboard a fish tender operating in the Aleutian trade is considered occupied.

(2) A fixed fire extinguishing system must:

(i) Be capable of manual actuation from outside the space protected;

(ii) Produce an audible alarm to indicate the discharge of the extinguishing agent for 20 seconds before the extinguishing agent for 20 seconds before the agent is released into the space;

(iii) The branch line valves of all fire extinguishing systems shall be plainly and permanently marked indicating the spaces serviced;

(iv) The control cabinets or spaces containing valves or manifolds for the various fire extinguishing systems shall be distinctly marked in conspicuous red letters at least 5.08 centimeters (2 inches) high:

“HALON FIRE SYSTEM”

“CARBON DIOXIDE FIRE SYSTEM”
or

“FOAM FIRE SYSTEM”, as the case may be;

(v) Instructions for the operation of the system must be located in a conspicuous place at or near all pull boxes, stop valve controls, and in the agent storage space;

(vi) If the space or enclosure containing the supply or controls is to be locked, a key to the space or enclosure shall be in a break-glass-type box conspicuously located adjacent to the opening, and;

(vii) Be equipped with a sign at the alarm stating: "WHEN ALARM SOUNDS—VACATE AT ONCE. CARBON DIOXIDE BEING RELEASED", or list other fire extinguishing agent.

(3) Any modification, alteration, or new installation of a fixed gas fire extinguishing system must meet the additional requirements of subpart D of this part.

§ 28.830 Fire detection system.

(a) Each accommodation space must be equipped with an independent modular smoke detector or a smoke actuated fire detecting unit installed in accordance with § 76.33 of this chapter.

(b) An independent modular smoke detector must meet UL 217 and be listed as a "Single Station Smoke Detector—Also Suitable for Use in Recreational Vehicles".

§ 28.835 Fuel systems.

(a) Portable fuel systems including portable tanks and related fuel lines and accessories are prohibited except where used for outboard engines or portable bilge/fire pumps.

(b) Each integral fuel tank must be fitted with a vent pipe connected to the highest point of the tank terminating in a 180 degree (3.14 radians) bend on a weather deck and be fitted with a flame screen.

(c) Test cocks must not be fitted to fuel oil tanks.

(d) Valves for removing water or impurities from diesel fuel oil systems are permitted in the machinery space provided they are away from any potential sources of ignition. Such valves shall be fitted with caps or plugs to prevent leakage.

(e) Oil piping drains, strainers and other equipment subject to normal oil leakage must be fitted with drip pans

or other means to prevent oil draining into the bilge.

(f) All nonmetallic filters and strainers must be fitted with a metal shield attached to their base in such a way as to prevent direct flame impingement in the case of a fire.

(g) Shutoff valves shall be installed in the fuel supply piping lines, one as close to each tank as practicable, and one as close to each fuel pump as practicable. Valves shall be accessible at all times.

(h) Fuel oil piping subject to internal head pressure from diesel oil in a tank must be fitted with a positive shutoff valve, installed to close against the flow at the tank. This valve is to be capable of remote actuation from outside the space in which the tank/piping is located, accessible at all times, and suitably marked.

(i) With the exception of paragraph (j) and (k) of this section, fuel piping shall be steel pipe, annealed seamless copper, brass, nickel copper, or copper nickel alloy tubing having a minimum wall thickness of 0.9 millimeters (0.035 inches).

(j) Flexible connections of a short length (no more than 762mm, (30 inches)), suitable metallic or non-metallic flexible tubing or hose is permitted in the fuel supply line at or near the engine to prevent damage by vibration. If nonmetallic flexible hose is used it must:

(1) Not exceed the minimum length needed to allow for vibration;

(2) Be visible, easily accessible, and must not penetrate a watertight bulkhead;

(3) Be fabricated with an inner tube and outer-covering of synthetic rubber or other suitable material reinforced with wire braid;

(4) Be fitted with suitable, corrosion resistant, compression fittings; and

(5) Be installed with two hose clamps at each end of the hose, if designed for use with clamps. Clamps must not rely on spring tension and must be installed beyond the bead or flare or over the serrations of the mating spud, pipe, or hose fitting.

(k) Supply piping that conveys fuel oil or lubricating oil to equipment and is in close proximity of equipment or lines having an open flame or having

§ 28.840

parts operating above 260° C (500° F) must be of seamless steel.

(l) Existing fuel oil piping may remain in service as long as it is serviceable to the satisfaction of the Coast Guard Representative. Any replacement, alterations, modifications or new installations to the fuel oil piping system must be made in accordance with the material requirements of this section.

§ 28.840 Means for stopping pumps, ventilation, and machinery.

All electrically driven fuel oil transfer pumps, fuel oil unit and service pumps, and ventilation fans shall be fitted with remote controls from a readily accessible position outside of the space concerned so that they may be stopped in the event of fire occurring in the compartment in which they are located. These controls shall be suitably protected against accidental operation or tampering and shall be suitably marked.

§ 28.845 General requirements for electrical systems.

(a) Electrical equipment exposed to the weather or in a location exposed to seas must be waterproof or watertight, or enclosed in a watertight housing.

(b) Aluminum must not be used for current carrying parts of electrical equipment or wiring.

(c) As far as practicable, electrical equipment must not be installed in lockers used to store paint, oil, turpentine, or other flammable or combustible liquids. If electrical equipment, such as lighting, is necessary in these spaces, it must be explosion-proof or intrinsically safe.

(d) Explosion-proof and intrinsically safe equipment must meet the requirements of § 111.105 of this chapter.

(e) Metallic enclosures and frames of electrical equipment must be grounded.

§ 28.850 Main source of electrical power.

(a) Applicability: Each vessel that relies on electricity to power any of the following essential loads must have at least two electrical generators to supply:

- (1) The propulsion system and its necessary auxiliaries and controls;
 - (2) Interior lighting;
 - (3) Steering systems;
 - (4) Communication systems;
 - (5) Navigation equipment and navigation lights;
 - (6) Fire protection or detection equipment;
 - (7) Bilge pumps; and
 - (8) General alarm system.
- (b) Each generator must be attached to an independent prime mover.

§ 28.855 Electrical distribution systems.

(a) Each electrical distribution system which has a neutral bus or conductor must have the neutral bus or conductor grounded.

(b) A grounded electrical distribution system must have only one connection to ground. This ground connection must be at the switchboard.

§ 28.860 Overcurrent protection and switched circuits.

(a) Each power source must be protected against overcurrent. Overcurrent devices for generators must be set at a value not exceeding 115 percent of the generator's full load rating.

(b) Except for a steering circuit, each circuit must be protected against both overload and short circuit. Each overcurrent device in a steering system power and control circuit must provide protection only.

(c) Each ungrounded current carrying conductor must be protected in accordance with its current carrying capacity by a circuit breaker or fuse at the connection to the switchboard or distribution panel bus.

(d) Each circuit breaker and each switch must simultaneously open all ungrounded conductors.

(e) The grounded conductor of a circuit must not be disconnected by a switch or an overcurrent device unless all ungrounded conductors of the circuit are simultaneously disconnected.

(f) Navigation light circuits must be separate, switched circuits having fused disconnect switches or circuit breakers so that only the appropriate navigation lights can be switched on.

(g) A separate circuit with overcurrent protection at the main distribution panel or switchboard must be provided for each radio installation.

§ 28.865 Wiring methods and materials.

(a) All cable and wire must have insulated, stranded copper conductors of the appropriate size and voltage rating of the circuit.

(b) Each conductor must be No. 22 AWG or larger. Conductors in power and lighting circuits must be No. 14 AWG or larger. Conductors must be sized so that the voltage drop at the load terminals is not more than 10 percent.

(c) Cable and wiring not serving equipment in high risk fire areas such as a galley, laundry, or machinery space must be routed as far as practicable from these spaces. As far as practicable, cables serving duplicated essential equipment must be separated so that a casualty that affects one cable does not affect the other. Existing cables and wires may remain as routed; however, any replacement wiring, new cabling and/or alterations must be routed as specified above.

(d) No unused or dead ended cables may remain after the permanent removal or alteration of an electrical device.

(e) Cable and wire for power and lighting circuits must:

(1) For circuits of less than 50 volts, meet 33 CFR 183.425 and 183.430; and

(2) For circuits of 50 volts or greater:

(i) Meet section 310-13 and 310-15 of NFPA 70, except that asbestos insulated cable and dry location cable must not be used;

(ii) Be listed by Underwriters Laboratories Inc. as UL Marine Boat or UL Marine Shipboard cable; or

(iii) Meet §111.60 of this chapter.

(f) All metallic cable armor must be electrically continuous and grounded to the metal hull or the common ground point at each end of the cable run, except that final sub-circuits (those supplying loads) may be grounded at the supply end only.

(g) Wiring terminations and connections must be made in a fire retardant enclosure such as a junction box, fixture enclosure, or panel enclosure.

(h) Existing cable and wire may remain in place and continue in use as long as it is deemed serviceable to the satisfaction of the Coast Guard Representative. Any new installation, replacement, modification or alteration must be done in accordance with the requirements of this section.

§ 28.870 Emergency source of electrical power.

(a) The following electrical loads must be connected to an independent emergency source of power capable of supplying all connected loads continuously for at least three hours:

(1) Navigation lights;

(2) Fire protection and detection systems;

(3) Communications equipment;

(4) General alarm system; and

(5) Emergency lighting;

(b) The emergency power source must be aft of the collision bulkhead, outside of the machinery space, and above the uppermost continuous deck.

(c) An emergency source of power supplied solely by storage battery must also meet the following requirements:

(1) Each battery must be a lead-acid or alkaline type and be able to withstand vessel pitch, vibration, roll, and exposure to a salt water atmosphere;

(2) A battery cell must not spill electrolyte when the battery is inclined at 30 degrees from the vertical;

(3) Each battery installation must be in a battery room, in a box on dock, or in a well ventilated compartment. The batteries must be protected from falling objects;

(4) Each battery tray must be secured to prevent shifting with the roll and pitch of the vessel and lined with a material that is corrosion resistant to the electrolyte of the battery;

(5) Each battery bank installation must be fitted with its own drip-proof charging system; and

(6) Each deck box used for battery storage must be weathertight, and have holes near the top to allow gas to escape.

§ 28.875 Radar, depth sounding, and auto-pilot.

(a) Each vessel must be fitted with a general marine radar system for surface navigation with a radar screen

mounted at the operating station, and facilities on the bridge for plotting radar readings.

(b) Each vessel must be fitted with a suitable echo depth sounding device.

(c) Except as provided in 33 CFR §164.15, when the automatic pilot is used in areas of high traffic density, conditions of restricted visibility, and all other hazardous navigational situations, the master or person in charge shall ensure that:

(1) It is possible to immediately establish manual control of the unit's steering;

(2) A competent person is ready at all times to take over steering control; and

(3) The changeover from automatic to manual steering and vice versa is made by, or under the supervision of, the officer of the watch.

§ 28.880 Hydraulic equipment.

(a) Each hydraulic system must be so designed and installed that proper operation of the system is not affected by back pressure in the system.

(b) Piping and piping components must be designed with a burst pressure of not less than four times the system's maximum operating pressure.

(c) Each hydraulic system must be equipped with at least one pressure relieving device set to relieve at the system's maximum operating pressure.

(d) All material in a hydraulic system must be suitable for use with the hydraulic fluid used and must be of such chemical and physical properties as to remain ductile at the lowest operating temperature likely to be encountered by the vessel.

(e) Except for hydraulic steering equipment, controls for operating hydraulic equipment must be located where the operator has an unobstructed view of the controls for operating hydraulic equipment and the adjacent work area. Protection shall be afforded to the operator of hydraulic equipment against falling or swinging objects and/or cargo.

(f) Controls for hydraulic equipment must be so arranged that the operator is able to quickly disengage the equipment in an emergency.

(g) Hydraulically operated machinery must be fail-safe or equipped with a

holding device to prevent uncontrolled movement or sudden loss of control due to loss of hydraulic system pressure. A system is considered to be fail-safe if a component failure results in a slow and controlled release of the load so as not to endanger personnel.

(h) Nonmetallic flexible hose assemblies must only be used between two points of relative motion, limited to the least amount of length that will afford maximum multidirectional movement of the equipment served.

(i) Hose end fittings must comply with SAE J1475, (Hydraulic Hose Fittings For Marine Applications). Field attachable fittings must be installed following the manufacturer's recommended practice (method).

(j) Nonmetallic flexible hose shall be marked with the manufacturer's name or trademark, type or catalog number and maximum allowable working pressure.

(k) Existing hydraulic piping, non-metallic hose assemblies, and components may be continued in service so long as they are maintained in good condition to the satisfaction of the Coast Guard Representative, but all new installations, or replacements shall meet the applicable specifications or requirements of this section.

§ 28.885 Cargo gear.

(a) The safe working load (SWL) for the assembled gear shall be marked on the heel of each cargo boom, crane, or derrick. These letters and figures are to be in contrasting colors to the background and at least one inch in height. The SWL is construed to be the load the gear is approved to lift, excluding the weight of the gear itself.

(b) All wire rope, chains, rings, hooks, links, shackles, swivels, blocks, and any other loose gear used or intended to be used in cargo loading or unloading must be commensurable with the SWL rating in paragraph (a) of this section. This gear shall be visually inspected by the vessel's captain or his designee at frequent intervals, and in any event not less than once in each operating month.

(c) In addition to the inspection required in paragraph (b) of this section, a biennial, (every second year), thorough examination and proof load test,

Coast Guard, DOT

§ 28.905

at a minimum of the SWL rating, shall be performed and witnessed by competent personnel. The proof load applied to the winches, booms, derricks, cranes and all associated gear shall be lifted with the ship's normal tackle with the boom or derrick at the lowest practicable angle. When the load has been lifted, it shall be swung as far as possible in both directions.

(d) After satisfactory completion of the tests and examinations required in paragraphs (b) and (c) of this section, all results and notations together with the date and location of each shall be maintained and available to Coast Guard representatives upon request.

§ 28.890 Examination and certification of compliance.

(a) At least once in every two years each ATA vessel must be examined for compliance with the regulations of this subchapter by the ABS, a similarly qualified organization, or a surveyor of an accepted organization.

(b) Each individual performing an examination under paragraph (a) of this section, upon finding the vessel to be in compliance with the requirements of this chapter, must provide written certification of compliance to the owner or operator of the vessel.

(c) Each certification of compliance issued under paragraph (b) of this section must:

(1) Be signed by the individual that performed the examination;

(2) Include the name of the organization the individual performing the examination represents or the name of the accepted organization the individual belongs to; and

(3) State that the vessel has been examined and found to meet the specific requirements of this chapter.

(d) A certification of compliance issued under paragraph (b) of this section must be retained on board the vessel until superseded.

(e) A copy of the certification of compliance issued under paragraph (b) of

this section must be forwarded by the organization under whose authority the examination was performed to the Coast Guard District Commander (Attention: Fishing Vessel Safety Coordinator) in charge of the district in which the examination took place.

§ 28.895 Loadlines.

(a) A fish tender vessel of not more than 500 gross tons, engaged in the Aleutian trade, is not subject to the loadline provisions of 46 U.S.C. Chapter 51 if it is not on a foreign voyage and the vessel:

(1) Operated in this trade before September 8, 1990; or

(2) Was purchased to be used in this trade before September 8, 1990 and entered into service before June 1, 1992; and

(3) Has not undergone a major conversion; and

(4) Has not had a loadline assigned at any time before November 16, 1990.

(b) The exemption from the loadline provision of 46 U.S.C. Chapter 51 set forth in paragraph (a) of this section expires on January 1, 2003.

§ 28.900 Post accident inspection.

The requirements for providing notice and reporting of marine casualties are contained in part 4 of this chapter. The owner of or master of the vessel shall ensure that the survey guidance provided by a Coast Guard Representative is effectively carried out, that the material and the workmanship of such repairs or renewals are in all respects satisfactory, and that the vessel complies in all respects with the regulations in this part.

§ 28.905 Repairs and alterations.

No repairs or alterations affecting the safety of the vessel with regard to the hull, machinery, or equipment, shall be made without the notification of a Coast Guard Representative.

INDEX

SUBCHAPTER C—UNINSPECTED VESSELS

EDITORIAL NOTE: This listing is provided for informational purposes only. It is compiled and kept current by the U.S. Coast Guard, Department of Transportation.

Part, subpart, or section

A

Accidents, action required after	26.03-5
Alarms:	
General	28.240
High water	28.250
Anchors	28.235
Application of regulations	28.30, 28.100, 28.200, 28.300, 28.500, 28.700
Approved, definition	24.10-1
Approved equipment & material	28.70
Assignment of functions	24.01-5
Authority for regulations	28.10

B

Backfire flame control	25.35
Barge, definition	24.10-2
Bilge pumps	28.255
Boarding	26.15
Boiler inspection	24.20-1

C

Canadian pleasure craft temporarily using navigable waters of the United States	24.15-5
Carburetor backfire flame arrester (See Flame arrester)	25.35
Carrying freight for hire, definition	24.10-5
Carrying passengers for hire, definition	24.10-3
Coast Guard District Commander, definition	24.10-9
Commandant, definition	24.10-7
Communication equipment	28.245, 28.375
Compasses	28.230
Cushion, buoyant (see Life preserver)	

D

Deck rails	28.410
Definition of terms	24.10, 28.50
Depth-sounding device	28.400
Distress Signals	28.145
Drills and instruction	28.270

E

Electrical power:	
Distribution system	28.360

46 CFR Ch. I (10–1–00 Edition)

Emergency source	28.375
General requirements.....	28.350
Main source	28.355
Overcurrent protection	28.365
Standards for vessels less than 79 ft.	28.345
Wiring methods and materials	28.370
Electronic position fixing devices	28.260
Embarkation station.....	28.395
Emergency checkoff list	26.03-2
Emergency instructions	28.265
EPIRBs.....	25.26, 28.150
Equivalents.....	24.15
Escape, means of	28.390

F

Fire detection systems.....	28.325
Fines and penalties.....	26.10
Fireman's outfit.....	28.205
Fire protection equipment:	
Application	25.30-1
Galley hood	28.330
General provisions.....	25.30-5, 28.160
Excess equipment	28.155
Portable fire extinguishers	25.30-10, 28.160
Fire pumps	28.315
First aid equipment and training.....	28.210
Fixed fire extinguishing system:	
Approved type required.....	25.30-5
Details.....	25.30-15, 28.320
Special provisions when installed.....	25.30-20
Flame arrester:	
Required	25.35
Freight, carrying for hire, definition.....	24.10-5
Fuel systems	28.335

G

General alarm	28.240
Guards for exposed hazards	28.215

H

Hand portable fire extinguisher:	
Approved type required.....	25.30-5, 28.70
Classification.....	25.30-10
Number required	25.30-20, 28.160
Headquarters, definition.....	24.10-11
Hydraulic equipment.....	28.405

I

International voyage:	
Requirement for vessels on.....	24.05
Definition	24.10-13
Instructions and drills.....	28.270
Immersion suits	25.25, 28.110
Injury placard	28.165

Subchapter C Index

L

Lifelines	28.410
Life preserver:	
Approved type required	25.25-5, 28.105
Condition	25.25-11
Marking	25.25-7, 28.135
Number required	25.25-5, 28.110
Storage	25.25-9, 28.110(b)
Lifesaving equipment:	
General requirements	25.25, 28.105, 28.305
Maintenance	28.140
Markings	25.25, 28.135

M

Machinery space, ventilation of	25.40, 28.340
Marine engineering requirements	24.20-1
Marine inspector, definition	24.10-15
Motorboat:	
Definition	24.10-17
Included under term vessel	24.10-17
Motor vessel, definition	24.10-19

N

Navigation:	
Information	28.225

O

Oceanographic vessel, definition	24.10-20
Officer in Charge, Marine Inspection, definition	24.10-21
Operator's license, exhibition of	26.20

P

Passenger:	
Carrying for hire, definition	24.10-3
Definition	24.10-23

R

Radar equipment	28.400
Radar reflectors	28.235
Regulations:	
Authority for and purpose	24.01, 28.10
Ring Life Buoys	25.25-5(d), 28.115

S

Safety orientation	26.03-1, 28.270
Self contained breathing apparatus	28.205
Semiportable fire extinguishing system:	
Approved type required	25.30-5
Classification	25.30-10
Number required	25.30-20, 28.160
Signaling equipment	28.305
Signaling lights	26.03-10
Special operating requirements	26.03
Stability instructions	28.530

46 CFR Ch. I (10–1–00 Edition)

Storm rails	28.410
Structural fire protection:	
General	28.380
Vessels with more than 49 persons	28.385
Survival Craft Equipment	28.130
Launching	28.310
Stowage	28.125
Type and number required	28.120

T

Tank space, ventilation of	25.40-1, 28.340
----------------------------------	-----------------

V

Ventilation of tanks and engine space	25.40-1, 28.340
Vessel, definition	24.10-27
Vest, work	26.30
Approved unicellular plastic foam	26.30-1
Stowage	26.30-10
Use	26.30-5
Violations, procedures for	26.10-5

SUBCHAPTER D—TANK VESSELS

PART 30—GENERAL PROVISIONS

NOTE: Parts 151 through 157 in 33 CFR subchapter O contain additional design, equipment, and operations requirements relating to pollution prevention for vessels that carry oil.

Subpart 30.01—Administration

Sec.

- 30.01-1 Purpose of regulations.
- 30.01-2 OMB control numbers assigned pursuant to the Paperwork Reduction Act.
- 30.01-3 Incorporation by reference.
- 30.01-5 Application of regulations—TB/ALL.
- 30.01-6 Application to vessels on an international voyage.
- 30.01-7 Ocean or unlimited coastwise vessels on inland and Great Lakes Routes—TB/OC.
- 30.01-10 Application of regulations governing alterations or repairs—TB/ALL.
- 30.01-15 Effective date of regulations—TB/ALL.

Subpart 30.10—Definitions

- 30.10-1 Definition of terms—TB/ALL.
- 30.10-2 Accommodation space—TB/ALL.
- 30.10-2a Anniversary date—TB/ALL.
- 30.10-3 Approved—TB/ALL.
- 30.10-5 Cargo—TB/ALL.
- 30.10-5a Cargo area—TB/ALL.
- 30.10-5b Cargo control station—TB/ALL.
- 30.10-6 Cargo handling room—TB/ALL.
- 30.10-6a Category A machinery space—TB/ALL.
- 30.10-7 Certificated—TB/ALL.
- 30.10-9 Classification requirements—TB/ALL.
- 30.10-11 Coastwise—TB/C.
- 30.10-13 Cofferdam—TB/ALL.
- 30.10-14 Combination carrier—TB/ALL.
- 30.10-15 Combustible liquid—TB/ALL.
- 30.10-17 Commandant—TB/ALL.
- 30.10-19 Coast Guard District Commander—TB/ALL.
- 30.10-19a Control space—TB/ALL.
- 30.10-20 Deadweight or DWT—TB/ALL.
- 30.10-21 Flammable or inflammable—TB/ALL.
- 30.10-22 Flammable liquid—TB/ALL.
- 30.10-23 Flame arrester—TB/ALL.
- 30.10-25 Flame screen—TB/ALL.
- 30.10-27 Flashpoint—TB/ALL.
- 30.10-29 Gas free—TB/ALL.
- 30.10-31 General rules and regulations—TB/ALL.
- 30.10-33 Great Lakes—TB/L.
- 30.10-35 Headquarters—TB/ALL.
- 30.10-37 Keel laying date—TB/ALL.
- 30.10-38 Lightweight—TB/ALL.

- 30.10-39 Liquefied flammable gas—TB/ALL.
- 30.10-41 Lakes, bays, and sounds—TB/B.
- 30.10-42 Machinery space—TB/ALL.
- 30.10-43 Marine inspector or inspector—TB/ALL.
- 30.10-45 Ocean—TB/O.
- 30.10-47 Officer in Charge, Marine Inspection—TB/ALL.
- 30.10-48 Oil fuel—TB/ALL.
- 30.10-48a Oil fuel unit—TB/ALL.
- 30.10-49 Permit—TB/ALL.
- 30.10-50 Pilot boarding equipment and point of access.
- 30.10-55 Pressure vacuum relief valve—TB/ALL.
- 30.10-57 Recognized classification society—TB/ALL.
- 30.10-59 Reid vapor pressure—TB/ALL.
- 30.10-61 Rivers—TB/R.
- 30.10-62 Self-propelled tank vessel—TB/ALL.
- 30.10-62a Service spaces—TB/ALL.
- 30.10-63 Spark arrester—TB/ALL.
- 30.10-65 Tank barge—B/ALL.
- 30.10-67 Tankship—T/ALL.
- 30.10-69 Tank vessel—TB/ALL.
- 30.10-71 Tankerman—TB/ALL.

Subpart 30.15—Equivalents

- 30.15-1 Conditions under which equivalents may be used—TB/ALL.

Subpart 30.25—Commodities Regulated

- 30.25-1 Cargoes carried in vessels certificated under the rules of this subchapter.
- 30.25-3 Benzene.

Subpart 30.30—Interim Procedures for Evaluating Vessel Personnel Licensing and Certification Programs of Foreign Countries

- 30.30-1 Scope and purpose.
- 30.30-3 Evaluation materials.
- 30.30-5 Submission of evaluation materials.
- 30.30-7 Availability of materials.
- 30.30-9 Evaluation.
- 30.30-11 Determinations.

AUTHORITY: 46 U.S.C. 2103, 3306, 3307, 3703; 49 U.S.C. 5103, 5106; 49 CFR 1.45, 1.46; Section 30.01-2 also issued under the authority of 44 U.S.C. 3507; Section 30.01-5 also issued under the authority of Sec. 4109, Pub. L. 101-380, 104 Stat. 515.

SOURCE: CGFR 65-50, 30 FR 16657, Dec. 30, 1965, unless otherwise noted.

Subpart 30.01—Administration

§ 30.01-1 Purpose of regulations.

(a) The rules and regulations in this subchapter are prescribed for all tank vessels in accordance with the intent of the various statutes administered by the Coast Guard and to provide for a correct and uniform administration of the vessel inspection requirements applicable to tank vessels.

[CGFR 68-32, 33 FR 5712, Apr. 12, 1968]

§ 30.01-2 OMB control numbers assigned pursuant to the Paperwork Reduction Act.

(a) *Purpose.* This section collects and displays the control numbers assigned to information collection and record-keeping requirements in this subchapter by the Office of Management and Budget (OMB) pursuant to the Paperwork Reduction Act of 1980 (44 U.S.C. 3501 *et seq.*). The Coast Guard intends that this section comply with the requirements of 44 U.S.C. 3507(f) which requires that agencies display a current control number assigned by the Director of the OMB for each approved agency information collection requirement.

(b) *Display.*

46 CFR part or section where identified or described	Current OMB control No.
§ 31.10-5(a)	2115-0131
§ 31.10-21	2115-0554
§ 31.10-22	2115-0554
§ 31.10-32	2115-0131
§ 31.10-33	2115-0131
§ 31.37-15	2115-0131
§ 31.40-35	2115-0131
§ 32.53-85	2115-0505
§ 35.20-7	2115-0589
§ 35.35-30	2115-0506
§ 39.10-13	2115-0505

[49 FR 38120, Sept. 27, 1984, as amended by CGD 89-037, 57 FR 41821, Sept. 11, 1992]

§ 30.01-3 Incorporation by reference.

(a) Certain material is incorporated by reference into this part with the approval of the Director of the Federal Register under 5 U.S.C. 552(a) and 1 CFR part 51. To enforce any edition other than that specified in paragraph (b) of this section, the Coast Guard must publish notice of change in the FEDERAL REGISTER; and the material

must be available to the public. All approved material is available for inspection at the Office of the Federal Register, 800 North Capitol Street, NW., suite 700, Washington, DC, and at the U.S. Coast Guard Office of Design and Engineering Standards (G-MSE), 2100 Second Street SW., Washington, DC 20593-0001, and is available from the sources indicated in paragraph (b) of this section.

(b) The material approved for incorporation by reference in this part, and the sections affected are as follows:

American Society for Testing and Materials (ASTM)

100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

ASTM D 323-94, Standard Test Method for Vapor Pressure of Petroleum Products (Reid Method)—30.10-22; 30.10-59

[USCG-1999-5151, 64 FR 67177, Dec. 1, 1999]

§ 30.01-5 Application of regulations—TB/ALL.

NOTE: 33 CFR subchapter O (parts 151 through 157) contains additional design, equipment, and operations requirements relating to pollution prevention for vessels that carry oil.

(a) The regulations in this subchapter contain requirements for materials, design, construction, inspection, manning, and operation of tank vessels, including handling and stowage of cargo and duties of officers and crew. However, vessels certificated as passenger, cargo, and miscellaneous vessels, whose principal purpose or use is not the carriage of flammable or combustible liquid cargo in bulk, may be granted a permit to carry limited quantities of flammable or combustible liquid cargo in bulk in the grades indicated:

(1) Passenger vessels:

(i) Grade E in an integral tank; and

(ii) Grade E in a portable tank, including a marine portable tank (MPT), in accordance with subpart 98.30 or 98.33 of this chapter.

(2) Cargo vessels:

(i) Grades D and E in an integral tank; and

(ii) Grades D and E and certain specifically named Grade C in a portable

Coast Guard, DOT

§ 30.01-5

tank, including an MPT, in accordance with subpart 98.30 or 98.33 of this chapter.

(3) Miscellaneous vessels, such as cable, salvage, pile-driving and oil-drilling-rig vessels:

(i) Grades B, C, D, and E in a fixed independent or integral tank authorized by the Commandant; and

(ii) Grades D and E and certain specifically named Grade C in a portable tank, including an MPT, in accordance with subpart 98.30 or 98.33 of this chapter.

(b) [Reserved]

(c) The vessels and services to which each regulation applies are indicated by letters in the heading of the section or paragraph. The first letter or two letters indicate the type of vessel and the letter or letters following the oblique line indicate the waters in which such vessels may operate. These letters are described as follows:

(1) "T" signifies a tankship.

(2) "B" signifies a tank barge when it precedes an oblique line; or it signifies

service on bays, sounds, and lakes other than the Great Lakes when it follows an oblique line.

(3) "ALL" signifies service on all waters.

(4) "O" signifies service on ocean waters.

(5) "C" signifies services on coastwise waters.

(6) "L" signifies service on Great Lakes waters.

(7) "R" signifies service on river waters.

(d) This subchapter shall be applicable to all United States flag vessels indicated in Column 3 of Table 30.01-5(d), except as follows:

(1) Any vessel operating exclusively on inland waters which are not navigable waters of the United States.

(2) Any vessel while laid up and dismantled and out of commission.

(3) With the exception of vessels of the U.S. Maritime Administration, any vessel with title vested in the United States and which is used for public purposes.

TABLE 30.01–5(D)

Method of propulsion	Classes of vessels (including motorboats) examined or inspected under various Coast Guard regulations ¹					
	Size or other limitations ¹	Vessels inspected and certificated under subchapter D—Tank Vessels ²	Vessels inspected and certificated under either subchapter H—Passenger Vessels ^{2,3,4,5} or subchapter T—Small Passenger Vessels ^{2,3,4}	Vessels inspected and certificated under subchapter I—Cargo and Miscellaneous Vessels ^{2,5}	Vessels subject to provisions of subchapter C—Uninspected Vessels ^{2,6,7,8}	Vessels subject to provisions of subchapter U—Oceanographic Vessels ^{2,6,7,8}
Column 1	Column 2	Column 3	Column 4	Column 5	Column 6	Column 7
Steam	Vessels not over 65 feet in length.	All vessels carrying combustible or flammable liquid cargo in bulk.	All vessels carrying more than 6 passengers. ⁷	All tugboats and towboats.	All vessels except those covered by columns 3, 4, 5, and 7.	None
	Vessels over 65 feet in length.	All vessels carrying combustible or flammable liquid cargo in bulk.	1. All vessels carrying more than 12 passengers on an international voyage, except yachts. 2. All vessels of not over 15 gross tons which carry more than 6 passengers. ⁷ 3. All other vessels carrying passengers, ⁷ except: a. Yachts. b. Documented cargo or tank vessels issued a permit to carry not more than 16 persons in addition to the crew.	All vessels except those covered by columns 3 and 4.	None	All vessels engaged in oceanographic research.
						Do.

Vessels subject to the provisions of subchapter O—Certain Bulk Dangerous Cargoes¹⁰

Column 8

All vessels carrying in bulk the cargoes listed in Table I of Pt. 153 and Table 4 of Pt. 154.

Motor									
	c. Towing and fishing vessels, in other than ocean and coastwise service, may carry persons on the legitimate business of the vessel, in addition to crew, but not to exceed one for each net ton of the vessel.								
Vessels not over 15 gross tons.	All vessels carrying combustible or flammable liquid cargo in bulk.	All vessels carrying more than 6 passengers. ⁷	Those vessels carrying dangerous cargoes when required by 46 CFR part 98 or 49 CFR parts 171-179.	All vessels except those covered by columns 3, 4, 5, and 7.	None	Do.			
Vessels over 15 gross tons except seagoing motor vessels of 300 gross tons and over.	All vessels carrying combustible or flammable liquid cargo in bulk. ⁵	1. All vessels carrying more than 12 passengers on an international voyage, except yachts. 2. All vessels not over 65 feet in length which carry more than 6 passengers. ⁷ 3. All other vessels of over 65 feet in length carrying passengers for hire except documented cargo or tank vessels issued a permit to carry not more than 16 persons in addition to the crew.	All vessels carrying freight for hire except those covered by columns 3 and 4.	All vessels except those covered by columns 3, 4, 5, and 7.	None	All vessels carrying in bulk the cargoes listed in Table I of Pt. 153 and Table 4 of Pt. 154.			

TABLE 30.01–5(D)—Continued

Method of propulsion	Size or other limitations ¹	Classes of vessels (including motorboats) examined or inspected under various Coast Guard regulations ¹					
		Vessels inspected and certificated under either subchapter H—Passenger Vessels ^{2,3,4,5} or subchapter T—Small Passenger Vessels ^{2,3,4}	Vessels inspected and certificated under subchapter I—Cargo and Miscellaneous Vessels ^{2,5}	Vessels subject to provisions of subchapter C—Uninspected Vessels ^{2,3,6,7,8}	Vessels subject to provisions of subchapter U—Oceanographic Vessels ^{2,5,6,7,9}	Vessels subject to the provisions of subchapter O—Certain Bulk Dangerous Cargoes ¹⁰	
Column 1	Column 2	Column 3	Column 4	Column 5	Column 6	Column 7	Column 8
	Seagoing motor vessels of 300 gross tons and over.	All vessels carrying combustible or flammable liquid cargo in bulk. ⁵	1. All vessels carrying more than 12 passengers on an international voyage, except yachts. 2. All other vessels carrying passengers, ⁷ except: a. Yachts. b. Documented cargo or tank vessels issued a permit to carry not more than 16 persons in addition to the crew.	All vessels except those covered by columns 3 and 4, and those engaged in the fishing, oystering, clamming, crabbing, or any other branch of the fishery, kelp, or sponge industry.	All vessels except those covered by columns 3, 4, 5, and 7.	All vessels engaged in oceanographic research.	Do.

Sail	Vessels not over 700 gross tons.	All vessels carrying combustible or flammable liquid cargo in bulk.	All vessels carrying more than 6 passengers. ⁷	Those vessels carrying dangerous cargoes when required by 46 CFR part 98 or 49 CFR parts 171-179.	None	None	Do.
	Vessels over 700 gross tons.	All vessels carrying combustible or flammable liquid cargo in bulk.	All vessels carrying passengers for hire.	Those vessels carrying dangerous cargoes when required by 46 CFR part 98 or 146.	None	None	Do.
Non-self-propelled	Vessels less than 100 gross tons.	All vessels carrying combustible or liquid cargo in bulk.	Those vessels carrying dangerous cargoes when required by 49 CFR parts 171-179.	Those vessels carrying dangerous cargoes when required by 46 CFR part 98 or 49 CFR parts 171-179.	All barges carrying passengers except those covered by column 4.	None	All tank barges carrying in bulk the cargoes listed in Table 151.05 of this chapter. ¹¹
	Vessels 100 gross tons or over.	All vessels carrying combustible or flammable liquid cargo in bulk.	All seagoing barges except those covered by columns 3 and 4; and those inland barges carrying dangerous cargoes when required by 49 CFR parts 171-179.	All seagoing barges except those covered by columns 3 and 4; and those inland barges carrying dangerous cargoes when required by 46 CFR part 98 or 49 CFR parts 171-179.	All barges carrying passengers except columns 4 and 7.	All seagoing barges engaged in oceanographic research.	All vessels carrying in bulk the cargoes listed in Table I of Pt. 153 and Table 4 of Pt. 154.

¹ Where length is used in this table it means the length measured from end to end over the deck, excluding sheer. This expression means a straight line measurement of the overall length from the foremost part of the vessel to the aftermost part of the vessel, measured parallel to the centerline.

² Subchapters E (Load Lines), F (Marine Engineering), J (Electrical Engineering), and N (Dangerous Cargoes) of this chapter may also be applicable under certain conditions. The provisions of 49 CFR parts 171-179 apply whenever hazardous materials are on board vessels (including motorboats), except when specifically exempted by law.

³ Public nautical schools, other than vessels of the Navy and Coast Guard, shall meet the requirements of part 167 of subchapter R (Nautical Schools) of this chapter. Civilian nautical schools, as defined by 46 U.S.C. 1331, shall meet the requirements of subchapter H (Passenger Vessels) and part 168 of subchapter R (Nautical Schools) of this chapter.

⁴ Subchapter H (Passenger Vessels) of this chapter covers only those vessels of 100 gross tons or more. Subchapter T (Small Passenger Vessels) of this chapter covers only those vessels of less than 100 gross tons.

⁵ Vessels covered by subchapter H (Passenger Vessels) or I (Cargo and Miscellaneous Vessels) of this chapter, where the principal purpose or use of the vessel is not for the carriage of liquid cargo, may be granted a permit to carry a limited amount of flammable or combustible liquid cargo in bulk. The portion of the vessel used for the carriage of the flammable or combustible liquid cargo shall meet the requirements of subchapter D (Tank Vessels) in addition to the requirements of subchapter H (Passenger Vessels) or I (Cargo and Miscellaneous Vessels) of this chapter.

⁶ Any vessel on an international voyage is subject to the requirements of the International Convention for Safety of Life at Sea, 1974.

⁷ The meaning of the term *passenger* is as defined in the Act of May 10, 1956 (Sec. 1, 70 Stat. 151; 46 U.S.C. 390). On oceanographic vessels scientific personnel on board shall not be deemed to be passengers or seamen, but for calculations of lifesaving equipment, etc., shall be counted as persons.

⁸ Boilers and machinery are subject to examination on vessels over 40 feet in length.

⁹ Under 46 U.S.C. 441 an *oceanographic research vessel* is a vessel " * * * being employed exclusively in instruction in oceanography or limnology, or both, or exclusively in oceanographic research, * * *". Under 46 U.S.C. 443, "an oceanographic research vessel shall not be deemed to be engaged in trade or commerce," if or when an oceanographic vessel engages in trade or commerce, such vessel cannot operate under its certificate of inspection as an oceanographic vessel, but shall be inspected and certificated for the service in which engaged, and the scientific personnel aboard then become persons employed in the business of the vessel.

¹⁰ Bulk dangerous cargoes are cargoes specified in Table 151.01-10(b) in Table 1 of part 153 of this chapter.

¹¹ For manned tank barges see § 151.01-10(e) of this chapter.

§ 30.01-6

(e) This subchapter shall be applicable to all foreign flag vessels carrying combustible or flammable liquid cargo in bulk while in the navigable waters over which the United States has jurisdiction, except that:

(1) A vessel of a foreign nation signatory to the International Convention for Safety of Life at Sea, 1974, which has on board a current valid Safety Equipment Certificate, or a vessel of a foreign nation having inspection laws approximating those of the United States, together with reciprocal inspection arrangements with the United States and which has on board a current valid certificate of inspection issued by its government under such arrangements, in either case, shall be subject only to the requirements of § 35.01-1 and the safety and cargo handling requirements in subparts 35.30 and 35.35 of this subchapter. In addition, these vessels shall report marine casualties occurring while they are in the navigable waters of the United States as required by subpart 35.15.

(2) A foreign flag vessel, except a public vessel, which operates on or enters the navigable waters of the United States, or which transfers oil in any port or place subject to the jurisdiction of the United States, must comply with the provisions of § 31.10-21a and subparts 32.53, 32.59 and 34.05 of this chapter, as applicable.

(f) Notwithstanding the exceptions previously noted in paragraph (e) of this section, foreign vessels of novel design or construction, or whose operation involves potential unusual risks, shall be subject to inspection to the extent necessary to safeguard life and property in United States ports, as further provided by § 2.01-13 of subchapter A (Procedures applicable to the Public) of this chapter.

(g) Manned barges carrying any of the cargoes listed in Table 30.25-1 will be considered individually by the Commandant and may be required to comply with the requirements of subchapter O of this chapter, as applicable, as well as the requirements of this subchapter.

(h) Subpart 30.30 contains procedures for evaluating vessel personnel licensing and certification programs of foreign countries which license or certifi-

46 CFR Ch. I (10-1-00 Edition)

cate personnel serving on tank vessels that enter or operate in U.S. navigable waters and ports.

EDITORIAL NOTE: For Federal Register citations affecting § 30.01-5, see the List of CFR Sections Affected in the Finding Aids section of this volume.

§ 30.01-6 Application to vessels on an international voyage.

(a) Except as provided in paragraphs (b), (c), and (d) of this section, the regulations in this subchapter that apply to a vessel on an *international voyage* apply to a vessel that:

(1) Is mechanically propelled and of at least 500 gross tons; and

(2) Is engaged on a voyage:

(i) From a country to which the International Convention for Safety of Life at Sea, 1974 (SOLAS 74) applies, to a port outside that country or the reverse;

(ii) From any territory, including the Commonwealth of Puerto Rico, all possessions of the United States, and all lands held by the United States under a protectorate or mandate, whose international relations are the responsibility of a contracting SOLAS 74 government, or which is administered by the United Nations, to a port outside that territory or the reverse; or

(b) The regulations that apply to a vessel on an *international voyage* in this subchapter do not apply to ships engaged on a voyage solely on the Great Lakes and the St. Lawrence River as far east as a straight line drawn from Cap des Rosiers to West Point, Anticosti Island and, on the north side of Anticosti Island, the 63rd Meridian;

(c) The Commandant or his authorized representative may exempt any vessel on an international voyage from the requirements of this subchapter if the vessel:

(1) Makes a single international voyage in exceptional circumstances; and

(2) Meets safety requirements prescribed for the voyage by the Commandant.

(d) The Commandant or his authorized representative may exempt any vessel from the construction requirements of this subchapter if the vessel does not proceed more than 20 nautical

Coast Guard, DOT

§ 30.10-5b

miles from the nearest land in the course of its voyage.

[CGD 72-131R, 38 FR 29320, Oct. 24, 1973, as amended by CGD 80-123, 45 FR 64586, Sept. 30, 1980; CGD 90-008, 55 FR 30660, July 26, 1990; CGD 84-069, 61 FR 25286, May 20, 1996]

§ 30.01-7 Ocean or unlimited coastwise vessels on inland and Great Lakes Routes—TB/OC.

(a) Vessels inspected and certificated for ocean or unlimited coastwise routes shall be considered suitable for navigation insofar as the provisions of this subchapter are concerned on any inland route, including the Great Lakes.

§ 30.01-10 Application of regulations governing alterations or repairs—TB/ALL.

When major alterations or major repairs of tank vessels become necessary the work shall be done under the direction of the Officer in Charge, Marine Inspection, and shall be in accordance with the regulations in effect for new construction insofar as possible. When minor alterations or minor repairs of tank vessels become necessary such work shall be under the direction of the Officer in Charge, Marine Inspection, and shall be in accordance with the regulations in effect at the time the vessel was contracted for or built, or in accordance with the regulations in effect for new construction insofar as possible.

§ 30.01-15 Effective date of regulations—TB/ALL.

The regulations in this subchapter are not retroactive in effect unless specifically made so at the time the regulations are issued. Changes in specification requirements of articles of equipment, or materials used in construction of tank vessels, shall not apply to such items which have been passed as satisfactory until replacement shall become necessary, unless a specific finding is made that such equipment or material used is unsafe or hazardous and has to be removed from tank vessels.

[CGFR 65-50, 30 FR 16657, Dec. 30, 1997, as amended by CGD 95-028, 62 FR 51197, Sept. 30, 1997]

Subpart 30.10—Definitions

§ 30.10-1 Definition of terms—TB/ALL.

Certain terms used in the regulations in this subchapter are defined in this subpart.

§ 30.10-2 Accommodation space—TB/ALL.

The term *accommodation space* means any public space such as a hall, dining room, mess room, lounge, corridor, lavatory, cabin, office, hospital, cinema, game and hobby room, pantry that contains no cooking appliances, and a similar space open to the passengers and crew.

[CGD 74-127, 41 FR 3842, Jan. 26, 1976]

§ 30.10-2a Anniversary date—TB/ALL.

The term *anniversary date* means the day and the month of each year, which corresponds to the date of expiration of the Certificate of Inspection.

[USCG-1999-4976, 65 FR 6499, Feb. 9, 2000]

§ 30.10-3 Approved—TB/ALL.

The term *approved* means approved by the Commandant unless otherwise stated.

§ 30.10-5 Cargo—TB/ALL.

The term *cargo* means combustible liquid, flammable liquid, or liquefied flammable gas unless otherwise stated.

§ 30.10-5a Cargo area—TB/ALL.

The term *cargo area* means that part of a vessel that includes the cargo tanks and other tanks into which cargo or cargo vapors are intentionally introduced, holds containing these tanks, all intervening space within, between, below, or outboard of these tanks or holds, and the deck area over the length and beam of the vessel above these tanks, holds, or spaces.

[CGD 74-127, 41 FR 3842, Jan. 26, 1976]

§ 30.10-5b Cargo control station—TB/ALL.

The term *cargo control station* means a location that is manned during cargo transfer operations for the purpose of directing or controlling the loading or unloading of cargo.

[CGD 74-127, 41 FR 3842, Jan. 26, 1976]

§ 30.10-6

§ 30.10-6 Cargo handling room—TB/ALL.

The term *cargo handling room* means any enclosed space where cargo is pumped, compressed, or processed. Examples of *cargo handling rooms* are pump rooms, compressor rooms, and cargo valve rooms.

[CGFR 68-65, 33 FR 19983, Dec. 28, 1968]

§ 30.10-6a Category A machinery space—TB/ALL.

The term *Category A machinery space* means any space and trunks and ducts to such a space that contains:

- (a) Internal combustion machinery used for main propulsion;
- (b) Internal combustion machinery used for purposes other than main propulsion where the total aggregate power is at least 500 brake horsepower;
- (c) Internal combustion machinery that uses a fuel that has a flash point of less than 43.3°C (110°F); or
- (d) One or more oil fired boilers or oil fuel units.

[CGD 74-127, 41 FR 3842, Jan. 26, 1976]

§ 30.10-7 Certificated—TB/ALL.

The term *certificated* when applied to tank vessels refers to a vessel covered by a certificate of inspection issued by the Coast Guard; when applied to men employed on tank vessels, the term refers to a certificate of ability issued by the Coast Guard.

§ 30.10-9 Classification requirements—TB/ALL.

The term *classification requirements* means applicable rules and supplementary requirements of the American Bureau of Shipping, or other recognized classification society.

§ 30.10-11 Coastwise—TB/C.

Under this designation shall be included all tank vessels normally navigating the waters of any ocean or the Gulf of Mexico 20 nautical miles or less offshore.

§ 30.10-13 Cofferdam—TB/ALL.

The term *cofferdam* means a void or empty space separating two or more compartments for the purpose of isolation or to prevent the contents of one compartment from entering another in

the event of the failure of the walls of one to retain their tightness.

§ 30.10-14 Combination carrier—TB/ALL.

The term *combination carrier* means a tank vessel designed to carry alternatively liquid and solid cargoes in bulk.

[CGD 74-127, 41 FR 3843, Jan. 26, 1976]

§ 30.10-15 Combustible liquid—TB/ALL.

The term *combustible liquid* means any liquid having a flashpoint above 80° F. (as determined from an open-cup tester, as used for test of burning oils). In the regulations of this subchapter, combustible liquids are referred to by grades, as follows:

- (a) *Grade D.* Any combustible liquid having a flashpoint below 150° F. and above 80° F.
- (b) *Grade E.* Any combustible liquid having a flashpoint of 150° F. or above.

[CGFR 65-50, 30 FR 16657, Dec. 30, 1965, as amended by CGD 73-96, 42 FR 49023, Sept. 26, 1977]

§ 30.10-17 Commandant—TB/ALL.

The term *Commandant* means the Commandant of the Coast Guard.

§ 30.10-19 Coast Guard District Commander—TB/ALL.

The term *Coast Guard District Commander* means an officer of the Coast Guard designated as such by the Commandant to command all Coast Guard activities within his district which include the enforcement and administration of Subtitle II, Title 46, U.S. Code, Title 46 and Title 33, U.S. Code, and regulations issued under these statutes.

[CGFR 65-50, 30 FR 16657, Dec. 30, 1965, as amended by CGD 95-028, 62 FR 51197, Sept. 30, 1997]

§ 30.10-19a Control space—TB/ALL.

The term *control space* means an enclosed space in which is located a ship's radio, main navigating equipment, or emergency source of power or in which is located centralized fire recording or fire control equipment, but not including firefighting apparatus that must be

located in the cargo area or individual pieces of firefighting equipment.

[CGD 74-127, 41 FR 3843, Jan. 26, 1976]

§ 30.10-20 Deadweight or DWT—TB/ALL.

The term *deadweight* or *DWT* means the difference in metric tons between the lightweight displacement and the total displacement of a vessel measured in water of specific gravity 1.025 at the load waterline corresponding to the summer freeboard assigned according to 46 CFR, subchapter E.

[CGD 74-127, 41 FR 3843, Jan. 26, 1976]

§ 30.10-21 Flammable or inflammable—TB/ALL.

The words *flammable* and *inflammable* are interchangeable or synonymous terms for the purpose of the regulations in this subchapter.

§ 30.10-22 Flammable liquid—TB/ALL.

The term *flammable liquid* means any liquid which gives off flammable vapors (as determined by flashpoint from an open-cup tester, as used for test of burning oils) at or below a temperature of 80° F. Flammable liquids are referred to by grades as follows:

(a) *Grade A.* Any flammable liquid having a Reid¹ vapor pressure of 14 pounds or more.

(b) *Grade B.* Any flammable liquid having a Reid¹ vapor pressure under 14 pounds and over 8½ pounds.

(c) *Grade C.* Any flammable liquid having a Reid¹ vapor pressure of 8½ pounds or less and a flashpoint of 80° F. or below.

[CGFR 65-50, 30 FR 16657, Dec. 30, 1965, as amended by CGD 73-96, 42 FR 49023, Sept. 26, 1977; USCG-2000-7790, 65 FR 58458, Sept. 29, 2000]

§ 30.10-23 Flame arrester—TB/ALL.

The term *flame arrester* means any device or assembly of a cellular, tubular, pressure, or other type used for preventing the passage of flames into enclosed spaces.

¹ American Society for Testing Materials Standard D 323 (incorporated by reference, see § 30.01-3), Method of Test for Vapor Pressure of Petroleum Products (Reid Method).

§ 30.10-25 Flame screen—TB/ALL.

The term *flame screen* means a fitted single screen of corrosion-resistant wire of at least 30 by 30 mesh, or two fitted screens, both of corrosion-resistant wire, of at least 20 by 20 mesh, spaced not less than ½ inch or more than 1½ inches apart.

§ 30.10-27 Flashpoint—TB/ALL.

The term *flashpoint* indicates the temperature in degrees Fahrenheit at which a liquid gives off a flammable vapor when heated in an open-cup tester. For the purpose of the regulations in this subchapter, flashpoints determined by other testing methods will be equivalent to those determined with an open-cup tester, as follows:

TABLE 30.10-27—EQUIVALENT FLASHPOINTS
[In degrees Fahrenheit]

Open-cup tester	Tag closed-cup tester (A.S.T.M.)	Pensky-Martens closed tester (A.S.T.M.)
80	75
150	140

§ 30.10-29 Gas free—TB/ALL.

The term *gas free* means free from dangerous concentrations of flammable or toxic gases.

§ 30.10-31 General rules and regulations—TB/ALL.

The term *general rules and regulations* means the requirements contained in this chapter.

§ 30.10-33 Great Lakes—TB/L.

Under this designation shall be included all tank vessels navigating the Great Lakes.

§ 30.10-35 Headquarters—TB/ALL.

The term *Headquarters* means the Office of the Commandant, U.S. Coast Guard, Washington, DC 20593-0001.

[CGFR 65-50, 30 FR 16657, Dec. 30, 1965, as amended by CGFR 68-32, 33 FR 5712, Apr. 12, 1968; CGD 88-070, 53 FR 34533, Sept. 7, 1988]

§ 30.10-37 Keel laying date—TB/ALL.

The term *keel laying date* means the date upon which progressive construction identifiable with a specific vessel

§ 30.10-38

begins, including construction of the first module or prefabricated section of the hull that is identifiable with that vessel.

[CGD 74-127, 41 FR 3843, Jan. 26, 1976]

§ 30.10-38 Lightweight—TB/ALL.

The term *lightweight* means the displacement of a vessel in metric tons without cargo, oil fuel, lubricating oil, ballast water, fresh water, feedwater in tanks, consumable stores, and persons and their effects.

[CGD 74-127, 41 FR 3843, Jan. 26, 1976]

§ 30.10-39 Liquefied flammable gas—TB/ALL.

The term *liquefied flammable gas* means any flammable gas having a Reid vapor pressure exceeding 40 pounds, which has been liquefied.

[CGFR 66-33, 31 FR 15267, Dec. 6, 1966]

§ 30.10-41 Lakes, bays, and sounds—TB/B.

Under this designation shall be included all tank vessels navigating the waters of any of the lakes, bays, or sounds other than the waters of the Great Lakes.

§ 30.10-42 Machinery space—TB/ALL.

The term *machinery space* means any space that contains machinery and related equipment including Category A machinery spaces, propelling machinery, boilers, oil fuel units, steam and internal combustion engines, generators and centralized electrical machinery, oil filling stations, refrigeration, stabilizing, ventilation, and air conditioning machinery, and similar spaces and trunks to such spaces.

[CGD 74-127, 41 FR 3843, Jan. 26, 1976]

§ 30.10-43 Marine inspector or inspector—TB/ALL.

The terms *marine inspector* or *inspector* mean any person from the civilian or military branch of the Coast Guard assigned under the superintendence and direction of an Officer in Charge, Marine Inspection, or any other person as may be designated for the performance of duties with respect to the enforcement and administration of Subtitle II, Title 46, U.S. Code, Title 46 and

46 CFR Ch. I (10-1-00 Edition)

Title 33, U.S. Code, and regulations issued under these statutes.

[CGFR 65-50, 30 FR 16657, Dec. 30, 1965, as amended by CGD 95-028, 62 FR 11597, Sept. 30, 1997; USCG-1998-4442, 63 FR 52190, Sept. 30, 1998]

§ 30.10-45 Ocean—TB/O.

Under this designation shall be included all tank vessels normally navigating the waters of any ocean or the Gulf of Mexico more than 20 nautical miles offshore.

§ 30.10-47 Officer in Charge, Marine Inspection—TB/ALL.

The term *Officer in Charge, Marine Inspection*, means any person from the civilian or military branch of the Coast Guard designated as such by the Commandant and who under the superintendence and direction of the Coast Guard District Commander is in charge of an inspection zone for the performance of duties with respect to the enforcement and administration of Subtitle II, Title 46, U.S. Code, Title 46 and Title 33, U.S. Code, and regulations issued under these statutes.

[CGFR 65-50, 30 FR 16657, Dec. 30, 1965, as amended by CGD 95-028, 62 FR 51197, Sept. 30, 1997]

§ 30.10-48 Oil fuel—TB/ALL.

The term *oil fuel* means oil used as fuel for machinery in the vessel in which it is carried.

[CGD 74-127, 41 FR 3843, Jan. 26, 1976]

§ 30.10-48a Oil fuel unit—TB/ALL.

The term *oil fuel unit* means the equipment used for the preparation of oil fuel for delivery to an oil fired boiler, the equipment used for the preparation of heated oil fuel for delivery to an internal combustion engine, and any oil fuel pressure pump, filter, and heater that deals with oil at a pressure of more than 1.8 kilograms per square centimeter (25 p.s.i.) gauge.

[CGD 74-127, 41 FR 3843, Jan. 26, 1976]

§ 30.10-49 Permit—TB/ALL.

The term *permit* refers to endorsement on the certificate of inspection, authorizing the presence on board of liquid flammable or combustible cargoes in bulk, issued by an Officer in

Coast Guard, DOT

§ 30.10-69

Charge, Marine Inspection, for a tank vessel which is found to be in substantial compliance with the regulations in this subchapter.

§ 30.10-50 Pilot boarding equipment and point of access.

(a) *Pilot boarding equipment* means a pilot ladder, accommodation ladder, pilot hoist, or combination of them as required by this subchapter.

(b) *Point of access* means the place on deck of a vessel where a person steps onto or off of pilot boarding equipment.

[CGD 79-032, 49 FR 25455, June 21, 1984]

§ 30.10-55 Pressure vacuum relief valve—TB/ALL.

The term *pressure vacuum relief valve* means any device or assembly of a mechanical, liquid, weight, or other type used for the automatic regulation of pressure or vacuum in enclosed places.

§ 30.10-57 Recognized classification society—TB/ALL.

The term *recognized classification society* means the American Bureau of Shipping or other classification society recognized by the Commandant.

§ 30.10-59 Reid vapor pressure—TB/ALL.

The term *Reid vapor pressure* means the vapor pressure of a liquid at a temperature of 100° F., expressed in pounds per square inch absolute, as determined by the *Reid Method* as described in the American Society for Testing Materials Standard D 323 (incorporated by reference, see § 30.01-3), Method of Test for Vapor Pressure of Petroleum Products. This Standard is available at Headquarters for reading purposes or it may be purchased from the Society at 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

[CGFR 65-50, 30 FR 16657, Dec. 30, 1965, as amended by USCG-2000-7790, 65 FR 58458, Sept. 29, 2000]

§ 30.10-61 Rivers—TB/R.

Under this designation shall be included all tank vessels whose navigation is restricted to rivers and/or to canals, exclusively.

§ 30.10-62 Self-propelled tank vessel—TB/ALL.

Self-propelled tank vessel means a self-propelled tank vessel other than a tankship.

[CGD 79-116, 62 FR 25135, May 8, 1997]

§ 30.10-62a Service spaces—TB/ALL.

Service spaces are spaces that are used for galleys, pantries containing cooking appliances, lockers, storerooms, paint and lamp rooms and similar spaces that contain highly combustible materials, laundries, garbage and trash disposal and stowage rooms, workshops other than those forming part of the machinery spaces, and similar spaces and trunks to such spaces.

[CGD 74-127, 41 FR 3843, Jan. 26, 1976]

§ 30.10-63 Spark arrester—TB/ALL.

The term *spark arrester* means any device, assembly, or method of a mechanical, centrifugal, cooling, or other type and of a size suitable for the retention or quenching of sparks in exhaust pipes from internal combustion engines.

§ 30.10-65 Tank barge—B/ALL.

The term *tank barge* means a nonself-propelled tank vessel.

[CGD 79-116, 62 FR 25135, May 8, 1997]

§ 30.10-67 Tankship—T/ALL.

The term *tankship* means a self-propelled tank vessel constructed or adapted primarily to carry oil or hazardous material in bulk in the cargo spaces.

[CGD 79-116, 62 FR 25135, May 8, 1997]

§ 30.10-69 Tank vessel—TB/ALL.

The term *tank vessel* means a vessel that is constructed or adapted to carry, or that carries, oil or hazardous material in bulk as cargo or cargo residue, and that—

- (a) Is a vessel of the United States;
- (b) Operates on the navigable waters of the United States; or
- (c) Transfers oil or hazardous material in a port or place subject to the jurisdiction of the United States.

[CGD 79-116, 62 FR 25135, May 8, 1997]

§ 30.10-71

§ 30.10-71 Tankerman—TB/ALL.

The following ratings are established in part 13 of this chapter. The terms for the ratings identify persons holding valid merchant mariners' documents for service in the ratings issued under that part:

- (a) Tankerman-PIC.
- (b) Tankerman-PIC (Barge).
- (c) Restricted Tankerman-PIC.
- (d) Restricted Tankerman-PIC (Barge).
- (e) Tankerman-Assistant.
- (f) Tankerman-Engineer.

[CGD 79-116, 60 FR 17155, Apr. 4, 1995]

Subpart 30.15—Equivalents

§ 30.15-1 Conditions under which equivalents may be used—TB/ALL.

(a) Where in this subchapter it is provided that a particular fitting, material, appliance, apparatus, or equipment, or type thereof, shall be fitted or carried in a vessel, or that any particular provision shall be made or arrangement shall be adopted, the Commandant may accept in substitution therefor any other fitting, material, apparatus, or equipment, or type thereof, or any other arrangement: *Provided*, That he shall have been satisfied by suitable trials that the fitting, material, appliance, apparatus, or equipment, or type thereof, or the provision or arrangement is at least as effective as that specified in this subchapter.

(b) In any case where it is shown to the satisfaction of the Commandant that the use of any particular equipment, apparatus, or arrangement not specifically required by law is unreasonable or impracticable, the Commandant may permit the use of alternate equipment, apparatus, or arrangement to such an extent and upon such conditions as will insure, to his satisfaction, a degree of safety consistent with the minimum standards set forth in this subchapter.

46 CFR Ch. I (10-1-00 Edition)

Subpart 30.25—Commodities Regulated

§ 30.25-1 Cargoes carried in vessels certificated under the rules of this subchapter.

The cargoes listed in Table 30.25-1 are flammable or combustible and when transported in bulk must be in vessels certificated under the rules of this subchapter. A mixture or blend of two or more cargoes appearing in Table 30.25-1 may be transported under the provisions of this subchapter. A category A, B, or C noxious liquid substance (NLS) cargo, as defined in § 153.2 of this chapter, that is listed in Table 30.25-1 and any mixture containing one or more category A, B, or C NLS cargoes listed in Table 30.25-1 may be carried in bulk under this subchapter if the vessel is not regulated under part 153 of this chapter. If the vessel is regulated under § 153.1 of this chapter, category A, B, and C NLS cargoes must be carried under part 153, or, as an alternative in the case of category C oil-like NLS, under 33 CFR part 151. Requirements for category D NLS cargoes and mixtures of non-NLS cargoes with category D NLS cargoes are in 33 CFR part 151.

TABLE 30.25-1—LIST OF FLAMMABLE AND COMBUSTIBLE BULK LIQUID CARGOES

Cargoes	Pollution category
Acetone	III
Acetophenone	@D
•Acrylonitrile-Styrene copolymer dispersion in Polyether polyol	D
•Alcohols (C13 and above), <i>see</i> Alcohols (C13+)	
Alcohols (C13+)	III
Alcoholic beverages, n.o.s.	III
Alcohol(C6-C17)(secondary) poly(3-6)ethoxylates	A
Alcohol(C6-C17)(secondary) poly(7-12)ethoxylates	B
•Alcohol(C12-C15) poly(1-3)ethoxylates, <i>see</i> Alcohol(C12-C15) poly(1-6)ethoxylates	A
•Alcohol(C12-C15) poly(3-11)ethoxylates, <i>see</i> Alcohol(C12-C15) poly(1-6), or poly(7-19)ethoxylates	A
Alcohol(C12-C15) poly(1-6)ethoxylates	A
Alcohol(C12-C15) poly(7-19)ethoxylates	B
Alcohol(C12-C15) poly(20+)ethoxylates	C
n-Alkanes (C10+)	III

Coast Guard, DOT

§ 30.25-1

TABLE 30.25-1—LIST OF FLAMMABLE AND COMBUSTIBLE BULK LIQUID CARGOES—Continued

Cargoes	Pollution category
iso- & cyclo-Alkanes (C10–C11)	D
iso- & cyclo-Alkanes (C12+)	III
Alkaryl polyether (C9–C20)	B
Alkenyl(C11+) amine	D
Alkenylsuccinic anhydride	#
Alkyl(C8+)amine, Alkenyl (C12+) acid ester mixture	D
•Alkyl(C9–C17) benzenes, <i>see</i> Alkyl(C9+)benzenes	III
Alkyl(C9+)benzenes	III
Alkylbenzenesulfonic acid (4% or less)	#
Alkyl dithiothiadiazole (C6–C24)	D
Alkyl ester copolymer (C6–C18)	[D]
Alkyl phenol sulfide (C8–C40)	[D]
•Alkyl phthalates (<i>n</i> -), <i>see individual phthalates</i>	
Aminoethylethanolamine,	
Aminoethylethanolamine solution	III
•Amyl acetate (iso-, <i>n</i> -), <i>see Amyl acetate (all isomers)</i>	C
Amyl acetate (all isomers)	C
Amyl alcohol (iso-, <i>n</i> -, sec-, primary)	D
Amyl alcohol (tert-)	III
Amylene, <i>see Pentene (all isomers)</i>	C
Amyl methyl ketone, <i>see Methyl amyl ketone</i> ..	D
Animal and Fish oils, n.o.s. (<i>see also</i> Oil, edible, or Oil, misc.)	D
Including:	
Cod liver oil	
Lanolin	
Neatsfoot oil	
Pitchard oil	
Sperm oil	
Animal and Fish acid oils and distillates, n.o.s.	D
Including:	
Animal acid oil	
Fish acid oil	
Lard acid oil	
Mixed acid oil	
Mixed general acid oil	
Mixed hard acid oil	
Mixed soft acid oil	
Aryl polyolefin (C11–C50)	D
Asphalt	I
Asphalt blending stocks:	
Roofers flux	I
Straight run residue	I
+Barium long chain alkaryl sulfonate (C11–C50)	[B]
+Barium long chain alkyl(C8–C14)phenate sulfide	[A]
Behenyl alcohol	III
Benzene tricarboxylic acid trioctyl ester	III
Benzyl alcohol	C
Brake fluid base mixtures	
(containing Poly(2-8)alkylene(C2–C3) glycols, Polyalkylene(C2–C10) glycol monoalkyl(C1–C4) ethers, and their borate esters)	D
Butane	LFG
Butene, <i>see Butylene</i> .	
Butene oligomer	B
•(iso-, <i>n</i> -) Butyl acetate <i>see Butyl acetate (all isomers)</i>	C
•sec-Butyl acetate <i>see Butyl acetate (all isomers)</i>	C
Butyl acetate (all isomers)	C
Butyl alcohol (iso-, <i>n</i> -, sec-, tert-)	III
Butyl benzyl phthalate	A
Butylene	LFG
Butylene glycol	D

TABLE 30.25-1—LIST OF FLAMMABLE AND COMBUSTIBLE BULK LIQUID CARGOES—Continued

Cargoes	Pollution category
•1,3-Butylene glycol, <i>see Butylene glycol</i>	
Butylene polyglycol, <i>see Butylene glycol</i>	@D
iso-Butyl formate	D
<i>n</i> -Butyl formate	@D
Butyl heptyl ketone	[C]
•Butyl methyl ketone, <i>see Methyl butyl ketone</i>	
Butyl stearate	III
Butyl toluene	@A
•gamma-Butyrolactone	D
Calcium alkyl(C9)phenol sulfide, polyolefin phosphorosulfide mixture	A
•Calcium alkyl salicylate, <i>see Calcium long chain alkyl salicylate (C13+)</i>	C
Calcium long chain alkaryl sulfonate (C11–C50)	D
Calcium long chain alkyl phenate (C8–C40)	[D]
Calcium long chain alkyl phenate sulfide (C8–C40)	D
Calcium long chain alkyl salicylate (C13+)	C
•Calcium long chain alkyl phenolic amine (C8–C40)	III
Caprolactam solutions	D
•Cetyl alcohol (hexadecanol), <i>see Alcohols (C13+)</i>	
Cetyl-Stearyl alcohol	III
† Coal tar	A
•Cumene (<i>isopropylbenzene</i>), <i>see Propylbenzene (all isomers)</i>	A
Cyclohexane	C
•Cyclohexanol	D
1,3-Cyclopentadiene dimer (molten)	B
•Cyclopentadiene polymers, <i>see 1,3-Cyclopentadiene dimer (molten)</i>	
•p-Cymene	C
Decahydronaphthalene	D
•iso-Decaldehyde	@C
•n-Decaldehyde	@B
•Decane, <i>see n-Alkanes (C10+)</i>	III
Decene	B
Decyl acetate	B
Decyl alcohol (all isomers)	B
Decylbenzene (<i>n</i> -)	D
Detergent alkylate	D
Diacetone alcohol	D
Dialkyl(C10–C14) benzenes	D
Dialkyl(C7–C13) phthalates	D
Including:	
Diisodecyl phthalate.	
Diisononyl phthalate.	
Dinonyl phthalate.	
Ditridecyl phthalate.	
Diundecyl phthalate.	
•Dibutyl carbinol, <i>see Nonyl alcohol (all isomers)</i>	C
•ortho-Dibutyl phthalate	A
Dicyclopentadiene, <i>see 1,3-Cyclopentadiene dimer (molten)</i>	B
Diethylbenzene	A
Diethylene glycol	D
Diethylene glycol butyl ether, <i>see Poly(2-8)alkylene glycol monoalkyl(C1-C6) ether</i>	D
Diethylene glycol butyl ether acetate, <i>see Poly(2-8)alkylene glycol monoalkyl(C1-C6) ether acetate</i>	D
Diethylene glycol dibutyl ether	D
Diethylene glycol diethyl ether	III
Diethylene glycol ethyl ether, <i>see Poly(2-8)alkylene glycol monoalkyl(C1-C6) ether</i>	D
•Diethylene glycol ethyl ether acetate, <i>see Poly(2-8)alkylene glycol monoalkyl(C1-C6) ether acetate</i>	D

§ 30.25–1

46 CFR Ch. I (10–1–00 Edition)

TABLE 30.25–1—LIST OF FLAMMABLE AND COMBUSTIBLE BULK LIQUID CARGOES—Continued

Cargoes	Pollution category
Diethylene glycol n-hexyl ether, <i>see</i> Poly(2-8)alkylene glycol monoalkyl(C1–C6) ether	D
•Diethylene glycol methyl ether, <i>see</i> Poly(2-8)alkylene glycol monoalkyl(C1–C6) ether	D
•Diethylene glycol methyl ether acetate, <i>see</i> Poly(2-8)alkylene glycol monoalkyl(C1–C6) ether acetate	D
Diethylene glycol phenyl ether	#
•Diethylene glycol phthalate	D
Diethylene glycol propyl ether, <i>see</i> Poly(2-8)alkylene glycol monoalkyl(C1–C6) ether	D
Di-(2-ethylhexyl)adipate	D
•Di-(2-ethylhexyl)phthalate, <i>see</i> Dialkyl(C7–C13) phthalates	D
Diethyl phthalate	C
Diglycidyl ether of Bisphenol A	B
Dihexyl phthalate	III
Dihexyl phthalate	III
•Diisobutylcarbinol, <i>see</i> Nonyl alcohol (all isomers)	C
Diisobutylene	B
Diisobutyl ketone	D
Diisobutyl phthalate	B
•Diisodecyl phthalate, <i>see</i> Dialkyl(C7–C13) phthalates	D
Diisononyl adipate	D
•Diisononyl phthalate, <i>see</i> Dialkyl(C7–C13) phthalates	D
Diisooctyl phthalate	III
Diisopropylbenzene (all isomers)	A
Diisopropyl naphthalene	D
Dimethyl adipate	B
•Dimethylbenzene, <i>see</i> Xylenes
Dimethyl glutarate	C
Dimethyl phthalate	C
•Dimethylpolysiloxane, <i>see</i> Polydimethylsiloxane	III
2,2-Dimethylpropane-1,3-diol	D
Dimethyl succinate	C
•Dinonyl phthalate, <i>see</i> Dialkyl(C7–C13) phthalates	D
Dioctyl phthalate	III
Dipentene	C
Diphenyl	A
Diphenyl, Diphenyl ether mixture	A
Diphenyl ether	A
Diphenyl ether, Biphenyl phenyl ether mixture	A
Dipropylene glycol	III
Dipropylene glycol butyl ether, <i>see</i> Poly(2-8)alkylene glycol monoalkyl(C1–C6) ether	D
Dipropylene glycol dibenzoate	[D]
•Dipropylene glycol methyl ether, <i>see</i> Poly(2-8)alkylene glycol monoalkyl(C1–C6) ether	D
Distillates:	
Flashed feed stocks	I
Straight run	I
•Ditridecyl phthalate, <i>see</i> Dialkyl(C7–C13) phthalates	D
•Diundecyl phthalate, <i>see</i> Dialkyl(C7–C13) phthalates	D
Dodecane (all isomers)	III
Dodecanol	B
Dodecene (all isomers)	B
Dodecyl alcohol, <i>see</i> Dodecanol	B
Dodecylbenzene	III
Dodecyl phenol	A
Dodecyl xylene	III
Drilling mud (low toxicity) (if flammable or combustible)	[III]
Ethane	LFG

TABLE 30.25–1—LIST OF FLAMMABLE AND COMBUSTIBLE BULK LIQUID CARGOES—Continued

Cargoes	Pollution category
2-Ethoxyethyl acetate	C
•Ethoxylated alcohols, C11–C15, <i>see</i> the alcohol polyethoxylates
Ethoxy triglycol (crude)	D
Ethyl acetate	D
Ethyl acetoacetate	D
Ethyl alcohol	III
Ethyl amyl ketone	C
Ethylbenzene	B
Ethyl butanol	@D
Ethyl butyrate	C
Ethyl cyclohexane	C
2-Ethyl-2-(hydroxymethyl) propane-1,3-diol, C8–C10 ester	D
Ethylene	LFG
Ethylene carbonate	III
Ethylene glycol	D
Ethylene glycol acetate	D
Ethylene glycol butyl ether acetate	C
Ethylene glycol diacetate	C
Ethylene glycol dibutyl ether	[D]
Ethylene glycol ethyl ether acetate, <i>see</i> 2-Ethoxyethyl acetate	C
Ethylene glycol methyl butyl ether	D
Ethylene glycol methyl ether acetate	C
Ethylene glycol phenyl ether	D
Ethylene glycol phenyl ether, Diethylene glycol phenyl ether mixture	D
Ethylene-Propylene copolymer (in liquid mixtures)	[III]
Ethyl-3-ethoxypropionate	C
•2-Ethylhexaldehyde, <i>see</i> Octyl aldehydes
•2-Ethylhexanoic acid, <i>see</i> Octanoic acid (all isomers)	D
2-Ethylhexanol, <i>see</i> Octanol (all isomers)	@C
•Ethylhexoic acid, <i>see</i> 2-Ethylhexanoic acid
Ethyl hexyl phthalate	C
Ethyl propionate	D
Ethyl toluene	B
•Fatty acid (saturated, C13 and above), <i>see</i> Fatty acid (saturated, C13+)	III
Fatty acid (saturated, C13+)	III
Formamide	D
Furfuryl alcohol	C
† Gas oil, cracked	I
Gasoline blending stocks:	
Alkylates	I
† Reformates	I
Gasolines:	
† Automotive (containing not over 4.23 grams lead per gallon)	I
† Aviation (containing not over 4.86 grams lead per gallon)	I
Casinghead (natural)	I
Polymer	I
† Straight run	I
Glycerine	III
Glycerine (83%), Dioxanedimethanol (17%) mixture	D
•Glycerol, <i>see</i> Glycerine
Glycerol monooleate	D
Glycerol polyalkoxylate	III
Glyceryl triacetate	III
•Glycidyl ester of tertiary carboxylic acid, <i>see</i> Glycidyl ester of tridecyl acetic acid
Glycidyl ester of tridecyl acetic acid	B
Glycidyl ester of C10 trialkylacetic acid, <i>see</i> Glycidyl ester of tridecyl acetic acid	B
Glycidyl ester of tridecyl acetic acid	B
•Glycidyl ester of versatic acid, <i>see</i> Glycidyl ester of tridecyl acetic acid

Coast Guard, DOT

§ 30.25-1

TABLE 30.25-1—LIST OF FLAMMABLE AND COMBUSTIBLE BULK LIQUID CARGOES—Continued

Cargoes	Pollution category
•Glycol diacetate, <i>see</i> Ethylene glycol diacetate	
•Glycol triacetate, <i>see</i> Glyceryl triacetate	
Glyoxal solution (40% or less)	D
•Heptadecane, <i>see</i> n-Alkanes (C10+)	III
Heptane (all isomers)	C
Heptanoic acid	D
Heptanol (all isomers)	C
Heptene (all isomers)	C
Heptyl acetate	B
•Herbicide (C15 -H22 -NO2 -Cl), <i>see</i> Metolachlor	
•Hexaethylene glycol, <i>see</i> Polyethylene glycol	III
Hexamethylene glycol	III
Hexamethylenetetramine solutions	D
Hexane (all isomers)	C
Hexanoic acid	D
Hexanol	D
Hexene (all isomers)	C
Hexyl acetate	B
Hexylene glycol	III
•Hog grease, <i>see</i> Lard	
2-Hydroxy-4-(methylthio)butanoic acid	C
Hydroxy terminated polybutadiene, <i>see</i> Polybutadiene, hydroxyl terminated.	
Isophorone	D
Jet fuels:	
† JP-4	I
JP-5 (kerosene, heavy)	I
JP-8	@I
Kerosene	I
Lactic acid	D
Lard	III
Latex (ammonia (1% or less) inhibited)	D
Latex, liquid synthetic	III
including:	
Styrene-butadiene rubber	III
Carboxylated styrene-butadiene copolymer	III
Lecithin (soyabean)	[D]
Long chain alkaryl polyether (C11–C20)	C
Long chain alkaryl sulfonic acid (C16–C60)	D
•Long chain alkylphenate/Phenol sulfide mixture	III
Magnesium long chain alkaryl sulfonate (C11–C50)	D
Magnesium long chain alkyl phenate sulfide (C8–C20)	[D]
Magnesium long chain alkyl salicylate (C11+) ..	C
•Magnesium nonyl phenol sulfide, <i>see</i> Magnesium long chain alkyl phenate sulfide (C8–C20)	
•Magnesium sulfonate, <i>see</i> Magnesium long chain alkaryl sulfonate (C11–C50)	
2-Mercaptobenzothiazol (in liquid mixtures)	#
Methane	LFG
3-Methoxy-1-butanol	III
3-Methoxybutyl acetate	D
1-Methoxy-2-propyl acetate	#
•Methoxy triglycol (triethylene glycol methyl ether), <i>see</i> Poly(2-8)alkylene glycol monoalkyl(C1–C6) ether	
Methyl acetate	III
Methyl acetoacetate	D
Methyl alcohol	D
Methyl amyl acetate	C
Methyl amyl alcohol	C
•Methyl amyl ketone	D
•Methyl butanol, <i>see</i> the amyl alcohols	

TABLE 30.25-1—LIST OF FLAMMABLE AND COMBUSTIBLE BULK LIQUID CARGOES—Continued

Cargoes	Pollution category
Methyl butenol	D
Methyl butyl ketone	D
Methyl butynol	D
Methyl butyrate	C
Methyl ethyl ketone	III
Methyl heptyl ketone	B
Methyl isobutyl carbinol, <i>see</i> Methyl amyl alcohol	
Methyl isobutyl ketone	C
3-Methyl-3-methoxybutanol	D
3-Methyl-3-methoxybutyl acetate	III
Methyl naphthalene	III
•Methyl pentene, <i>see</i> Hexene (all isomers) ..	A
+Methyl propyl ketone	D
•N-Methyl-2-pyrrolidone	D
Methyl tert-butyl ether	D
Metolachlor	B
Mineral spirits	I
•Myrcene	D
Naphtha:	
•† Aromatic (having less than 10% Benzene)	@I
Heavy	@I
Paraffinic	@I
† Petroleum	I
† Solvent	@I
Stoddard Solvent	@I
† Varnish makers' and painters' (75%)	@I
N-Methylglucamine solution (70% or less)	III
n-Pentyl propionate	C
Naphthalene sulfonic acid-formaldehyde copolymer, sodium salt solution	D
Naphthenic acid	A
Nonane (all isomers)	C
Nonanoic acid (all isomers)	D
Nonanoic, Tridecanoic acid mixture	@D
•Nonene (all isomers)	B
Nonyl acetate	C
•Nonyl alcohol (all isomers)	C
Nonyl methacrylate monomer	D
Nonyl phenol	A
Nonyl phenol poly(4-12)ethoxylates	B
•Nonyl phenol sulfide (90% or less), <i>see</i> Alkyl phenol sulfide (C8–C40)	
Noxious liquid, N.F., (1) n.o.s. ("trade name" contains "principle components") ST 1, Cat A (if combustible)	A
Noxious liquid, F., (2) n.o.s. ("trade name" contains "principle components") ST 1, Cat A	A
Noxious liquid, N.F., (3) n.o.s. ("trade name" contains "principle components") ST 2, Cat A (if combustible)	A
Noxious liquid, F., (4) n.o.s. ("trade name" contains "principle components") ST 2, Cat A	A
Noxious liquid, N.F., (5) n.o.s. ("trade name" contains "principle components") ST 2, Cat B (if combustible)	B
Noxious liquid, N.F., (6) n.o.s. ("trade name" contains "principle components") ST 2, Cat B, mp. equal to or greater than 15 deg. C (if combustible)	B
Noxious liquid, F., (7) n.o.s. ("trade name" contains "principle components") ST 2, Cat B	B
Noxious liquid, F., (8) n.o.s. ("trade name" contains "principle components") ST 2, Cat B, mp. equal to or greater than 15 deg. C ..	B

§ 30.25–1

46 CFR Ch. I (10–1–00 Edition)

TABLE 30.25–1—LIST OF FLAMMABLE AND COMBUSTIBLE BULK LIQUID CARGOES—Continued

Cargoes	Pollution category
Noxious liquid, N.F., (9) n.o.s. ("trade name" contains "principle components") ST 3, Cat A (if combustible)	A
Noxious liquid, F., (10) n.o.s. ("trade name" contains "principle components") ST 3, Cat A	A
Noxious liquid, N.F., (11) n.o.s. ("trade name" contains "principle components") ST 3, Cat B (if combustible)	B
Noxious liquid, N.F., (12) n.o.s. ("trade name" contains "principle components") ST 3, Cat B, mp. equal to or greater than 15 deg. C (if combustible)	B
Noxious liquid, F., (13) n.o.s. ("trade name" contains "principle components") ST 3, Cat B	B
Noxious liquid, F., (14) n.o.s. ("trade name" contains "principle components") ST 3, Cat B, mp. equal to or greater than 15 deg. C	B
Noxious liquid, N.F., (15) n.o.s. ("trade name" contains "principle components") ST 3, Cat C (if combustible)	C
Noxious liquid, F., (16) n.o.s. ("trade name" contains "principle components") ST 3, Cat C	C
Noxious liquid, n.o.s. (17) ("trade name," contains "principal components"), Category D (if flammable or combustible)	D
Non-noxious liquid, n.o.s. (18) ("trade name," contains "principal components"), Appendix III (if flammable or combustible)	III
•Octadecene, see the olefin or alpha-olefin entries	
Octadecenoamide solution (oleamide)	[D]
Octane (all isomers)	C
Octanoic acid (all isomers)	D
Octanol (all isomers)	C
Octene (all isomers)	B
Octyl acetate	C
•Octyl alcohol (iso-, n-), see Octanol (all isomers)	
Octyl aldehydes	B
Octyl decyl adipate	III
•Octyl phthalate (Di-(2-ethylhexyl)phthalate), see Dialkyl(C7–C13) phthalates	
Oil, edible:	
Beechnut	D
Castor	D
Cocoa butter	D
Coconut	D
Cod liver	D
Corn	D
Cottonseed	D
Fish, n.o.s.	D
Groundnut	D
Hazelnut	D
Lard	@III
Maize, see Corn oil	D
Nutmeg butter	D
Olive	D
Palm	D
Palm kernel	D
Peanut	D
Poppy	D
Raisin seed	D
Rapeseed	D
Rice bran	D
Safflower	D
Salad	D
Sesame	D

TABLE 30.25–1—LIST OF FLAMMABLE AND COMBUSTIBLE BULK LIQUID CARGOES—Continued

Cargoes	Pollution category
Soya bean	D
Sunflower, see Sunflower seed	D
Sunflower seed	D
Tucum	D
Vegetable, n.o.s.	D
Walnut	D
Oil, fuel:	
No. 1 (kerosene)	I
No. 1-D	I
No. 2	I
No. 2-D	I
No. 4	I
No. 5	I
No. 6	I
Oil, misc:	
Aliphatic	@I
Animal, n.o.s.	D
Aromatic	I
Clarified	I
Coal	#
•Coconut oil, esterified, see Coconut oil, fatty acid methyl ester	
Coconut oil, fatty acid	C
Coconut oil, fatty acid methyl ester	D
•Coconut oil, methyl ester, see Coconut oil, fatty acid methyl ester	
Cottonseed, fatty acid, see Cottonseed oil, fatty acid	C
† Crude	I
Diesel	I
Gas, high pour	@I
Gas, low pour	@I
Gas, low sulfur	@I
Heartcut distillate	I
Lanolin	D
Linseed	D
Lubricating	I
Mineral	I
Mineral seal	@I
Motor	I
Neatsfoot	D
Oiticica	D
Palm oil, fatty acid methyl ester	D
•Palm oil, methyl ester, see Palm oil, fatty acid methyl ester	
Penetrating	I
Perilla	D
Pilchard	D
Pine	C
Residual	I
Road	I
Rosin	B
Seal	I
Soapstock	#
Soya bean (epoxidized)	[D]
Sperm	D
Spindle	I
Tall	B
Tall, fatty acid	C
Transformer	I
Tung	D
Turbine	I
Whale	D
alpha-Olefins (C6–C18)	B
alpha-Olefins (C13–C18)	III
Olefin mixtures (C5–C7)	C
Olefin mixtures (C5–C15)	B
•Olefins (C13+, all isomers)	III
Olefin/Alkyl ester copolymer (molecular weight 2000+)	D

Coast Guard, DOT

§ 30.25-1

TABLE 30.25-1—LIST OF FLAMMABLE AND COMBUSTIBLE BULK LIQUID CARGOES—Continued

Cargoes	Pollution category
Oleic acid	D
•Oleyl alcohol (octadecenol), <i>see</i> Alcohols (C13+)	
•Organic amine 70, <i>see</i> Aminoethylethanolamine, Aminoethylethanolamine solution	
Palm kernel acid oil, methyl ester	[D]
Palm stearin	D
•n-Paraffins (C10–C20), <i>see</i> n-Alkanes (C10+)	III
•Pentadecanol, <i>see</i> Alcohols (C13+)	
•Pentaethylene glycol, <i>see</i> Polyethylene glycols	
Pentaethylenehexamine	D
Pentane (all isomers)	C
Pentanoic acid	D
Pentene (all isomers)	C
Petrolatum	III
1-Phenyl-1-xylyl ethane	C
Phosphosulfurized bicyclic terpene	#
•Phthalate plasticizers, <i>see</i> individual phthalates	
Pinene, <i>see</i> the alpha- or beta- isomers	
alpha-Pinene	A
beta-Pinene	B
Polyalkylene glycols, Polyalkylene glycol monoalkyl ethers mixtures	@D
Polyalkylene glycol butyl ether, <i>see</i> Poly(2-8)alkylene glycol monoalkyl(C1–C6) ether	D
Poly(2-8)alkylene glycol monoalkyl(C1–C6) ether	D
Including:	
Diethylene glycol butyl ether.	
Diethylene glycol ethyl ether.	
Diethylene glycol n-hexyl ether.	
Diethylene glycol methyl ether.	
Diethylene glycol n-propyl ether.	
Dipropylene glycol butyl ether.	
Dipropylene glycol methyl ether.	
Polypropylene glycol methyl ether.	
Triethylene glycol butyl ether.	
Triethylene glycol methyl ether.	
Triethylene glycol methyl ether.	
Tripropylene glycol methyl ether.	
Poly(2-8)alkylene glycol monoalkyl(C1–C6) ether acetate	D
Including:	
Diethylene glycol butyl ether acetate.	
Diethylene glycol ethyl ether acetate.	
Diethylene glycol methyl ether acetate.	
Polyalkylene oxide polyol	C
Polyalkyl methacrylate (C1–C20)	[D]
Polybutadiene, hydroxyl terminated	[III]
Polybutene	III
Polybutenyl succinimide	[D]
Polydimethylsiloxane	#
Polyether (molecular weight 2000+)	D
Polyethylene glycol	III
Polyethylene glycol dimethyl ether	III
Polyethylene glycol monoalkyl ether, <i>see</i> Poly(2-8)alkylene glycol monoalkyl(C1–C6) ether	D
Polyglycerine, Sodium salts solution (containing less than 3% Sodium hydroxide)	III
•Polyglycerol	III
•Poly(4+) isobutylene	III
Polymerized esters	#
Polyolefin (molecular weight 300+)	III
Polyolefin amide alkeneamine (C28+)	D
Polyolefin amide alkeneamine borate (C28–C250)	D

TABLE 30.25-1—LIST OF FLAMMABLE AND COMBUSTIBLE BULK LIQUID CARGOES—Continued

Cargoes	Pollution category
•Polyolefin amide alkeneamine/Molybdenum oxysulfide mixture	III
Polyolefin amide alkeneamine polyol	D
Polyolefin anhydride	D
Polyolefin ester (C28–C250)	D
Polyolefin phenolic amine (C28–C250)	D
Polyolefin phosphorosulfide, barium derivative (C28–C250)	C
•Poly(20)oxyethylene sorbitan monooleate	III
•Poly(5+) propylene	III
Polypropylene glycol	D
Polypropylene glycol methyl ether, <i>see</i> Poly(2-8)alkylene glycol monoalkyl(C1–C6) ether	D
Polysiloxane	III
•Potassium oleate	C
Propane	LFG
•n-Propoxypropanol (propylene glycol propyl ether), <i>see</i> Propylene glycol monoalkyl ether	
•iso-Propyl acetate	D
•n-Propyl acetate	D
•iso-Propyl alcohol	III
•n-Propyl alcohol	III
•iso-Propylbenzene (<i>cumene</i>), <i>see</i> Propylbenzene (all isomers)	A
•n-Propylbenzene, <i>see</i> Propylbenzene (all isomers)	A
Propylbenzene (all isomers)	A
iso-Propylcyclohexane	C
Propylene	LFG
Propylene-butylene copolymer	III
Propylene carbonate	[III]
Propylene dimer	C
Propylene glycol	III
Propylene glycol n-butyl ether, <i>see</i> Propylene glycol monoalkyl ether	D
•Propylene glycol ethyl ether, <i>see</i> Propylene glycol monoalkyl ether	D
•Propylene glycol methyl ether, <i>see</i> Propylene glycol monoalkyl ether	D
Propylene glycol methyl ether acetate	D
Propylene glycol monoalkyl ether	D
Including:	
n-Propoxypropanol.	
Propylene glycol n-butyl ether.	
Propylene glycol ethyl ether.	
Propylene glycol methyl ether.	
Propylene glycol phenyl ether	[D]
Propylene glycol propyl ether, <i>see</i> Propylene glycol monoalkyl ether	D
Propylene polymer (<i>in liquid mixtures</i>)	#
Propylene tetramer	B
Propylene trimer	B
•Pseudocumene, <i>see</i> Trimethylbenzenes	
•Rum, <i>see</i> Alcoholic beverages, n.o.s.	
•Sodium acetate, Glycol, Water mixture (containing 1% or less, Sodium hydroxide) (<i>if flammable or combustible</i>)	#
•Sodium acetate solution	D
•Sodium benzoate solution	D
Sodium long chain alkyl salicylate (C13+)	[C]
Soyabean oil (epoxidized)	[D]
•Stearic acid, <i>see</i> Fatty acid (saturated, C13+)	III
Stearyl alcohol (octadecanol)	III
Sulfohydrocarbon (C3–C88)	D
Sulfohydrocarbon, long chain (C18+) alkylamine	B
Sulfolane	D
Tallow	D

§ 30.25–1

TABLE 30.25–1—LIST OF FLAMMABLE AND COMBUSTIBLE BULK LIQUID CARGOES—Continued

Cargoes	Pollution category
•Tallow alcohol, <i>see</i> Alcohols (C13+)	III
Tallow fatty acid	D
Tallow alkyl nitrile	#
•Tetradecanol, <i>see</i> Alcohols (C13+)	III
•Tetradecene, <i>see</i> the olefin or alpha-olefin entries
•Tetradecylbenzene	[D]
Tetraethylene glycol	III
Tetrahydronaphthalene	C
•Tetrapropylbenzene, <i>see</i> Alkyl(C9+)benzenes
Toluene	C
•Triarylphosphate, <i>see</i> Triisopropylated phenyl phosphates	A
Tributyl phosphate	B
Tricresyl phosphate (less than 1% of the ortho isomer)	A
•Tridecane, <i>see</i> n-Alkanes (C10+)	III
Tridecanoic acid	B
•Tridecanol, <i>see</i> Alcohols (C13+)
•Tridecene, <i>see</i> Olefins (C13+)	III
Tridecyl acetate	III
•Tridecylbenzene	[D]
Triethylbenzene	A
Triethylene glycol	III
Triethylene glycol butyl ether, <i>see</i> Poly(2-8)alkylene glycol monoalkyl(C1–C6) ether	D
Triethylene glycol butyl ether mixture	#
Triethylene glycol di-(2-ethylbutyrate)	[C]
Triethylene glycol ether mixture	#
•Triethylene glycol ethyl ether, <i>see</i> Poly(2-8)alkylene glycol monoalkyl(C1–C6) ether	D
•Triethylene glycol methyl ether, <i>see</i> Poly(2-8)alkylene glycol monoalkyl(C1–C6) ether	D
Triethyl phosphate	D
Triisooctyl trimellitate	#
Triisopropanolamine	III
Triisopropylated phenyl phosphates	A
Trimethylbenzene (all isomers)	A
Trimethylol propane polyethoxylate	D
•2,2,4-Trimethyl-1,3-pentanediol diisobutyrate	III
2,2,4-Trimethyl-3-pentanol-1-isobutyrate	#
Tripropylene, <i>see</i> Propylene trimer	@B
Tripropylene glycol	III
•Tripropylene glycol methyl ether, <i>see</i> Poly(2-8)alkylene glycol monoalkyl(C1–C6) ether	D
Trixylenyl phosphate	A
Trixylyl phosphate, <i>see</i> Trixylenyl phosphate ..	A
Turpentine	B
•† Turpentine substitute, <i>see</i> White spirit (low (15–20%) aromatic)	@B
•Undecanol, <i>see</i> 1- Undecyl alcohol
Undecene	B
•1- Undecyl alcohol	B
•Undecylbenzene	[D]
Vegetable oils, n.o.s. (<i>see also</i> Oil, edible)	D

46 CFR Ch. I (10–1–00 Edition)

TABLE 30.25–1—LIST OF FLAMMABLE AND COMBUSTIBLE BULK LIQUID CARGOES—Continued

Cargoes	Pollution category
<i>Including:</i> Beechnut oil Castor oil Cocoa butter Coconut oil Corn oil Cottonseed oil Groundnut oil Hazelnut oil Linseed oil Nutmeg butter Oiticica oil Olive oil Palm kernel oil Palm oil Peel oil (oranges and lemons) Perilla oil Poppy oil Raisin seed oil Rapeseed oil Rice bran oil Safflower oil Salad oil Sesame oil Soya bean oil Sunflower seed oil Tucum oil Tung oil Walnut oil	
Vegetable acid oils and distillates, n.o.s.	D
<i>Including:</i> Corn acid oil Cottonseed acid oil Dark mixed acid oil Groundnut acid oil Mixed acid oil Mixed general acid oil Mixed hard acid oil Mixed soft acid oil Rapeseed acid oil Safflower acid oil Soya acid oil Sunflower seed acid oil	
•Waxes: Candelilla	D
Carnauba	@D
Paraffin	@D
•† White spirit, <i>see</i> White spirit (low (15–20%) aromatic)	III
† White spirit (low (15–20%) aromatic)
•Wine, <i>see</i> Alcoholic beverages, n.o.s.	B
Xylenes (<i>ortho-, meta-, para-</i>)	C
Zinc alkaryl dithiophosphate (C7–C16)	C
Zinc alkenyl carboxamide	D
Zinc alkyl dithiophosphate (C3–C14)	B

denotes newly added products.
Items with a bullet (•) or in **boldface** are changes since October 1, 1993.
NOTE: See table 2 of part 153 for additional cargoes permitted to be carried by tank barge.
Explanation of Symbols: As used in this table the following stands for:
A, B, C, D—NLS Category of Annex II of MARPOL 73/78.
I—Considered an “oil” under Annex I of MARPOL 73/78.
III—Appendix III of Annex II (non-NLS cargoes) of MARPOL 73/78.
LFG—Liquefied flammable gas.
#—No determination of NLS status. For shipping on an oceangoing vessel, see 46 CFR 153.900(c).

Coast Guard, DOT

§ 30.30-9

[]—A NLS category in brackets indicates that the product is provisionally categorized and that further data are necessary to complete the evaluation of its pollution hazards. Until the hazard evaluation is completed, the pollution category assigned is used.

@—The NLS category has been assigned by the U.S. Coast Guard, in absence of one assigned by the IMO. The category is based upon a GESAMP Hazard Profile or by analogy to a closely related product having an NLS assigned.

†—The provisions contained in 46 CFR part 197, subpart C, may apply to this cargo.

Abbreviations for Noxious liquid Cargoes:

N.F.—non-flammable (flash point greater than 60 degrees C (140 degrees F) cc)

F.—flammable (flash point less than or equal to 60 degrees C (140 degrees F) cc)

n.o.s.—not otherwise specified.

ST—Ship type.

Cat—Pollution category.

Words in italics are not part of the cargo name but may be used in addition to the cargo name.

When one entry references another entry by use of the word “see”, and both names are in roman type, either name may be used as the cargo name (e.g., Diethyl ether, see Ethyl ether). However, the referenced entry is preferred.

[CGD 81-101, 53 FR 28972, Aug. 1, 1988, as amended by CGD 88-100, 54 FR 40009, Sept. 29, 1989; CGD 88-100, 55 FR 17276, Apr. 24, 1990; CGD 88-040, 56 FR 52122, Oct. 17, 1991; CGD 92-100, 59 FR 17005, Apr. 11, 1994; CGD 94-900, 59 FR 45135, Aug. 31, 1994; CGD 94-902, 60 FR 34042, 34045, June 29, 1995; CGD 95-900, 60 FR 39267, Aug. 2, 1995]

§ 30.25-3 Benzene.

The provisions contained in 46 CFR part 197, subpart C, apply to liquid cargoes containing 0.5% or more benzene by volume.

[CGD 88-040, 56 FR 65006, Dec. 13, 1991]

Subpart 30.30—Interim Procedures for Evaluating Vessel Personnel Licensing and Certification Programs of Foreign Countries

SOURCE: CGD 79-081a, 45 FR 23427, Apr. 7, 1980, unless otherwise noted.

§ 30.30-1 Scope and purpose.

(a) This subpart contains procedures for evaluating vessel personnel licensing and certification programs of foreign countries. Evaluations are done for countries which license or certify personnel serving on tank vessels that enter or operate in U.S. navigable waters and ports.

(b) The purpose of each evaluation is to determine whether a foreign licensing and certification program has standards that are comparable to or more stringent than U.S. standards.

(c) A determination that licensing and certification standards of a foreign

country are not comparable to or more stringent than U.S. standards will subject tank vessels manned with officers licensed by that country to the prohibition in 33 U.S.C. 1228(a)(5) on operation with those officers in U.S. navigable waters and ports.

§ 30.30-3 Evaluation materials.

The materials to be submitted for evaluation must include the English text of the following:

(a) All laws, decrees, orders, and regulations relating to manning, training, qualification, and watchkeeping of personnel on tank vessels engaged in foreign trade.

(b) A copy of each type of license and certificate issued by the country to tank vessel personnel.

§ 30.30-5 Submission of evaluation materials.

(a) The evaluation materials listed in § 30.30-3 should be sent to Commandant (G-MOC), U.S. Coast Guard Headquarters, 2100 Second Street, SW., Washington, DC 20593. The materials should include the name and address of the person to whom correspondence concerning the evaluation can be sent.

(b) Updated materials may be submitted at any time during the evaluation process.

[CGD 79-081a, 45 FR 23427, Apr. 7, 1980, as amended by CGD 95-072, 60 FR 50461, Sept. 29, 1995; CGD 96-041, 61 FR 50726, Sept. 27, 1996]

§ 30.30-7 Availability of materials.

Evaluation materials submitted in accordance with this subpart will be available for inspection and copying between 7:30 a.m. and 4:30 p.m., Monday through Thursday, except holidays, at Coast Guard Headquarters, room 1104, 2100 Second Street, SW., Washington, DC 20593. Telephone: (202) 267-2978.

[CGD 79-081a, 45 FR 23427, Apr. 7, 1980, as amended by CGD 95-072, 60 FR 50461, Sept. 29, 1995]

§ 30.30-9 Evaluation.

Materials submitted in accordance with this subpart will be evaluated by comparison to the regulations in parts 5, 10, and 13 of this chapter, and by

§ 30.30-11

comparison to the U.S. laws referenced in those regulations.

[CGD79-081a, 45 FR 23427, Apr. 7, 1980, as amended by CGD 97-057, 62 FR 51043, Sept. 30, 1997]

§ 30.30-11 Determinations.

(a) After evaluation of materials submitted in accordance with this subpart, a determination will be made as to whether the licensing and certification program described by the materials has standards that are comparable to or more stringent than standards set by the regulations and laws referenced in § 30.30-9.

(b) Notice of each determination made in accordance with this section and a brief explanation of reasons therefor will be published in the FEDERAL REGISTER. A copy of this notice will also be sent to the person whose name is provided in accordance with § 30.30-5.

(c) Each determination remains in effect for 5 years unless sooner cancelled.

(d) Any request to reconsider a determination must be submitted to the address listed in § 30.30-5 and must include a statement of reasons in support. The person submitting the request will be notified in writing of the action taken.

PART 31—INSPECTION AND CERTIFICATION

Subpart 31.01—General

Sec.

31.01-1 Inspections required—TB/ALL.

31.01-3 Alternate compliance.

31.01-5 Scope of initial inspection—TB/ALL.

31.01-10 Authority of marine inspectors—TB/ALL.

31.01-15 Application for a Certificate of inspection—TB/ALL.

31.01-20 Application for inspection of a new tank vessel or conversion of a vessel to a tank vessel—TB/ALL.

Subpart 31.05—Certificates of Inspection

31.05-1 Issuance of certificate of inspection—TB/ALL.

31.05-5 Posting the certificate of inspection—TB/ALL.

31.05-10 Period of validity for a Certificate of Inspection—TB/ALL.

31.05-15 Certificate of inspection; terms; endorsements—TB/ALL.

46 CFR Ch. I (10-1-00 Edition)

Subpart 31.10—Inspections

31.10-1 Recognized classification society—TB/ALL.

31.10-5 Inspection of new tank vessels—TB/ALL.

31.10-10 Vessels converted to tank vessels—TB/ALL.

31.10-15 Inspection for certification—TB/ALL.

31.10-16 Inspection and certification of cargo gear—TB/ALL.

31.10-17 Annual and periodic inspections—TB/ALL.

31.10-17a Certificate of inspection: Conditions of validity.

31.10-18 Firefighting equipment: General—TB/ALL.

31.10-18a Liquefied gas vessels: additional firefighting equipment inspections.

31.10-19 All firefighting equipment may be tested—TB/ALL.

31.10-20 Definitions relating to hull examinations—T/B ALL.

31.10-21 Drydock examination, internal structural examination, cargo tank internal examination, and underwater survey intervals—TB/ALL.

31.01-21a Periodic gauging of tank vessel midbodies more than 30 years old that carry certain oil cargoes—TB/ALL.

31.10-22 Notice and plans required.

31.10-24 Integral fuel oil tank examinations—T/ALL.

31.10-25 Inspection covering repairs and alterations involving safety—TB/ALL.

31.10-30 Stability requirements—TB/ALL.

31.10-32 Loading information—TB/ALL.

31.10-35 Permit to proceed to another port for repair—TB/ALL.

31.10-40 Inspection during trial trip—T/ALL.

31.10-45 Inspection of crew accommodations—TB/ALL.

31.10-50 Inspection of bilges—TB/ALL.

Subpart 31.15—Manning of Tank Vessels

31.15-1 Licensed officers and crews—TB/ALL.

31.15-5 Tank barges—B/ALL.

31.15-10 Towing vessels may carry persons in addition to crew—B/LBR.

Subpart 31.20—Waters Operated Over

31.20-1 Waters—TB/ALL.

Subpart 31.25—Load Lines

31.25-1 Load lines required—TB/OCL.

Subpart 31.30—Marine Engineering

31.30-1 Marine engineering regulations and material specifications—TB/ALL.

Coast Guard, DOT

§31.01-5

Subpart 31.35—Electrical Engineering

- 31.35-1 Electrical installations, lighting and power equipment, batteries, etc.—TB/ALL.
- 31.35-5 Communications; alarm systems, telephone and voice tube systems, engine telegraph systems, etc.—TB/ALL.

Subpart 31.36—Lifesaving Appliances and Arrangements

- 31.36-1 Lifesaving appliances and arrangements—TB/ALL.

Subpart 31.40—Certificates Under International Convention for Safety of Life at Sea, 1974

- 31.40-1 Application—T/ALL.
- 31.40-5 Cargo Ship Safety Construction Certificate—T/ALL.
- 31.40-10 Cargo Ship Safety Equipment Certificate—T/ALL.
- 31.40-15 Cargo Ship Safety Radio Certificate—T/ALL.
- 31.40-25 Exemption Certificate—T/ALL.
- 31.40-30 Safety Management Certificate—T/ALL.
- 31.40-35 Availability of certificates.
- 31.40-40 Duration of Convention certificates—T/ALL.
- 31.40-45 American Bureau of Shipping—T/ALL.

AUTHORITY: 33 U.S.C. 1321(j); 46 U.S.C. 2103, 3205, 3306, 3307, 3703; 49 U.S.C. 5103, 5106; E.O. 12234, 45 FR 588013 CFR, 1980 Comp., p. 277; E.O. 12777, 56 FR 54757, 3 CFR, 1991 Comp., p. 351; 49 CFR 1.46. Section 31.10-21 also issued under the authority of Sect. 4109, Pub. L. 101-380, 104 Stat. 515.

SOURCE: CGFR 65-50, 30 FR 16662, Dec. 30, 1965, unless otherwise noted.

Subpart 31.01—General

§31.01-1 Inspections required—TB/ALL.

(a) Every tank vessel subject to the regulations in this subchapter shall be inspected every 5 years or more often, if necessary, by the Coast Guard to see that the hull, boilers, machinery, equipment, apparatus for storage, and appliances of the vessel comply with marine inspection laws, and the regulations in this subchapter, and when applicable, subchapters E, F, J, O, Q, S, and W of this chapter and 33 CFR parts 155 and 157.

(b) Tank vessels which are laid up, dismantled, and out of commission are exempt from inspections required by

law or regulations in this subchapter, provided that such vessels are cleaned of all cargo residue and maintained in a gas free condition.

(c) For inspection and tests of tanks containing certain dangerous cargoes in bulk, see part 98 and subchapter O of this chapter.

[CGFR 65-50, 30 FR 16662, Dec. 30, 1965, as amended by CGFR 70-10, 35 FR 3709, Feb. 25, 1970; CGD 80-009, 48 FR 36458, Aug. 11, 1983; CGD 79-023, 48 FR 51006, Nov. 4, 1983; CGD 84-069, 61 FR 25286, May 20, 1996; CGD 97-057, 62 FR 51043, Sept. 30, 1997; USCG-1999-4976, 65 FR 6499, Feb. 9, 2000]

§31.01-3 Alternate compliance.

(a) In place of compliance with other applicable provisions of this subchapter, the owner or operator of a vessel subject to plan review and inspection under this subchapter for initial issuance or renewal of a Certificate of Inspection may comply with the Alternate Compliance Program provisions of part 8 of this chapter.

(b) For the purposes of this section, a list of authorized classification societies, including information for ordering copies of approved classification society rules and supplements, is available from Commandant (G-MSE), 2100 Second St., SW., Washington, DC 20593-0001; telephone (202) 267-6925; or fax (202) 267-4816. Approved classification society rules and supplements are incorporated by reference into 46 CFR 8.110(b).

[CGD 95-010, 62 FR 67536, Dec. 24, 1997, as amended by USCG-1999-5004, 64 FR 30439, June 8, 1999]

§31.01-5 Scope of initial inspection—TB/ALL.

The initial inspection, which may consist of a series of inspections during the construction of a vessel, shall include a complete inspection of the structure, including the outside of the vessel's bottom, the machinery, unfired pressure vessels, equipment and the inside and outside of the boilers. The inspection shall be such as to insure that the arrangements, material, and scantlings of the structure, boilers and other pressure vessels and their appurtenances, piping, main and auxiliary machinery, electrical installations, lifesaving appliances, fire-detecting

§ 31.01-10

and extinguishing equipment, pilot boarding equipment and other equipment fully comply with the applicable regulations for such vessel and are in accordance with approved plans, and determine that the vessel is in possession of a valid certificate issued by the Federal Communications Commission, if any. The inspection shall be such as to ensure that the workmanship of all parts of the vessel and its equipment is in all respects satisfactory and that the vessel is provided with lights, means of making sound signals, and distress signals as required by applicable statutes and regulations.

[CGFR 65-50, 30 FR 16662, Dec. 30, 1965, as amended by CGFR 68-32, 33 FR 5712, Apr. 12, 1968; CGFR 68-82, 33 FR 18804, Dec. 18, 1968; CGD 82-036, 48 FR 654, Jan. 6, 1983; CGD 79-032, 49 FR 25455, June 21, 1984; CGD 95-012, 60 FR 48049, Sept. 18, 1995]

§ 31.01-10 Authority of marine inspectors—TB/ALL.

Inspectors may at any time lawfully inspect any tank vessel.

§ 31.01-15 Application for a Certificate of inspection—TB/ALL.

(a) You must submit a written application for an inspection for certification to the cognizant OCMI. To renew a Certificate of Inspection, you must submit an application at least 30 days before the expiration of the tank vessel's current Certificate of Inspection. When renewing a Certificate of Inspection, you must schedule an inspection for certification within the 3 months before the expiration date of the current Certificate of Inspection.

(b) The application should be on Form CG-3752, Application for Inspection of U.S. Vessel, which requires information on name and type of vessel, nature of employment and route in which to be operated, grade or type of cargo to be carried, place where and date when the vessel may be inspected, and that no other application has been made to any Officer in Charge, Marine Inspection, since the issuance of the last valid certificate of inspection.

[CGFR 65-50, 30 FR 16662, Dec. 30, 1965, as amended by USCG-1999-4976, 65 FR 6499, Feb. 9, 2000]

46 CFR Ch. I (10-1-00 Edition)

§ 31.01-20 Application for inspection of a new tank vessel or conversion of a vessel to a tank vessel—TB/ALL.

Prior to the commencement of the construction of any new tank vessel, or prior to the commencement of the conversion of any vessel to a tank vessel, application for the approval of contract plans and specifications and for a certificate of inspection shall be made in writing to the Coast Guard and no such construction or conversion shall be proceeded with until such approval is granted. (See § 31.10-1.)

Subpart 31.05—Certificates of Inspection

§ 31.05-1 Issuance of certificate of inspection—TB/ALL.

(a) When a tank vessel is found to comply with the regulations in this subchapter, and applicable provisions of subchapters E, F, J, O, Q, S, and W of this chapter and 33 CFR parts 155 and 157, a certificate of inspection will be issued to it, or to its owners, by the Officer in Charge, Marine Inspection.

(b) Certificates of inspection for tank vessels shall be similar in form to certificates issued to other cargo vessels, and in addition to the manning requirements and waters over which they may be operated, they shall be appropriately endorsed *Inspected and approved for the carriage of flammable or combustible liquids of Grade A, B, C, D, or E* (as the case may be), and such endorsement shall serve as a permit for such vessel to operate. The endorsement for the carriage of liquefied flammable gases is set forth in § 38.01-5 of this subchapter.

(c) The certificate of inspection shall be delivered to the master or owner of the tank vessel to which it relates.

[CGFR 65-50, 30 FR 16662, Dec. 30, 1965, as amended by CGD 73-96, 42 FR 49024, Sept. 26, 1977; CGD 79-023, 48 FR 51006, Nov. 4, 1983; CGD 84-069, 61 FR 25286, May 20, 1996]

§ 31.05-5 Posting the certificate of inspection—TB/ALL.

The certificate of inspection shall be framed under glass and posted in a conspicuous part of the vessel, except that where it is not practicable to so expose the certificate of inspection it shall be carried in the vessel in such manner as

Coast Guard, DOT

§31.10-5

authorized by the Officer in Charge, Marine Inspection.

§31.05-10 Period of validity for a Certificate of Inspection—TB/ALL.

(a) A Certificate of Inspection is valid for 5 years.

(b) Application may be made by the master, owner, or agent for inspection and issuance of a new certificate of inspection at any time during the period of validity of the current certificate.

(c) Certificates of inspection may be revoked or suspended by the Coast Guard where such process is authorized by law. This may occur if the vessel does not meet the requirements of law or regulations in this chapter or if there is a failure to maintain the safety requirements requisite to the issuance of a certificate of inspection.

[CGFR 68-82, 33 FR 18804, Dec. 18, 1968, as amended by CGD 95-012, 60 FR 48049, Sept. 18, 1995; USCG-1999-4976, 65 FR 6499, Feb. 9, 2000]

§31.05-15 Certificate of inspection; terms; endorsements—TB/ALL.

The terms, endorsements and conditions set forth on a certificate of inspection shall have the same force and effect as the regulations contained in this subchapter.

Subpart 31.10—Inspections

§31.10-1 Recognized classification society—TB/ALL.

(a) In the inspection of hulls, boilers, and machinery, the current standards established by the American Bureau of Shipping and designated *Rules for Building and Classing Steel Vessels* respecting material and construction of hulls, boilers, and machinery, except as otherwise provided for by law and regulations in this chapter, shall be accepted as standard by the Coast Guard.

(b) The current standards established by the American Bureau of Shipping in effect at the time of construction of the vessel, or otherwise as applicable, shall be used. The book *Rules for Building and Classing Steel Vessels* is usually published annually and may be purchased from the American Bureau of Shipping, ABS Plaza, 16855 Northchase Drive, Houston, TX 77060. These standards may be also examined at the office of the Commandant (G-M), U.S. Coast

Guard, Washington, DC 20593-0001, or at the office of any Coast Guard District Commander or Officer in Charge, Marine Inspection.

(c) The approved plans and certificate of the American Bureau of Shipping, or other recognized classification society for classed vessels, may be accepted by the Coast Guard as evidence of the structural efficiency of the hull and reliability of machinery of vessels subject to the regulations in this subchapter, except as otherwise provided for by laws and regulations in this chapter.

[CGFR 65-50, 30 FR 16662, Dec. 30, 1965, as amended by CGFR 68-32, 33 FR 5712, Apr. 12, 1968; CGD 88-070, 53 FR 34533, Sept. 7, 1988; 53 FR 37570, Sept. 27, 1988; 53 FR 44011, Nov. 1, 1988; CGD 95-072, 60 FR 50461, Sept. 29, 1995; USCG-2000-7790, 65 FR 58459, Sept. 29, 2000]

§31.10-5 Inspection of new tank vessels—TB/ALL.

(a) *Plans.* Triplicate copies of contract plans and specifications shall be forwarded to the Officer in Charge, Marine Inspection, in whose district the construction will take place, for submission to the Marine Safety Center, 400 7th Street, SW., Washington, DC 20590-0001 for approval, but if the tank vessel is to be classed, such plans and specifications shall first be approved by a recognized classification society. If the plans and specifications are found to be in substantial agreement with the regulations in this chapter, they shall be approved, properly stamped and dated and distributed as follows: One set to owner or builder; one set to Officer in Charge, Marine Inspection, of the district in which the vessel is to be built; and one set shall be retained at the Marine Safety Center. If such plans and specifications are not approved, the Marine Safety Center shall notify the owner or builder promptly wherein they fail to comply with the regulations in this chapter. For list of electrical plans see subchapter J (Electrical Engineering) of this chapter.

(1) The plans and specifications shall include the arrangement of the cargo gear. Plans and specifications for cargo gear shall be approved by either a recognized classification society or the International Cargo Gear Bureau, Inc.,

§ 31.10-10

46 CFR Ch. I (10-1-00 Edition)

whose home office is located at 90 West Street, Suite 1612, New York, NY 10006, prior to submission to the Officer in Charge, Marine Inspection.

(2) For vessels of 100 meters (328 feet) or more in length contracted for on or after September 7, 1990, a plan must be included which shows how visibility from the navigation bridge will meet the standards contained in § 32.16-1 of this subchapter.

(b) *Inspection.* During construction, and upon completion of each tank vessel, it shall be inspected by the Officer in Charge, Marine Inspection, to determine whether it has been built in accordance with the approved plans and specifications, and, if so, a certificate of inspection endorsed as a permit for the carriage of flammable or combustible liquids in bulk for the proper grade or grades of cargo shall be issued to the vessel or its owner.

(c) *Certificate of class may be accepted.* In the event such tank vessel is classed by the American Bureau of Shipping or other recognized classification society, the approved plans and certificates of such society may be accepted by the Coast Guard as evidence of the structural efficiency of the hull and reliability of machinery, except as otherwise provided for by law and the rules and regulations in this subchapter.

[CGFR 65-50, 30 FR 16662, Dec. 30, 1965, as amended by CGD 74-125A, 47 FR 15230, Apr. 8, 1982; CGD 85-099, 55 FR 32247, Aug. 8, 1990; CGD 95-028, 62 FR 51197, Sept. 30, 1997; USCG-2000-7790, 65 FR 58459, Sept. 29, 2000]

§ 31.10-10 Vessels converted to tank vessels—TB/ALL.

The procedure for the inspection of vessels converted to tank vessels shall conform to the inspection for new tank vessels as called for in § 31.10-5(b), and such vessels shall comply with the requirements of inspections for converted vessels as set forth in the regulations in this subchapter.

§ 31.10-15 Inspection for certification—TB/ALL.

(a) After receiving an application for inspection, the OCMI will inspect a tank vessel in his or her jurisdiction once every 5 years. The OCMI will ensure that every tank vessel is of a structure suitable for the carriage of

flammable and/or combustible liquids in bulk and for the proper grade or grades of cargo the vessel carries while in service. If the OCMI deems it necessary, he or she may direct the vessel to be put in motion, and may adopt any other suitable means to test the tank vessel and its equipment.

(b) The inspection for certification shall include an inspection of the structure, boilers, and other pressure vessels, machinery and equipment. The inspection shall be such as to insure that the vessel, as regards the structure, boilers, and other pressure vessels and their appurtenances, piping, main and auxiliary machinery, electrical installations, life-saving appliances, fire-detecting and extinguishing equipment, pilot boarding equipment, and other equipment is in satisfactory condition and fit for the service for which it is intended, and that it complies with the applicable regulations for such vessels, and determine that the vessel is in possession of a valid certificate issued by the Federal Communications Commission, if required. The lights, means of making sound signals, and distress signals carried by the vessel shall also be subject to the above-mentioned inspection for the purpose of ensuring that they comply with the requirements of the applicable statutes and regulations.

(c) If the vessel passes the inspection for certification, the OCMI will issue a new Certificate of Inspection.

[CGFR 65-50, 30 FR 16662, Dec. 30, 1965, as amended by CGFR 68-32, 33 FR 5712, Apr. 12, 1968; CGFR 68-82, 33 FR 18804, Dec. 18, 1968; CGD 82-036, 48 FR 655, Jan. 6, 1983; CGD 79-032, 49 FR 25455, June 21, 1984; CGD 95-012, 60 FR 48049, Sept. 18, 1995; CGD 95-027, 61 FR 25997, May 23, 1996; USCG-1999-4976, 65 FR 6499, Feb. 9, 2000]

§ 31.10-16 Inspection and certification of cargo gear—TB/ALL.

(a) The owner, operator or master shall provide the Officer in Charge, Marine Inspection with all current valid certificates and registers of cargo gear issued by competent persons or a recognized organization or nonprofit association approved by the Commandant to certify the suitability of the cargo gear.

Coast Guard, DOT

§31.10-17

(b) Every acceptable cargo gear certificate and/or register shall be properly executed by a person authorized to do so and shall:

(1) Certify as to the tests and examinations conducted;

(2) Show the dates on which the tests and examinations were conducted; and

(3) Indicate that the cargo gear described in the certificate or register complies with the standards of the organization or association authorized to issue the certificate or register.

(c) Competent persons for the purposes of this section are defined as—

(1) Surveyors of a classification society recognized by the Commandant under 46 U.S.C. 3316,

(2) Surveyors of a recognized cargo gear organization; or

(3) Responsible officials or employees of the testing laboratories, companies, or organizations who conduct tests of pieces of loose cargo gear, wire rope, or the annealing of gear as may be required by the standards of the organization or association authorized to issue the certificate or register.

(d) The registers issued in connection with cargo gear certification must have all required entries fully completed as of the dates indicated, shall be kept current, and shall include the following:

(1) A register of the cargo handling machinery and the gear accessory thereto carried on the vessel named therein;

(2) Certification of the testing and examination of winches, derricks, and their accessory gear;

(3) Certification of the testing and examination of cranes, hoists, and their accessory gear;

(4) Certification of the testing and examination of chains, rings, hooks, shackles, swivels, and blocks;

(5) Certification of the testing and examination of wire rope;

(6) Certification of the heat treatment of chains, rings, hooks, shackles, and swivels which require such treatment; and,

(7) Certification of the annual thorough examinations of gear not required to be periodically heat treated.

(e) The authorization for an organization to perform the required inspection is granted by the Commandant (G-

MOC), and will continue until superseded, canceled, or modified. The following organization is currently recognized, by the Commandant (G-MOC), as having the technical competence to handle the required inspection:

The International Cargo Gear Bureau, Inc., with home office at 90 West Street, Suite 1612, New York, New York 10006.

[CGFR 65-50, 30 FR 16662, Dec. 30, 1965, as amended by CGD 95-028, 62 FR 51197, Sept. 30, 1997]

§31.10-17 Annual and periodic inspections—TB/ALL.

(a) *Annual inspection.* Your vessel must undergo an annual inspection within 3 months before or after each anniversary date, except as specified in paragraph (b) of this section.

(1) You must contact the cognizant OCMI to schedule an inspection at a time and place which he or she approves. No written application is required.

(2) The scope of the annual inspection is the same as the inspection for certification but in less detail unless the cognizant marine inspector finds deficiencies or determines that a major change has occurred since the last inspection. If deficiencies are found or a major change to the vessel has occurred, the marine inspector will conduct an inspection more detailed in scope to ensure that the vessel is in satisfactory condition and fit for the service for which it is intended. If your vessel passes the annual inspection, the marine inspector will endorse your vessel's current Certificate of Inspection.

(3) If the annual inspection reveals deficiencies in your vessel's maintenance, you must make any or all repairs or improvements within the time period specified by the OCMI.

(4) Nothing in this subpart limits the marine inspector from conducting such tests or inspections he or she deems necessary to be assured of the vessel's seaworthiness.

(b) *Periodic inspection.* Your vessel must undergo a periodic inspection within 3 months before or after the second or third anniversary of the date of your vessel's Certificate of Inspection. This periodic inspection will take the place of an annual inspection.

§ 31.10-17a

(1) You must contact the cognizant OCMI to schedule an inspection at a time and place which he or she approves. No written application is required.

(2) The scope of the periodic inspection is the same as that for the inspection for certification, as specified in § 31.10-15(b). The OCMI will ensure that the vessel is in satisfactory condition and fit for the service for which it is intended. If your vessel passes the periodic inspection, the marine inspector will endorse your vessel's current Certificate of Inspection.

(3) If the periodic inspection reveals deficiencies in your vessel's maintenance, you must make any or all repairs or improvements within the time period specified by the OCMI.

(4) Nothing in this subpart limits the marine inspector from conducting such tests or inspections he or she deems necessary to be assured of the vessel's seaworthiness.

[USCG-1999-4976, 65 FR 6499, Feb. 9, 2000]

§ 31.10-17a Certificate of Inspection: Conditions of validity.

To maintain a valid Certificate of Inspection, you must complete your annual and periodic inspections within the periods specified in § 31.10-17 (a) and (b) and your Certificate of Inspection must be endorsed.

[USCG-1999-4976, 65 FR 6500, Feb. 9, 2000]

§ 31.10-18 Firefighting equipment: General—TB/ALL.

(a) It shall be the duty of the owner, master, or person in charge of a tank vessel to require and have performed at least once in every 12 months, the tests and inspections of all hand portable fire extinguishers, semiportable fire extinguishing systems, and fixed fire extinguishing systems on board, as described in paragraphs (b), (c), and (d) of this section. The owner, master, or person in charge shall keep records of such tests and inspections showing the dates when performed, the number and/or other identification of each unit tested and inspected, and the name(s) of the person(s) and/or company conducting the tests and inspections. Such records shall be made available to the marine inspector upon request and shall be

46 CFR Ch. I (10-1-00 Edition)

kept for the period of validity of the vessel's current certificate of inspection. Where practicable, these records should be kept in or with the vessel's logbook. The conduct of these tests and inspections does not relieve the owner, master, or person in charge of his responsibility to maintain this fire-fighting equipment in proper condition at all times.

(b) The following tests and inspections of portable fire extinguishing equipment shall be made:

TABLE 31.10-18(b)

Type unit	Test
Soda acid	Discharge. Clean hose and inside of extinguisher thoroughly. Recharge.
Foam	Discharge. Clean hose and inside of extinguisher thoroughly. Recharge.
Pump tank (water or antifreeze).	Discharge. Clean hose and inside of extinguisher thoroughly. Recharge with clean water or antifreeze.
Cartridge operated (water, antifreeze or loaded stream).	Examine pressure cartridge and replace if end is punctured or if cartridge is otherwise determined to have leaked or to be in unsuitable condition. Remove liquid, clean hose and inside of extinguisher thoroughly. Recharge with clean water, solution, or antifreeze. Insert charged cartridge.
Stored pressure (water, antifreeze or loaded stream).	See that pressure gage is in operating range. If not, or if seal is broken, weigh or otherwise determine that full charge is in extinguisher. Recharge if pressure is low or if extinguishing agent is needed.
Carbon dioxide	Weigh cylinders. Recharge if weight loss exceeds 10 percent of weight of charge. Inspect hose and nozzle to be sure they are clear. ¹
Dry chemical (cartridge-operated type).	Examine pressure cartridge and replace if end is punctured or if cartridge is otherwise determined to have leaked or to be in unsuitable condition. Inspect hose and nozzle to see if they are clear. Insert charged cartridge. Be sure dry chemical is freeflowing (not caked) and chamber contains full charge.
Dry chemical (stored pressure type).	See that pressure gage is in operating range. If not, or if seal is broken, weigh or otherwise determine that full charge of dry chemical is in extinguisher. Recharge if pressure is low or if dry chemical is needed.
Vaporizing liquid ² (pump type).	Pump a few strokes into clean pail and replace liquid. Keep water out of extinguisher or liquid. Keep extinguisher completely full of liquid.

TABLE 31.10-18(b)—Continued

Type unit	Test
Vaporizing liquid ² (stored pressure type).	See that pressure gage is in operating range. Weigh or check liquid level to determine that full charge of liquid is in extinguisher. Recharge if pressure is low or if liquid is needed.

¹ Cylinders must be tested and marked, and all flexible connections and discharge hoses of semi-portable carbon dioxide and halon extinguishers must be tested or renewed, as required by §§ 147.60 and 147.65 of this chapter.

² Vaporizing-liquid type fire extinguishers containing carbon tetrachloride or chlorobromomethane or other toxic vaporizing liquids shall be removed from all vessels.

(c) The following tests and inspections of fixed fire extinguishing equipment shall be made:

TABLE 31.10-18(c)

Type system	Test
Foam	Systems utilizing a soda solution shall have such solution replaced. In all cases, ascertain that powder is not caked.
Carbon dioxide	Weigh cylinders. Recharge if weight loss exceeds 10 percent of weight of charge. ¹

¹ Cylinders must be tested and marked, and all flexible connections on fixed carbon dioxide and halon extinguishers must be tested or renewed, as required by §§ 147.60 and 147.65 of this chapter.

(d) Deck foam systems shall be tested at the inspection for certification and the periodic inspection by discharging foam for approximately 15 seconds from any nozzle designated by the marine inspector. It shall not be required to deliver foam from all foam outlets, but all lines and nozzles shall be tested with water to prove them to be clear of obstruction. Before the inspection for certification and periodic inspection of deck foam systems utilizing a mechanical foam system, a representative sample of the foam liquid shall be submitted to the manufacturer who will issue a certificate indicating gravity, pH, percentage of water dilution and solid content.

(e) At each inspection for certification, periodic inspection, and at such other times as considered necessary, the inspector shall determine that all fire extinguishing equipment is in suitable condition and that the tests and inspections required by paragraphs (b) through (i) of this section have been conducted. In addition, the marine inspector may require such tests as are

considered necessary to determine the condition of the equipment.

(f) On all fire extinguishing systems, all the piping, controls, valves, and alarms shall be checked by the marine inspector to ascertain that the system is in good operating condition.

(g) The fire main system shall be operated and the pressure checked at the most remote and highest outlets by the marine inspector. All fire hose shall be subjected to a test pressure equivalent to the maximum pressure to which they may be subjected in service, but not less than 100 p.s.i. The marine inspector shall check that the hose couplings are securely fastened in accordance with the regulations of this subchapter.

(h) At each inspection for certification, periodic inspection, and at such other times as considered necessary, all carbon dioxide cylinders for fixed, semiportable, and portable systems shall be examined and replaced if any corrosion is found. They shall also be checked by weighing to determine their contents, and if found to be more than 10 percent under the required contents of carbon dioxide, they shall be recharged.

(i) Steam smothering lines shall be tested with at least 50 pounds per square inch of air pressure or by blowing steam through the lines at the working pressure and a survey made for detecting corrosion and defects using hammer test or such other means as may be necessary.

[CGFR 65-50, 30 FR 16662, Dec. 30, 1965, as amended by CGFR 68-32, 33 FR 5712, Apr. 12, 1968; CGD 84-044, 53 FR 7748, Mar. 10, 1988; USCG-1999-4976, 65 FR 6500, Feb. 9, 2000]

§ 31.10-18a Liquefied gas vessels: additional firefighting equipment inspections.

(a) Once during each 12 month period after the month an original Certificate of Inspection is issued for a liquefied gas vessel under § 31.05-1, the master shall ensure that the firefighting systems required in part 154 of this chapter for a liquefied gas vessel meets the following:

(1) The exterior water spray system must pass a water spray test.

§ 31.10-19

(2) The dry chemical system must meet the manufacturer's specifications for—

(i) The amount of dry chemical powder; and

(ii) The pressure for nitrogen bottles.

(3) The piping, valves, and controls of the system must be operable.

(b) On the same date that the requirements under paragraph (a) of this section are met, the master shall record in the vessel's official logbook the following information:

(1) The date of the inspection.

(2) The identification of each device inspected.

(3) The name of the inspector.

[CGD 74-289, 44 FR 26006, May 3, 1979]

§ 31.10-19 All firefighting equipment may be tested—TB/ALL.

(a) During the inspection of firefighting equipment, the Officer in Charge, Marine Inspection, may require fire apparatus to be tested, and used, except as provided under §§ 31.10-18(h) and 34.15-90(a) of this subchapter.

(b) [Reserved]

§ 31.10-20 Definitions relating to hull examinations—T/B ALL.

As used in this part—

(a) *Drydock examination* means hauling out of a vessel or placing a vessel in a drydock or slipway for an examination of all accessible parts of the vessel's underwater body and all through-hull fittings.

(b) *Internal structural examination* means an examination of the vessel while afloat or in drydock and consists of a complete examination of the vessel's main strength members, including

46 CFR Ch. I (10-1-00 Edition)

the major internal framing, the hull plating, voids, and ballast tanks, but not including cargo or fuel oil tanks.

(c) *Cargo tank internal examination* means an examination of the vessel while afloat or in drydock and consists of an examination of the internals of all cargo tanks; except, if the vessel is certificated to carry cargoes regulated under part 38 or subchapter O of this chapter, the cargo tank internal examination must be accomplished as specified in parts 38 and 151 of this chapter respectively.

(d) *Underwater survey* means the examination, while the vessel is afloat, of all accessible parts of the vessel's underwater body and all through-hull fittings.

[CGD 84-024, 52 FR 39649, Oct. 23, 1987, as amended by CGD 84-024, 53 FR 32229, Aug. 24, 1988; CGD 95-028, 62 FR 51197, Sept. 30, 1997]

§ 31.10-21 Drydock examination, internal structural examination, cargo tank internal examination, and underwater survey intervals—TB/ALL.

(a) Except as provided in paragraphs (b) through (g) of this section, each tank vessel must undergo drydock, internal structural, and cargo tank internal examinations as follows:

(1) Except under paragraph (a)(2) of this section, vessels that operate in salt water must be inspected in accordance with the intervals set forth in table 31.10-21(a). Where table 31.10-21(a) indicates a 2.5 year examination interval, it means a vessel must undergo two examinations within any five year period. No more than three years may elapse between any two examinations.

TABLE 31.10-21(a).--SALT WATER SERVICE VESSELS EXAMINATION INTERVALS IN YEARS

	Ship and single hull barge ⁹	Double hull barge with internal framing ¹	Double hull barge with external framing ²	Single hull barge with independent tanks ^{3,9}	Wood hull ship and barge	Ship and single hull barge Grade D and E cargoes only ^{4,9}	Double hull barge Grade D and E cargoes only ⁵	Single hull asphalt barge ^{6,9}	Double hull asphalt barge ⁷
Drydock.....	2.5	5.0	5.0	5.0	2.5	2.5	5.0	2.5	5.0
Internal structural.....	2.5	2.5	2.5	2.5	5.0	5.0	2.5	10.0	2.5
Cargo tank internal..	⁸ 2.5	⁸ 5.0	⁸ 10.0	⁸ 10.0	⁸ 2.5	5.0	10.0	10.0	15.0

Notes:

¹Applicable to double hull tank barges (double sides, ends, and bottoms) when the structural framing is on the internal tank surface.²Applicable to double hull tank barges (double sides, ends, and bottoms) when the structural framing is on the external tank surface accessible for examination from voids, double bottoms, and other similar spaces.³Applicable to single hull tank barges with independent cargo tanks where the cargo tanks are not a contiguous part of the hull structure and which has adequate clearance between the tanks and between the tanks and the vessel's hull to provide access for examination of all tank surfaces and the hull structure.⁴Applicable to single hull tankships and tank barges certificated for the carriage of Grade D and E cargoes only.⁵Applicable to double hull tank barges (double sides, ends, and bottoms) certificated for the carriage of Grade D and E cargoes only.⁶Applicable to single hull tank barges certificated for the carriage of asphalt only.⁷Applicable to double hull tank barges (double sides, ends, and bottoms) certificated for the carriage of asphalt only.⁸Or as specified in part 38 or 151 as applicable⁹Enhanced survey requirements apply as specified in 33 CFR part 157.

(2) Vessels that operate in fresh water at least six months in every 12 month period since the last drydock examination must be examined in ac-

cordance with the intervals set forth in table 31.10-21(b). Where table 31.10-21(b) indicates a 2.5 year examination interval, it means a vessel must undergo

two examinations within any five year period. No more than three years may elapse between any two examinations.

TABLE 31.10-21(b).-- FRESH WATER SERVICE VESSELS EXAMINATION INTERVALS IN YEARS

	Ship and single hull barge ⁹	Double hull barge with internal framing ¹	Double hull barge with external framing ²	Single hull barge with independent tanks ^{3,9}	Wood hull ship and barge	Ship and single hull barge Grade D and E cargoes only ^{4,9}	Double hull barge Grade D and E cargoes only ⁵	Single hull asphalt barge ^{6,9}	Double hull asphalt barge ⁷
Drydock.....	5.0	10.0	10.0	10.0	2.5	5.0	10.0	5.0	10.0
Internal structural.....	5.0	5.0	5.0	5.0	5.0	5.0	5.0	10.0	5.0
Cargo tank internal.....	^a 5.0	^a 5.0	^a 10.0	^a 10.0	^a 2.5	5.0	10.0	10.0	15.0

Notes:

¹Applicable to double hull tank barges (double sides, ends, and bottoms) when the structural framing is on the internal tank surface.

²Applicable to double hull tank barges (double sides, ends, and bottoms) when the structural framing is on the external tank surface accessible for examination from voids, double bottoms, and other similar spaces.

³Applicable to single hull tank barges with independent cargo tanks where the cargo tanks are not a contiguous part of the hull structure and which has adequate clearance between the tanks and between the tanks and the vessel's hull to provide access for examination of all tank surfaces and the hull structure.

⁴Applicable to single hull tankships and tank barges certificated for the carriage of Grade D and E cargoes only.

⁵Applicable to double hull tank barges (double sides, ends, and bottoms) certificated for the carriage of Grade D and E cargoes only.

⁶Applicable to single hull tank barges certificated for the carriage of asphalt only.

⁷Applicable to double hull tank barges (double sides, ends, and bottoms) certificated for the carriage of asphalt only.

⁸Or as specified in part 38 or 151 as applicable

⁹Enhanced survey requirements apply as specified in 33 CFR part 157.

(b) During each inspection or reinspection for certification, all wing voids, rakes, cofferdams, and other void spaces on tank barges must be opened and checked from on-deck for the presence of water or cargo indicating hull damage or cargo tank leakage. If water or cargo is not present, these spaces need not be gas freed, ventilated, cleaned, or otherwise prepared for personnel entry. If water or cargo is present, an internal structural examination may be required.

(c) If, during an internal structural examination, cargo tank internal examination, or underwater survey, damage or deterioration to the hull plating, structural members, or cargo tanks is discovered, the Officer in Charge, Marine Inspection, may require the vessel to be drydocked or otherwise taken out of service to further assess the extent of the damage and to effect permanent repairs.

(d) Vessels less than 15 years of age (except wooden hull vessels) that are in salt water service with a 2.5 year drydock interval (as indicated in table 31.10-21(a) of this section) or that are in fresh water service with a five year drydock interval (as indicated in table 31.10-21(b) of this section) may be considered for an underwater survey instead of alternate drydock examinations, provided the vessel is fitted with an effective hull protection system. Vessel owners or operators must apply to the Officer in Charge, Marine Inspection, for approval of underwater surveys instead of alternate drydock examinations for each vessel. The application must include the following information:

- (1) The procedure to be followed in carrying out the underwater survey.
- (2) The location where the underwater survey will be accomplished.
- (3) The method to be used to accurately determine the diver location relative to the hull.
- (4) The means that will be provided for examining through-hull fittings.
- (5) The means that will be provided for taking shaft bearing clearances.
- (6) The condition of the vessel, including the anticipated draft of the vessel at the time of the survey.
- (7) A description of the hull protection system.

(e) Vessels otherwise qualifying under paragraph (d) of this section, that are 15 years of age or older may be considered for continued participation in or entry into the underwater survey program on a case-by-case basis, if—

(1) Before the vessel's next scheduled drydocking, the owner or operator submits a request for participation or continued participation to Commandant (G-MOC);

(2) During the vessel's next drydocking after the request is submitted, no appreciable hull deterioration is indicated as a result of a complete set of hull gaugings; and

(3) The results of the hull gauging and the results of the Coast Guard drydock examination together with the recommendation of the Officer in Charge, Marine Inspection, are submitted to Commandant (G-MOC) for final approval.

(f) Each vessel which has not met with the applicable examination schedules in paragraphs (a) through (e) of this section because it is on a voyage, must undergo the required examinations upon completion of the voyage.

(g) The Commandant (G-MOC) may authorize extensions to the examination intervals specified in paragraph (a) of this section.

[CGD 84-024, 52 FR 39649, Oct. 23, 1987, as amended at 53 FR 32230, Aug. 24, 1988; 53 FR 34872, Sept. 8, 1988; CGD 95-072, 60 FR 50461, Sept. 29, 1995; CGD 91-045, 61 FR 39792, July 30, 1996; CGD 96-041, 61 FR 50726, Sept. 27, 1996; CGD 95-028, 62 FR 51198, Sept. 30, 1997]

§31.10-21a Periodic gauging of tank vessel midbodies more than 30 years old that carry certain oil cargoes—TB/ALL.

(a) As used in this section, the term "midbody" means the 40-percent midship length (0.40L) of the tank vessel. The age of the midbody is determined from its year of original construction.

(b) Midbodies of all tank vessels certificated to carry a pollution category I oil cargo listed in 46 CFR Table 30.25-1 must undergo an initial gauging survey and periodic regauging surveys as follows:

- (1) An initial midbody gauging survey must be accomplished no later than the next drydocking inspection after the midbody becomes 30 years old.

§ 31.10-22

46 CFR Ch. I (10-1-00 Edition)

(2) Regaugings:

(i) Midbodies of double hull tank vessels, or single hull tank vessels with independent tanks, that operated in fresh water at least 6 months in every 12-month period since the last drydock examination must be regauged at intervals not exceeding 10 years;

(ii) Midbodies of all other tank vessels must be regauged at intervals not exceeding 5 years.

(c) The midbody gauging survey must be comprised of at least three transverse (girth) belts of deck, bottom, side, inner hull, trunk, and longitudinal bulkhead plating and attached longitudinal members. The number and specific locations of the gauging points shall be to the satisfaction of the Officer in Charge of Marine Inspection (OCMI).

(d) Except as provided in paragraph (f) of this section, within 60 days of the vessel's required compliance date the owner or operator shall submit the following to the OCMI that issued the vessel's current Certificate of Inspection:

(1) The gauging survey results.

(2) An engineering analysis signed by a registered Professional Engineer licensed by any state of the United States or the District of Columbia, or signed by a Coast Guard-approved organization, that—

(i) Certifies the vessel's compliance with the minimum section modulus and plating thickness requirements of subpart 32.59 of this chapter; or

(ii) Proposes structural repairs and/or modifications that will bring the vessel up to the required strength standards.

(e) The vessel owner or operator shall keep a permanent copy of the Coast Guard-approved gauging report available for inspection by the OCMI.

(f) Instead of the submittals required by paragraphs (c) and (d) of this section, current classification with the American Bureau of Shipping or another recognized classification society, or a load line certificate issued in accordance with the International Convention on Load Lines or the International Voyage Load Line Act, may be submitted as evidence of compliance with the requirements of this section.

[CGD 91-209, 58 FR 52602, Oct. 8, 1993]

§ 31.10-22 Notice and plans required.

(a) The master, owner, operator, or agent of the vessel shall notify the Officer in Charge, Marine Inspection, whenever the vessel is to be drydocked regardless of the reason for drydocking.

(b) Each vessel, except barges, that holds a Load Line Certificate must have on board a plan showing the vessel's scantlings. This plan must be made available to the Coast Guard marine inspector whenever the vessel undergoes a drydock examination, internal structural examination, cargo tank internal examination, or underwater survey or whenever repairs are made to the vessel's hull.

(c) Each barge that holds a Load Line Certificate must have a plan showing the vessel's scantlings. The plan need not be maintained on board the barge but must be made available to the Coast Guard marine inspector whenever the barge undergoes a drydock examination, internal structural examination, cargo tank internal examination or underwater survey or whenever repairs are made to the barge's hull.

[CGD 84-024, 52 FR 39651, Oct. 23, 1987]

§ 31.10-24 Integral fuel oil tank examinations—T/ALL.

(a) Each fuel oil tank with at least one side integral to the vessel's hull and located within the hull (*integral fuel oil tank*) is subject to inspection as provided in this section. The owner or operator of the vessel shall have the tanks cleaned out and gas freed as necessary to permit internal examination of the tank or tanks designated by the marine inspector. The owner or operator shall arrange for an examination of the fuel tanks of each vessel during an internal structural examination at intervals not to exceed five years.

(b) Integral non-double-bottom fuel oil tanks need not be cleaned out and internally examined if the marine inspector is able to determine by external examination that the general condition of the tanks is satisfactory.

(c) Double-bottom fuel oil tanks on vessels less than 10 years of age need not be cleaned out and internally examined if the marine inspector is able to determine by external examination

that the general condition of the tanks is satisfactory.

(d) All double-bottom fuel oil tanks on vessels 10 years of age or older but less than 15 years of age need not be cleaned out and internally examined if the marine inspector is able to determine by internal examination of at least one forward double-bottom fuel oil tank, and by external examination of all other double-bottom fuel oil tanks on the vessel, that the general condition of the tanks is satisfactory.

(e) All double-bottom fuel oil tanks on vessels 15 years of age or older but less than 25 years of age need not be cleaned out and internally examined if the marine inspector is able to determine by internal examination of at least one forward, one amidships, and one aft double-bottom fuel oil tank, and by external examination of all other double-bottom fuel oil tanks on the vessel, that the general condition of the tanks is satisfactory.

(f) All double-bottom fuel oil tanks on vessels 25 years of age or older need not be cleaned out and internally examined if the marine inspector is able to determine by internal examination of at least one double-bottom fuel oil tank in way of each cargo tank, and by external examination of all other double-bottom fuel oil tanks, that the general condition of the tanks is satisfactory.

[CGD 84-024, 52 FR 39651, Oct. 23, 1987, as amended at 53 FR 32230, Aug. 24, 1988]

§ 31.10-25 Inspection covering repairs and alterations involving safety—TB/ALL.

No extensive alterations involving the safety of a tank vessel either in regard to hull or machinery shall be made without the approval of the Commandant. Before such alterations are carried out, copies of plans and specifications in triplicate for the work involved shall be forwarded to the Officer in Charge, Marine Inspection, in whose zone the repairs will be made, for submission to Headquarters for approval. If approved one set of the plans and specifications, properly stamped and dated, shall be returned to the owner or to the repair yard designated by the owner; one set to the Officer in Charge, Marine Inspection, who forwarded the

plans and specifications to Headquarters; and one set shall be retained at Headquarters. If such plans and specifications are not approved, the Commandant shall promptly notify the owner or designated shipyard wherein they fail to comply with the regulations in this chapter. No extensive repairs to the hull or machinery which affect the safety of a vessel shall be made without the knowledge of the Officer in Charge, Marine Inspection.

§ 31.10-30 Stability requirements—TB/ALL.

Each tank vessel must meet the applicable requirements in subchapter S of this chapter.

[CGD 79-023, 48 FR 51006, Nov. 4, 1983]

§ 31.10-32 Loading information—TB/ALL.

(a) This section applies to each tankship and tank barge the construction of which begins on or after September 6, 1977.

(b) Each tank vessel over 300 feet in length must have the loading information prescribed in either § 42.15-1(a) or § 45.105(a) of this chapter. For tank vessels subject to the Load Line Acts the information must be approved by the Commandant or by a recognized classification society that is approved by the Commandant. For tank vessels not subject to the Load Line Acts loading information must be approved by the Commandant. If the vessel is a tankship, the approved information must be provided to the master of the vessel. If the vessel is a tank barge, the information must be provided to the person in charge of handling the cargo during loading or off-loading of the barge.

[CGD 75-041, 42 FR 28887, June 6, 1977; 42 FR 35650, July 11, 1977]

§ 31.10-35 Permit to proceed to another port for repair—TB/ALL.

(a) The Officer in Charge, Marine Inspection, may issue a permit to proceed to another port for repair, Form CG-948, to a vessel if in his judgment it can be done with safety even if the certificate of inspection of the vessel has expired or is about to expire.

§ 31.10-40

(b) Such permit will only be issued upon the written application of the master, owner or agent of the vessel.

(c) The permit will state upon its face the conditions under which it is issued and whether or not the vessel is permitted to carry freight or passengers. Passengers may not be carried if the certificate of inspection has expired.

(d) The permit shall be carried in a manner similar to that described in § 31.05-5 for a certificate of inspection.

§ 31.10-40 Inspection during trial trip—T/ALL.

On the trial trip of each new or converted tankship, an inspector shall be present to observe from the standpoint of safety in the carriage of flammable and/or combustible liquids in bulk, the operation of boilers, engines, steering gear, and auxiliaries; and if not satisfied with the performance of such boilers and machinery, appliances, and apparatus for stowage, he shall make such requirements as in his judgment will overcome any deficiencies which may have come under his observation.

§ 31.10-45 Inspection of crew accommodations—TB/ALL.

Crew's quarters shall be inspected to determine their sanitary condition. The Officer in Charge, Marine Inspection, upon completing such inspection, shall notify the master or officer in charge of the vessel of his findings, which shall be entered in the vessel's log book.

§ 31.10-50 Inspection of bilges—TB/ALL.

(a) When inspecting oil-burning vessels, either internal-combustion type or steam-driven type, the marine inspector shall examine the tank tops and bilges in the fireroom and engineroom to see that there is no accumulation of oil which might create a fire hazard.

Subpart 31.15—Manning of Tank Vessels

§ 31.15-1 Licensed officers and crews—TB/ALL.

The Officer in Charge, Marine Inspection (OCMI), that inspects the vessel

46 CFR Ch. I (10-1-00 Edition)

enters on the Certificate of Inspection (COI) for each tank vessel the complement of officers and crew that are required by statute and regulation and that in the judgment of the OCMI are necessary for its safe operation. The OCMI may change the complement from time to time by endorsement to the COI for changes in conditions of employment.

[CGD 79-116, 60 FR 17155, Apr. 4, 1995]

§ 31.15-5 Tank barges—B/ALL.

Tank barges subject to the provisions of this subchapter need not be manned unless, in the judgment of the Officer in Charge, Marine Inspection, such manning is necessary for the protection of life and property and for the safe operation of the vessel.

[CGD 81-059, 54 FR 151, Jan. 4, 1989]

§ 31.15-10 Towing vessels may carry persons in addition to crew—B/LBR.

(a) Towing vessels engaged in towing tank barges on the Great Lakes, inland waters, or rivers, may be authorized by the Coast Guard District Commander of the district to carry on board such number of persons in addition to its crew as shall be deemed necessary to carry on the legitimate business of such towing vessel or barge, not exceeding, however, one person to every net ton of the towing vessel.

(b) A Coast Guard District Commander granting a license to a vessel engaged in towing to carry persons in addition to its crew shall notify the Officer in Charge, Marine Inspection, in whose jurisdiction the vessel receiving the permit is engaged, and the Officer in Charge, Marine Inspection, shall keep a record of the same.

Subpart 31.20—Waters Operated Over

§ 31.20-1 Waters—TB/ALL.

The certificate of inspection shall show the waters over which the tank vessel is permitted to operate, such as: all waters; oceans; coastwise; Great Lakes; bays, sounds, and lakes other than the Great Lakes; rivers; or inland waters tributary to the Gulf of Mexico.

Subpart 31.25—Load Lines**§ 31.25-1 Load lines required—TB/OCL.**

All tank vessels of 150 gross tons or over, or 79 feet in length or greater, navigating the oceans, coastwise waters, and Great Lakes are subject to the regulations in parts 42 to 45, inclusive, subchapter E (Load Lines), of this chapter, as applicable.

[CGFR 69-72, 34 FR 17481, Oct. 29, 1969]

Subpart 31.30—Marine Engineering**§ 31.30-1 Marine engineering regulations and material specifications—TB/ALL.**

(a) All tank vessels are subject to the regulations contained in parts 50 to 63, inclusive, of subchapter F (Marine Engineering) of this chapter, whenever applicable, except as such regulations are modified by the regulations in this subchapter for tank vessels.

[CGFR 68-82, 33 FR 18804, Dec. 18, 1968]

Subpart 31.35—Electrical Engineering**§ 31.35-1 Electrical installations, lighting and power equipment, batteries, etc.—TB/ALL.**

All tank vessels are subject to the regulations contained in subchapter J (Electrical Engineering) of this chapter except as such regulations are modified by the regulations in this subchapter for tank vessels.

§ 31.35-5 Communications; alarm systems, telephone and voice tube systems, engine telegraph systems, etc.—TB/ALL.

All tank vessels are subject to the regulations contained in subchapter J (Electrical Engineering) of this chapter except as such regulations are modified by the regulations in this subchapter for tank vessels.

Subpart 31.36—Lifesaving Appliances and Arrangements**§ 31.36-1 Lifesaving appliances and arrangements—TB/ALL.**

All lifesaving appliances and arrangements on tank vessels must be in accordance with subchapter W (Lifesaving Appliances and Arrangements) of this chapter.

[CGD 84-069, 61 FR 25286, May 20, 1996]

Subpart 31.40—Certificates Under International Convention for Safety of Life at Sea, 1974**§ 31.40-1 Application—T/ALL**

The provisions of this subpart shall apply to all tankships on an international voyage. (See § 30.01-6 of this chapter.)

[CGD 95-012, 60 FR 48049, Sept. 18, 1995, as amended by USCG-1999-4976, 65 FR 6500, Feb. 9, 2000]

§ 31.40-5 Cargo Ship Safety Construction Certificate—T/ALL.

(a) All tankships on an international voyage are required to have a Cargo Ship Safety Construction Certificate. This certificate shall be issued by the U.S. Coast Guard or the American Bureau of Shipping to certain vessels on behalf of the United States of America as provided in Regulation 12, Chapter I, of the International Convention for Safety of Life at Sea, 1974.

(b) All such tankships shall meet the applicable requirements of this chapter for tankships on an international voyage.

[CGFR 65-50, 30 FR 16662, Dec. 30, 1965, as amended by CGD 90-008, 55 FR 30660, July 26, 1990]

§ 31.40-10 Cargo Ship Safety Equipment Certificate—T/ALL.

(a) All tankships on an international voyage are required to have a Cargo Ship Safety Equipment Certificate.

(b) All such tankships shall meet the applicable requirements of this chapter for tankships on an international voyage.

§ 31.40-15

§ 31.40-15 Cargo Ship Safety Radio Certificate—T/ALL.

Every tankship equipped with a radio installation on an international voyage must have a Cargo Ship Safety Radio Certificate. Each radio installation must meet the requirements of the Federal Communication Commission and the International Convention for Safety of Life at Sea.

[USCG-1999-4976, 65 FR 6500, Feb. 9, 2000]

§ 31.40-25 Exemption Certificate—T/ALL.

(a) A tankship may be exempted by the Commandant from complying with certain requirements of the Convention under his administration upon request made in writing to him and transmitted via the Officer in Charge, Marine Inspection.

(b) When an exemption is granted to a tankship by the Commandant under and in accordance with the Convention, an Exemption Certificate describing such exemption shall be issued through the appropriate Officer in Charge, Marine Inspection, in addition to other required certificates.

§ 31.40-30 Safety Management Certificate—T/ALL.

All tankships to which 33 CFR part 96 applies on an international voyage must have a valid Safety Management Certificate and a copy of their company's valid Document of Compliance certificate on board.

[CGD 95-073, 62 FR 67514, Dec. 24, 1997]

§ 31.40-35 Availability of certificates.

The Convention certificates shall be on board the vessel and readily available for examination at all times.

[USCG-1999-4976, 65 FR 6500, Feb. 9, 2000]

§ 31.40-40 Duration of Convention certificates—T/ALL.

(a) The following certificates are valid for a period of not more than 60 months.

(1) A Cargo Ship Safety Construction Certificate.

(2) A Cargo Ship Safety Equipment Certificate.

(3) A Safety Management Certificate.

(4) A Cargo Ship Safety Radio Certificate.

46 CFR Ch. I (10-1-00 Edition)

(b) An Exemption certificate must not be valid for longer than the period of the certificate to which it refers.

(c) A Convention certificate may be withdrawn, revoked, or suspended at any time when it is determined that the vessel is no longer in compliance with applicable requirements. (See § 2.01-70 of this chapter for procedures governing appeals.)

[USCG-1999-4976, 65 FR 6500, Feb. 9, 2000]

§ 31.40-45 American Bureau of Shipping—T/ALL.

(a) The American Bureau of Shipping, with its home office at ABS Plaza, 16855 Northchase Drive, Houston, TX 77060, is hereby designated as an organization duly authorized to issue the *Cargo Ship Safety Construction Certificate* to certain tankships on behalf of the United States of America as provided in Regulation 12, chapter I, of the International Convention for Safety of Life at Sea, 1974, and executive order 12234 and the certificate shall be subject to the requirements in this subpart. The American Bureau of Shipping is authorized to place the official seal of the United States of America on the certificate. This designation and delegation to the American Bureau of Shipping shall be in effect from May 26, 1965, until terminated by proper authority and notice of cancellation is published in the FEDERAL REGISTER.

(b) At the option of the owner or agent of a tankship on an international voyage and on direct application to the American Bureau of Shipping, the Bureau may issue to such tankship a Cargo Ship Safety Construction Certificate, having a period of validity of not more than 60 months after ascertaining that the tankship:

(1) Has met the applicable requirements of the Convention; and,

(2) Is currently classed by the Bureau and classification requirements have been dealt with to the satisfaction of the Bureau.

(c) When the Bureau determines that a tankship to which it has issued a Cargo Ship Safety Construction Certificate no longer complies with the Bureau's applicable requirements for classification, the Bureau shall immediately furnish to the Coast Guard all relevant information, which will be

used by the Coast Guard to determine whether or not to withdraw, revoke or suspend the Cargo Ship Safety Construction Certificate.

[CGFR 65-50, 30 FR 16662, Dec. 30, 1965, as amended by CGD 90-008, 55 FR 30660, July 26, 1990; CGD 96-041, 61 FR 50726, Sept. 27, 1996; USCG-2000-7790, 65 FR 58459, Sept. 29, 2000]

PART 32—SPECIAL EQUIPMENT, MACHINERY, AND HULL REQUIREMENTS

Subpart 32.01—General

Sec.

32.01-1 Incorporation by reference.

Subpart 32.02—Safety Requirements

32.02-1 Means of escape—T/ALL.

32.02-5 Communication between deck-houses—TB/OCLEB.

32.02-10 Rails—TB/ALL.

32.02-15 Guards at dangerous places—TB/ALL.

Subpart 32.05—Markings

32.05-1 Draft marks and draft indicating systems—TB/ALL.

32.05-5 Vessel's name on equipment—TB/ALL.

32.05-10 Name of tankship—T/ALL.

32.05-15 Name of tank barge—B/ALL.

Subpart 32.15—Navigation Equipment

32.15-5 Whistles—T/ALL.

32.15-10 Sounding machines—T/OCLEB.

32.15-15 Anchors, Chains, and Hawsers—TB/ALL.

32.15-30 Radar—T/OC.

32.15-35 Magnetic Compass and Gyro-compass—T/OC.

Subpart 32.16—Navigation Bridge Visibility

32.16-1 Navigation bridge visibility—T/ALL.

Subpart 32.20—Equipment Installations

32.20-1 Equipment installations on vessels during World War II—TB/ALL.

32.20-5 Pressure vacuum relief valves—TB/ALL.

32.20-10 Flame arresters—TB/ALL.

32.20-20 Liquid level gaging—T/ALL.

Subpart 32.22T—Tank Level or Pressure Monitoring Devices

32.22T-1 Scope and applicability.

32.22T-5 Performance standards for tank level or pressure monitoring devices.

Subpart 32.25—General Alarm Systems

32.25-1 General alarm systems for tankships and manned tank barges.

Subpart 32.30—Sound Powered Telephone, Voice Tube, and Engine Order Telegraph Systems

32.30-1 Voice tubes or telephone equipment—T/ALL.

32.30-5 Engine order telegraph equipment—T/ALL.

Subpart 32.35—Main and Auxiliary Machinery

32.35-1 Boilers and machinery—TB/ALL.

32.35-5 Installation of internal combustion engines—TB/ALL.

32.35-10 Steering apparatus on tank vessels—TB/ALL.

32.35-15 Installation of air compressors on tank vessels contracted for on or after June 15, 1977—TB/ALL.

Subpart 32.40—Accommodations for Officers and Crew

32.40-1 Application—TB/ALL.

32.40-5 Intent—T/ALL.

32.40-10 Location of crew spaces—T/ALL.

32.40-15 Construction—T/ALL.

32.40-20 Sleeping accommodations—T/ALL.

32.40-25 Washrooms and toilet rooms—T/ALL.

32.40-30 Messrooms—T/ALL.

32.40-35 Hospital space—T/ALL.

32.40-40 Other spaces—T/ALL.

32.40-45 Lighting—T/ALL.

32.40-50 Heating and cooling—T/ALL.

32.40-55 Insect screens—T/ALL.

32.40-60 Crew accommodations on tankships of less than 100 gross tons and manned tank barges—T/ALL.

32.40-65 Crew accommodations on tankships constructed before June 15, 1987—T/ALL.

Subpart 32.45—Electrical Installations

32.45-1 Installation and details.

Subpart 32.50—Pumps, Piping, and Hose for Cargo Handling

32.50-1 Cargo pumps for tank vessels constructed on or after November 10, 1936—TB/ALL.

32.50-3 Cargo discharge—TB/ALL.

32.50-5 Cargo pump gauges on tank vessels constructed on or after November 10, 1936—TB/ALL.

32.50-10 Cargo pumps on tank vessels with independent cargo tanks which were constructed prior to November 10, 1936—TB/ALL.

- 32.50–15 Cargo piping on tank vessels constructed on or after July 1, 1951—TB/ALL.
- 32.50–20 Cargo piping for tank vessels constructed between November 10, 1936, and July 1, 1951—TB/ALL.
- 32.50–25 Cargo pumps and piping on tank vessels constructed prior to November 10, 1936—TB/ALL.
- 32.50–30 Cargo hose—TB/ALL.
- 32.50–35 Remote manual shutdown for internal combustion engine driven cargo pump on tank vessels—TB/ALL.

Subpart 32.52—Bilge Systems

- 32.52–1 Bilge pumps on tank vessels constructed or converted on or after November 19, 1952—TB/ALL.
- 32.52–5 Bilge piping for pump rooms and adjacent cofferdams on tank vessels constructed or converted on or after November 19, 1952—TB/ALL.
- 32.52–10 Bilge pumps and piping on tank vessels constructed or converted prior to November 19, 1952—TB/ALL.

Subpart 32.53—Inert Gas System

- 32.53–1 Application—T/ALL.
- 32.53–3 Exemptions.
- 32.53–5 Operation—T/ALL.
- 32.53–10 General—T/ALL.

Subpart 32.55—Ventilation and Venting

- 32.55–1 Ventilation of tank vessels constructed on or after July 1, 1951—TB/ALL.
- 32.55–5 Ventilation of tank vessels constructed between November 10, 1936, and July 1, 1951—TB/ALL.
- 32.55–10 Ventilation of tank vessels constructed prior to November 10, 1936—TB/ALL.
- 32.55–15 Ventilation for hold spaces—TB/ALL.
- 32.55–20 Venting of cargo tanks of tankships constructed on or after July 1, 1951—T/ALL.
- 32.55–25 Venting of cargo tanks of tank barges constructed on or after July 1, 1951—B/ALL.
- 32.55–30 Venting of cargo tanks of tank vessels constructed between November 10, 1936, and July 1, 1951—TB/ALL.
- 32.55–35 Venting of cargo tanks on tank vessels constructed prior to November 10, 1936—TB/ALL.
- 32.55–45 Venting of cofferdams and void spaces of tank vessels constructed on or after November 10, 1936—TB/ALL.
- 32.55–50 Ventilation of tankships that have a keel laying date on or after January 1, 1975—T/ALL.

Subpart 32.56—Structural Fire Protection for Tank Ships With a Keel Laying Date On or After January 1, 1975

- 32.56–1 Application—T/ALL.
- 32.56–5 General—T/ALL.
- 32.56–10 Navigation positions—T/ALL.
- 32.56–15 Deck spills—T/ALL.
- 32.56–20 Insulation of exterior boundaries: Superstructures and deckhouses—T/ALL.
- 32.56–21 Openings in exterior boundaries: Accommodation, service, and control spaces—T/ALL.
- 32.56–22 Openings in and insulation of boundaries: Other spaces—T/ALL.
- 32.56–25 Category A machinery spaces: Windows and port lights—T/ALL.
- 32.56–30 Category A machinery spaces: Bulkheads and decks—T/ALL.
- 32.56–35 Doors—T/ALL.
- 32.56–40 Category A machinery spaces: Insulation—T/ALL.
- 32.56–45 Draft stops—T/ALL.
- 32.56–50 Combustible veneers—T/ALL.
- 32.56–55 Control spaces—T/ALL.
- 32.56–60 Ventilation ducts—T/ALL.

Subpart 32.57—Structural Fire Protection for Tank Vessels Contracted for On or After January 1, 1963

- 32.57–1 Application—TB/ALL.
- 32.57–5 Definitions—TB/ALL.
- 32.57–10 Construction—TB/ALL.

Subpart 32.59—Minimum Longitudinal Strength and Plating Thickness Requirements for Unclassed Tank Vessels That Carry Certain Oil Cargoes—TB/ALL

- 32.59–1 Minimum section modulus and plating thickness requirements—TB/ALL.

Subpart 32.60—Hull Requirements for Tank Vessels Constructed On or After July 1, 1951

- 32.60–1 Scantlings, material, and workmanship—TB/ALL.
- 32.60–5 Subdivision of cargo space—TB/ALL.
- 32.60–10 Segregation of cargo; Grade A, B, C, or D—TB/ALL.
- 32.60–15 Segregation of cargo; Grade E—TB/ALL.
- 32.60–20 Pumprooms on tank vessels carrying Grade A, B, C, D and/or E liquid cargo—TB/ALL.
- 32.60–25 Living quarters—TB/ALL.
- 32.60–30 Tank vessels with independent tanks—TB/ALL.
- 32.60–35 Tank vessels carrying Grade A liquid cargo—TB/ALL.
- 32.60–40 Construction and testing of cargo tanks and bulkheads—TB/ALL.
- 32.60–45 Segregation of spaces containing the emergency source of electric power—TB/ALL.

Coast Guard, DOT

§ 32.01-1

Subpart 32.63—Hull and Cargo Tank Requirements for Tank Barges Constructed or Converted On or After July 1, 1964, and Carrying Certain Dangerous Bulk Cargoes

- 32.63-1 Application—B/ALL.
- 32.63-5 Barge hull classifications—B/ALL.
- 32.63-8 Alternative arrangements—B/ALL.
- 32.63-10 Rakes and coamings—B/ALL.
- 32.63-20 Hull structure—B/ALL.
- 32.63-25 Cargo tanks and supports—B/ALL.

Subpart 32.65—Hull Requirements for Tank Vessels Constructed On or After November 10, 1936, and Prior to July 1, 1951

- 32.65-1 Application—TB/ALL.
- 32.65-5 Scantlings, material, and workmanship—TB/ALL.
- 32.65-10 Subdivision of cargo space—TB/ALL.
- 32.65-15 Cofferdams—TB/ALL.
- 32.65-20 Pumprooms—TB/ALL.
- 32.65-25 Living quarters—TB/ALL.
- 32.65-30 Tank vessels with independent tanks—TB/ALL.
- 32.65-35 Tank vessels carrying Grade A liquids—TB/ALL.
- 32.65-40 Construction and testing of cargo tanks and bulkheads—TB/ALL.

Subpart 32.70—Hull Requirements for Steel Hull Tank Vessels Constructed Prior to November 10, 1936

- 32.70-1 Application—TB/ALL.
- 32.70-5 Hull requirements; general—TB/ALL.
- 32.70-10 Cofferdams—TB/ALL.
- 32.70-15 Pumprooms—TB/ALL.
- 32.70-20 Pump-engine compartment—TB/ALL.
- 32.70-25 Cargo tanks—TB/ALL.

Subpart 32.75—Hull Requirements for Wood Hull Tank Vessels Constructed Prior to November 10, 1936

- 32.75-1 Application—TB/ALL.
- 32.75-5 Hull requirements; general—TB/ALL.
- 32.75-10 Cargo tanks—TB/ALL.
- 32.75-15 Electric bonding and grounding for tanks—TB/ALL.
- 32.75-20 Hold spaces and bulkheads—TB/ALL.

Subpart 32.80—Tank Barges Constructed of Materials Other Than Steel or Iron

- 32.80-1 General requirements—B/ALL.

Subpart 32.85—Lamp and Paint Rooms and Similar Compartments on Tankships

- 32.85-1 Fireproofing of lamp, oil and paint rooms—T/ALL.

Subpart 32.90—Pilot Boarding Equipment

- 32.90-1 Pilot boarding equipment.

AUTHORITY: 46 U.S.C. 2103, 3306, 3703, 3719; E.O. 12234, 45 FR 58801, 3 CFR, 1980 Comp., p. 277; 49 CFR 1.46; Subpart 32.59 also issued under the authority of Sec. 4109, Pub. L. 101-380, 104 Stat. 515.

SOURCE: CGFR 65-50, 30 FR 16671, Dec. 30, 1965, unless otherwise noted.

Subpart 32.01—General

§ 32.01-1 Incorporation by reference.

(a) Certain material is incorporated by reference into this part with the approval of the Director of the Federal Register in accordance with 5 U.S.C. 552(a). To enforce any edition other than that specified in paragraph (b) of this section, the Coast Guard must publish notice of change in the FEDERAL REGISTER and make the material available to the public. All approved material is on file at the Office of the Federal Register, 800 North Capitol Street, NW., suite 700, Washington, DC and at the U.S. Coast Guard, Office of Design and Engineering Standards (G-MSE), 2100 Second Street SW., Washington, DC 20593-0001 and is available from the sources indicated in paragraph (b) of this section.

(b) The material approved for incorporation by reference in this part and the sections affected are:

American Bureau of Shipping (ABS)

ABS Plaza, 16855 Northchase Drive, Houston, TX 77060

Rules for Building and Classing Steel Vessels, 1989.....32.15-15; 32.60-10; 32.65-40

American Society for Testing and Materials (ASTM)

100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

ASTM D 4986-98, Standard Test Method for Horizontal Burning Characteristics of Cellular Polymeric Materials.....32.57-10

§ 32.02-1

ASTM F 1273-91 (1997), Standard Specification for Tank Vent Flame Arresters.....32.20-10

[CGD88-032, 56 FR 35820, July 29, 1991, as amended by CGD 95-072, 60 FR 50461, Sept. 29, 1995; CGD 96-041, 61 FR 50727, Sept. 27, 1996; CGD 97-057, 62 FR 51043, Sept. 30, 1997; USCG-1999-5151, 64 FR 67177, Dec. 1, 1999; USCG-2000-7790, 65 FR 58459, Sept. 29, 2000]

Subpart 32.02—Safety Requirements

§ 32.02-1 Means of escape—T/ALL.

On all tankships where the plans and arrangements will possibly permit, all passageways leading to living quarters, or places where anyone may be regularly employed, shall be provided with not less than two avenues of escape so located that if one of such avenues is not available another may be. The locality and arrangement of such additional means of escape shall be determined by the inspectors as will in their judgment best carry out the purpose for which this provision was made.

[CGFR 65-50, 30 FR 16671, Dec. 30, 1965. Redesignated by CGD 88-032, 56 FR 35820, July 29, 1991]

§ 32.02-5 Communication between deckhouses—TB/OCLB.

On all tank vessels where the distance between deckhouses is more than 46 meters (150 feet), a fixed means of facilitating communication between both ends of the vessel, such as a raised fore and aft bridge or side tunnels, must be provided. Previously approved arrangements may be retained so long as they are maintained in satisfactory condition to the satisfaction of the Officer in Charge, Marine Inspection.

[CGD 95-027, 61 FR 25997, May 23, 1996]

§ 32.02-10 Rails—TB/ALL.

(a) All tank vessels, except unmanned tank barges, contracted for on or after July 1, 1969, shall have efficient guard rails or bulwarks on decks and bridges. The height of rails or bulwarks shall be at least 39½ inches from the deck except that where this height would interfere with the normal operation of the vessel, a lesser height may be approved by the Commandant. At exposed peripheries of the freeboard

46 CFR Ch. I (10-1-00 Edition)

and superstructure decks the rails shall be in at least three courses including the top. The opening below the lowest course shall not be more than 9 inches. The courses shall not be more than 15 inches apart. In the case of ships with rounded gunwales, the guard rail supports shall be placed on the flat of the deck. On other decks and bridges the rails shall be in at least two courses, including the top, approximately evenly spaced. All rails shall consist of solid or tubular sections or chains or wire rope or a combination thereof.

(b) Where it can be shown to the satisfaction of the Commandant that a vessel is engaged exclusively on voyages of a sheltered nature, the provisions of paragraph (a) of this section may be relaxed.

(c) Tank vessels contracted for prior to July 1, 1969, except unmanned tank barges, assigned a deeper load line under part 42 of subchapter E (Load Lines) of this chapter shall have efficient guard rails or bulwarks as required by paragraph (a) of this section. Otherwise, existing rails and bulwarks previously approved will be considered satisfactory so long as they are maintained in good condition. Minor repairs and alterations may be made to the same standards as the original construction.

(d) All tank vessels in ocean and coastwise service, except unmanned tank barges, constructed on or after June 15, 1987, must have suitable storm rails installed in all passageways and at the deckhouse sides on weather decks where persons on board might have normal access. Storm rails must be installed on both sides of passageways which are six feet or more in width. Tank vessels to which this paragraph applies constructed prior to June 15, 1987, may retain previously accepted or approved installations so long as they are maintained in good condition to the satisfaction of the Officer in Charge, Marine Inspection.

[CGFR 69-72, 34 FR 17481, Oct. 29, 1969, as amended by CGD 84-073; 52 FR 18362, May 15, 1987; 52 FR 22751, June 15, 1987. Redesignated by CGD 88-032, 56 FR 35820, July 29, 1991]

Coast Guard, DOT

§ 32.15-5

§ 32.02-15 Guards at dangerous places—TB/ALL.

All exposed and dangerous places such as gears and machinery shall be properly protected with covers, guards or rails in order that the danger of accidents may be minimized. On vessels equipped with radio communication, the lead-ins shall be efficiently incased or insulated to insure against accidental shock. Such lead-ins shall be located so as not to interfere with the launching of lifeboats and life rafts.

[CGFR 65-50, 30 FR 16671, Dec 30, 1965. Redesignated by CGD 88-032, 56 FR 35820, July 29, 1991]

Subpart 32.05—Markings

§ 32.05-1 Draft marks and draft indicating systems—TB/ALL.

(a) All vessels must have draft marks plainly and legibly visible upon the stem and upon the sternpost or rudderpost or at any place at the stern of the vessel as may be necessary for easy observance. The bottom of each mark must indicate the draft.

(b) The draft must be taken from the bottom of the keel to the surface of the water at the location of the marks.

(c) In cases where the keel does not extend forward or aft to the location of the draft marks, due to raked stem or cutaway skeg, the datum line from which the drafts shall be taken, shall be obtained by projecting the line of the bottom of the keel forward or aft, as the case may be, to the location of the draft marks.

(d) In cases where a vessel may have a skeg or other appendage extending locally below the line of the keel, the draft at the end of the vessel adjacent to such appendage shall be measured to a line tangent to the lowest part of such appendage and parallel to the line of the bottom of the keel.

(e) Draft marks must be separated so that the projections of the marks onto a vertical plane are of uniform height equal to the vertical spacing between consecutive marks.

(f) Draft marks must be painted in contrasting color to the hull.

(g) In cases where draft marks are obscured due to operational constraints or by protrusions, the vessel must be

fitted with a reliable draft indicating system from which the bow and stern drafts can be determined.

[CGFR 65-50, 30 FR 16671, Dec. 30, 1965, as amended by CGD 89-037, 57 FR 41821, Sept. 11, 1992]

§ 32.05-5 Vessel's name on equipment—TB/ALL.

The equipment of all tank vessels, such as fire hose, fire axes, lifeboats, life rafts, life preservers, and lifeboats, shall be painted or branded with the name of the vessel upon which they are used.

§ 32.05-10 Name of tankship—T/ALL.

Every tankship shall have the name marked upon each bow and upon the stern, and the home port shall also be marked upon the stern. The name shall be in a light color on a dark ground, or in a dark color on a light ground, and shall be distinctly visible. The smallest letters used shall be not less than 4 inches in size. In addition, every tankship shall have her name conspicuously displayed in distinct plain letters, of not less than 6 inches in size, on each outer side of the pilothouse.

[CGFR 65-50, 30 FR 16657, Dec. 30, 1965, as amended by CGFR 72-104R, 37 FR 14233, July 18, 1972]

§ 32.05-15 Name of tank barge—B/ALL.

Every tank barge shall have its name or number carved, punch-marked, or welded on the main beam, inside the cargo hatch, or other suitable permanent part of the vessel's structure for the purpose of identification. The vessel's name or number shall be so displayed at the highest part of the vessel's hull or permanent structure that the name or number can be seen from either side.

[CGFR 65-50, 30 FR 16657, Dec. 30, 1965, as amended by CGFR 72-104R, 37 FR 14233, July 18, 1972]

Subpart 32.15—Navigation Equipment

§ 32.15-5 Whistles—T/ALL.

(a) [Reserved]

(b) On tankships contracted for on and after November 19, 1955 means shall be provided to operate the whistle

§ 32.15-10

from a position adjacent to the main steering station and from the steering station on top of the pilothouse where such steering station is fitted. Details of the whistle operating devices shall meet the requirements of subchapter J (Electrical Engineering) of this chapter.

NOTE: Appendix A in 33 CFR subchapter D contains the International Regulations for Preventing Collisions at Sea, 1972.

[CGFR 65-50, 30 FR 16671, Dec. 30, 1965, as amended by CGD 74-125A, 47 FR 15230, Apr. 8, 1982; CGD 82-036, 48 FR 654, Jan. 6, 1983]

§ 32.15-10 Sounding machines—T/OCL.

All mechanically propelled vessels in ocean or coastwise service of 500 gross

46 CFR Ch. I (10-1-00 Edition)

tons and over, and all mechanically propelled vessels in of 500 gross tons and over and certificated for service on the River St. Lawrence eastward of the lower exit of the St. Lambert Lock at Montreal, Canada, must be fitted with an efficient electronic deep-sea sounding apparatus.

[CGD 95-027, 61 FR 25997, May 23, 1996]

§ 32.15-15 Anchors, Chains, and Hawsers—TB/ALL

(a) *Application.* Use the following table to determine which provisions of this section apply to you:

If you own . . .	And . . .	Then . . .
(1) A tankship or a manned seagoing barge.	It was constructed before June 15, 1987,	It must meet the requirements of paragraphs (d) and (f).
(2) A tankship or a manned seagoing barge.	It was constructed on or after June 15, 1987,	It must meet all the requirements of this section except paragraphs (d) and (e).
(3) An unmanned barge equipped with anchors.		It must meet the requirements of paragraphs (e) and (f).

(b) *Ocean, Coastwise, or Great Lakes Service.* Tankships in ocean, coastwise, or Great Lakes service and manned seagoing barges must be fitted with anchors, chains and hawsers in general agreement with the standards established by the American Bureau of Shipping. The current standards of other recognized classification societies may also be accepted upon approval by the Commandant.

(c) *Lakes, Bays, and Sounds, or River Service.* Tankships in lakes, bays, and sounds, or river service must be fitted with such ground tackle and hawsers as deemed necessary by the Officer in Charge, Marine Inspection, depending upon the size of the tankship and the waters on which it operates.

(d) *Tankships and Barges Constructed Before June 15, 1987.* For each tankship or manned seagoing barge constructed before June 15, 1987, except a barge specified in paragraph (e) of this section, the equipment previously accepted or approved is satisfactory for the same service so long as it is maintained in good condition to the satisfaction of the Officer in Charge, Marine Inspection (OCMI). If the service of the

vessel changes, the OCMI will evaluate the suitability of the equipment.

(e) *Barges Equipped with Anchors to Comply with 33 CFR 155.230(b)(1).* Each barge equipped with an anchor, to comply with 33 CFR 155.230(b)(1), must be fitted with an operable anchoring system that includes a cable or chain, and a winch or windlass. All components of the system must be in general conformity with the standards issued by a recognized classification society. A list of recognized classification societies, including information for ordering copies of approved standards, is available from Commandant (G-MSE), 2100 Second Street SW., Washington, DC 20593-0001; telephone (202) 267-6925 or fax (202) 267-4816. If the Coast Guard finds that your anchoring system is not in general conformity with an approved standard, it will advise you how to bring it into such conformity.

(f) *Operation and Performance.* Each anchor, exposed length of chain or cable, and hawser must be visually inspected before the barge begins each voyage. The anchor must be stowed so that it is ready for immediate use in an emergency. The barge must have a

Coast Guard, DOT

§ 32.16-1

working means for releasing the anchor that can be operated safely by one or two persons.

[CGD 84-073, 52 FR 18362, May 15, 1987; 52 FR 22751, June 15, 1987, as amended by USCG 1998-4443, 63 FR 71764, Dec. 30, 1998; USCG 1998-4443, 65 FR 31813, May 19, 2000]

EFFECTIVE DATE NOTE: By USCG 1998-4443, 63 FR 71764, Dec. 30, 1998, § 32.15-15 was amended by adding paragraph (e), effective Dec. 11, 2000. By USCG 1998-4443, 65 FR 31813, May 19, 2000, § 32.15-15 was further amended by revising paragraph (e), effective Dec. 11, 2000. For the convenience of the user, paragraph (e) published Dec. 30, 1998, is set forth as follows:

§ 32.15-15 Anchors, Chains, and Hawsers-TB/ALL.

* * * * *

(e) *Barges Equipped with Anchors to Comply with 33 CFR 155.230(b)(1).* Each barge equipped with an anchor, to comply with 33 CFR 155.230(b)(1), must be fitted with an operable anchoring system that includes a cable or chain, and a winch or windlass. All components of the system must be in substantial agreement with the standards issued by the American Bureau of Shipping (ABS). The current standards of other recognized classification societies are acceptable if they are approved by the Commandant (G-MSE).

* * * * *

§ 32.15-30 Radar—T/OC.

All tankships of 1,600 gross tons and over in ocean or coastwise service must be fitted with a marine radar system for surface navigation. Facilities for plotting radar readings must be provided on the bridge.

[CGD 74-074, 42 FR 5963, Jan. 31, 1977]

§ 32.15-35 Magnetic Compass and Gyrocompass—T/OC.

(a) All tankships in ocean or coastwise service must be fitted with a magnetic compass.

(b) All tankships of 1,600 gross tons and over in ocean or coastwise service must be fitted with a gyrocompass in addition to the magnetic compass.

(c) Each tankship must have an illuminated repeater for the gyrocompass required under paragraph (b) that is at the main steering stand unless the gyro-

compass is illuminated and is at the main steering stand.

[CGD 74-074, 42 FR 5963, Jan. 31, 1977]

Subpart 32.16—Navigation Bridge Visibility

§ 32.16-1 Navigation bridge visibility-T/ALL.

Each tankship which is 100 meters (328 feet) or more in length and contracted for on or after September 7, 1990, must meet the following requirements:

(a) The field of vision from the navigation bridge, whether the vessel is in a laden or unladen condition, must be such that:

(1) From the conning position, the view of the sea surface is not obscured forward of the bow by more than the lesser of two ship lengths or 500 meters (1,640 feet) from dead ahead to 10 degrees on either side of the vessel. Within this arc of visibility any blind sector caused by cargo, cargo gear, or other permanent obstruction must not exceed 5 degrees.

(2) From the conning position, the horizontal field of vision extends over an arc from at least 22.5 degrees abaft the beam on one side of the vessel, through dead ahead, to at least 22.5 degrees abaft the beam on the other side of the vessel. Blind sectors forward of the beam caused by cargo, cargo gear, or other permanent obstruction must not exceed 10 degrees each, nor total more than 20 degrees, including any blind sector within the arc of visibility described in paragraph (a)(1) of this section.

(3) From each bridge wing, the field of vision extends over an arc from at least 45 degrees on the opposite bow, through dead ahead, to at least dead astern.

(4) From the main steering position, the field of vision extends over an arc from dead ahead to at least 60 degrees on either side of the vessel.

(5) From each bridge wing, the respective side of the vessel is visible forward and aft.

(b) Windows fitted on the navigation bridge must be arranged so that:

§ 32.20-1

(1) Framing between windows is kept to a minimum and is not installed immediately in front of any work station.

(2) Front windows are inclined from the vertical plane, top out, at an angle of not less than 10 degrees and not more than 25 degrees;

(3) The height of the lower edge of the front windows is limited to prevent any obstruction of the forward view previously described in this section; and

(4) The height of the upper edge of the front windows allows a forward view of the horizon at the conning position, for a person with a height of eye of 1.8 meters (71 inches), when the vessel is at a forward pitch angle of 20 degrees.

(c) Polarized or tinted windows must not be fitted.

[CGD 85-099, 55 FR 32247, Aug. 8, 1990]

Subpart 32.20—Equipment Installations

§ 32.20-1 Equipment installations on vessels during World War II—TB/ALL.

Boilers, pressure vessels, machinery, piping, electrical and other installations, including lifesaving, firefighting and other safety equipment, installed on vessels during the Unlimited National Emergency declared by the President on May 27, 1941, and prior to the termination of title V of the Second War Powers Act, as extended (sec. 501, 56 Stat. 180, 50 U.S.C. 635), which do not fully meet the detailed requirements of the regulations in this chapter, may be continued in service if found to be satisfactory by the Commandant for the purpose intended. In each instance prior to final action by the Commandant, the Officer in Charge, Marine Inspection, shall notify Headquarters of the facts in the case, together with recommendations relative to suitability for retention.

§ 32.20-5 Pressure vacuum relief valves—TB/ALL.

The pressure vacuum relief valve shall be of a type and size approved by the Commandant for the purpose intended. For specifications and procedures re approval, see subpart 162.017 of

46 CFR Ch. I (10-1-00 Edition)

subchapter Q (Specifications) of this chapter.

§ 32.20-10 Flame arresters—TB/ALL.

Flame arresters must be of a type and size suitable for the purpose intended and meet ASTM F 1273 (incorporated by reference, see § 32.01-1).

[CGD 88-032, 56 FR 35821, July 29, 1991, as amended by USCG-2000-7790, 65 FR 58459, Sept. 29, 2000]

§ 32.20-20 Liquid level gaging—T/ALL.

On tankships, the construction or conversion of which is started on or after July 1, 1951, a method for determining the level of the liquid in a cargo tank without opening ullage holes, cargo hatches, or Butterworth plates, shall be provided on all tankships certificated for the carriage of Grade A liquids: *Provided*, That ullage holes fitted with sounding pipes tightly secured to the underside of the tank tops, open at the bottom, and extending to within 18 inches or less of the bottom of the tank shall be considered as complying with the foregoing requirement.

Subpart 32.22T—Tank Level or Pressure Monitoring Devices

SOURCE: CGD 90-071, 62 FR 14830, Mar. 28, 1997, unless otherwise noted.

§ 32.22T-1 Scope and applicability.

(a) *Effective period*. This subpart is effective for 2 years from April 28, 1997.

(b) *Applicability*. The standards set forth in this subpart apply to tank level or pressure monitoring devices developed for use on single-hull tank vessels over 5,000 gross tons carrying oil in bulk as cargo.

(c) *Scope*. This subpart sets performance standards for tank level or pressure monitoring devices. If a device meeting these standards is developed during the effective period of this subpart, the Coast Guard will address installation requirements separately. During the effective period of this subpart no owner or operator is required to install any tank level or pressure

Coast Guard, DOT

monitoring device meeting the performance standards of this subpart unless required by the Coast Guard in a separate regulation.

§32.22T-5 Performance standards for tank level or pressure monitoring devices.

(a) A tank level or pressure monitoring device shall determine the level of the liquid in a cargo tank without opening ullage holes, cargo hatches, or butterworth plates.

(b) A tank level or pressure monitoring device shall meet the following standards:

(1) Automatically compensate for changes in cargo volume due to temperature.

(2) Meet the requirements in §111.105 of this chapter when used in hazardous locations.

(3) Indicate any loss of power or failure of the tank level or pressure monitoring device and monitor the condition of the alarm circuitry and sensor by an electronic self-testing feature.

(4) Alarm before cargo in the cargo tank declines to a level of 0.5 percent below the quantity to which it was loaded, or 1,000 gallons of cargo, whichever is less.

(5) Operate without degradation in heavy seas, moisture, and varying weather conditions.

(6) Not alarm when loading or off loading cargo.

(7) Have audible and visible alarm indicators that can be seen and heard on the navigation bridge of the vessel, or towing vessel for non-self-propelled vessels, which are distinctly identifiable as cargo tank level or pressure monitoring alarms.

Subpart 32.25—General Alarm Systems

§32.25-1 General alarm systems for tankships and manned tank barges.

A general alarm system must be installed on tankships and manned tank barges which meets the requirements in subchapter J (Electrical Engineering Regulations) of this chapter.

[CGD 74-125A, 47 FR 15230, Apr. 8, 1982]

§ 32.35-10

Subpart 32.30—Sound Powered Telephone, Voice Tube, and Engine Order Telegraph Systems

§32.30-1 Voice tubes or telephone equipment—T/ALL.

Each tankships must have communication equipment which meets the requirements in subchapter J (Electrical Engineering Regulations) of this chapter.

[CGD 74-125A, 47 FR 15230, Apr. 8, 1982]

§32.30-5 Engine order telegraph equipment—T/ALL.

Each tankship must have an engine order telegraph system which meets the requirements in subchapter J (Electrical Engineering Regulations) of this chapter.

[CGD 74-125A, 47 FR 15230, Apr. 8, 1982]

Subpart 32.35—Main and Auxiliary Machinery

§32.35-1 Boilers and machinery—TB/ALL.

Boilers, main and auxiliary machinery, and piping systems shall conform to the requirements of subchapter F (Marine Engineering) of this chapter, except as otherwise provided for in this subchapter.

§32.35-5 Installation of internal combustion engines—TB/ALL.

Each internal combustion engine located on the weather deck shall be provided with a ventilated metal hood or, where space permits, with a well-ventilated metal housing of sufficient size to allow for proper operation and maintenance.

§32.35-10 Steering apparatus on tank vessels—TB/ALL.

Tank vessels shall be provided with steering apparatus as required by part 58 of subchapter F (Marine Engineering) of this chapter.

[CGFR 68-82, 33 FR 18805, Dec. 18, 1968]

§ 32.35-15

§ 32.35-15 Installation of air compressors on tank vessels contracted for on or after June 15, 1977—TB/ALL.

No tank vessel, except an oil pollution clean-up vessel, that carries petroleum products grades A thru D contracted for on or after June 15, 1977 may have an air compressor on an air compressor intake installed in any of the following cargo areas:

- (a) A cargo handling room.
- (b) An enclosed space containing cargo piping.
- (c) A space in which cargo hose is stowed.
- (d) A space adjacent to a cargo tank or cargo tank hold.
- (e) A space within three meters of any of the following:
 - (1) A cargo tank opening.
 - (2) An outlet for cargo gas or vapor.
 - (3) A cargo pipe flange.
 - (4) A cargo valve.
 - (5) An entrance or ventilation opening to a cargo handling room.
- (f) Except for tank barges, the cargo deck space. For the purpose of this paragraph, *cargo deck space* means the volume bounded by the open deck over the cargo tank block, including all ballast tanks within the cargo tank block, extending to the full width of the vessel, plus three meters (about 10 feet) fore and aft of the cargo tank block and up to a height of 2.4 meters (about 8 feet) above the deck.
- (g) An enclosed space having an opening into a location described in paragraphs (a)-(f) of this section.
- (h) A location similar to those described in paragraphs (a)-(g) of this section in which cargo vapors or gases may be present.

[CGD 75-017, 42 FR 25735, May 19, 1977, as amended by CGD 75-017, 42 FR 45677, Sept. 12, 1977]

Subpart 32.40—Accommodations for Officers and Crew

SOURCE: CGD 95-027, 61 FR 25997, May 23, 1996, unless otherwise noted.

§ 32.40-1 Application—TB/ALL.

(a) The provisions of this subpart, except § 32.40-60 and § 32.40-65, apply to all tankships of 100 gross tons and over constructed on or after June 15, 1987.

46 CFR Ch. I (10-1-00 Edition)

(b) Tankships of less than 100 gross tons and manned tank barges must meet the requirements of § 32.40-60.

(c) Tankships of 100 gross tons and over constructed prior to June 15, 1987, must meet the requirements of § 32.40-65.

§ 32.40-5 Intent—T/ALL.

The accommodations provided for officers and crew on all vessels must be securely constructed, properly lighted, heated, drained, ventilated, equipped, located, arranged and insulated from undue noise, heat and odors.

§ 32.40-10 Location of crew spaces—T/ALL.

(a) Crew quarters must not be located farther forward in the vessel than a vertical plane located at 5 percent of the vessel's length abaft the forward side of the stem at the designed summer load water line. However, for vessels in other than ocean or coastwise service, this distance need not exceed 8.5 meters (28 feet). For the purposes of this paragraph, the vessel's length must be as defined in § 43.15-1 of subchapter E (Load Lines) of this chapter. Unless approved by the Commandant, no section of the deck head of the crew spaces may be below the deepest load line.

(b) There must be no direct communication, except through solid, close fitted doors or hatches between crew spaces and chain lockers, or machinery spaces.

§ 32.40-15 Construction—T/ALL.

All crew spaces are to be constructed and arranged in a manner suitable to the purpose for which they are intended and so that they can be kept in a clean, workable and sanitary condition.

§ 32.40-20 Sleeping accommodations—T/ALL.

(a) Where practicable, each licensed officer shall be provided with a separate stateroom.

(b) Sleeping accommodations for the crew must be divided into rooms, no one of which may berth more than 4 persons.

(c) Each room must be of such size that there is at least 2.78 square meters

(30 square feet) of deck area and a volume of at least 5.8 cubic meters (210 cubic feet) for each person accommodated. The clear head room must not be less than 190 centimeters (75 inches). In measuring sleeping accommodations any furnishings contained therein for the use of the occupants are not to be deducted from the total volume or from the deck area.

(d) Each person shall have a separate berth and not more than one berth may be placed above another. The berth must be composed of materials not likely to corrode. The overall size of a berth must not be less than 68 centimeters (27 inches) wide by 190 centimeters (75 inches) long, except by special permission of the Commandant. Where two tiers of berths are fitted, the bottom of the lower berth must not be less than 30 centimeters (12 inches) above the deck. The berths must not be obstructed by pipes, ventilating ducts, or other installations.

(e) A locker must be provided for each person accommodated in a room.

§ 32.40-25 Washrooms and toilet rooms—T/ALL.

(a) At least 1 toilet, 1 washbasin, and 1 shower or bathtub must be provided for each 8 members or portion thereof in the crew who do not occupy sleeping accommodations to which private or semi-private facilities are attached.

(b) The toilet rooms and washrooms must be located convenient to the sleeping quarters of the crew to which they are allotted but must not open directly into such quarters except when they are provided as private or semi-private facilities.

(c) All washbasins, showers, and bathtubs must be equipped with adequate plumbing, including hot and cold running water. All toilets must be installed with adequate plumbing for flushing.

(d) At least 1 washbasin must be fitted in each toilet room, except where private or semi-private facilities are provided and washbasins are installed in the sleeping rooms.

(e) Where more than 1 toilet is located in a space or compartment, each toilet must be separated by partitions.

§ 32.40-30 Messrooms—T/ALL.

(a) Messrooms must be located as near to the galley as is practicable except where the messroom is equipped with a steam table.

(b) Each messroom must seat the number of persons expected to eat in the messroom at one time.

§ 32.40-35 Hospital space—T/ALL.

(a) Each vessel which in the ordinary course of its trade makes voyages of more than 3 days duration between ports and which carries a crew of 12 or more, must be provided with a hospital space. This space must be situated with due regard to the comfort of the sick so that they may receive proper attention in all weathers.

(b) The hospital must be suitably separated from other spaces and must be used for the care of the sick and for no other purpose.

(c) The hospital must be fitted with berths in the ratio of 1 berth to every 12 members of the crew or portion thereof who are not berthed in single occupancy rooms, but the number of berths need not exceed 6.

(d) The hospital must have a toilet, washbasin, and bathtub or shower conveniently situated. Other necessary suitable equipment such as a clothes locker, a table, and a seat must be provided.

§ 32.40-40 Other spaces—T/ALL.

Each vessel must have—

(a) Sufficient facilities where the crew may wash and dry their own clothes, including at least 1 sink supplied with hot and cold fresh water;

(b) Recreation spaces; and

(c) A space or spaces of adequate size available on an open deck to which the crew has access when off duty.

§ 32.40-45 Lighting—T/ALL.

Each berth must have a light.

§ 32.40-50 Heating and cooling—T/ALL.

(a) All manned spaces must be adequately heated and cooled in a manner suitable to the purpose of the space.

(b) The heating and cooling system for accommodations must be capable of maintaining a temperature of 21 °C (70

§ 32.40-55

°F) under normal operating conditions without curtailing ventilation.

(c) Radiators and other heating apparatus must be so placed and shielded, where necessary, to avoid risk of fire, danger or discomfort to the occupants. Pipes leading to radiators or heating apparatus must be insulated where those pipes create a hazard to persons occupying the space.

§ 32.40-55 Insect screens—T/ALL.

Provisions shall be made to protect the crew quarters against the admission of insects.

§ 32.40-60 Crew accommodations on tankships of less than 100 gross tons and manned tank barges—TB/ALL.

(a) The crew accommodations on all tankships of less than 100 gross tons and all manned tank barges must have sufficient size and equipment, and be adequately constructed to provide for the protection of the crew in manner practicable for the size, facilities, and service of the tank vessel.

(b) The crew accommodations must be consistent with the principles underlying the requirements for crew accommodations of tankships of 100 gross tons or more.

§ 32.40-65 Crew accommodations on tankships constructed before June 15, 1987—T/ALL.

All tankships of 100 gross tons and over constructed before June 15, 1987, may retain previously accepted or approved installations and arrangements so long as they are maintained in good condition to the satisfaction of the Officer in Charge, Marine Inspection.

Subpart 32.45—Electrical Installations

§ 32.45-1 Installation and details.

The installation of all electrical engineering or interior communications systems, together with the details of design, construction, and installation, must meet the requirements of subchapter J (Electrical Engineering Regulations) of this chapter.

[CGD 74-125A, 47 FR 15230, Apr. 8, 1982]

46 CFR Ch. I (10-1-00 Edition)

Subpart 32.50—Pumps, Piping, and Hose for Cargo Handling

§ 32.50-1 Cargo pumps for tank vessels constructed on or after November 10, 1936—TB/ALL.

On all tank vessels, the construction or conversion of which is started on or after November 10, 1936, the cargo pumps shall be designed and installed to minimize the danger of sparking. Special care shall be exercised in the design of packing spaces in order to secure ample depth and accessibility of glands. Where cargo pump shafts pierce gastight bulkheads, stuffing boxes with readily accessible gastight glands shall be provided.

§ 32.50-3 Cargo discharge—TB/ALL.

(a) Pumps or other acceptable means shall be used to discharge cargo from gravity type cargo tanks vented at gauge pressures of 4 pounds per square inch or less.

(b) The use of compressed air as the primary means of discharging cargo from such tanks is prohibited.

§ 32.50-5 Cargo pump gauges on tank vessels constructed on or after November 10, 1936—TB/ALL.

(a) [Reserved]

(b) A pressure gage shall be installed for each pump discharge, and it shall be located at a point visible with respect to the pump controls.

[CGFR 65-50, 30 FR 16671, Dec. 30, 1965, as amended by CGD 73-254, 40 FR 40163, Sept. 2, 1975]

§ 32.50-10 Cargo pumps on tank vessels with independent cargo tanks which were constructed prior to November 10, 1936—TB/ALL.

(a) Cargo pumps on tank vessels, the construction or conversion of which was started prior to November 10, 1936, may be located in a hold space containing independent cargo tanks or on deck. If the pump driving unit is of the type permitted in cargo pumprooms, it also may be located in the hold space. If other types of driving units are used, they shall be located on deck or in an engine compartment. If the pump drive shaft passes through decks or bulkheads into a hold space or pumproom,

Coast Guard, DOT

§ 32.50-20

it shall be provided with suitable stuffing boxes at such points.

§ 32.50-15 Cargo piping on tank vessels constructed on or after July 1, 1951—TB/ALL.

(a) On all tank vessels, the construction or conversion of which is started on or after July 1, 1951, the cargo piping shall be:

(1) A fixed cargo piping system shall be installed on a tank vessel carrying Grade A, B, or C cargo. The piping shall be arranged so as to avoid excessive stresses at the joints. For sizes exceeding 2 inches in diameter, flanged, welded, or other approved types of joints shall be employed. Packing material shall be suitable for the cargo carried. Connections at bulkheads shall be made so that the plating does not form part of a flanged joint. Piping may be carried through bunker spaces and deep tanks provided it is run through a pipe tunnel. The tunnel may be omitted where the pipe is extra heavy, all joints are welded, and bends are installed to provide for expansion and contraction.

(2) Tank vessels carrying only Grades D and E cargo may use a portable piping system in lieu of a fixed piping system meeting the requirements of paragraph (a)(1) of this section, provided:

(i) The hose complies with 33 CFR 154.500 or the portable piping complies with part 56 of this chapter;

(ii) The connections comply with 33 CFR 156.130;

(iii) A shutoff valve is at or near the point of entry into the tank;

(iv) Except for the carriage of animal fats and vegetable oils, the system has a closure which forms a vapor-tight seal on the tank opening through which the cargo is transferred, is bolted or dogged in place, and has the hose and drop line connected to it; and

(v) Except for the carriage of animal fats and vegetable oils, the system has a metallic drop line which complies with 46 CFR 153.282.

(3) Cargo piping shall not pass through spaces containing machinery where sources of vapor ignition are normally present: *Provided*, That, in special cases the Commandant may permit the piping to pass through such

spaces if Grade E liquids only are involved.

(b) Valve operating rods in cargo tanks shall be solid, except that tank barges having plug cocks inside the cargo tanks may have operating rods of extra heavy pipe with the annular space between the lubricant tube and the pipe wall sealed with a nonsoluble material to prevent penetration of the cargo. Valve operating rods shall be of ample size, well guided and supported, and attached to the valve stems in a manner so as to prevent the operating rods from working loose. Where the operating rods pass through a deck, gas-tight stuffing boxes shall be fitted. The leads of operating rods shall be as direct as possible. Valves shall be of suitable design for the intended service.

(c) All cargo loading and discharge hose connections shall be fitted with valves or blind flanges.

[CGFR 65-50, 30 FR 16671, Dec. 30, 1965, as amended by CGD 80-009, 48 FR 36458, Aug. 11, 1983]

§ 32.50-20 Cargo piping for tank vessels constructed between November 10, 1936, and July 1, 1951—TB/ALL.

(a) On tank vessels, the construction or conversion of which is started on or after November 10, 1936, and prior to July 1, 1951, the piping shall be arranged so as to avoid excessive stresses at the joints. For sizes exceeding 2 inches in diameter, flanged, welded, or other approved types of joints shall be employed. Packing material shall be suitable for the cargo carried. Connections at bulkheads shall be made so that the plating does not form part of a flanged joint. Piping may be carried through bunker spaces and deep tanks provided it is run through a pipe tunnel. The tunnel may be omitted where the pipe is extra heavy, all joints are welded, and bends are installed to provide for expansion and contraction.

(b) Cargo piping shall not pass through spaces containing machinery where sources of vapor ignition are normally present: *Provided*, That in special cases the Commandant may permit the piping to pass through such spaces if Grade E liquids only are involved.

(c) Valve operating rods in the cargo tanks shall be solid and of ample size,

§ 32.50-25

well guided and supported, and attached to the valve stems in a manner to guard against their working loose. Where such valve rods pass through the deck, gas tight stuffing boxes shall be fitted. The leads of valve rods shall be as direct as possible. All valves and fittings shall be of material, design, and manufacture for the intended service on the cargo system; either rising or nonrising stem valves may be used.

§ 32.50-25 Cargo pumps and piping on tank vessels constructed prior to November 10, 1936—TB/ALL.

On tank vessels, the construction or conversion of which was started prior to November 10, 1936, cargo pumps and piping which do not fully comply with the regulations in this subchapter shall be made as nearly equal to the requirements for tank vessels constructed between November 10, 1936, and July 1, 1951, as is necessary in the interest of safety. Cargo pipe lines may pass through cargo pump engine compartments provided no cargo valves are located therein.

§ 32.50-30 Cargo hose—TB/ALL.

Cargo hose carried on tank vessels must be suitable for oil service and designed to withstand the pressure of the shutoff head of the cargo pump or pump relief valve setting, less static head, but in no case less than 150 pounds per square inch.

NOTE: For additional requirements concerning cargo hose, see 33 CFR 154.500, 155.800 and 156.170.

[CGD 80-009, 48 FR 36458, Aug. 11, 1983]

§ 32.50-35 Remote manual shutdown for internal combustion engine driven cargo pump on tank vessels—TB/ALL.

(a) Any tank vessel which is equipped with an internal combustion engine driven cargo pump on the weather deck shall be provided with a minimum of one remote manual shutdown station, conspicuously marked, and located at the midpoint of such vessel, or 100 feet from the engine, whichever is the more practical. The remote quick acting manual shutdown shall be installed on the engine so as to provide a quick and effective means of stopping the engine (such as by cutting off the intake air).

46 CFR Ch. I (10-1-00 Edition)

(b) This regulation applies to all installations of this type on tank vessels, but for such installations now on existing tankships at the date of next biennial inspection or October 1, 1963, whichever occurs later.

Subpart 32.52—Bilge Systems

§ 32.52-1 Bilge pumps on tank vessels constructed or converted on or after November 19, 1952—TB/ALL.

The number and arrangement of bilge pumps on each tank vessel shall conform to the requirements of subchapter F (Marine Engineering) of this chapter, except as hereinafter provided in this subpart.

§ 32.52-5 Bilge piping for pump rooms and adjacent cofferdams on tank vessels constructed or converted on or after November 19, 1952—TB/ALL.

(a) Provisions shall be made for removing drainage from the pumproom bilges and adjacent cofferdams. A separate bilge pump, ejector, or bilge suction from a cargo pump or cargo stripping pump may be provided for this purpose. The bilge pump shall not be located in nor shall the piping pass through spaces containing machinery where sources of vapor ignition are normally present.

(b) Where a bilge suction is provided from a cargo or stripping pump, a stopcheck valve shall be fitted in the suction branch, and an additional stop valve shall be fitted also if the bilge suction branch can be subjected to a head of oil from the filling line.

(c) Means shall be provided for controlling the cargo or pump room bilge pumps and their suctions or discharges in order that a flooded pump room may be pumped out. Suitable portable or manually operated pumps may be accepted as complying with this provision, or alternatively, the pump controls shall be arranged so that they are operable from inside the pump room and either from an accessible position outside the pump room, or from the pump room casing above the freeboard deck.

§ 32.52-10 Bilge pumps and piping on tank vessels constructed or converted prior to November 19, 1952—TB/ALL.

(a) On tank vessels, the construction or conversion of which was started prior to November 19, 1952, bilge pumps and piping which do not fully comply with the regulations of this subchapter shall be made as nearly equal to the requirements for tank vessels constructed on or after November 19, 1952, as is necessary in the interest of safety.

(b) Bilge suction from hold spaces containing independent cargo tanks may be connected to cargo pumps or stripping pumps, provided the installation complies with the requirements of § 32.52-5(b).

Subpart 32.53—Inert Gas System

SOURCE: CGD 74-127, 41 FR 3843, Jan. 26, 1976, unless otherwise noted.

§ 32.53-1 Application—T/ALL.

(a) Except as provided in paragraphs (b) and (c) of this section, this subpart applies to:

(1) A U.S. crude oil tanker or product carrier of 100,000 DWT tons (metric) or more or combination carrier of 50,000 DWT tons (metric) or more, that has a keel laying date on or after January 1, 1975.

(2) A new (as defined in 46 U.S.C. 3701) crude oil tanker or product carrier, or foreign flag crude oil tanker or product carrier of 20,000 DWT tons or more entering the navigable waters of the U.S.

(3) A crude oil tanker that is equipped with a cargo tank cleaning system that uses crude oil washing.

(4) An existing product carrier of 20,000 deadweight tons (metric) or more that has tank washing machines with a capacity of more than 60 cubic meters per hour after May 31, 1983.

(5) Any other U.S. or foreign flag:

(i) Crude oil tanker or product carrier of 70,000 deadweight tons (metric) and over after May 31, 1981;

(ii) Crude oil tanker between 20,000 and 70,000 deadweight tons (metric) after May 31, 1983;

(iii) Product carrier between 40,000 and 70,000 deadweight tons (metric) after May 31, 1983.

(b) This subpart does not apply to vessels designed to carry only:

(1) Liquefied gas cargo; or

(2) Grade E cargo that is carried at a temperature lower than 5° C below its flash point.

(c) This part does not apply to vessels as stated in 46 U.S.C. 3702.

[CGD 77-057a, 44 FR 66501, Nov. 19, 1979, as amended by CGD 97-057, 62 FR 51043, Sept. 30, 1997; CGD 95-028, 62 FR 51198, Sept. 30, 1997]

§ 32.53-3 Exemptions.

(a) The Assistant Commandant for Marine Safety and Environmental Protection grants exemptions for crude oil tankers of less than 40,000 deadweight tons not fitted with high capacity tank washing machines, if the vessel's owner can show that compliance would be unreasonable and impracticable due to the vessel's design characteristics.

(b) Requests for exemptions must be submitted in writing to: Commandant (G-MSO), U.S. Coast Guard, Washington, DC 20593-0001.

(c) Each request must be supported by documentation showing that:

(1) The system would be detrimental to the safe operation of the vessel;

(2) It is physically impracticable to install the system; or

(3) Adequate maintenance of the system would be impossible.

(d) The vessel's owner may request a conference. The exemption request file will be available for use in the conference and additional arguments or evidence in any form may be presented. The conference will be recorded. The presiding officer summarizes the material presented at the conference and submits written recommendations to the Assistant Commandant for Marine Safety and Environmental Protection.

(e) The Assistant Commandant for Marine Safety and Environmental Protection reviews the exemption request file and decides whether to grant or deny the exemption. The decision shall include an explanation of the basis on

§ 32.53-5

which the exemption is granted or denied, and constitutes final agency action.

[CGD 77-057a, 44 FR 66502, Nov. 19, 1979, as amended by CGD 82-063b, 48 FR 29486, June 27, 1983; CGD 88-070, 53 FR 34534, Sept. 7, 1988; CGD 95-072, 60 FR 50461, Sept. 29, 1995; CGD 96-041, 61 FR 50727, Sept. 27, 1996; CGD 97-057, 62 FR 51043, Sept. 30, 1997]

§ 32.53-5 Operation—T/ALL.

The master of each tankship to which this subpart applies shall ensure that the inert gas system is operated as necessary to maintain an inert atmosphere in the cargo tanks at the pressure required under § 32.53-30, except when the cargo tanks are gas free.

§ 32.53-10 General—T/ALL.

(a) Each tankship to which this subpart applies must have an inert gas system that meets the requirements of this subpart and is approved in accordance with 46 CFR 50.20.

(b) Each inert gas system must be designed, constructed and installed in accordance with the provisions of SOLAS II-2, regulation 62, with the following provisions:

(1) Acceptable types of water seals include the wet and semiwet type. Other types of seals may be accepted on a case by case basis if approval is given by the Coast Guard Marine Safety Center.

(2) If a vapor collection system required to meet part 39 of this subchapter is connected to the inert gas system, the instruction manual required by SOLAS II-2, regulation 62.21 must include procedures relating to vapor collection operations.

[CGD 74-127, 41 FR 3843, Jan. 26, 1976, as amended by CGD 95-028, 62 FR 51198, Sept. 30, 1997]

Subpart 32.55—Ventilation and Venting

§ 32.55-1 Ventilation of tank vessels constructed on or after July 1, 1951—TB/ALL.

(a) On all tanks vessels, the construction or conversion of which is started on or after July 1, 1951, all enclosed parts of the vessel, other than cargo, fuel and water tanks, cofferdams and

46 CFR Ch. I (10-1-00 Edition)

void spaces, shall be provided with efficient means of ventilation.

(b) Compartments containing machinery where sources of vapor ignition are normally present shall be ventilated in such a way as to remove vapors from points near the floor level or the bilges. Effective steam or air actuated gas ejectors, blowers or ventilators fitted with heads for natural ventilation, with at least one duct extending to immediately below the floor plates will be approved for this purpose. Machinery spaces below the freeboard deck, in which fuels with flash point of 110° F or lower are used, shall be equipped with power ventilation. (See § 32.60-20 for other requirements concerning pumprooms.)

§ 32.55-5 Ventilation of tank vessels constructed between November 10, 1936, and July 1, 1951—TB/ALL.

(a) On tank vessels, the construction or conversion of which was started on or after November 10, 1936, and prior to July 1, 1951, all enclosed parts of the vessel, other than cargo, fuel, and water tanks and cofferdams, shall be provided with efficient means of ventilation.

(b) Pumprooms and compartments containing machinery where sources of vapor ignition are normally present shall be ventilated in such a way as to remove vapors from points near the floor level or the bilges. Effective steam or air actuated gas ejectors or blowers or ventilators fitted with heads for natural ventilation, will be approved for this purpose. (See § 32.65-20 for other requirements concerning pumprooms.)

§ 32.55-10 Ventilation of tank vessels contracted prior to November 10, 1936—TB/ALL.

Ventilation of tank vessels, the construction or conversion of which was started prior to November 10, 1936, shall be equal to the requirements of tank vessels constructed before July 1, 1951, where the changes are, in the opinion of the Officer in Charge, Marine Inspection, necessary in the interest of safety.

[CGFR 65-50, 30 FR 16671, Dec. 30, 1965, as amended by CGFR 66-33, 31 FR 15268, Dec. 6, 1966]

**§ 32.55-15 Ventilation for hold spaces—
TB/ALL.**

Hold spaces containing independent cargo tanks shall be considered to be equivalent to cargo pumprooms and shall be ventilated and safeguarded as such.

**§ 32.55-20 Venting of cargo tanks of
tankships constructed on or after
July 1, 1951—T/ALL.**

(a) *Venting required.* (1) On all tankships, the construction or conversion of which is started on or after July 1, 1951, each cargo tank shall be equipped with a vent. The diameter of a vent shall be not less than 2½ inches.

(2) In any case where a venting system is required for a particular grade of liquid, the venting system permitted for a higher grade of liquid may be used instead.

(b) *Grade A liquids.* (1) Cargo tanks in which Grade A liquids are to be transported must be fitted with a venting system consisting of a branch vent line from each cargo tank connected to a vent header which must extend to a height above the weather deck equal to at least 13.1 feet and must terminate at a comparable distance from any living or working space, ventilator inlet, or source of ignition. When special conditions will prevent the vent line or header outlets being permanently installed at a height above the deck of 13.1 feet an adjustable system must be provided which, when extended vertically, is capable of reaching a height of 13.1 feet.

(2) A weather hood may be installed at the vent outlet providing it is of such design as not to direct the flow of vapor below the horizontal.

(3) The branch vent lines shall consist of either:

(i) Pipe with no valves or other hindrances to a free flow of gas; or,

(ii) Piping fitted with a pressure vacuum relief valve, provided means are supplied for relieving all internal pressure on cargo tanks by fitting the valve with a positive means for opening its pressure valve to allow free passage of gases through the branch vent line or by the installation of a by-pass fitted with a manually operated stop valve.

(4) The vent header shall be fitted with a flame arrester or pressure vacuum relief valve. If a pressure vacuum relief valve is used in the header, means shall be provided for relieving all internal pressure on cargo tanks by fitting the valve with a positive means for opening its pressure valve to allow free passage of gases through the header or by the installation of a by-pass fitted with a manually operated stop valve. A suitable means of relieving pressure shall be fitted in the header in order to prevent excess pressure being built up in the tanks, in the event of overfilling of the latter. The vent header system shall be provided with suitable connections for flushing and draining. The vent header system shall be of sufficient capacity as to be able to carry off all displaced air and vapors during loading of the cargo tanks without opening of ullage plates, cargo hatches, etc. See § 32.20-20 for liquid level gaging requirements.

(c) *Grade B or C liquids.* Cargo tanks in which Grade B or C liquids are to be transported shall be fitted with either individual pressure-vacuum relief valves which shall extend to a reasonable height above the weather deck or shall be fitted with a venting system consisting of branch vent lines connected to a vent header which shall extend to a reasonable height above the weather deck and be fitted with a flame arrester or a pressure-vacuum relief valve. The vent header system, if fitted, shall be provided with suitable connections for flushing and draining, and if desired, stop valves may be placed in the individual branch vent lines provided that each stop valve is bypassed by a pressure-vacuum relief valve.

(d) *Grade D or E liquids.* Cargo tanks in which Grade D or E liquids only are to be transported shall be fitted with gooseneck vents and flame screens.

(e) Tank vents which meet the requirements of SOLAS will be considered equivalent to the provisions of this section.

[CGFR 65-50, 30 FR 16671, Dec. 30, 1965, as amended by CGD 73-96, 42 FR 49024, Sept. 26, 1977; CGD 95-028, 62 FR 51198, Sept. 30, 1997]

§ 32.55-25 Venting of cargo tanks of tank barges constructed on or after July 1, 1951—B/ALL.

(a) *Venting required.* (1) On all tank barges, subject to the provisions of this subchapter the construction or conversion of which is started on or after July 1, 1951, each cargo tank shall be equipped with a vent. The diameter of a vent shall be not less than 2½ inches.

(2) In any case where a venting system is required for a particular grade of liquid, the venting system permitted for a higher grade of liquid may be used instead.

(b) *Grade A, B, or C liquids.* Cargo tanks in which Grade A, B, or C liquids are to be transported shall be fitted with either individual pressure-vacuum relief valves which shall extend to a reasonable height above the weather deck or shall be fitted with a venting system consisting of branch vent lines connected to a vent header which shall extend to a reasonable height above the weather deck and be fitted with a pressure-vacuum relief valve. The vent header system, if fitted, shall be provided with suitable connections for flushing and draining, and if desired, stop valves may be placed in the individual branch vent lines: *Provided*, That each such stop valve is bypassed by a pressure-vacuum relief valve.

(c) *Grade D or E liquids.* Cargo tanks in which Grade D or E liquids only are to be transported shall be fitted with gooseneck vents and flame screens.

[CGFR 65-50, 30 FR 16671, Dec. 30, 1965, as amended by CGFR 70-10, 35 FR 3709, Feb. 25, 1970]

§ 32.55-30 Venting of cargo tanks of tank vessels constructed between November 10, 1936, and July 1, 1951—TB/ALL.

(a) *Venting required.* On all tank vessels, the construction or alteration of which is started on or after November 10, 1936, and prior to July 1, 1951, each cargo tank shall be equipped with a vent. The details of the venting system shall meet the requirements of this section, or alternatively, the requirements of either § 32.55-20 or § 32.55-25, as applicable, shall be met.

(b) *Grade A liquids.* (1) Cargo tanks in which Grade A liquids are to be transported shall be fitted with a venting

system consisting of branch vent line from each cargo tank connected to a vent header which shall extend to a reasonable height above the weather deck and be fitted with a flame arrester or pressure-vacuum relief valve. Each branch vent line may be provided with a manually operated control valve, provided it is bypassed with a pressure-vacuum relief valve or each cargo tank to which such a branch vent line is connected is fitted with an independent pressure-vacuum relief valve. The vent header system shall be provided with suitable connections for flushing and draining.

(2) In barges with independent tanks carrying Grade A liquids, separate discharge pipes may be fitted to each pressure-vacuum relief valve, or the pressure-vacuum relief valve may be elevated, so that in either case the discharge from such valve will not be less than 7 feet above the deck where practicable.

(c) *Grade B or C liquids.* Cargo tanks in which Grade B or C liquids are to be transported shall be fitted with individual pressure-vacuum relief valves or shall be fitted with a venting system consisting of branch vent lines connected to a vent header which shall extend to a reasonable height above the weather deck and be fitted with a flame arrester or a pressure-vacuum relief valve.

(d) *Grade D or E liquids.* Cargo tanks in which Grade D or E liquids only are to be transported shall be fitted with gooseneck vents and flame screens unless such tanks are vented by pressure-vacuum relief valves or a venting system of branch vent lines and a vent header.

§ 32.55-35 Venting of cargo tanks on tank vessels constructed prior to November 10, 1936—TB/ALL.

The venting of cargo tanks of tank vessels, the construction or alteration of which was started prior to November 10, 1936, shall be made to equal the requirements of tank vessels constructed before July 1, 1951, where the changes are, in the opinion of the Officer in Charge, Marine Inspection, necessary in the interests of safety: *Provided*, That on such vessels carrying Grade A

cargo the requirements in § 32.55-30(b) shall be met.

§ 32.55-45 Venting of cofferdams and void spaces of tank vessels constructed on or after November 10, 1936—TB/ALL.

(a) Except as provided in paragraph (b) of this section, on all tank vessels, the construction or conversion of which was started on or after November 10, 1936, cofferdams and void spaces shall be provided with gooseneck vents fitted with a flame screen or pressure-vacuum relief valves. The diameter of a vent shall be not less than 2½ inches.

(b) On unmanned tank barges not fitted with fixed bilge systems in the cofferdams and void spaces, vents for cofferdams and void spaces will not be required.

§ 32.55-50 Ventilation of tankships that have a keel laying date on or after January 1, 1975—T/ALL.

Each tankship that has a keel laying date on or after January 1, 1975, must have deckhouse and superstructure ventilation inlets and outlets and other openings to the exterior arranged to minimize the admission of flammable gas to enclosed spaces that contain a source of ignition.

[CGD 74-127, 41 FR 3844, Jan. 26, 1976]

Subpart 32.56—Structural Fire Protection for Tank Ships With a Keel Laying Date On or After January 1, 1975

SOURCE: CGD 74-127, 41 FR 3844, Jan. 26, 1976, unless otherwise noted.

§ 32.56-1 Application—T/ALL.

(a) This subpart applies to all tankships that have a keel laying date on or after January 1, 1975.

(b) SOLAS-certificated vessels may be considered equivalent to the provisions of this subpart.

[CGD 74-127, 41 FR 3844, Jan. 26, 1976, as amended by CGD 95-028, 62 FR 51198, Sept. 30, 1997]

§ 32.56-5 General—T/ALL.

(a) Except as provided in paragraphs (c) and (d) of this section, each cat-

egory A machinery space must be aft of the cargo area and pumprooms.

(b) Except as provided in paragraphs (c), (d), and (e) of this section, each accommodation space, service space except isolated storage spaces, and control space and each main cargo control station must be aft of:

(1) The cargo area;

(2) All cargo pumprooms; and

(3) All cofferdams that isolate the cargo area from category A machinery spaces.

(c) Except as provided in paragraph (e) of this section, any pumproom may be recessed below accommodation, service, and control spaces and recessed into any category A machinery space if the distance between the deckhead of the recess and the underside of the accommodation, service, or control space is at least equal to the height of the recess.

(d) Accommodation, service, control and certain machinery spaces, such as spaces for bow thrusters, windlass, and emergency fire pumps, may be located forward of the cargo area and pumprooms if it is demonstrated to the Commandant that the overall degree of safety of the vessel is improved and that the degree of fire and life safety for these spaces is not less than the degree of fire and life safety for similar spaces located aft.

(e) On liquefied gas carriers:

(1) Main cargo control stations may be located in the cargo area;

(2) Accommodation, service, and control spaces may be located over cofferdams that isolate cargo tanks other than integral tanks from category A machinery spaces;

(3) Pumprooms may not be recessed into any space below deck.

§ 32.56-10 Navigation positions—T/ALL.

(a) No navigation position may be above the cargo area unless it is approved by the Commandant as necessary for the safe operation of the vessel.

(b) Each navigation position that is above the cargo area must be separated from the deck by an unenclosed space that extends at least 2 meters (6.6 feet) from the deck to the navigation position.

§ 32.56-15

(c) Openings to navigation positions above cargo areas, except air locks, must be at least 2.4 meters (7.9 feet) above the deck.

§ 32.56-15 Deck spills—T/ALL.

A coaming or other barrier at least .3 meters (1 foot) higher than adjacent spill containment barrier must be provided to prevent cargo spills from flowing aft of the housefront.

§ 32.56-20 Insulation of exterior boundaries: Superstructures and deckhouses—T/ALL.

The following exterior boundaries of superstructures and deckhouses that contain accommodation, service, and control spaces, except wheelhouses, must be insulated to "A-60" Class:

(a) The exterior boundaries that face the cargo area.

(b) The portion of the exterior bulkheads and decks within 3 meters (10 feet) of these boundaries.

§ 32.56-21 Openings in exterior boundaries: Accommodation, service, and control spaces—T/ALL.

The following exterior boundaries of accommodation, service, and control spaces, except wheelhouses, must have no openings, and portlights must be of a fixed type with easily operable steel covers on the inside:

(a) The exterior boundaries that face the cargo area.

(b) The portion of the exterior boundaries within 3 meters (10 feet) or the length of the vessel divided by 25, whichever is greater, except that the distance need not exceed 5 meters (16.4 feet), of these boundaries.

§ 32.56-22 Openings in and insulation of boundaries: Other spaces—T/ALL.

If openings are fitted into the following exterior boundaries of any space other than an accommodation, service, or control space, the interior of the space must be insulated to "A-60" Class and the space must not provide access to any accommodation, service, or control space:

(a) The exterior boundaries that face the cargo area.

(b) The portion of the exterior boundaries within 3 meters (10 feet) or the

46 CFR Ch. I (10-1-00 Edition)

length of the vessel divided by 25, whichever is greater, except that the distance need not exceed 5 meters (16.4 feet), of these boundaries.

§ 32.56-25 Category A machinery spaces: Windows and port lights—T/ALL.

(a) Except as provided in paragraph (b) of this section and subpart 111.105, of this chapter, boundaries of category A machinery spaces and boundaries of cargo pumprooms must not be pierced for windows or portlights.

(b) Skylights that can be closed from outside the spaces they serve may be fitted in boundaries of category A machinery spaces.

[CGD 74-127, 41 FR 3844, Jan. 26, 1976, as amended by CGD 74-125A, 47 FR 15230, Apr. 8, 1982]

§ 32.56-30 Category A machinery spaces: Bulkheads and decks—T/ALL.

(a) Bulkheads and decks that separate category A machinery spaces from cargo pumprooms must be "A" Class construction.

(b) Bulkheads and decks that separate category A machinery spaces or cargo pumprooms, including the pump-room entrance, from accommodation, service, or control spaces must be "A-60" Class construction.

§ 32.56-35 Doors—T/ALL.

(a) Casing doors in category A machinery spaces and all elevator doors must be self-closing and must meet the requirements of 46 CFR 72.05-25(b).

(b) If a means of holding a door open is used, it must be a magnetic holdback or equivalent device that is operated from the bridge or other suitable remote control position.

§ 32.56-40 Category A machinery spaces: Insulation—T/ALL.

Structural insulation within category A machinery spaces must have a barrier such as metal foil, sheet metal, cementitious coating, or other vapor barrier so that the surface of that insulation is impervious to oil and oil vapors.

[CGD 74-127, 41 FR 3844, Jan. 26, 1976, as amended by CGD 74-127, 41 FR 4826, Feb. 2, 1976]

§ 32.56-45 Draft stops—T/ALL.

(a) Where ceilings or linings are fitted in accommodation, service, or control spaces, "B" Class bulkheads, except those that form passageways, may stop at the ceiling or lining if draft stops of "B" Class construction are fitted between the ceiling or lining and the deck or shell at intervals of 14 meters (45 feet) or less.

(b) Spaces behind the linings of stairways and other trunks must have draft stops at each deck.

§ 32.56-50 Combustible veneers—T/ALL.

(a) Except as provided in paragraph (b) of this section combustible veneers on bulkheads, linings, and ceilings within accommodation, service, or control spaces must be 2 millimeters (.079 inches) or less in thickness.

(b) Veneers on bulkheads, linings, and ceilings in concealed spaces, corridors, stairway enclosures, or control spaces must be an approved interior finish material or a reasonable number of coats of paint.

§ 32.56-55 Control spaces—T/ALL.

Bulkheads and decks that separate control spaces from adjacent spaces must be "A" Class construction and insulated against fire. 46 CFR Table 72.05-10(e) of the Passenger Vessel Regulations may be used as a guide.

§ 32.56-60 Ventilation ducts—T/ALL.

(a) Each duct for ventilation of Category A machinery spaces that passes through accommodation, service, or control spaces must be:

(1) Constructed of steel and insulated to "A-60" Class; or

(2) Constructed of steel, fitted with an automatic fire damper at each boundary where it enters and leaves the Category A machinery space, and insulated to "A-60" Class for a distance of 5 meters (16.4 feet) beyond each machinery space boundary.

(b) Each duct for ventilation of accommodation, service, and control spaces that passes through Category A machinery spaces must be constructed of steel and be fitted with an automatic fire damper at each Category A machinery space boundary.

Subpart 32.57—Structural Fire Protection for Tank Vessels Contracted for On or After January 1, 1963**§ 32.57-1 Application—TB/ALL.**

(a) The provisions of this subpart shall apply to all tank vessels contracted for on or after January 1, 1963.

(b) SOLAS-certificated vessels may be considered equivalent to the provisions of this subpart.

[CGFR 65-50, 30 FR 16671, Dec. 30, 1965, as amended by CGD 95-028, 62 FR 51198, Sept. 30, 1997]

§ 32.57-5 Definitions—TB/ALL.

(a) *Standard fire test.* A "standard fire test" is one which develops in the test furnace a series of time temperature relationships as follows:

5 minutes—	1,000° F.
10 minutes—	1,300° F.
30 minutes—	1,550° F.
60 minutes—	1,700° F.

(b) *"A" Class divisions.* "A" Class divisions such as bulkheads and decks, means divisions that are composed of steel or an equivalent metal, suitably stiffened, and made intact with the main structure of the vessel, including the shell, structural bulkheads, or decks. They are constructed so that, if subjected to the standard fire test, they are capable of preventing the passage of flame and smoke for one hour. In addition, they are insulated with approved structural insulation, bulkhead panels, or deck coverings so that the average temperature on the unexposed side does not rise more than 139° C (250° F) above the original temperature, nor does the temperature at any one point, including any joint, rise more than 181° C (325° F) above the original temperature, within the time listed below:

Class A-60	60 minutes
Class A-30	30 minutes
Class A-15	15 minutes
Class A-0	0 minutes with no insulation requirement

(c) *"B" Class bulkheads.* Bulkheads of the "B" Class shall be constructed with approved incombustible materials and made intact from deck to deck and to shell or other boundaries. They shall be so constructed that, if subjected to the

standard fire test, they would be capable of preventing the passage of flame for one-half hour.

(d) *“C” Class divisions.* Bulkheads or decks of the “C” Class shall be constructed of approved incombustible materials, but need meet no requirements relative to the passage of flame.

(e) *Steel.* Where the term “steel or other equivalent metal” is used in this subpart, it is intended to require a material which, by itself or due to insulation provided, has structural and integrity qualities equivalent to steel at the end of the applicable fire exposure.

(f) *Approved material.* Where in this subpart approved materials are required, they refer to materials approved under the applicable subparts of subchapter Q (Specifications) of this chapter, as follows:

Deck Coverings	164.006
Structural Insulations	164.007
Bulkhead Panels	164.008
Incombustible Materials	164.009
Interior Finishes	164.012

(g) *Stairtower.* A stairtower is a stairway which penetrates more than a single deck within the same enclosure.

[CGFR 65-50, 30 FR 16671, Dec. 30, 1965, as amended by CGFR 67-90, 33 FR 1015, Jan. 26, 1968; CGD 74-127, 41 FR 3845, Jan. 26, 1976; CGD 75-032, 41 FR 17910, Apr. 29, 1976]

§ 32.57-10 Construction—TB/ALL.

(a) The hull, superstructure, structural bulkheads, decks, and deckhouses shall be constructed of steel. Alternately, the Commandant may permit the use of other suitable material in special cases, having in mind the risk of fire.

(b) Bulkheads of galleys, paint and lamp lockers, and emergency generator rooms shall be of “A” Class construction.

(c) The boundary bulkheads and decks separating the accommodations and control stations from cargo, and machinery spaces and from galleys, main pantries and storerooms other than small service lockers shall be of “A” Class Construction.

(d) The following conditions apply within accommodation, service, and control spaces:

(1) Corridor bulkheads in accommodation areas shall be of “A” or “B” Class intact from deck to deck State-

room doors in such bulkheads may have a louver in the lower half.

(2) Stairtowers, elevator, dumbwaiter, and other trunks shall be of “A” Class construction.

(3) Bulkheads not already specified to be of “A” or “B” Class construction may be of “A”, “B”, or “C” Class Construction.

(4) The integrity of any deck in way of a stairway opening, other than a stairtower, shall be maintained by means of “A” or “B” Class divisions or bulkheads and doors at one level. The integrity of a stairtower shall be maintained by “A” Class doors at every level. The doors shall be of the self-closing type. No means shall be provided for locking such doors, except that crash doors or locking devices capable of being easily forced in an emergency may be employed provided a permanent and conspicuous notice to this effect is attached to both sides of the door. Holdback hooks or other means of permanently holding the door open will not be permitted. However, magnetic holdbacks operated from the bridge or from other suitable remote control positions are acceptable.

(5) Interior stairs, including stringers and treads shall be of steel or other suitable material having in mind the risk of fire. This is not intended to preclude the use of other material for nosing, walking surfaces, etc., over the steel.

(6) Except for washrooms and toilet spaces, deck coverings within accommodation spaces shall be of an approved type. However, overlays for leveling or finishing purposes which do not meet the requirements for an approved deck covering may be used in thicknesses not exceeding $\frac{3}{8}$ of an inch.

(7) Except as provided in paragraph (d)(7-a) of this section, ceilings, linings, and insulation, including pipe and duct laggings, must be made of approved incombustible material.

(7-a) Combustible insulations and vapor barriers that have a maximum extent of burning of 122 millimeters (5 inches) or less when tested in accordance with ASTM D 4986, “Standard Test Method for Horizontal Burning Characteristics of Cellular Polymeric Materials” (incorporated by reference,

Coast Guard, DOT

§ 32.59-1

see § 32.01-1), may be used within refrigerated compartments.

(8) Any sheathing, furring or holding pieces incidental to the securing of any bulkhead, ceiling, lining, or insulation shall be of approved incombustible materials.

(9) Bulkheads, linings and ceilings may have a combustible veneer within a room not to exceed 2 millimeters (.079 inch) in thickness. However, combustible veneers, trim, decorations, etc., shall not be used in corridors or hidden spaces. This is not intended to preclude the use of an approved interior finish or a reasonable number of coats of paint.

(e) Wood hatch covers may be used between cargo spaces or between stores spaces. Hatch covers in other locations shall be of steel or equivalent metal construction. Tonnage openings shall be closed by means of steel plates or equivalent metal construction.

(f) Nitrocellulose or other highly flammable or noxious fume-producing paints or lacquers shall not be used.

[CGFR 65-50, 30 FR 16671, Dec. 30, 1965, as amended by CGFR 66-33, 31 FR 15268, Dec. 6, 1966; CGFR 67-90, 33 FR 1015, Jan. 26, 1968; CGD 74-127, 41 FR 3845, Jan. 26, 1976; CGD 95-028, 62 FR 51198, Sept. 30, 1997; USCG-1998-4442, 63 FR 52190, Sept. 30, 1998; USCG-1999-5151, 64 FR 67177, Dec. 1, 1999]

Subpart 32.59—Minimum Longitudinal Strength and Plating Thickness Requirements for Unclassed Tank Vessels That Carry Certain Oil Cargoes—TB/ALL

§ 32.59-1 Minimum section modulus and plating thickness requirements—TB/ALL.

(a) As used in this section, *Rule* means the current Rules of the American Bureau of Shipping or other recognized classification society, as appropriate for the vessel's present service and regardless of the year the vessel was constructed.

(b) The requirements of this section apply to all in-service, unclassified tank vessels certificated to carry a pollution category I oil cargo listed in 46 CFR Table 30.25-1.

(c) For all vessels except those limited on their Certificate of Inspection

to river routes only, the minimum midship section modulus must be—

(1) At least 90 percent of that required by Rule; or

(2) Where there is no specific Rule requirement, at least 100 percent of that which is necessary to meet the bending moment developed under a full load condition in still water, using a permissible bending stress of 12.74 kN/cm² (1.30 t/cm², 8.25 Ltf/in²).

(d) Within the 40-percent midship length, the average flange and web thicknesses of each longitudinal stiffener must be as follows:

(1) For deck and bottom stiffeners: at least 85 percent of Rule thickness, unless a buckling analysis demonstrates that lesser thicknesses can be safely tolerated. However, the average thickness must never be less than 80 percent of Rule thickness; and

(2) For side stiffeners: at least 75 percent of Rule thickness.

(e) Within the 40-percent midship length, the average thickness for longitudinal strength plating must be at least as follows:

(1) Weather deck: 75 percent of Rule thickness;

(2) Hatch: 70 percent of Rule thickness;

(3) Trunk: 75 percent of Rule thickness;

(4) Sheer strake: 75 percent of Rule thickness;

(5) Outer sideshell: 75 percent of Rule thickness;

(6) Inner sideshell: 75 percent of Rule thickness;

(7) Outer bottom: 75 percent of Rule thickness;

(8) Inner bottom: 70 percent of Rule thickness;

(9) Keel: 75 percent of Rule thickness;

(10) Bulkheads: 75 percent of Rule thickness.

[CGD 91-209, 58 FR 52602, Oct. 8, 1993]

Subpart 32.60—Hull Requirements for Tank Vessels Constructed On or After July 1, 1951

NOTE: Requirements for double hull construction for vessels carrying oil, as defined in 33 CFR 157.03, in bulk as cargo are found in 33 CFR 157.10d.

§ 32.60-1 Scantlings, material, and workmanship—TB/ALL.

(a) All tank vessels, the construction or conversion of which is started on or after July 1, 1951, shall conform to the requirements in this subpart in construction of hulls. The hull and deck-houses shall be of steel or iron construction except that the pilothouse and decks over quarters may be constructed of wood. Scantlings, material, and workmanship, subdivision of cargo spaces, fitting of cofferdams, and testing of tanks shall be at least equivalent to the requirements of the American Bureau of Shipping or other recognized classification society.

(b) See subpart 32.57 for structural fire protection requirements for tank vessels contracted for on or after January 1, 1963.

§ 32.60-5 Subdivision of cargo space—TB/ALL.

The cargo space shall be divided into tight compartments as necessary to avoid excessive stresses and to provide stability.

§ 32.60-10 Segregation of cargo; Grade A, B, C, or D—TB/ALL.

(a) *General.* The galleys, living quarters, navigation spaces, general cargo spaces, boiler rooms, and enclosed spaces where sources of vapor ignition are normally present, shall be segregated from cargo tanks by cofferdams or pump rooms or tanks, either empty or used to carry liquid having a flashpoint of 150° F. or above, or deck spaces enclosed or open.

(b) *Cargo tank spaces.* Cargo tank spaces shall extend to the main deck, with hatches and vents located on the weather deck. Liquids having a flash point of not less than 150° F. may be carried in the bulk tanks located beyond the segregating cofferdams and/or pump rooms.

(c) *Enclosed spaces.* (1) Cargo and vent piping passing through enclosed spaces immediately above the bulk cargo tanks shall be continuous except that flanged joints connecting pipe sections will be permitted.

(2) No openings to cargo tank shall be permitted other than stuffing boxes through which valve control rods or permanently installed gage tapes ex-

tend and openings for use of tank cleaning machines. Openings for tank cleaning machines, when not in use, shall be kept closed by means of gas-tight bolted plates and when in use shall be made essentially gas and watertight by covers through which hose or pipe to the tank cleaning machines extend.

(3) The overhead in way of quarters shall be gastight.

(d) *Stowage spaces.* The spaces described in paragraph (c) of this section may be used for stowage purposes and for general cargo provided that adequate ventilation is furnished.

(e) *Openings.* (1) Except as provided in paragraph (c) of this section, there shall be no manholes or other openings from cargo tanks to any other enclosed spaces. An exception may be made to allow direct access from cargo tanks to innerbottoms through gas tight bolted manholes, provided:

(i) The innerbottom tanks are voids or ballast tanks only, and

(ii) The innerbottom tanks are protected from sources of ignition similar to the cargo tanks, and any bilge or ballast pumping system serving the innerbottom tanks are treated like cargo pumping systems.

(2) Any vents, sounding tubes, and similar piping passing through such tanks shall be run in a suitable trunk; or such piping shall have a wall thickness equal to or greater than the innerbottom plating, but not less than schedule 80, and shall be welded continuously on both sides of the innerbottom plating.

[CGFR 65-50, 30 FR 16671, Dec. 30, 1965, as amended by CGFR 69-72, 34 FR 17481, Oct. 29, 1969]

§ 32.60-15 Segregation of cargo; Grade E—TB/ALL.

(a) *General.* The galleys, living quarters, navigation spaces, general cargo spaces, boilerrooms, and enclosed spaces containing machinery, where sources of vapor ignition are normally present, shall be segregated from the cargo tanks by tight bulkheads and intervening spaces are not required.

(b) *Cargo tank spaces.* Cargo tank spaces can be terminated at any deck with hatches on the same deck, but the vent lines shall be extended to the

weather deck. Butterworth openings and extension rods may be located on the tank top.

§ 32.60-20 Pumprooms on tank vessels carrying Grade A, B, C, D and/or E liquid cargo—TB/ALL.

(a) *Cargo pumps.* In tank vessels carrying Grade A, B, C, or D liquid cargo, cargo pumps shall be isolated from source of vapor ignition by gastight bulkheads. A gastight bulkhead between the pumproom and the pump engine room may be pierced for drive shaft and pump engine control rods provided such openings are fitted with stuffing boxes or other approved gland arrangement. A steam driven pump shall not be considered a source of vapor ignition provided the steam temperature does not exceed 500° F.

(b) *Ventilation for pumprooms on tank vessels the construction or conversion of which is started between July 1, 1951, and January 1, 1963.* (1) Pumprooms of all tank vessels, the construction or conversion of which is started between July 1, 1951, and January 1, 1963, shall be ventilated in such a way as to remove vapors from points near the floor level or bilges. Pumprooms on tankships handling Grade A, B, or C liquid cargo, with machinery located below the freeboard deck, shall be equipped with power ventilation. Pumprooms equipped with power ventilation shall have the ventilation outlets terminate more than six feet from any opening to the interior part of the vessel which normally contains sources of vapor ignition.

(2) For all tank vessels, the construction or conversion of which is started between October 1, 1959, and January 1, 1963, the power ventilation shall not produce a source of vapor ignition in either the pumproom or the ventilation systems associated with the pumproom. The capacity of power ventilation units shall be sufficient to effect a complete change of air in not more than 3 minutes, based upon the volume of the pumproom and associated trunks up to the deck at which access from the weather is provided.

(c) *Ventilation for pumprooms on tank vessels the construction or conversion of which is started on or after January 1, 1963.* (1) For all tank vessels, the con-

struction or conversion of which is started on or after January 1, 1963, the cargo pumprooms shall be fitted in accordance with paragraphs (a) and (d) of this section. Cargo pumprooms on these vessels shall be ventilated in such a way as to remove vapors from points near the floor level or bilges. Cargo pumprooms on tank vessels handling Grade A, B, or C liquid cargo, shall be equipped with power ventilation of the exhaust type having capacity sufficient to effect a complete change of air in not more than 3 minutes based upon the volume of the pumproom and associated trunks up to the deck at which access from the weather is provided.

(2) The power ventilation units shall not produce a source of vapor ignition in either the pumproom or the ventilation systems associated with the pumproom. Inlets to exhaust ducts shall be provided and located near the floor level at points where concentrations of vapors may be expected. Ventilation from the weather deck shall be provided. Power supply ventilation may be fitted in lieu of natural ventilation, but when fitted shall be arranged to avoid turbulence in the cargo pumproom. Cargo pumprooms equipped with power ventilation shall have the ventilation outlets terminate more than 6 feet from any opening to the interior part of the vessel which normally contains sources of vapor ignition, and shall be so located as to minimize the possibility of recirculating contaminated air through the pumproom.

(3) Cargo pumprooms handling Grade D and/or E liquid cargo only shall be fitted with at least two ducts extended to the weather deck, one of which shall be extended to a point near the floor level. This does not preclude installation of power ventilation, if desired.

(4) The ventilation required in this paragraph shall be sufficient to properly ventilate the pumproom with the access openings closed.

(d) *Access.* The access to a cargo pumproom in a tank vessel carrying Grade A, B, C, or D liquid cargo shall be from the open deck.

[CGFR 65-50, 30 FR 16671, Dec. 30, 1965, as amended by CGFR 70-143, 35 FR 19905, Dec. 30, 1970]

§ 32.60-25

§ 32.60-25 Living quarters—TB/ALL.

For living quarters the partitions and sheathing shall be of an approved fire resistive construction. The specification for incombustible materials is in subchapter Q (Specifications) of this chapter.

[CGFR 65-50, 30 FR 16671, Dec. 30, 1965, as amended by CGD 95-028, 62 FR 51198, Sept. 30, 1997]

§ 32.60-30 Tank vessels with independent tanks—TB/ALL.

(a) Independent cargo tanks may be located in hold spaces or in other cargo tanks; however, a working space of at least 15 inches shall be maintained around each independent tank, or else provisions shall be made for moving such tanks to furnish such working space, except that less than 15 inches around such tanks may be permitted if in the judgment of the Officer in Charge, Marine Inspection, having jurisdiction, a satisfactory inspection of the cargo tanks and hull structure can be made.

(b) When an independent cargo tank is located in an enclosed space other than a cargo tank, such enclosed space shall be considered as equivalent to a pumproom and shall be safeguarded as such as required by this subpart.

(c) Cargo tanks independent of the hull structure shall be supported in saddles or on foundations of steel or other suitable material and securely attached in place to preclude the cargo from being damaged or shifting as a result of collision. The arrangement shall be such as to permit longitudinal and circumferential, or athwartship and vertical, expansion of the cargo tanks. Each tank shall be supported so as to prevent the concentration of excessive loads on the supporting portion of the shell.

§ 32.60-35 Tank vessels carrying Grade A liquid cargo—TB/ALL.

(a) Grade A liquids having a Reid vapor pressure in excess of 25 pounds per square inch shall be transported in cargo tanks which are independent of the hull.

(b) Barges carrying Grade A liquids having a Reid vapor pressure in excess of 25 pounds per square inch shall be of

46 CFR Ch. I (10-1-00 Edition)

a Type III barge hull as defined in § 32.63-5(b)(3).

[CGFR 70-10, 35 FR 3709, Feb. 25, 1970]

§ 32.60-40 Construction and testing of cargo tanks and bulkheads—TB/ALL.

(a) All cargo tanks vented at gage pressure of 4 pounds per square inch or less shall be constructed and tested as required by standards established by the American Bureau of Shipping or other recognized classification society. The design of cargo tanks integral with the hull and vented at a gage pressure exceeding 4 pounds per square inch but not exceeding 10 pounds per square inch gage pressure will be given special consideration by the Commandant.

(b) Cargo tanks vented at a gage pressure exceeding 10 pounds per square inch are considered to be pressure vessels and shall be of cylindrical or similar design and shall meet the requirements of subchapter F (Marine Engineering) of this chapter.

[CGFR 65-50, 30 FR 16671, Dec. 30, 1965, as amended by CGFR 68-82, 33 FR 18805, Dec. 18, 1968]

§ 32.60-45 Segregation of spaces containing the emergency source of electric power—TB/ALL.

(a) The provisions of this section shall apply to all vessels contracted for on or after October 1, 1958.

(b) When a compartment containing the emergency source of electric power, or vital components thereof, adjoins a space containing either the ship's service generators or machinery necessary for the operation of the ship's service generators, all common bulkheads and/or decks shall be protected by approved "structural insulation" or other approved material. This protection shall be such as to be capable of preventing an excessive temperature rise in the space containing the emergency source of electric power, or vital components thereof, for a period of at least one hour in the event of fire in the adjoining space. Bulkheads or decks meeting Class A-60 requirements, as defined by § 72.05-10 of subchapter H (Passenger Vessels) of this chapter, will be considered as meeting the requirements of this paragraph.

Subpart 32.63—Hull and Cargo Tank Requirements for Tank Barges Constructed or Converted On or After July 1, 1964, and Carrying Certain Dangerous Bulk Cargoes

§ 32.63-1 Application—B/ALL.

(a) The requirements of this subpart shall apply to all tank barges, the construction or conversion of which is started on or after July 1, 1964, and carrying those cargoes listed in Table 30.25-1 which are defined as:

(1) Flammable liquids having a Reid vapor pressure in excess of 25 pounds per square inch, absolute, in independent tanks (part 32).

(2) Liquefied flammable gases (part 38 of this subchapter).

[CGFR 70-10, 35 FR 3709, Feb. 25, 1970]

§ 32.63-5 Barge hull classifications—B/ALL.

(a) Each barge subject to the provision of this subpart shall be assigned a hull type number. The Commandant will designate the barge hull types to be used for carrying cargoes in order to insure that the vessel is designed consistent with the degree and nature of the hazard of the commodity carried.

(b) For this purpose the barge hull types shall be as follows:

(1) *Type I barge hull.* Barge hulls classed as Type I are those designed to carry products which require the maximum preventive measures to preclude the uncontrolled release of the cargo to the waterways and/or atmosphere.

(2) *Type II barge hull.* Barge hulls classed as Type II are those designed to carry products which require substantial preventive measures to preclude uncontrolled release to the atmosphere, but whose uncontrolled release to the waterways does not constitute a longlasting public or operating personnel hazard, though local and temporary pollution may occur.

(3) *Type III barge hull.* Barge hulls classed as Type III are those designed to carry products of sufficient hazard to require a moderate degree of control.

§ 32.63-8 Alternative arrangements—B/ALL.

(a) Alternative arrangements, differing from those specifically required by this subpart, may be considered and approved by the Commandant, if it is demonstrated to his satisfaction that a degree of safety is obtained which is consistent with the intent of this subpart.

§ 32.63-10 Rakes and coamings—B/ALL.

(a) Each barge hull shall be constructed with a suitable blow form (length, shape, and height of headlog) to protect against diving at the maximum speed at which the barge is designed to be towed. In any integrated tow, only the lead barge need comply with this requirement. In any case, the operator of the towing vessel shall be guided by appropriate speed limitations.

(b) All open hopper type barge hulls shall be provided with coamings around the hopper space and, additionally, a 36-inch minimum height plowshare breakwater on the forward rake. Coamings shall have a minimum height of 36 inches forward graduated to a minimum height of 24 inches at midlength and 18 inches thereafter.

§ 32.63-20 Hull structure—B/ALL.

(a) *General.* In addition to complying with the requirements of § 32.60-1, as applicable, barge hulls of Types I and II shall comply with the provisions of this section.

(b) *Types I and II barge hull.* Under an assumed grounding condition such that the forward rake bulkhead rests upon a pinnacle at the water surface, the maximum hull bending stress shall not exceed the following limits:

(1) Independent tanks may be installed in such a manner that they do not contribute to the strength and stiffness of the barge. In such case, the hull stress shall not exceed either 50 percent of the minimum ultimate tensile strength of the material or 70 percent of the yield strength when specified, whichever is greater.

(2) The Commandant may consider a reduction in hull stress when independent tanks are installed in such a manner as to contribute to the

strength and stiffness of the barge and this is accounted for in determining the effective section modulus of the barge. In such case, the hull stress shall not exceed the percentage stress values prescribed in paragraph (b)(1) of this section multiplied by the quantity $(1.5 - \text{SWT}/\text{UTS})$, where SWT is the stress calculated without including the effect of the tanks, and UTS is the minimum ultimate tensile strength of the material. The value SWT, however, shall in no case be more than 75 percent of UTS.

§ 32.63-25 Cargo tanks and supports—B/ALL.

(a) *General.* Saddles and hold-down securing straps for independent cargo tanks shall be designed to prevent tank failure due to loads induced in the saddles or straps by barge deflection.

(b) *Collision protection.* (1) All independent cargo tanks installed on Type I and Type II barge hulls shall be protected with suitable collision chocks or collision straps to withstand a longitudinal collision load of one and one-half times the weight of the tank and cargo. All other independent cargo tanks shall be provided with suitable collision chocks or collision straps to withstand a longitudinal collision load equal to the weight of the tank and cargo.

(2) All cargo tanks shall be so located as to reduce the likelihood of their being damaged in the event of collision. This protection shall be obtained by locating the cargo tanks not less than 4 feet from the side shell and box-end for Type I hulls and 3 feet for Type II barge hulls, and not less than 25 feet from the headlog at the bow for both types.

(c) *Cargo tank design—(1) Types I and II barge hulls.* (i) In addition to requirements provided for in applicable regulations for a specific commodity, cargoes subject to the provisions of this subpart shall be transported in cargo tanks meeting the requirements of this paragraph. Pressure vessel-type cargo tanks shall have sufficient additional strength so as to limit the maximum combined tank stress, including saddle horn and bending stresses, to 1.5 times the maximum allowable hoop stress in still water, and to the yield strength of

the tank material or 70 percent of the minimum ultimate tensile strength of the tank material, if less, in the grounded condition as required by § 32.63-20(b).

(ii) Gravity type cargo tanks shall have sufficient additional strength to limit the maximum combined tank stress, including saddle horn and bending stresses, to the yield strength of the tank material or 70 percent of the minimum ultimate tensile strength of the tank material, if less, in the grounded condition as required by § 32.63-20(b).

(2) *Type III barge hulls.* In addition to the requirements of this paragraph, pressure vessel-type cargo tanks shall have sufficient additional strength so as to limit the maximum combined stress, including saddle horn and bending stresses, to 1.5 times the maximum allowable hoop stress.

Subpart 32.65—Hull Requirements for Tank Vessels Constructed On or After November 10, 1936, and Prior to July 1, 1951

§ 32.65-1 Application—TB/ALL.

The requirements in this subpart apply to all tank vessels, the construction or conversion of which was started on or after November 10, 1936, and prior to July 1, 1951.

§ 32.65-5 Scantlings, material, and workmanship—TB/ALL.

The hull and deck houses shall be of steel or iron construction except that the pilothouse and decks over quarters may be constructed of wood. Scantlings, material, and workmanship, subdivision of cargo spaces, fitting of cofferdams, and testing of tanks shall be at least equivalent to the requirements of the American Bureau of Shipping or other recognized classification society.

§ 32.65-10 Subdivision of cargo space—TB/ALL.

The cargo space shall be divided into tight compartments as necessary to avoid excessive stresses and to provide stability.

Coast Guard, DOT

§ 32.70-5

§ 32.65-15 Cofferdams—TB/ALL.

Tank vessels equipped to carry Grade A, B, C, or D liquids shall have their galleys, living quarters, general cargo spaces, boiler rooms, and enclosed spaces containing propelling machinery or other machinery where sources of vapor ignition are normally present, segregated from their cargo tanks by cofferdams or equivalent pumprooms, tanks, or air spaces.

§ 32.65-20 Pumprooms—TB/ALL.

(a) Tank vessels handling Grade A, B, C, or D liquids shall have their cargo pumps isolated from all sources of vapor ignition by gastight bulkheads. Totally enclosed motors of the "explosion proof" type, motors ventilated on both the intake and exhaust by ducts to atmosphere, and engines driven by steam shall not be considered to be sources of vapor ignition. The gastight bulkhead between the pumproom and the pump-engine compartment may be pierced by fixed lights, drive shaft and pump-engine control rods, provided that the shafts and rods are fitted with stuffing boxes where they pass through the gastight bulkheads. The access to a cargo pumproom handling such liquids shall be from the open deck. (See § 32.60-20.0.)

§ 32.65-25 Living quarters—TB/ALL.

Partitions and sheathing shall be of approved fire-resistive construction.

§ 32.65-30 Tank vessels with independent tanks—TB/ALL.

Independent cargo tanks may be located in hold spaces or in other cargo tanks but in all cases a working space of at least 15 inches shall be provided around such independent tanks, or else provisions shall be made for moving them to secure such space. When independent cargo tanks are located in an enclosed space other than a cargo tank, such enclosed space shall be considered as equivalent to a pumproom, and shall be safeguarded as such, as required in the regulations in this subchapter.

§ 32.65-35 Tank vessels carrying Grade A liquids—TB/ALL.

Cargo tanks for Grade A liquids having a Reid vapor pressure in excess of

25 pounds shall be independent of the hull.

§ 32.65-40 Construction and testing of cargo tanks and bulkheads—TB/ALL.

(a) All cargo tanks to be vented at gage pressures of 4 pounds per square inch or less shall be constructed and tested as required by the requirements of the American Bureau of Shipping or other recognized classification society.

(b) All cargo tanks to be vented at gage pressures above 4 pounds per square inch shall be considered as pressure vessels and shall meet the requirements for such vessels as to construction and testing, as set forth in subchapter F (Marine Engineering) of this chapter.

(c) Gastight bulkheads shall be subjected to a thorough hose test.

[CGFR 65-50, 30 FR 16671, Dec. 30, 1965, as amended by CGFR 68-82, 33 FR 18805, Dec. 18, 1968]

Subpart 32.70—Hull Requirements for Steel Hull Tank Vessels Constructed Prior to November 10, 1936

§ 32.70-1 Application—TB/ALL.

All steel hull tank vessels, the construction or conversion of which was started prior to November 10, 1936, shall conform to the requirements in this subpart.

§ 32.70-5 Hull requirements; general—TB/ALL.

The scantlings, material, and workmanship, the subdivision of cargo spaces, the arrangement of cofferdams, the testing of tanks and cofferdams, shall be at least equivalent to the requirements of a recognized classification society for the particular service specified in the application for the certificate of inspection and permit for the transportation of liquid flammable cargoes in bulk as of the date when the tank vessel was built or as of the date when the vessel was converted into a tank vessel. In the absence of such classification requirements, the Officer in Charge, Marine Inspection, shall satisfy himself that the vessel's structure as specified in this section is safe for

§ 32.70-10

the service to be specified in its certificate of inspection.

[CGFR 66-33, 31 FR 15268, Dec. 6, 1966]

§ 32.70-10 Cofferdams—TB/ALL.

Tank vessels carrying Grade A, B, or C liquids shall be required to conform to the construction requirements in regard to vertical cofferdams in § 32.65-15, except that a dry cargo compartment shall be considered to be equivalent to a cofferdam, and except as provided for in § 32.70-20.

§ 32.70-15 Pumprooms—TB/ALL.

Tank vessels handling Grade A, B, C or D liquid cargo shall meet the requirements for tank vessels in § 32.65-20 except that the electrical installation shall comply with the requirements of § 32.45-10(c).

§ 32.70-20 Pump-engine compartment—TB/ALL.

No cofferdam will be required between a cargo tank and a compartment containing pumping engines and their auxiliaries which are used exclusively during pumping operations, provided the pumping engine compartment contains no cargo valves and is well ventilated and provided further that internal combustion exhaust within the compartment are completely water jacketed or insulated and that gasoline engine intakes are fitted with effective flame arresters.

§ 32.70-25 Cargo tanks—TB/ALL.

Cargo tanks shall comply with the conditions specified in §§ 32.65-30 and 32.65-35, and shall pass the tests required in § 32.65-40: *Provided, however*, That less than 15 inches around such tanks may be accepted if in the judgment of the Officer in Charge, Marine Inspection, making the inspection, a satisfactory inspection of the cargo tanks and hull structure can be made.

Subpart 32.75—Hull Requirements for Wood Hull Tank Vessels Constructed Prior to November 10, 1936

§ 32.75-1 Application—TB/ALL.

All wood hull tank vessels, the construction or conversion of which was

46 CFR Ch. I (10-1-00 Edition)

started prior to November 10, 1936, shall conform to the requirements in this subpart.

§ 32.75-5 Hull requirements; general—TB/ALL.

The scantlings, material, and workmanship, and the fitting and fastening of parts shall be at least equivalent to the requirements of a recognized classification society for the particular service specified in the application for certificate of inspection and permit for the transportation of liquid flammable cargoes in bulk as of the date when the tank vessel was built, or as of the date when the vessel was converted into a tank vessel. In the absence of such classification requirements, the Officer in Charge, Marine Inspection, shall satisfy himself that the vessel's structure as specified in this section is safe for the service to be specified in its certificate of inspection.

§ 32.75-10 Cargo tanks—TB/ALL.

Cargo tanks shall be independent of the wood hull, shall be made of steel or iron, and shall pass the tests required in § 32.65-40 (a), (b). Where cargo tanks in wood hulls are not arranged to provide working space around them they shall be so constructed as to allow inspection of the hull, tanks, and bilges, and they shall be so installed that they can be moved to allow repairs to the hull structure and to themselves.

§ 32.75-15 Electric bonding and grounding for tanks—TB/ALL.

All independent cargo tanks in wood hull tank vessels shall be electrically bonded together with stranded copper cable of not less than No. 4B and S gage and one end of this cable shall be grounded to a copper or brass plate of not less than 2 square feet in area and one-sixteenth inch in thickness and this plate shall be securely fastened to the hull, on the outside, at a point where it shall be covered by water when the tank vessel is unloaded.

§ 32.75-20 Hold spaces and bulkheads—TB/ALL.

In wood hull tank vessels containing independent cargo tanks for the transportation of Grade A, B, C, or D liquids, the hold spaces shall be considered as

equivalent to a pumproom and shall be safeguarded and ventilated as such as required by §32.65-20. Where the hold spaces contain equipment or operations which are sources of vapor ignition, such equipment or operations shall be isolated from other spaces by gastight bulkhead or, if it is impracticable to construct a gastight bulkhead, two structurally tight bulkheads without openings, separated by a well-ventilated air space 24 inches wide, where possible may be used.

Subpart 32.80—Tank Barges Constructed of Materials Other Than Steel or Iron

§ 32.80-1 General requirements—B/ALL.

All tank barges with hulls constructed of materials other than iron or steel, the construction or conversion of which was started prior to September 2, 1945, and to which certificates of inspection were issued prior to March 2, 1946, shall be considered the same as tank barges constructed prior to November 10, 1936.

Subpart 32.85—Lamp and Paint Rooms and Similar Compartments on Tankships

§ 32.85-1 Fireproofing of lamp, oil and paint rooms—T/ALL.

Lamp, oil and paint rooms shall be wholly and tightly lined with metal.

Subpart 32.90—Pilot Boarding Equipment

§ 32.90-1 Pilot boarding equipment.

(a) This section applies to each vessel that normally embarks or disembarks a pilot from a pilot boat or other vessel.

(b) Each vessel must have suitable pilot boarding equipment available for use on each side of the vessel. If a vessel has only one set of equipment, the equipment must be capable of being easily transferred to and rigged for use on either side of the vessel.

(c) Pilot boarding equipment must be capable of resting firmly against the vessel's side and be secured so that it is clear from overboard discharges.

(d) Each vessel must have lighting positioned to provide adequate illumination for the pilot boarding equipment and each point of access.

(e) Each vessel must have a point of access that has:

(1) A gateway in the rails or bulwark with adequate handholds; or

(2) Two handhold stanchions and a bulwark ladder that is securely attached to the bulwark rail and deck.

(f) The pilot boarding equipment required by paragraph (b) of this section must include at least one pilot ladder approved under subpart 163.003 of this chapter. Each pilot ladder must be of a single length and capable of extending from the point of access to the water's edge during each condition of loading and trim, with an adverse list of 15°.

(g) Whenever the distance from the water's edge to the point of access is more than 30 feet, access from a pilot ladder to the vessel must be by way of an accommodation ladder or equally safe and convenient means.

(h) Pilot hoists, if used, must be approved under subpart 163.002 of this chapter.

[CGD 79-032, 49 FR 25455, June 21, 1984]

PART 34—FIREFIGHTING EQUIPMENT

Subpart 34.01—General

34.01-1 Applicability—TB/ALL.

34.01-5 Equipment installed but not required—TB/ALL.

34.01-10 Protection for unusual arrangements or special products—TB/ALL.

34.01-15 Incorporation by reference.

Subpart 34.05—Firefighting Equipment, Where Required

34.05-1 Fire main system—T/ALL.

34.05-5 Fire-extinguishing systems—T/ALL.

34.05-10 Portable and semiportable extinguishers—TB/ALL.

34.05-20 Fire axes—T/ALL.

Subpart 34.10—Fire Main System, Details

34.10-1 Application—TB/ALL.

34.10-5 Fire pumps—T/ALL.

34.10-10 Fire station hydrants, hose and nozzles—T/ALL.

34.10-15 Piping—T/ALL.

34.10-90 Installations contracted for prior to May 26, 1965—T/ALL.

§ 34.01-1

Subpart 34.13—Steam Smothering System

34.13-1 Application—T/ALL.

Subpart 34.15—Carbon Dioxide Extinguishing Systems, Details

34.15-1 Application—T/ALL.
34.15-5 Quantity, pipe sizes, and discharge rates—T/ALL.
34.15-10 Controls—T/ALL.
34.15-15 Piping—T/ALL.
34.15-20 Carbon dioxide storage—T/ALL.
34.15-25 Discharge outlets—T/ALL.
34.15-30 Alarms—T/ALL.
34.15-35 Enclosure openings—T/ALL.
34.15-40 Pressure relief—T/ALL.
34.15-90 Installations contracted for prior to January 1, 1962—T/ALL.

Subpart 34.17—Fixed Foam Extinguishing Systems, Details

34.17-1 Application—T/ALL.
34.17-5 Quantity of foam required—T/ALL.
34.17-10 Controls—T/ALL.
34.17-15 Piping—T/ALL.
34.17-20 Discharge outlets—T/ALL.
34.17-25 Additional protection required—T/ALL.
34.17-90 Installations contracted for prior to January 1, 1962—T/ALL.

Subpart 34.20—Deck Foam System, Details

34.20-1 Application—T/ALL.
34.20-3 Cargo area definition—T/ALL.
34.20-5 Quantity of foam required—T/ALL.
34.20-10 Controls—T/ALL.
34.20-15 Piping—T/ALL.
34.20-20 Discharge outlets—T/ALL.
34.20-25 Foam monitor capacity—T/ALL.
34.20-90 Installations contracted for prior to January 1, 1970—T/ALL.

Subpart 34.25—Water Spray Extinguishing Systems, Details

34.25-1 Application—T/ALL.
34.25-5 Capacity and arrangement—T/ALL.
34.25-10 Controls—T/ALL.
34.25-15 Piping—T/ALL.
34.25-20 Spray nozzles—T/ALL.
34.25-90 Installations contracted for prior to January 1, 1964—T/ALL.

Subpart 34.30—Automatic Sprinkler Systems, Details

34.30-1 Application—TB/ALL.

Subpart 34.50—Portable and Semiportable Extinguishers

34.50-1 Application—TB/ALL.
34.50-5 Classification—TB/ALL.
34.50-10 Location—TB/ALL.
34.50-15 Spare charges—TB/ALL.

46 CFR Ch. I (10-1-00 Edition)

34.50-20 Semiportable fire extinguishers—TB/ALL.

34.50-90 Vessels contracted for prior to January 1, 1962—TB/ALL.

Subpart 34.60—Fire Axes

34.60-1 Application—T/ALL.
34.60-5 Number required—T/ALL.
34.60-10 Location—T/ALL.

AUTHORITY: 46 U.S.C. 3306, 3703; E.O. 12234, 45 FR 58801, 3 CFR, 1980 Comp., p. 277; 49 CFR 1.46.

SOURCE: CGFR 65-50, 30 FR 16694, Dec. 30, 1965, unless otherwise noted.

Subpart 34.01—General

§ 34.01-1 Applicability—TB/ALL.

(a) The provisions of this part shall apply to all tank vessels except as otherwise noted in this part.

[CGFR 65-50, 30 FR 16694, Dec. 30, 1965, as amended by CGD 88-032, 56 FR 35821, July 29, 1991]

§ 34.01-5 Equipment installed but not required—TB/ALL.

(a) Where firefighting equipment is not required, but is installed, the equipment and its installation shall be of an approved type.

§ 34.01-10 Protection for unusual arrangements or special products—TB/ALL.

(a) The provisions of this part contemplate fire protection for tank vessels of conventional design carrying the usual liquid petroleum products in internal tanks. Whenever unusual arrangements exist or special cargoes are carried upon which the vessel's normal firefighting equipment will be ineffective, additional suitable firefighting equipment of approved type shall be carried.

§ 34.01-15 Incorporation by reference.

(a) Certain material is incorporated by reference into this part with the approval of the Director of the Federal Register in accordance with 5 U.S.C. 552(a). To enforce any edition other than that specified in paragraph (b) of this section, the Coast Guard must publish notice of change in the FEDERAL REGISTER and make the material available to the public. All approved material is on file at the Office of the

Federal Register, 800 North Capitol Street, NW., suite 700, Washington, DC and at the U.S. Coast Guard, Office of Design and Engineering Standards (G-MSE), 2100 Second Street SW., Washington, DC 20593-0001 and is available from the sources indicated in paragraph (b) of this section.

(b) The material approved for incorporation by reference in this part and the sections affected are:

American Society for Testing and Materials (ASTM)

100 Barr Harbor Drive, West Conshohocken, PA 19428-2959

ASTM F 1121-87 (Reapproved 1993), Standard Specification for International Shore Connections for Marine Fire Applications, 198734.10-15

National Fire Protection Association (NFPA)

1 Batterymarch Park, Quincy, MA 02269-9101

NFPA 13-1996, Standard for the Installation of Sprinkler Systems—34.30-1

[CGD 88-032, 56 FR 35821, July 29, 1991, as amended by CGD 95-072, 60 FR 50461, Sept. 29, 1995; CGD 96-041, 61 FR 50727, Sept. 27, 1996; CGD 97-057, 62 FR 51043, Sept. 30, 1997; CGD 95-028, 62 FR 51198, Sept. 30, 1997; USCG-1999-6216, 64 FR 53223, Oct. 1, 1999; USCG-1999-5151, 64 FR 67177, Dec. 1, 1999]

Subpart 34.05—Firefighting Equipment, Where Required

§ 34.05-1 Fire main system—T/ALL.

(a) Fire pumps, piping, hydrants, hose and nozzles shall be installed on all tankships.

(b) The arrangements and details of the fire main system shall be as set forth in subpart 34.10.

[CGFR 65-50, 30 FR 16694, Dec. 30, 1965, as amended by CGD 77-057a, 44 FR 66502, Nov. 19, 1979]

§ 34.05-5 Fire-extinguishing systems—T/ALL.

(a) Approved fire extinguishing systems must be installed on all tankships in the following locations. Previously approved installations may be retained as long as they are maintained in good condition to the satisfaction of the Officer in Charge, Marine Inspection.

(1) *Dry cargo compartments.* A carbon dioxide or water spray system must be installed for the protection of all dry

cargo compartments. Where such compartments are readily accessible by means of doors such spaces need be protected only by the fire main system.

(2) *Cargo tanks.* A deck foam system must be installed for the protection of all cargo tank spaces. Where a deck foam system is installed, an approved inert gas, steam or other system may also be installed for the purposes of fire prevention or inerting of cargo tanks. For vessels under 100 feet in length, the semiportable equipment required by footnote 1 of table 34.05-5(a) will be considered as meeting the requirements of this subparagraph.

(3) *Lamp and paint lockers and similar spaces.* A carbon dioxide or water spray system must be installed in all lamp and paint lockers, oil rooms, and similar spaces.

(4) *Pumprooms.* A carbon dioxide, inert gas, foam or water spray system must be installed for the protection of all pumprooms.

(5) *Boilerrooms.* On tankships contracted for on or after November 19, 1952, a carbon dioxide or foam system shall be installed for the protection of all spaces containing oil fired boilers, either main or auxiliary, their fuel oil service pumps and/or such fuel oil units as the heaters, strainers, valves, manifolds, etc., that are subject to the discharge pressure of the fuel oil service pumps.

(6) *Machinery spaces.* A carbon dioxide system shall be installed for the protection of machinery spaces containing internal combustion propelling engines using fuel having a flashpoint of less than 110 degrees F.

(7) *Internal combustion installations.* Fire-extinguishing systems shall be provided for internal combustion installations in accordance with the following:

(i) If a fire-extinguishing system is installed to protect an internal combustion installation, the system shall be of the carbon dioxide type.

(ii) On vessels of 1,000 gross tons and over on an international voyage, the construction or conversion of which is contracted for on or after May 26, 1965, a fixed carbon dioxide system shall be installed in all spaces containing internal combustion or gas turbine main propulsion machinery, auxiliaries with

§ 34.05-10

an aggregate power of 1,000 b.h.p. or greater, or their fuel oil units, including purifiers, valves, and manifolds.

(iii) On vessels of 1,000 gross tons and over, the construction, conversion or automation of which is contracted for on or after January 1, 1968, a fixed carbon dioxide system shall be installed in all spaces containing internal combustion or gas turbine main propulsion machinery, auxiliaries with an aggregate power of 1,000 b.h.p. or greater, or their fuel oil units, including purifiers, valves and manifolds.

(8) *Enclosed ventilating system.* On tankships contracted for on or after January 1, 1962, where an enclosed ventilating system is installed for electric propulsion motors or generators, a carbon dioxide extinguishing system shall be installed in such system.

(b) The arrangements and details of the fire-extinguishing systems shall be as set forth in subparts 34.10 through 34.20.

[CGFR 65-50, 30 FR 16694, Dec. 30, 1965, as amended by CGFR 67-90, 33 FR 1015, Jan. 26, 1968; CGD 77-057a, 44 FR 66502, Nov. 19, 1979; CGD 95-027, 61 FR 25998, May 23, 1996]

§ 34.05-10 Portable and semiportable extinguishers—TB/ALL.

(a) All portable and semiportable extinguishers on board tank vessels shall be of an approved type.

(b) The type, size, location and arrangement of portable and semiportable extinguishers shall be as set forth in subpart 34.50.

[CGFR 65-50, 30 FR 16694, Dec. 30, 1965, as amended by CGFR 70-143, 35 FR 19905, Dec. 30, 1970]

§ 34.05-20 Fire axes—T/ALL.

(a) Fire axes shall be provided on all tankships.

(b) The location and arrangement of fire axes shall be as set forth in subpart 34.60.

Subpart 34.10—Fire Main System, Details

§ 34.10-1 Application—TB/ALL.

(a) On all tankships the provisions of this subpart, with the exception of § 34.10-90, shall apply to all fire main installations contracted for on or after

46 CFR Ch. I (10-1-00 Edition)

May 26, 1965. Installations contracted for prior to May 26, 1965, shall meet the requirements of § 34.10-90.

(b) If a fire main system is installed on a tank barge, the system shall meet the intent of this subpart insofar as reasonable and practicable.

§ 34.10-5 Fire pumps—T/ALL.

(a) Tankships shall be equipped with independently driven fire pumps in accordance with table 34.10-5(a).

TABLE 34.10-5(a)—FIRE PUMPS

Size vessel, L.O.A. (feet)		Minimum number of pumps	Powerful streams of water per pump	Minimum hydrant and hose size (inches)	
Over—	Not over—			Exterior stations	Interior stations
	100	(¹)
100	250	² 1	³ 2	1½	1½
250	400	2	³ 2	1½	1½
400	650	2	³ 2	4 2½	1½
650	2	³ 3	4 2½	1½

¹ Vessels of 65 feet and not over 100 feet shall be equipped with 2 B-V extinguishers. (Refer to Table 34.50-5(c).) Vessels under 65 feet shall be equipped with 1 B-V extinguisher. (Refer to Table 34.50-5(c).)

² Vessels of 1,000 gross tons and over on an international voyage shall have at least 2 fire pumps.

³ From hydrants having greatest pressure drop between fire-pump(s) and nozzles.

⁴ Where 2½-inch hydrant size is required, two 1½-inch outlets may be substituted therefor with two 1½-inch hoses.

(b) Each pump shall be capable of delivering simultaneously the number of streams of water required by table 34.10-5(a) from the outlets having the greatest pressure drop between fire pump(s) and nozzles at a Pitot tube pressure of approximately 75 p.s.i. Where 1½-inch hose is permitted in lieu of 2½-inch hose by footnote 3 of Table 34.10-5(a), the pump capacity shall be determined on the basis that both hoses are used.

(c) On tankships of 1,000 gross tons and over on an international voyage, each required fire pump, while delivering water through the fire main system at a pressure corresponding to that required by § 34.10-15(e), shall have a minimum capacity of at least two-thirds of that required for an independent bilge pump if no length correction is taken for the cargo tank space. However, in no case shall the capacity of each fire pump be less than that otherwise required by this section.

(d) Fire pumps shall be fitted on the discharge side with relief valves set to

relieve at 25 p.s.i. in excess of the pressure necessary to maintain the requirements of paragraph (b) of this section.

(e) Fire pumps shall be fitted with a pressure gage on the discharge side of the pumps.

(f) Fire pumps may be used for other purposes provided at least one of the required pumps is kept available for use on the fire system at all times. In no case shall a pump having connection to an oil line be used as a fire pump. Branch lines connected to the fire main for purposes other than fire and deck wash shall be arranged so that the requirements of paragraph (b) of this section and any other services installed on the fire main can be met simultaneously.

(g) On all vessels where two fire pumps are required, they shall be located in separate spaces, and the arrangement of pumps, sea connections, and sources of power shall be such as to insure that a fire in any one space will not put all of the fire pumps out of operation. However, where it is shown to the satisfaction of the Commandant that it is unreasonable or impracticable to meet this requirement due to the size, or arrangement of the vessel, or for other reasons, the installation of a total flooding carbon dioxide system may be accepted as an alternate method of extinguishing any fire which would affect the powering and operation of at least one of the required fire pumps.

[CGFR 65-50, 30 FR 16694, Dec. 30, 1965, as amended by CGD 95-028, 62 FR 51199, Sept. 30, 1997]

§ 34.10-10 Fire station hydrants, hose and nozzles—T/ALL.

(a) The size of fire station hydrants and hose required shall be as noted in Table 34.10-5(a).

(b) Fire hydrants shall be of sufficient number and so located that any part of living quarters, storerooms, working spaces and weather decks accessible to crew while at sea may be reached with two effective spray patterns of water, one of which shall be from a single 50-foot length of hose. In main machinery spaces all portions of such spaces shall be capable of being reached by at least 2 effective spray patterns of water, each of which shall

be from a single 50-foot length of hose from separate outlets.

(c) The outlets at the fire station hydrant shall be limited to any position from the horizontal to the vertical pointing downward so that hose will lead horizontally or downward to minimize possibility of kinking.

(d) All fire station hydrants shall be equipped with spanners suitable for use on the hose at that station.

(e) Each fire station hydrant must have at least 1 length of firehose. Each firehose on the hydrant must have a combination solid stream and water spray firehose nozzle that meets the requirements in subpart 162.027 of this chapter. Firehose nozzles previously approved under subpart 162.027 of this chapter may be retained so long as they are maintained in good condition to the satisfaction of the Officer in Charge, Marine Inspection. A suitable hose rack or other device must be provided. Hose racks on weather decks must be located to afford protection from heavy seas. The hose must be stored in a location that is readily visible.

TABLE 34.10-10(E) HYDRANTS WITH COAST GUARD APPROVED LOW-VELOCITY WATER SPRAY APPLICATORS

Location	Number of hydrants with approved applicators	Approved applicator length (feet)
Living space	1	4
Weather deck	4	10 or 12
Machinery space	2	4

(f) Each combination firehose nozzle previously approved under subpart 162.027 of this chapter in the locations listed in table 34.10-10(E) must have a low-velocity water spray applicator also previously approved under subpart 162.027 of this chapter that is of the length listed in that table.

(g) The pipes and fire station hydrants shall be so placed that the fire hose may be easily coupled to them. All hydrants shall be so located as to be readily accessible. If deck cargo is carried, it shall not interfere with access to the fire station hydrants, and the pipes shall be arranged as far as practicable to avoid risk of damage by such cargo.

§ 34.10-15

(h) Each fire station hydrant or “y” branch shall be equipped with a valve so that the hose may be removed while there is pressure on the fire main.

(i) Fire station hydrant connections shall be brass, bronze, or other equivalent metal. Couplings shall either:

(1) Use National Standard fire hose coupling threads for the 1½ inch (38 millimeter) and 2½ inch (64 millimeter) hose sizes, i.e. 9 threads per inch for 1½ inch hose, and 7½ threads per inch for 2½ inch hose; or

(2) Be a uniform design for each hose diameter throughout the vessel.

(j) Fire hose shall be 50 feet in length except on weather decks the hose shall be increased in length if necessary to enable a single length to be goose-necked over each side of the vessel. If two fire mains are installed on the weather decks, the length of hose shall be such that it may be goose-necked over the side from the nearest fire main.

(k) Fire hose when part of the fire equipment shall not be used for any other purpose than fire extinguishing, fire drills, and testing.

(l) Fire hose shall be connected to outlets at all times. However, in heavy weather on open decks where no protection is afforded the hose may be removed temporarily from the hydrant and stowed in an accessible location nearby. While in port, fire hose in way of cargo area shall be kept ready for immediate use. The fire hose may be temporarily removed when it will interfere with the handling of cargo.

(m) Each section of fire hose used after January 1, 1980 must be lined commercial fire hose that conforms to Underwriters' Laboratories, Inc. Standard 19 or Federal Specification ZZ-H-451E. Hose that bears the label of Underwriters' Laboratories, Inc. as lined fire hose is accepted as conforming to this requirement. Each section of replacement fire hose or any section of new fire hose placed aboard a vessel after January 1, 1977 must also conform to the specification required by this paragraph.

(n) Coupling shall conform to the requirements of paragraph (h) of this section.

(o) Each low-velocity water spray applicator under paragraph (f) of this sec-

46 CFR Ch. I (10-1-00 Edition)

tion must have fixed brackets, hooks, or other means for stowing next to the hydrant.

[CGFR 65-50, 30 FR 16694, Dec. 30, 1965, as amended by CGD 74-60, 41 FR 43151, Sept. 30, 1976; CGD 76-086, 44 FR 2391, Jan. 11, 1979; CGD 95-027, 61 FR 25999, May 23, 1996; CGD 95-028, 62 FR 51199, Sept. 30, 1997]

§ 34.10-15 Piping—T/ALL.

(a) All piping, valves and fittings shall meet the applicable requirements of subchapter F (Marine Engineering) of this chapter.

(b) An adequate number of valves shall be installed to isolate damaged sections of piping except on self-propelled vessels carrying bulk liquefied gases that must have stop valves:

(1) At cross connections;

(2) At the front of the after deck house; and

(3) In the cargo area spaced 40 m (131 ft.) or less between hydrants.

(c) All distribution valves shall be marked as required by § 35.40-10 of this subchapter.

(d) Tankships of 500 gross tons and over on an international voyage must be provided with at least one international shore connection which meets ASTM F 1121 (incorporated by reference, see § 34.01-15). Facilities must be available enabling such a connection to be used on either side of the vessel.

(e) For tankships on an international voyage, the diameter of the fire main shall be sufficient for the effective distribution of the maximum required discharge from two fire pumps operating simultaneously. This requirement is in addition to § 34.10-5(b). The discharge of this quantity of water through hoses and nozzles at a sufficient number of adjacent hydrants shall be at a minimum Pitot tube pressure of approximately 71 pounds per square inch on self-propelled vessels that carry bulk liquefied gases and approximately 50 pounds per square inch on other tankships.

[CGFR 65-50, 30 FR 16694, Dec. 30, 1965, as amended by CGD 74-289, 44 FR 26006, May 3, 1979, CGD 88-032, 56 FR 35821, July 29, 1991; USCG-2000-7790, 65 FR 58459, Sept. 29, 2000]

§ 34.10-90 Installations contracted for prior to May 26, 1965—T/ALL.

(a) Installations contracted for prior to January 1, 1962, shall meet the following requirements:

(1) Existing arrangements, materials and facilities previously approved shall be considered satisfactory so long as they meet the minimum requirements of this paragraph and they are maintained in good condition to the satisfaction of the Officer in Charge, Marine Inspection. Minor repairs and alterations may be made to the same standards as the original installation.

(2) Except as further modified by this paragraph, the details of the systems shall be in general agreement with §§ 34.10-5 through 34.10-15 insofar as is reasonable and practicable.

(3) Tankships of less than 500 gross tons shall be equipped with an efficient hand pump capable of delivering 50 gallons per minute or a power-driven pump of equivalent capacity. However, on tankships of 20 gross tons or under where it is impracticable to install a hand or power-operated fire pump, or on tankships with only one man in the crew, at least one additional B-II fire extinguisher may be accepted in lieu of a fire pump.

(4) Tankships of 500 gross tons and over but not over 1,000 gross tons shall be provided with one independently power-driven pump.

(5) Tankships of over 1,000 gross tons shall be provided with two independently power-driven pumps.

(6) On tankships of 500 gross tons and over, the capacity of the combined fire pump installation shall be one-fifth gallon per minute per gross ton of the ship. The maximum total fire pump capacity required for any tankship shall be 800 gallons per minute.

(7) Each fire pump on a tankship of 500 gross tons or more must deliver enough water to the fire main so that the topmost outlet on the fire main emits two jets of water at a Pitot tube pressure of 50 pounds per square inch through two combination solid stream and water spray firehose nozzles meeting paragraph (10) of this section.

(8) On oil-burning tankships, provided with two fire pumps, where the engine and fire rooms are not entirely separated by iron or steel bulkheads, or

if fuel can drain from fireroom bilges into the engineroom, one of the fire pumps shall be located in an accessible space separate from the machinery compartment. On all tankships contracted for on or after November 19, 1952, the requirements of paragraph (f) of § 34.10-5 shall be met.

(9) Fire hydrant outlets shall have a minimum diameter of 1½ inches.

(10) Each fire station hydrant on a tankship of 500 gross tons or more must have at least 1 length of firehose. Each firehose on the hydrant must have a combination solid stream and water spray firehose nozzle that meets the requirements of subpart 162.027. Firehose nozzles previously approved under subpart 162.027 of this chapter may be retained so long as they are maintained in good condition to the satisfaction of the Officer in Charge, Marine Inspection.

(11) On each tankship of 1000 gross tons or more, the firehose nozzle required by paragraph (a)(10) of this section on each of the following hydrants must have a low-velocity water-spray applicator that was previously approved under subpart 162.027 and that connects to that nozzle when the nozzle itself was previously approved under subpart 162.027—

(i) At least two hydrants in the Machinery and boiler spaces; and

(ii) At least 25 percent of other hydrants.

(12) Vessels contracted for on or after July 1, 1954, shall meet the requirements of § 34.10-10(h).

(b) Installations contracted for on or after January 1, 1962, but prior to May 26, 1965, shall meet the following requirements:

(1) Existing arrangements, materials, facilities, and equipment, except firehose nozzles, previously approved shall be considered satisfactory as long as they meet the minimum requirements of this paragraph and they are maintained in good conditions to the satisfaction of the Officer in Charge, Marine Inspection. Minor repairs and alterations may be made to the same standards as the original installation.

(2) Each fire station hydrant must have at least 1 length of firehose. Each firehose on the hydrant must have a combination solid stream and water

§ 34.13-1

spray firehose nozzle that meets the requirements of subpart 162.027. Firehose nozzles previously approved under subpart 162.027 of this chapter may be retained so long as they are maintained in good condition to the satisfaction of the Officer in Charge, Marine Inspection. If the firehose nozzles were previously approved under subpart 162.027, each of the number of hydrants in the locations listed in table 34.10-10(E) must have a low-velocity water spray applicator that—

- (i) Was previously approved under subpart 162.027 of this chapter;
- (ii) Is the length listed in table 34.10-10(E); and
- (iii) Meets § 34.10-10(o).

[CGFR 65-50, 30 FR 16694, Dec. 30, 1965, as amended by CGD 76-086, 44 FR 2391, Jan. 11, 1979; CGD 95-027, 61 FR 25999, May 23, 1996]

Subpart 34.13—Steam Smothering Systems

SOURCE: CGD 95-027, 61 FR 25999, May 23, 1996.

§ 34.13-1 Application—T/ALL.

Steam smothering fire extinguishing systems are not permitted on vessels contracted for on or after January 1, 1962. Previously approved installations may be retained as long as they are maintained in good condition to the satisfaction of the Officer in Charge, Marine Inspection.

Subpart 34.15—Carbon Dioxide Extinguishing Systems, Details

§ 34.15-1 Application—T/ALL.

(a) Where a carbon dioxide extinguishing system is installed, the provisions of this subpart, with the exception of § 34.15-90, shall apply to all installations contracted for on or after January 1, 1962. Installations contracted for prior to January 1, 1962, shall meet the requirements of § 34.15-90.

(b) The requirements of this subpart are based on a "high pressure system," i.e., one in which the carbon dioxide is stored in liquid form at atmospheric temperature. Details for "low pressure systems," i.e., those in which the carbon dioxide is stored in liquid form at

46 CFR Ch. I (10-1-00 Edition)

a continuously controlled low temperature, may be specifically approved by the Commandant where it is demonstrated that a comparable degree of safety and fire extinguishing ability is achieved.

§ 34.15-5 Quantity, pipe sizes, and discharge rates—T/ALL.

(a) *General.* (1) The amount of carbon dioxide required for each space shall be as determined by paragraphs (b) through (d) of this section.

(b) *Total available supply.* (1) A separate supply of carbon dioxide need not be provided for each space protected. The total available supply shall be at least sufficient for the space requiring the greatest amount.

(c) *Dry cargo spaces.* (1) The number of pounds of carbon dioxide required for each space shall be equal to the gross volume of the space in cubic feet divided by 30.

(2) Although separate piping shall be led to each cargo hold and 'tween deck, for the purpose of determining the amount of carbon dioxide required, a cargo compartment will be considered as the space between watertight or firescreen bulkheads and from the tank top or lowest deck to the deck head of the uppermost space on which cargo may be carried. If a trunk extends beyond such deck, the trunk volume shall be included. Tonnage openings shall be considered as sealed for this purpose.

(3) Branch lines to the various cargo holds and 'tween decks shall not be less than 3/4-inch standard pipe size.

(4) No specific discharge rate need be applied to such systems.

(d) *Machinery spaces, pumprooms, paint lockers, and similar spaces.* (1) Except as provided in paragraph (d)(4) of this section, the number of pounds of carbon dioxide required for each space shall be equal to the gross volume of the space divided by the appropriate factor noted in Table 34.15-5(d)(1). If fuel can drain from the compartment being protected to an adjacent compartment, or if the compartments are not entirely separate, the requirements for both compartments shall be used to determine the amount of carbon dioxide to be provided. The carbon dioxide shall be arranged to discharge into

both such compartments simultaneously.

TABLE 34.15-5(d)(1)

Gross volume of compartment, cubic feet		Factor
Over	Not Over	
500	500	15
1,600	1,600	16
4,000	4,500	18
50,000	50,000	20
	22

(2) For the purpose of the above requirement of this paragraph, the volume of a machinery space shall be taken as exclusive of the normal machinery casing unless the boiler, internal combustion propelling machinery, or fuel oil installations subject to the discharge pressure of the fuel oil service pump extend into such space, in which case the volume shall be taken to the top of the casing or the next material reduction in casing area, whichever is lower. The terms "normal machinery casing" and "material reduction in casing area" shall be defined as follows:

(i) By "normal machinery casing" shall be meant a casing the area of which is not more than 40 percent of the maximum area of the machinery space.

(ii) By "material reduction in casing area" shall be meant a reduction to at least 40 percent of the casing area.

(3) For the purpose of the above requirements of this paragraph, the volume of a pumproom shall include the pumproom and all associated trunks up to the deck at which access from the weather is provided.

(4) For tankships on an international voyage contracted for on or after May 26, 1965, the amount of carbon dioxide required for a space containing propulsion boilers or internal combustion propulsion machinery shall be as given by paragraphs (d) (1) and (2) of this section or by dividing the entire volume, including the casing, by a factor of 25, whichever is the larger.

(5) Branch lines in the various spaces shall be noted in Table 34.15-5(d)(5).

TABLE 34.15-5(d)(5)

Maximum quantity of carbon dioxide required, pounds	Minimum pipe sizes, inches	Maximum quantity of carbon dioxide required, pounds	Minimum pipe size inches
100	1/2	2,500	2 1/2
225	3/4	4,450	3
300	1	7,100	3 1/2
600	1 1/4	10,450	4
1,000	1 1/2	15,000	4 1/2
2,450	2

(6) Distribution piping within the space shall be proportioned from the supply line to give proper distribution to the outlets without throttling.

(7) The number, type and location of discharge outlets shall be such as to give a uniform distribution throughout the space.

(8) The total area of all discharge outlets shall not exceed 85 percent nor be less than 35 percent of the nominal cylinder outlet area or the area of the supply pipe, whichever is smaller. The nominal cylinder outlet area in square inches shall be determined by multiplying the factor 0.0022 by the number of pounds of carbon dioxide required, except that in no case shall this outlet area be less than 0.110 square inches.

(9) The discharge of at least 85 percent of the required amount of carbon dioxide shall be complete within 2 minutes.

[CGFR 65-50, 30 FR 16694, Dec. 30, 1965, as amended at 45 FR 64188, Sept. 29, 1980; CGD 95-028, 62 FR 51199, Sept. 30, 1997; USCG-1999-6216, 64 FR 53223, Oct. 1, 1999]

§ 34.15-10 Controls—T/ALL.

(a) Except as noted in § 34.15-20(b), all controls and valves for the operation of the system shall be outside the space protected, and shall not be located in any space that might be cut off or made inaccessible in the event of fire in any of the spaces protected.

(b) If the same cylinders are used to protect more than one space, a manifold with normally closed stop valves shall be used to direct the carbon dioxide into the proper space. If cylinders are used to protect only one space, a normally closed stop valve shall be installed between the cylinders and the space except for systems of the type indicated in § 34.15-5(d) which contain not

§ 34.15-15

more than 300 pounds of carbon dioxide.

(c) Distribution piping to the dry cargo spaces shall be controlled from not more than two stations. One of the stations controlling the system for the main machinery space shall be located as convenient as practicable to one of the main-escapes from the space. All control stations and the individual valves and controls shall be marked as required by § 35.40-10 of the subchapter.

(d) Systems of the type indicated in § 34.15-5(d) shall be actuated at each station by one control operating the valve to the space and a separate control releasing at least the required amount of carbon dioxide. These two controls shall be located in a box or other enclosure clearly identified for the particular space. Systems installed without a stop valve shall be operated by one control releasing at least the required amount of carbon dioxide.

(e) Where provisions are made for the simultaneous release of a given amount of carbon dioxide by operation of a remote control, provisions shall also be made for manual control at the cylinders. Where gas pressure from pilot cylinders is used as a means for releasing the remaining cylinders, not less than two pilot cylinders shall be used for systems consisting of more than two cylinders. Each of the pilot cylinders shall be capable of manual control at the cylinder, but the remaining cylinders need not be capable of individual manual control.

(f) Systems of the type indicated in § 34.15-5(d), which are of more than 300 pounds of carbon dioxide shall be fitted with an approved delayed discharge so arranged that the alarm will be sounded for at least 20 seconds before the carbon dioxide is released into the space. Such systems of not more than 300 pounds of carbon dioxide shall also have a similar delayed discharge, except for spaces which have a suitable horizontal escape.

(g) All distribution valves and controls shall be of an approved type. All controls shall be suitably protected.

(h) Complete but simple instructions for the operation of the systems must be located in a conspicuous place at or near all pull boxes, stop valve controls and in the CO₂ cylinder storage room.

46 CFR Ch. I (10-1-00 Edition)

On systems in which the CO₂ cylinders are not within the protected space, these instructions must also include a schematic diagram of the system and instructions detailing alternate methods of discharging the system should the manual release or stop valve controls fail to operate. Each control valve to branch lines must be marked to indicate the related space served.

(i) If the space or enclosure containing the carbon dioxide supply or controls is to be locked, a key to the space or enclosure shall be in a break-glass-type box conspicuously located adjacent to the opening.

[CGFR 65-50, 30 FR 16694, Dec. 30, 1965, as amended by CGD 74-100R, 40 FR 6208, Feb. 10, 1975; USCG-1999-6216, 64 FR 53223, Oct. 1, 1999]

§ 34.15-15 Piping—T/ALL.

(a) The piping, valves, and fittings shall have a bursting pressure of not less than 6,000 pounds p.s.i.

(b) All piping, in nominal sizes not over ¾-inch shall be at least Schedule 40 (standard weight) and in nominal sizes over ¾-inch, shall be at least Schedule 80 (extra heavy).

(c) All piping, valves, and fittings of ferrous materials shall be protected inside and outside against corrosion unless specifically approved otherwise by the Commandant.

(d) A pressure relief valve or equivalent set to relieve between 2,400 and 2,800 pounds p.s.i. shall be installed in the distributing manifold or such other location as to protect the piping in the event that all branch line shut-off valves are closed.

(e) All deadend lines shall extend at least 2 inches beyond the last orifice and shall be closed with cap or plug.

(f) All piping, valves, and fittings shall be securely supported, and where necessary, protected against injury.

(g) Drains and dirt traps shall be fitted where necessary to prevent the accumulation of dirt or moisture. Drains and dirt traps shall be located in accessible locations where possible.

(h) Piping shall be used for no other purpose except that it may be incorporated with the fire-detecting system.

(i) Piping passing through living quarters shall not be fitted with drains or other openings within such spaces.

(j) Installation test requirements are:

(1) Upon completion of the piping installation, and before the cylinders are connected, a pressure test shall be applied as set forth in this paragraph. Only carbon dioxide or other inert gas shall be used for this test.

(2) The piping from the cylinders to the stop valves in the manifold shall be subjected to a pressure of 1,000 pounds p.s.i. With no additional gas being introduced to the system, it shall be demonstrated that the leakage of the system is such as not to permit a pressure drop of more than 150 pounds per square inch per minute for 2-minute period.

(3) The individual branch lines to the various spaces protected shall be subjected to a test similar to that described in the preceding paragraph with the exception that the pressure used shall be 600 pounds p.s.i. in lieu of 1,000 pounds p.s.i. For the purpose of this test, the distribution piping shall be capped within the space protected at the first joint ahead of the nozzles.

(4) In lieu of the tests prescribed in the preceding paragraphs in this section, small independent systems protecting spaces such as emergency generator rooms, lamp lockers, etc., may be tested by blowing out the piping with the air at a pressure of at least 100 pounds p.s.i.

§ 34.15-20 Carbon dioxide storage—T/ALL.

(a) Except as provided in paragraph (b) of this section, the cylinders shall be located outside the spaces protected, and shall not be located in any space that might be cut off or made inaccessible in the event of a fire in any of the spaces protected.

(b) Systems of the type indicated in § 34.15-5(d), consisting of not more than 300 pounds of carbon dioxide, may have the cylinders located within the space protected. If the cylinder stowage is within the space protected, the system shall be arranged in an approved manner to be automatically operated by a heat actuator within the space in addition to the regular remote and local controls.

(c) The space containing the cylinders shall be properly ventilated and designed to preclude an anticipated

ambient temperature in excess of 130 degrees F.

(d) Cylinders shall be securely fastened and supported, and where necessary, protected against injury.

(e) Cylinders shall be so mounted as to be readily accessible and capable of easy removal for recharging and inspection. Provisions shall be available for weighing the cylinders.

(f) Where subject to moisture, cylinders shall be so installed as to provide a space of at least 2 inches between the flooring and the bottom of the cylinders.

(g) Cylinders shall be mounted in an upright position or inclined not more than 30 degrees from the vertical. However, cylinders which are fitted with flexible or bent siphon tubes may be inclined not more than 80 degrees from the vertical.

(h) Where check valves are not fitted on each independent cylinder discharge, plugs or caps shall be provided for closing outlets when cylinders are removed for inspection or refilling.

(i) All cylinders used for storing carbon dioxide must be fabricated, tested, and marked in accordance with §§ 147.60 and 147.65 of this chapter.

[CGFR 65-50, 30 FR 16694, Dec. 30, 1965, as amended at 53 FR 7748, Mar. 10, 1988; USCG-1999-6216, 64 FR 53223, Oct. 1, 1999]

§ 34.15-25 Discharge outlets—T/ALL.

(a) Discharge outlets shall be of an approved type.

§ 34.15-30 Alarms—T/ALL.

(a) Spaces required to have a delayed discharge by § 34.15-10(f) which are protected by a carbon dioxide extinguishing system and are normally accessible to persons on board while the vessel is being navigated, other than paint and lamp lockers and similar small spaces, shall be fitted with an approved audible alarm in such spaces which will be automatically sounded before the carbon dioxide is admitted to the space. The alarm shall be conspicuously and centrally located and shall be marked as required by § 35.40-7 of this subchapter. Such alarms shall be so arranged as to sound during the 20-second delay period prior to the discharge of carbon dioxide into the space, and the alarm shall depend on no

§ 34.15-35

source of power other than the carbon dioxide.

§ 34.15-35 Enclosure openings—T/ALL.

(a) Except for cargo spaces, the operation of the carbon dioxide system shall automatically shut down any mechanical ventilation to that space. This will not be required where the carbon dioxide system is a secondary system in addition to another approved primary system protecting the space.

(b) Where natural ventilation is provided for spaces protected by a carbon dioxide extinguishing system, provisions shall be made for easily and effectively closing off the ventilation.

(c) Means shall be provided for closing all other openings to the space protected from outside such space. In this respect, relatively tight doors, shutters, or dampers shall be provided for openings in the lower portion of the space. The construction shall be such that openings in the upper portion of the space can be closed off either by permanently installed means or by the use of canvas or other material which is normally carried by the vessel.

§ 34.15-40 Pressure relief—T/ALL.

(a) Where necessary, relatively tight compartments such as refrigeration spaces, paint lockers, etc., shall be provided with suitable means for relieving excessive pressure accumulating within the compartment when the carbon dioxide is injected.

§ 34.15-90 Installations contracted for prior to January 1, 1962—T/ALL.

(a) Installations contracted for prior to November 19, 1952, shall meet the requirements of this paragraph.

(1) Existing arrangements, materials, and facilities previously approved shall be considered satisfactory so long as they meet the minimum requirements of this paragraph and they are maintained in good condition to the satisfaction of the Officer in Charge, Marine Inspection. Minor repairs and alterations may be made to the same standards as the original installation.

(2) The details of the systems shall be in general agreement with §§ 34.15-5 through 34.15-40 insofar as is reasonable and practicable, with the exception of § 34.15-5(d)(1) through (3) cov-

46 CFR Ch. I (10-1-00 Edition)

ering spaces other than cargo spaces, which systems may be installed in accordance with paragraphs (a) (4) through (7) of this section.

(3) For cargo tanks at least one pound of carbon dioxide shall be available for each 30 cubic feet of the largest cargo tank. The discharge of the required amount of carbon dioxide shall be complete within 5 minutes.

(4) In boiler rooms, the bilges shall be protected by a system discharging principally below the floor plates. Perforated pipe may be used in lieu of discharge nozzles for such systems. The number of pounds of carbon dioxide shall be equal to the gross volume of the boiler room taken to the top of the boilers divided by 36. In the event of an elevated boiler room which drains to the machinery space, the system shall be installed in the engineroom bilge and the gross volume shall be taken to the flat on which the boilers are installed.

(5) In machinery spaces where main propulsion internal combustion machinery is installed, the number of pounds of carbon dioxide required shall be equal to the gross volume of the space taken to the underside of the deck forming the hatch opening divided by 22.

(6) In miscellaneous spaces other than cargo or main machinery spaces the number of pounds of carbon dioxide required shall be equal to the gross volume of the space divided by 22.

(7) Branch lines to the various spaces other than cargo and similar spaces shall be as noted in Table 34.15-90(a)(7). This table is based on cylinders having discharge outlets and siphon tubes of 3/8-inch diameter.

TABLE 34.15-90(a)(7)

Number of cylinders		Nominal pipe size, inches
Over	Not over	
2	2	1/2-standard.
4	4	3/4-standard.
6	6	1-extra heavy.
12	12	1 1/4-extra heavy.
16	16	1 1/2-extra heavy.
27	27	2-extra heavy.
39	39	2 1/2-extra heavy.
60	60	3-extra heavy.
80	80	3 1/2-extra heavy.
104	104	4-extra heavy.
165	165	5-extra heavy.

(b) Installations contracted for on or after November 19, 1952, but prior to January 1, 1962, shall meet the requirements of this paragraph.

(1) Existing arrangements, materials, and facilities previously approved shall be considered satisfactory so long as they meet the minimum requirements of this paragraph and they are maintained in good condition to the satisfaction of the Officer in Charge, Marine Inspection. Minor repairs and alterations may be made to the same standards as the original installation.

(2) The details of the systems shall be in general agreement with §§ 34.15-5 through 34.15-40 insofar as is reasonable and practicable with the exception that delayed discharges need not be provided for installations made prior to July 1, 1957.

[CGFR 65-50, 30 FR 16694, Dec. 30, 1965, as amended by CGFR 66-33, 31 FR 15268, Dec. 6, 1966; USCG-1999-6216, 64 FR 53223, Oct. 1, 1999]

Subpart 34.17—Fixed Foam Extinguishing Systems, Details

§ 34.17-1 Application—T/ALL.

(a) Where a fixed foam extinguishing system is installed, the provisions of this subpart with the exception of § 34.17-90, shall apply to all installations contracted for on or after January 1, 1962.

(b) Installations contracted for prior to January 1, 1962, shall meet the requirements of § 34.17-90.

§ 34.17-5 Quantity of foam required—T/ALL.

(a) *Area protected.* (1) For machinery spaces and pumprooms, the system shall be so designed and arranged as to spread a blanket of foam over the entire tank top or bilge of the space protected. The arrangement of piping shall be such as to give a relatively uniform distribution over the entire area protected.

(2) Where an installation is made to protect an oil-fired boiler installation on a flat which is open to or can drain to the lower engine room or other space, both the flat and the lower space shall be protected simultaneously. The flat shall be fitted with suitable coamings on all openings other than deck drains to properly restrain the oil

and foam at that level. Other installations of a similar nature will be considered in a like manner.

(b) *Rate of application.* (1) The rate of discharge to foam outlets protecting the hazard shall be at least as set forth in this paragraph.

(2) For chemical foam systems with stored "A" and "B" solutions, a total of at least 1.6 gallons per minute of the two solutions shall be discharged for each 10 square feet of area protected.

(3) For other types of foam systems, the water rate to the dry-powder generators or air foam production equipment shall be at least 1.6 gallons per minute for each 10 square feet of area protected.

(c) *Supply of foam-producing material.* (1) There shall be provided a quantity of foam-producing material sufficient to operate the equipment at the minimum discharge rate specified in paragraph (b) of this section for a period of at least 3 minutes.

(d) *Separate supply of foam-producing material.* (1) A separate supply of foam-producing material need not be provided for each space protected. This includes a deck foam system. The total available supply shall be at least sufficient for the space requiring the greatest amount.

(e) *Water supply for required pumps.* (1) The water supply shall be from outside and completely independent of the space protected.

§ 34.17-10 Controls—T/ALL.

(a) The foam agent, its container, measuring devices, and other items peculiar to the system shall be of an approved type.

(b) The foam-producing material container and all controls and valves for the operation of the system shall be outside the space protected and shall not be located in such space as might be cut off or made inaccessible in the event of fire in any of the spaces protected. The control space shall be as convenient as practicable to one of the main escapes from the spaces protected, and shall be marked as required by § 35.40-10 of this subchapter. Where pumps are required, it shall not be necessary that they be started from the control space.

§ 34.17-15

(c) Complete, but simple instructions for the operation of the system shall be located in a conspicuous place at or near the controls.

(d) The valves to the various spaces served shall be marked as required by § 35.40-10 of this subchapter.

§ 34.17-15 Piping—T/ALL.

(a) All piping, valves, and fittings shall meet the applicable requirements of subchapter F (Marine Engineering) of this chapter.

(b) All piping, valves, and fittings of ferrous materials shall be protected inside and outside against corrosion unless specifically approved otherwise by the Commandant.

(c) All piping, valves, and fittings shall be securely supported, and where necessary, protected against injury.

(d) Drains and dirt traps shall be fitted where necessary to prevent the accumulation of dirt or moisture.

(e) Piping shall not be used for any other purpose than firefighting, drills and testing.

§ 34.17-20 Discharge outlets—T/ALL.

(a) Discharge outlets shall be of an approved type.

§ 34.17-25 Additional protection required—T/ALL.

(a) In order that any residual fires above the floor plates may be extinguished when a foam system is installed for the protection of machinery spaces, at least 2 fire hydrants, in addition to those required for the machinery space by subpart 34.10, shall be installed outside of the machinery space entrance. Such hydrants shall be fitted with sufficient hose so that any part of the machinery space may be reached with at least 2 streams of water, and each hose shall be equipped with an approved combination nozzle and applicator.

§ 34.17-90 Installations contracted for prior to January 1, 1962—T/ALL.

(a) Installations contracted for prior to January 1, 1962, shall meet the following requirements:

(i) Existing arrangements, materials, and facilities previously approved shall be considered satisfactory so long as they meet the minimum requirements

46 CFR Ch. I (10-1-00 Edition)

of this paragraph and they are maintained in good condition to the satisfaction of the Officer in Charge, Marine Inspection. Minor repairs and alterations may be made to the same standards as the original installation.

(2) The details of the systems shall be in general agreement with §§ 34.17-5 through 34.17-20, insofar as is reasonable and practicable. Installations contracted for prior to November 19, 1952, need not comply with paragraph (a)(2) of § 34.17-5 and § 34.17-25. A 6-inch blanket of foam in 3 minutes for machinery spaces and pumprooms will be considered as meeting the requirements of § 34.17-5.

(3) Where a system is installed to protect a tank, it shall be so designed and arranged as to spread a blanket of foam over the entire liquid surface of the tank within the range of usual trim. The arrangement of piping shall be such as to give a relatively uniform distribution over the entire area protected.

(4) For tanks, the rate of discharge to foam outlets protecting the hazard shall be as set forth in § 34.17-5(b), except that the value of 1 gallon per minute shall be substituted in both cases for the value of 1.6 gallons per minute. The quantity of foam provided shall be sufficient to operate the equipment for 5 minutes.

(5) On installations installed prior to November 19, 1952, a semiportable foam generator using a dry-chemical mixture or mechanical foam in conjunction with the fire lines may be substituted for the fixed system subject to the following conditions:

(i) There shall be at least one fire pump of suitable capacity available which can be operated and controlled from outside the space protected.

(ii) Stop valves shall be installed in the line so that if any portion of the fire main is ruptured, the foam generator may still be operated. Connections for at least two fire hoses shall be provided between the pump and the stop valve.

(iii) If the foam system is of the portable or semiportable type, the apparatus and chemicals shall be stored in a readily accessible place protected from the weather.

Subpart 34.20—Deck Foam System, Details

§ 34.20-1 Application—T/ALL.

(a) Where a deck foam system is installed, the provisions of this subpart, except § 34.20-90, apply to all installations that are contracted for on or after January 1, 1970, unless otherwise indicated.

(b) Installations contracted for prior to January 1, 1970, shall meet the requirements of § 34.20-90.

(c) Foreign flag crude oil tankers and product carriers required to have fixed deck foam systems by this subpart must have systems that are designed and installed in accordance with Regulation 61 of Chapter II-2 of SOLAS 1974. (Senate Document, 57-1180, GPO, Washington, 1976; "Message from the President of the United States transmitting, the International Convention for the Safety of Life at Sea, 1974, Done at LONDON, November 1, 1974").

(46 U.S.C. 391a; 49 CFR 1.46(n)(4))

[CGFR 69-72, 34 FR 17481, Oct. 29, 1969, as amended by CGD 74-127, 41 FR 3846, Jan. 26, 1976; CGD 77-057a, 44 FR 66502, Nov. 19, 1979]

§ 34.20-3 Cargo area definition—T/ALL.

(a) For the purpose of this subpart, the term *cargo area* is defined as the maximum beam of the vessel times the total longitudinal extent of the cargo tank spaces.

§ 34.20-5 Quantity of foam required—T/ALL.

(a) *Area protected.* Systems of this type are designed to give primary protection to the spaces over the cargo tanks.

(b) *Rate of application.* The water rate of the foam production equipment shall be determined as follows:

(1) For usual petroleum products the rate of supply of foam solution shall be not less than the greatest of the following:

(i) 0.6 liters/min per square meter of cargo tanks deck area, where cargo tanks deck area means the maximum breadth of the ship multiplied by the total longitudinal extent of the cargo tank spaces;

(ii) 6 liters/min per square meter of the horizontal sectional area of the single tank having the largest such area; or

(iii) 3 liters/min per square meter of the area protected by the largest monitor, such area being entirely forward of the monitor, but not less than 1,250 liters/min.

(2) For polar solvent products (e.g. alcohols, ketones, etc.) the water rate shall be determined for each vessel. The rate will depend upon the vessel design, products to be carried and foam system to be used.

(c) *Supply of foam-producing material.* Each deck foam system must have a supply of foam-producing material sufficient to operate the system at its designed rate of foam production for the following periods:

(1) For installations contracted for on or after January 1, 1970, 15 minutes without recharging, except as required in paragraph (c)(2) of this section.

(2) For installations on ships that have a keel laying date on or after January 1, 1975, 20 minutes without recharging.

(d) *Separate supply of foam-producing material.* Where the same foam-producing material may be used for this system as well as a fixed foam system, separate supplies need not be provided for each space protected. The total available supply shall be at least sufficient for the space requiring the greatest amount.

(e) *Water supply.* Suitable pumps shall be provided capable of producing the required water rate. The fire pumps required by subpart 34.10 may be used for this purpose; however, the operation of the deck foam system shall not interfere with the simultaneous use of the fire main system.

[CGFR 65-50, 30 FR 16694, Dec. 30, 1965, as amended by CGFR 69-72, 34 FR 17481, Oct. 29, 1969; CGD 74-127, 41 FR 3846, Jan. 26, 1976; CGD 95-028, 62 FR 51199, Sept. 30, 1997]

§ 34.20-10 Controls—T/ALL.

(a) The foam agent, its container, measuring devices, and other items peculiar to this system shall be of an approved type.

(b) The foam agent container and the main controls for operating the system shall be located in a protected space

§ 34.20-15

not likely to be made inaccessible in the event of a fire in any portion of the cargo area.

(c) Complete, but simple instructions for the operation of the system shall be located in a conspicuous place at or near the controls.

(d) All valves shall be marked as required by § 35.40-17.

(e) The deck foam system on each tankship that has a keel laying date on or after January 1, 1975, must be capable of being actuated, including introduction of foam to the foam main, within three minutes of notification of a fire.

[CGFR 65-50, 30 FR 16694, Dec. 30, 1965, as amended by CGD 74-127, 41 FR 3846, Jan. 26, 1976]

§ 34.20-15 Piping—T/ALL.

(a) All piping, valves, and fittings shall meet the applicable requirements of subchapter F (Marine Engineering) of this chapter.

(b) All piping, valves, and fittings of ferrous materials shall be protected inside and outside against corrosion unless specifically approved otherwise by the Commandant.

(c) The piping and outlet arrangement shall allow the required rate of applications as contained in § 34.20-5(b), to any portion of the open deck of the cargo area through the use of the mounted and hand-held appliances that are provided. At least 50 percent of the required rate of application shall be from the mounted appliances. One or more hose outlets for hand-held appliances shall be provided at each foam station. For enclosed spaces, application of at least 1.6 gallons per minute water rate for each 10 square feet of the enclosed area for 5 minutes is acceptable. For the purpose of this paragraph, all piping is assumed to be damaged in way of the fire and an adequate number of valves shall be fitted to prevent loss of foam by closing valves to damaged piping.

(d) All piping, valves, and fittings shall be securely supported, and where necessary, protected against injury.

(e) Drains and dirt traps shall be fitted where necessary to prevent the accumulation of dirt or moisture.

46 CFR Ch. I (10-1-00 Edition)

(f) Piping shall not be used for any other purpose than firefighting, drills, and testing.

(g) Tankships of 100,000 or more DWT (metric) and combination carriers of 50,000 or more DWT (metric) that have a keel laying date on or after January 1, 1975, must have at least one foam station port and at least one foam station starboard that are separated from each other by a distance equal to at least one-half the beam of the vessel:

(1) At the housefront or aft of the cargo area in a location that is accessible to the crew for fighting a cargo and a pumproom fire; and

(2) If the tankship has a forward accommodations house, at the after boundary of that house.

[CGFR 65-50, 30 FR 16694, Dec. 30, 1965, as amended by CGD 72-138, 39 FR 7790, Feb. 28, 1974; CGD 74-127, 41 FR 3846, Jan. 26, 1976]

§ 34.20-20 Discharge outlets—T/ALL.

(a) Discharge outlets shall be of an approved type.

(b) At least one mounted foam appliance shall be provided for each station that is required in § 34.20-15(c).

(c) The number of hand-held appliances provided shall be at least equal to the number of hose outlets at the two foam stations having the most hose outlets. Hand-held appliances shall be stowed in a well marked, readily accessible position that cannot be isolated by a fire involving the cargo tanks.

[CGFR 65-50, 30 FR 16694, Dec. 30, 1965, as amended by CGD 72-138, 39 FR 7790, Feb. 28, 1974]

§ 34.20-25 Foam monitor capacity—T/ALL.

The capacity of each foam monitor on ships that have a keel laying date on or after January 1, 1975, must be at least 3 liters per minute per square meter (.073 gallons per minute per square foot) of cargo area protected by that monitor.

[CGD 74-127, 41 FR 3846, Jan. 26, 1976]

§ 34.20-90 Installations contracted for prior to January 1, 1970—T/ALL.

(a) Installations contracted for prior to January 1, 1970, shall meet the following requirements:

(1) Existing arrangements, materials, and facilities previously approved shall be considered satisfactory so long as they meet the minimum requirements of this paragraph and they are maintained in good condition to the satisfaction of the Officer in Charge, Marine Inspection. Minor repairs and alterations may be made to the same standards as the original installation.

(2) For installations contracted for prior to November 19, 1952, see § 34.17-90(a)(5).

(3) Installations contracted for on or after November 4, 1957, but prior to January 1, 1970, shall meet the requirements of §§ 34.20-5 through 34.20-20 insofar as is reasonable and practicable.

[CGFR 65-50, 30 FR 16694, Dec. 30, 1965, as amended by CGFR 69-72, 34 FR 17481, Oct. 29, 1969]

Subpart 34.25—Water Spray Extinguishing Systems, Details

§ 34.25-1 Application—T/ALL.

(a) Where a water spray extinguishing system is installed, the provisions of this subpart, with the exception of § 34.25-90, shall apply to all installations contracted for on or after January 1, 1964. Installations contracted for prior to January 1, 1964, shall meet the requirements of § 34.50-90.

§ 34.25-5 Capacity and arrangement—T/ALL.

(a) The capacity and arrangement shall be such as to effectively blanket the entire area of the space protected. The rate of discharge and the arrangement of piping and spray nozzles shall be such as to give a uniform distribution over the entire area protected.

(b) The spacing of the spray nozzles shall be on the basis of the spray pattern provided by the lowest pressure at any spray nozzle in the system. In no instance shall a system be designed for any spray nozzle to be operated at a pressure less than that for which it was approved. The maximum permissible height of the spray nozzle above the protected area shall not exceed that specified in its approval. Whenever there are obstructions to coverage by the spray patterns, additional spray

nozzles shall be installed to provide full coverage.

(c) The water supply shall be from outside the space protected and shall in no way be dependent upon power from the space protected. The pump supplying water for the system shall either be reserved exclusively for the system or it may be one of the fire pumps, provided the capacity of the fire pump as set forth in subpart 34.10 is increased by the required capacity of the system, so that this system may be operated simultaneously with the fire main system.

§ 34.25-10 Controls—T/ALL.

(a) There shall be one control valve for the operation of the system located in an accessible position outside the space protected. The control shall be located as convenient as practicable to one of the main escapes from the space protected, and shall be marked as required by § 35.40-18 of this subchapter. It shall not be necessary to start the pumps from the control space.

(b) Complete, but simple instructions for the operation of the system shall be located in a conspicuous place at or near the controls.

(c) The valve to the space protected shall be marked as required by § 35.40-18 of this subchapter.

§ 34.25-15 Piping—T/ALL.

(a) All piping, valves and fittings shall meet the applicable requirements of subchapter F (Marine Engineering) of this chapter.

(b) Distribution piping shall be of materials resistant to corrosion, except that steel or iron pipe may be used if inside corrosion resistant coatings which will not flake off and clog the nozzles are applied. Materials readily rendered ineffective by heat of a fire shall not be used. The piping shall be subject to approval for each installation.

(c) All piping, valves, and fittings shall be securely supported, and where necessary, protected against injury.

(d) Drains, strainers, and dirt traps shall be fitted where necessary to prevent the accumulation of dirt or moisture.

(e) Threaded joints shall be metal to metal, with no thread compound used.

§ 34.25-20

(f) Distribution piping shall be used for no other purpose.

(g) All piping shall be thoroughly cleaned and flushed before installation of the water spray nozzles.

§ 34.25-20 Spray nozzles—T/ALL.

(a) Spray nozzles shall be of an approved type.

§ 34.25-90 Installations contracted for prior to January 1, 1964—T/ALL.

(a) Installations contracted for prior to January 1, 1964, shall meet the following requirements:

(1) Existing arrangements, materials, and facilities previously approved shall be considered satisfactory so long as they meet the minimum requirements of this paragraph and they are maintained in good condition to the satisfaction of the Officer in Charge, Marine Inspection. Minor repairs and alterations may be made to the same standards as the original installation.

(2) The details of the systems shall be in general agreement with §§ 34.25-5 through 34.25-20 insofar as is reasonable and practicable.

Subpart 34.30—Automatic Sprinkler Systems, Details

§ 34.30-1 Application—TB/ALL.

Automatic sprinkler systems shall comply with NFPA 13-1996.

[CGD 95-028, 62 FR 51199, Sept. 30, 1997]

Subpart 34.50—Portable and Semiportable Extinguishers

§ 34.50-1 Application—TB/ALL.

(a) The provisions of this subpart, with the exception of § 34.50-90, shall apply to all vessels contracted for on or after January 1, 1962.

(b) All vessels contracted for prior to January 1, 1962, shall meet the requirements of § 34.50-90.

§ 34.50-5 Classification—TB/ALL.

(a) Portable and semiportable extinguishers shall be classified by a combination letter and number symbol. The letter indicating the type of fire which the unit could be expected to extinguish, and the number indicating the relative size of the unit.

46 CFR Ch. I (10-1-00 Edition)

(b) The types of fire will be designated as follows:

(1) "A" for fires in ordinary combustible materials such as mattresses, piles of wood, shavings, canvas, etc., where the quenching and cooling effects of quantities of water, or solutions containing large percentages of water, are of first importance.

(2) "B" for fires in combustible or flammable liquids such as gasoline, lubricating oil, diesel oil, greases, etc., where a blanketing or smothering effect is essential.

(3) "C" for fires in electrical equipment where the use of non-conducting extinguishing agent is of first importance so that electrical shock is not experienced by the firefighter.

(c) The number designations for size will start with "I" for the smallest to "V" for the largest. Extinguishers which have a gross weight of 55 pounds or less when fully charged are considered portable. Extinguishers which have a gross weight of more than 55 pounds when fully charged are considered semiportable and shall be fitted with suitable hose and nozzle or other practicable means so that all portions of the space concerned may be reached. Examples of size graduations for some of the typical portable and semiportable extinguishers are set forth in Table 34.50-5(c).

TABLE 34.50-5(c)

Classification type (Size)	Soda-acid and water (Gallons)	Foam (Gallons)	Carbon dioxide (Pounds)	Dry chemical (Pounds)
A-II	2½	2½
B-I	1¼	4	2
B-II	2½	15	10
B-III	12	35	20
B-IV	20	50	30
B-V	40	100	50
C-I	4	2
CC-II	15	10

¹ For outside use, double the amount shall be carried.

§ 34.50-10 Location—TB/ALL.

(a) Approved portable and semiportable extinguishers shall be installed in accordance with Table 34.50-10(a). The location of the equipment shall be such as in the opinion of the Officer in Charge, Marine Inspection, will be most convenient in case of

Coast Guard, DOT

§ 34.50-10

emergency. Where special circumstances exist, not covered by Table 34.50-10(a), the Officer in Charge, Marine Inspection, may require such additional equipment as he deems necessary for the proper protection of the vessel.

(b) For additional portable extinguishers as a substitute for sand, see § 34.55-10.

(c) Semiportable extinguishers shall be located in the open so as to be readily seen.

(d) If portable extinguishers are not located in the open or behind glass so

that they may be readily seen they may be placed in enclosures together with the fire hose, provided such enclosures are marked as required by § 35.40-25 of this subchapter.

(e) Portable extinguishers and their stations shall be numbered in accordance with § 34.40-25 of this subchapter.

(f) Hand portable or semiportable extinguishers which are required on their nameplates to be protected from freezing shall not be located where freezing temperatures may be expected.

TABLE 34.50-10(a)—PORTABLE AND SEMI-PORTABLE EXTINGUISHERS

Tank ships		Area	Tank barges	
Quantity and location	Classification (see § 34.50–5)		Classification (see § 34.50–5)	Quantity and loca- tion
		<i>Safety Areas</i>		
1 required	C–II	Wheelhouse and chartroom area.	None required.
1 required in vicinity of exit	C–II ¹	Radio room	None required.
		<i>Accommodation Areas</i>		
1 required in each main passageway on each deck, conveniently lo- cated, and so that no room is more than 75 feet from an extinguisher.	A–II or B–II	Staterooms, toilet spaces, public spaces, offices, etc., and associ- ated lockers, storerooms, and pantries..	A–II or B–II	1 required in vicini- ty of exit
		<i>Service Areas</i>		
1 required for each 2,500 square feet or fraction thereof, suitable for haz- ard involved.	B–II or C–II	Galleys	B–II or C–II	1 required, suitable for hazard invol- ved.
1 required for each 2,500 square feet or fraction thereof, suitable for haz- ard involved.	A–II or B–II	Stores areas, including paint and lamp rooms.	None required.
		<i>Machinery Area²</i>		
2 required ³	B–II	Spaces containing oil fired boilers, either main or auxiliary, or any fuel oil units subject to the dis- charge pressure of the fuel oil service pump.	B–II	1 required. ¹²
1 required	and B–V ⁴ .	Spaces containing internal combus- tion or gas turbine propulsion ma- chinery.	None required.
1 required for each 1,000 B.H.P., but not less than 2 nor more than 6 ⁵ .	B–II			
1 required ^{6 7}	and B–III.	Auxiliary spaces containing internal combustion or gas turbine units.	B–II	1 required in vicini- ty of exit. ^{7 9 12}
1 required in vicinity of exit ⁷	B–II			
1 required in vicinity of exit ⁹	C–II	Auxiliary spaces containing emer- gency generators.	None required.
		<i>Cargo Areas</i>		
1 required in lower pump- room.	B.II	Pumprooms	B–II	1 required in vicini- ty of exit. ^{9 12}
None required	Cargo tank area	B–II	2 required. ^{10 12}

TABLE 34.50-10(a)—PORTABLE AND SEMI-PORTABLE EXTINGUISHERS—Continued

Tank ships		Area	Tank barges	
Quantity and location	Classification (see § 34.50-5)		Classification (see § 34.50-5)	Quantity and location
			B-V	1 required. ⁹¹¹

¹ Vessels not on an international voyage may substitute 2 C-I.

² A C-II shall be immediately available to the service generator and main switchboard areas, and further, a C-II shall be conveniently located not more than 50 feet walking distance from any point in all main machinery operating spaces. These extinguishers need not be in addition to other required extinguishers.

³ Vessels of less than 1,000 gross tons require 1.

⁴ Vessels of less than 1,000 gross tons may substitute 1 B-IV.

⁵ Only 1 required for vessels under 65 feet in length.

⁶ If oil burning donkey boiler fitted in space, the B-V previously required for the protection of the boiler may be substituted. Not required where a fixed carbon dioxide system is installed.

⁷ Not required on vessels of less than 300 gross tons if fuel has a flashpoint higher than 110° F.

⁸ Not required on vessels of less than 300 gross tons.

⁹ Not required if fixed system installed.

¹⁰ If no cargo pump on barge, only one B-II required.

¹¹ Manned barges of 100 gross tons and over only.

¹² Not required on unmanned barges except during transfer of cargo, or operation of barge machinery, or boilers. (See § 35.35-1(c) of this chapter.)

[CGFR 65-50, 30 FR 16694, Dec. 30, 1965, as amended by CGFR 70-143, 35 FR 19905, Dec. 30, 1970]

§ 34.50-15 Spare charges—TB/ALL.

(a) Spare charges shall be carried on all vessels for at least 50 percent of each size and each variety, i.e. foam, soda-acid, carbon dioxide, etc., of portable extinguisher required by § 34.50-10(a). However, if the unit is of such variety that it cannot be readily recharged by the vessel's personnel, one spare unit of the same classification shall be carried in lieu of spare charges for all such units of the same size and variety. This section does not apply to unmanned barges.

(b) Spare charges shall be so packaged as to minimize the hazards to personnel while recharging the units.

§ 34.50-20 Semiportable fire extinguishers—TB/ALL

(a) The frame or support of each size III, IV, and V fire extinguisher required by Table 34.50-10(a) must be welded or otherwise permanently attached to a bulkhead or deck.

(b) If a size III, IV, or V fire extinguisher has wheels and is not required by Table 34.50-10(a), it must be securely stowed when not in use to prevent it from rolling out of control under heavy sea conditions.

[CGD 77-039, 44 FR 34132, June 14, 1979]

§ 34.50-90 Vessels contracted for prior to January 1, 1962—TB/ALL.

(a) Vessels contracted for prior to January 1, 1962, shall meet the following requirements:

(1) The provisions of §§ 34.50-5 through 34.50-15 shall be met with the exception that existing installations may be maintained if in the opinion of the Officer in Charge, Marine Inspection, they are in general agreement with the degree of safety prescribed by Table 34.50-10(a). In such cases, minor modifications may be made to the same standard as the original installation: *Provided*, That in no case will a greater departure from the standards of Table 34.50-10(a) be permitted than presently exists.

(2) [Reserved]

(b) [Reserved]

Subpart 34.60—Fire Axes

§ 34.60-1 Application—T/ALL.

(a) The provisions of this subpart shall apply to all tankships.

(b) [Reserved]

§ 34.60-5 Number required—T/ALL.

(a) All tankships shall carry at least the minimum number of fire axes as set forth in Table 34.60-5(a). Nothing in this paragraph shall be construed as limiting the Officer in Charge, Marine Inspection, from requiring such additional fire axes as he deems necessary

for the proper protection of the tank-ship.

TABLE 34.60–5(a)

Gross tons		Number of axes
Over	Not over	
	50	1
50	200	2
200	500	3
500	1,000	4
1,000	5

(b) [Reserved]

§ 34.60–10 Location—T/ALL.

(a) Fire axes shall be distributed throughout the spaces so as to be most readily available in the event of emergency.

(b) If fire axes are not located in the open, or behind glass, so that they may readily be seen, they may be placed in enclosures together with the fire hose, provided such enclosures are marked as required by § 35.40–15 of this subchapter.

PART 35—OPERATIONS

Subpart 35.01—Special Operating Requirements

Sec.

- 35.01–1 Inspection and testing required when making alterations, repairs, or other such operations involving riveting, welding, burning, or like fire-producing actions—TB/ALL.
- 35.01–3 Incorporation by reference.
- 35.01–5 Sanitary condition and crew quarters—T/ALL.
- 35.01–10 Shipping papers—TB/ALL.
- 35.01–15 Carriage of persons other than crew—TB/ALL.
- 35.01–25 Sacrificial anode installations—TB/ALL.
- 35.01–35 Repairs and alterations to fire-fighting equipment—TB/ALL.
- 35.01–45 Open hopper type barges—B/ALL.
- 35.01–50 Special operating requirements for tank barges carrying certain dangerous bulk cargoes—B/ALL.
- 35.01–55 Pilot boarding operation.
- 35.01–60 Person excluded.

Subpart 35.03—Work Vests

- 35.03–1 Application—TB/ALL.
- 35.03–5 Approved types of work vests—TB/ALL.
- 35.03–10 Use—TB/ALL.
- 35.03–15 Shipboard stowage—TB/ALL.
- 35.03–20 Shipboard inspections—TB/ALL.

- 35.03–25 Additional requirements for hybrid work vests.

Subpart 35.05—Officers and Crews

- 35.05–1 Licensed officers and crews of tank-ships—T/ALL.
- 35.05–5 [Reserved]
- 35.05–10 [Reserved]
- 35.05–15 Tank vessel security—TB/ALL.
- 35.05–20 Physical condition of crew—TB/ALL.
- 35.05–25 Illness, alcohol, drugs—TB/ALL.

Subpart 35.07—Logbook Entries

- 35.07–1 Application—TB/ALL.
- 35.07–5 Logbooks and records—TB/ALL.
- 35.07–10 Actions required to be logged—TB/ALL.

Subpart 35.08—Stability Information

- 35.08–1 Posting of stability letter.

Subpart 35.10—Fire and Emergency Requirements

- 35.10–1 Emergency training, musters, and drills—T/ALL.
- 35.10–3 Display of plans—TB/ALL.
- 35.10–5 Muster lists, emergency signals, and manning—T/ALL.
- 35.10–15 Emergency lighting and power systems—T/ALL.

Subpart 35.15—Notice and Reporting of Casualty and Voyage Records

- 35.15–1 Notice and reporting of casualty and voyage records—TB/ALL.

Subpart 35.20—Navigation

- 35.20–1 Notice to mariners; aids to navigation—T/OCB.
- 35.20–5 Draft of tankships—T/OC.
- 35.20–7 Verification of vessel compliance with applicable stability requirements—TB/ALL.
- 35.20–10 Steering gear test—T/ALL.
- 35.20–20 Master's and officer's responsibility—TB/ALL.
- 35.20–30 Flashing the rays of a searchlight or other blinding light—T/ALL.
- 35.20–35 Whistling—T/ALL.
- 35.20–40 Maneuvering characteristics—T/OC.
- 35.20–45 Use of Auto Pilot—T/ALL.

Subpart 35.25—Engine Department

- 35.25–1 Examination of boilers and machinery by engineer—T/ALL.
- 35.25–5 Repairs of boilers and unfired pressure vessels and reports of repairs or accidents by chief engineer—TB/ALL.
- 35.25–10 Requirements for fuel oil—T/ALL.
- 35.25–15 Carrying of excess steam—TB/ALL.

§ 35.01-1

46 CFR Ch. I (10-1-00 Edition)

Subpart 35.30—General Safety Rules

- 35.30-1 Warning signals and signs—TB/ALL.
- 35.30-5 Fires, matches, and smoking—TB/ALL.
- 35.30-10 Cargo tank hatches, ullage holes, and Butterworth plates—TB/ALL.
- 35.30-15 Combustible gas indicator—TB/ALL.
- 35.30-20 Emergency equipment—TB/ALL.
- 35.30-25 Explosives—TB/ALL.
- 35.30-30 Portable electrical equipment—TB/ALL.
- 35.30-35 Spark producing devices—TB/ALL.
- 35.30-40 Flammable liquid and gas fuels as ship's stores—TB/ALL.

Subpart 35.35—Cargo Handling

- 35.35-1 Persons on duty—TB/ALL.
- 35.35-5 Electric bonding—TB/ALL.
- 35.35-10 Closing of freeing-ports, scuppers, and sea valves—TB/ALL.
- 35.35-15 Connecting for cargo transfer—TB/ALL.
- 35.35-20 Inspection before transfer of cargo—TB/ALL.
- 35.35-25 Approval to start transfer of cargo—TB/ALL.
- 35.35-30 "Declaration of Inspection" for tank vessels—TB/ALL.
- 35.35-35 Duties of person in charge of transfer—TB/ALL.
- 35.35-40 Conditions under which transfer operations shall not be commenced or if started shall be discontinued—TB/ALL.
- 35.35-42 Restrictions on vessels alongside a tank vessel loading or unloading cargo of Grade A, B, or C—TB/ALL.
- 35.35-45 Auxiliary steam, air, or electric current—B/ALL.
- 35.35-50 Termination of transfer operations—TB/ALL.
- 35.35-55 Transfer of other cargo or stores on tank vessels—TB/ALL.
- 35.35-60 Transportation of other cargo or stores on tank barges—B/ALL.
- 35.35-70 Maintenance of cargo handling equipment—TB/ALL.
- 35.35-75 Emergencies—TB/ALL.
- 35.35-85 Air compressors—TB/ALL.

Subpart 35.40—Posting and Marking Requirements —TB/ALL

- 35.40-1 General alarm contact maker—TB/ALL.
- 35.40-5 General alarm bells—TB/ALL.
- 35.40-6 Emergency lights—TB/ALL.
- 35.40-7 Carbon dioxide alarm—T/ALL.
- 35.40-10 Steam, foam, or CO₂ fire smoothing apparatus—TB/ALL.
- 35.40-15 Fire hose stations—TB/ALL.
- 35.40-17 Foam hose/monitor stations—T/ALL.
- 35.40-18 Water spray systems—TB/ALL.
- 35.40-20 Emergency equipment—TB/ALL.

- 35.40-25 Fire extinguishers—TB/ALL.
- 35.40-30 Instructions for changing steering gear—TB/ALL.
- 35.40-35 Rudder orders—TB/ALL.
- 35.40-40 Marking and instructions for fire and emergency equipment—TB/ALL.

AUTHORITY: 33 U.S.C. 1321(j); 46 U.S.C. 3306, 3703, 6101; 49 U.S.C. 5103, 5106; E.O. 12234, 45 FR 58801, 3 CFR, 1980 Comp., p. 277; E.O. 12777, 56 FR 54757, 3 CFR, 1991 Comp., p. 351; 49 CFR 1.46.

SOURCE: CGFR 65-50, 30 FR 16704, Dec. 30, 1965, unless otherwise noted.

Subpart 35.01—Special Operating Requirements

§ 35.01-1 Inspection and testing required when making alterations, repairs, or other such operations involving riveting, welding, burning, or like fire-producing actions—TB/ALL.

(a) The provisions of "Standard for the Control of Gas Hazards on Vessels to be Repaired," NFPA No. 306, published by National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02269, shall be used as a guide in conducting the inspections and issuance of certificates required by this section.

(b) Until an inspection has been made to determine that such operation can be undertaken with safety, no alterations, repairs, or other such operations involving riveting, welding, burning, or like fire-producing actions shall be made:

(1) Within or on the boundaries of cargo tanks which have been used to carry flammable or combustible liquid or chemicals in bulk, or within spaces adjacent to such cargo tanks; or,

(2) Within or on the boundaries of fuel tanks; or,

(3) To pipe lines, heating coils, pumps, fittings, or other appurtenances connected to such cargo or fuel tanks.

(c) Such inspections shall be made and evidenced as follows:

(1) In ports or places in the United States or its territories and possessions, the inspection shall be made by a marine chemist certificated by the National Fire Protection Association; however, if the services of such certified marine chemist are not reasonably available, the Officer in Charge,

Coast Guard, DOT

§ 35.01-10

Marine Inspection, upon the recommendation of the vessel owner and his contractor or their representative, shall select a person who, in the case of an individual vessel, shall be authorized to make such inspection. If the inspection indicates that such operations can be undertaken with safety, a certificate setting forth the fact in writing and qualified as may be required, shall be issued by the certified marine chemist or the authorized person before the work is started. Such qualifications shall include any requirements as may be deemed necessary to maintain, insofar as can reasonably be done, the safe conditions in the spaces certified, throughout the operation and shall include such additional tests and certifications as considered required. Such qualifications and requirements shall include precautions necessary to eliminate or minimize hazards that may be present from protective coatings or residues from cargoes.

(2) When not in such a port or place, and a marine chemist or such person authorized by the Officer in Charge, Marine Inspection, is not reasonably available, the inspection shall be made by the senior officer present and a proper entry shall be made in the vessel's logbook.

(d) It shall be the responsibility of the senior officer present to secure copies of certificates issued by the certified marine chemist or such person authorized by the Officer in Charge, Marine Inspection. It shall be the responsibility of the senior officer present, insofar as the persons under his control are concerned, to maintain a safe condition on the vessel by full observance of all qualifications and requirements listed by the marine chemist in the certificate.

[CGFR 65-50, 30 FR 16704, Dec. 30, 1965, as amended by CGD 95-072, 60 FR 50462, Sept. 29, 1995]

§ 35.01-3 Incorporation by reference.

(a) Certain materials are incorporated by reference into this part with the approval of the Director of the Federal Register in accordance with 5 U.S.C. 552(a). To enforce any edition other than the one listed in paragraph (b) of this section, notice of the change must be published in the FEDERAL REG-

ISTER and the material made available to the public. All approved material is on file at the Office of the Federal Register, Washington, DC 20408, and at the U.S. Coast Guard, Office of Operating and Environmental Standards, 2100 Second Street SW., Washington, DC 20593-0001, and is available from the address indicated in paragraph (b).

(b) The material approved for incorporation by reference in this part, and the sections affected is:

American Society for Testing and Materials

100 Barr Harbor Drive, West Conshohocken,
PA 19428-2959

ASTM F 1014-92 Standard Specification for
Flashlights on Vessels.

Section affected—35.30-20(c)(3)

ASTM Adjunct F 1626, Symbols for Use in
Accordance with Regulation II-2/20 of the
1974 SOLAS Convention, PCN 12-616260-01,
© 1996-35.10-3

ASTM D 93-97, Standard Test Methods for
Flash-Point by Pensky-Martens Closed Cup
Tester—35.25-10

International Maritime Organization (IMO)
Publications Section, 4 Albert Embankment,
London, SE1 7SR United Kingdom. Resolu-
tion A.654(16), Graphical Symbols for Fire
Control Plans—35.10-3

NOTE: All other documents referenced in
this part are still in effect.

[CGD 82-042, 53 FR 17704, May 18, 1988, as
amended by CGD 96-041, 61 FR 50727, Sept. 27,
1996; CGD 97-057, 62 FR 51043, Sept. 30, 1997;
CDG 95-028, 62 FR 51199, Sept. 30, 1997; USCG-
1999-5151, 64 FR 67177, Dec. 1, 1999]

§ 35.01-5 Sanitary condition and crew quarters—T/ALL.

It shall be the duty of the master and chief engineer of every tankship to see that such vessel and crew's quarters are kept in a sanitary condition.

[CGFR 65-50, 30 FR 16704, Dec. 30, 1965, as
amended by CGD 95-027, 61 FR 25999, May 23,
1996]

§ 35.01-10 Shipping papers—TB/ALL.

Each loaded tank vessel shall have on board a bill of lading, manifest, or shipping document giving the name of the consignee and the location of the delivery point, the kind, grades, and approximate quantity of each kind and grade of cargo, and for whose account the cargo is being handled. The tank vessel shall not be delayed in order to secure

§ 35.01-15

exact quantities of cargo. Such manifests or bills of lading may be made out by the master, master of the towing vessel, owner, or agent of the owner: *Provided, however,* That in the case of unmanned barges where shipping papers are not available, an entry in the logbook of the towing vessel giving the name of the shipper and location of shipping point, the name of the consignee and location of delivery point, the approximate kind, grade, and quantity of cargo in each barge of the tow, and for whose account the cargo is being handled, shall be considered as complying with the requirements of this section.

§ 35.01-15 Carriage of persons other than crew—TB/ALL.

No person not connected with the operation of a tank ship or tank barge or not having legitimate business with said vessel, shall be permitted aboard while vessel is under way unless specifically allowed by its certificate.

§ 35.01-25 Sacrificial anode installations—TB/ALL.

(a) The installation of magnesium sacrificial anodes in cargo tanks utilized for the carriage of flammable or combustible liquids in bulk is prohibited.

(b) A sacrificial anode using an aluminum alloy will be permitted in cargo tanks under the following criteria:

(1) The maximum allowable energy that can be developed by a falling anode shall be 200 foot-pounds.

(2) No anode shall be installed more than 6 feet above the bottom of the tank. Special consideration will be given when structural design prevents the anodes from falling in event of failure of the attachments.

(3) Each anode shall have at least two welded or bolted connections to the supporting structure. Special consideration will be given to proprietary attachments which provide equally safe installations.

(4) The plans of the anode installation and a chemical analysis of the alloy composition shall be submitted for approval. The anode should be magnesium free and the silicon content limited to trace amounts.

46 CFR Ch. I (10-1-00 Edition)

(5) The recommended construction of the anode should utilize a mild steel core with necessary attachments. Other types may be used but will require special consideration.

(c) Sacrificial anodes using materials other than those having aluminum and/or magnesium in whole or in part are permitted.

[CGFR 69-72, 34 FR 17482, Oct. 29, 1969]

§ 35.01-35 Repairs and alterations to firefighting equipment—TB/ALL.

(a) No extensive repairs or alterations, except in emergency, shall be made to any fire-extinguishing apparatus, or other appliance subject to inspection, without advance notice to the Officer in Charge, Marine Inspection. Such repairs or alterations shall so far as is practicable be made with materials and tested in the manner specified within the regulations in this subchapter and subchapter Q (Specifications) of this chapter for new construction.

(b) Emergency repairs or alterations shall be reported as soon as practicable to the Officer in Charge, Marine Inspection, where the vessel may call after such repairs are made.

§ 35.01-45 Open hopper type barges—B/ALL.

(a) With the exception of those open hopper type barges constructed or modified in conformance with the requirements of subpart 32.63 of this subchapter, the special operating conditions in this section apply to all other open hopper type barges carrying those cargoes listed in Table 30.25-1, of this chapter, which are defined as:

(1) Flammable liquids having a Reid vapor pressure in excess of 25 pounds per square inch, absolute, in independent tanks (part 32 of this subchapter).

(2) Liquefied flammable gases (part 38 of this subchapter).

(b) All open hopper type barges, while carrying in bulk any of the cargoes described in paragraph (a) of this section, shall be operated in conformance with the provisions in this section. However, the provisions in this section are not applicable to such barges when empty (not necessarily cleaned or gas-freed).

(c)(1) Except as otherwise provided in this section, no such open hopper type barge shall be placed as a lead barge in any tow. Such barges shall be placed in protected positions within the tow so that the danger from diving or swamping will be minimized. Where, due to operating conditions, compliance with this paragraph is impossible, the provisions of paragraph (c)(3) of this section apply. The person in charge of the towing vessels shall be responsible for compliance with this paragraph.

(2) No such open hopper type barge shall be moved from a loading facility unless all void spaces and bilges are substantially free of water. Periodic inspections and necessary pumping shall be carried out to insure the maintenance of such water-free conditions, in order to minimize the free surface effect in both the longitudinal and transverse directions. Except when otherwise considered necessary for inspection or pumping, all hatch covers and other hull closure devices for void spaces and hull compartments shall be closed and secured at all times. In the case of unmanned barges, the person in charge of the towing vessel shall be deemed to be in charge of the barge, and all requirements to be carried out on the barge shall be carried out by or under the direction of such person.

(3) When an open hopper type barge is in an exposed position, such that protection from swamping provided by adjoining barges cannot be obtained from location within the tow alone, it shall be the responsibility of the person in charge of the towing vessel to control speed so as to insure protection against diving and swamping of the barge, having due regard to its design and freeboard, and to the operating conditions.

(d) To show that special operating requirements apply to a specific open hopper type barge, additional placards or signs shall be displayed in at least four different locations on the barge when the cargoes described in paragraph (a) of this section are carried in any form in the cargo tanks. The placards or signs shall be posted on the barge approximately amidships on each side and near the centerline of each end, facing outboard. Racks, or other

suitable means, for mounting such placards or signs shall be so arranged as to provide clear visibility and shall be protected from becoming readily damaged or obscured. The placards or signs shall be at least equal in dimensions to the DOT standard tank car "Dangerous" placard (10¾ inches square or larger), and shall display a circle (10 inches in diameter or larger) with alternating quadrants of white and red, and so mounted that the red quadrants are centered on the vertical axis. The shipper and/or owner of the barge shall be responsible for the installation of the required placards or signs, including maintenance of them while such barge is in temporary storage with cargo aboard. The person in charge of the towing vessel shall be responsible for the continued maintenance of the placards or signs while such barge is in transit.

[CGFR 65-50, 30 FR 16704, Dec. 30, 1965, as amended by CGFR 70-10, 35 FR 3709, Feb. 25, 1970; CGD 86-033, 53 FR 36024, Sept. 16, 1988]

§ 35.01-50 Special operating requirements for tank barges carrying certain dangerous bulk cargoes—B/ALL.

(a) The requirements of this section shall apply to all tank barges carrying those cargoes listed on Table 30.25-1, of this chapter, which are defined as:

(1) Flammable liquids having a Reid vapor pressure in excess of 25 pounds per square inch, absolute, in independent tanks (part 32 of this subchapter).

(2) Liquefied flammable gases (part 38 of this subchapter).

(b) All tank barges constructed or modified in conformance with the requirements of subpart 32.63 of this subchapter are exempt from the provisions of § 35.01-45.

(c) When it is necessary to operate box or square-end barges as lead barges of tows, the person in charge of the towing vessel shall control the speed to insure protection against diving and swamping of such barges, having due regard to their design and freeboard, and to the operating conditions.

(d) All barges, while carrying in bulk any of the cargoes described in paragraph (a) of this section, shall be operated in conformance with the provisions of this section. However, the provisions of this section are not applicable to such barges when empty and gas-freed.

(e) Barges shall not be moved from a loading facility unless all bilges and void spaces (except those used for ballasting) are substantially free of water. Periodic inspections and necessary pumping shall be carried out to insure maintenance of such water-free condition in order to minimize the free surface effects, both in the longitudinal and transverse directions. Except when otherwise considered necessary for inspection or pumping, all hatch covers and other hull closure devices for void spaces and hull compartments other than cargo spaces shall be closed and secured at all times.

(f) During the time the cargo tanks contain dangerous cargoes described in paragraph (a) of this section in any amount, in the liquid or gaseous state, the barge shall be under constant surveillance.

(1) A strict watch of each unmanned barge in tow shall be maintained from the towing vessel while underway.

(2) A towing vessel engaged in transporting such unmanned barges shall not leave them unattended. When a barge is moored, but not gas free, it shall be under the observation of a watchman who may be a member of the complement of the towing vessel, or a terminal employee, or other person. Such person shall be responsible for the security of the barge and for keeping unauthorized persons off the barge.

(g) The owner, operator, master, or person in charge of any barge carrying dangerous cargoes described in paragraph (a) of this section shall insure that, while the barge is being towed and during cargo transfer operations, the persons as required by § 31.15-5 of this subchapter and § 35.35-1 are provided.

[CGFR 65-50, 30 FR 16704, Dec. 30, 1965, as amended by CGFR 70-10, 35 FR 3709, Feb. 25, 1970; CGD 73-243, 45 FR 18000, Mar. 20, 1980]

§ 35.01-55 Pilot boarding operation.

(a) The master shall ensure that pilot boarding equipment is maintained as follows:

(1) The equipment must be kept clean and in good working order.

(2) Each damaged step or spreader step on a pilot ladder must be replaced in kind with an approved replacement step or spreader step, prior to further use of the ladder. The replacement step or spreader step must be secured by the method used in the original construction of the ladder, and in accordance with manufacturer instructions.

(b) The master shall ensure compliance with the following during pilot boarding operations:

(1) Only approved pilot boarding equipment may be used.

(2) The pilot boarding equipment must rest firmly against the hull of the vessel and be clear of overboard discharges.

(3) Two man ropes, a safety line and an approved lifebuoy with an approved water light must be at the point of access and be immediately available for use during boarding operations.

(4) Rigging of the equipment and embarkation/debarkation of a pilot must be supervised in person by a deck officer.

(5) Both the equipment over the side and the point of access must be adequately lit during night operations.

(6) If a pilot hoist is used, a pilot ladder must be kept on deck adjacent to the hoist and available for immediate use.

[CGD 79-032, 49 FR 25455, June 21, 1984]

§ 35.01-60 Person excluded.

Masters and pilots shall exclude from the pilothouse and navigation bridge while underway, all persons not connected with the navigation of the vessel. However, licensed officers of vessels, persons regularly engaged in training, regulating, evaluating, or learning the profession of pilot, officials of the United States Coast Guard, United States Navy, United States Coast and Geodetic Survey, United States Army Corps of Engineers, Maritime Administration, and National Transportation Safety Board may be allowed in the pilothouse or upon the

Coast Guard, DOT

§ 35.05–15

navigation bridge upon the responsibility of the master or pilot.

[CGD 91–023, 59 FR 16779, Apr. 8, 1994]

Subpart 35.03—Work Vests

§ 35.03–1 Application—TB/ALL.

(a) Provisions of this subpart shall apply to all tank vessels.

§ 35.03–5 Approved types of work vests—TB/ALL.

(a) Each buoyant work vest carried under the permissive authority of this section must be approved under—

- (1) Subpart 160.053 of this chapter; or
- (2) Subpart 160.077 of this chapter as a commercial hybrid PFD.

[CGD 78–174A, 51 FR 4350, Feb. 4, 1986]

§ 35.03–10 Use—TB/ALL.

(a) Approved buoyant work vests are considered to be items of safety apparel and may be carried aboard tank vessels to be worn by crew members when working near or over the water under favorable working conditions. They shall be used under the supervision and control of designated ship's officers. When carried, such vests shall not be accepted in lieu of any portion of the required number of approved life preservers and shall not be substituted for the approved life preservers required to be worn during drills and emergencies.

§ 35.03–15 Shipboard stowage—TB/ALL.

(a) The approved buoyant work vests shall be stowed separately from the regular stowage of approved life preservers.

(b) The locations for the stowage of work vests shall be such as not to be easily confused with that for approved life preservers.

§ 35.03–20 Shipboard inspections—TB/ALL.

(a) Each work vest shall be subject to examination by a marine inspector to determine its serviceability. If found to be satisfactory, it may be continued in service, but shall not be stamped by a marine inspector with a Coast Guard stamp. If a work vest is found not to be in a serviceable condition, then such

work vest shall be removed from the vessel. If a work vest is beyond repair, it shall be destroyed or mutilated in the presence of a marine inspector so as to prevent its continued use as a work vest.

§ 35.03–25 Additional requirements for hybrid work vests.

(a) In addition to the other requirements in this subpart, commercial hybrid PFD's must be—

- (1) Used, stowed, and maintained in accordance with the procedures set out in the manual required for these devices by § 160.077–29 of this chapter and any limitation(s) marked on them; and
- (2) Of the same or similar design and have the same method of operation as each other hybrid PFD carried on board.

[CGD 78–174A, 51 FR 4350, Feb. 4, 1986; 51 FR 15497, Apr. 24, 1986]

Subpart 35.05—Officers and Crews

§ 35.05–1 Licensed officers and crews of tankships—T/ALL.

No tankship of the United States shall be navigated unless she shall have in her service and on board such complement of licensed officers and crew, including certificated lifeboatmen and certificated tankermen where required by the regulations in this subchapter, separately stated, as called for in her certificate of inspection.

§ 35.05–5 [Reserved]

§ 35.05–10 [Reserved]

§ 35.05–15 Tank vessel security—TB/ALL.

(a) *Manned tank vessel.* At least one member of the crew of a manned tank vessel shall be on board at all times except when the vessel is gas free or is moored at a dock or terminal at which watchman service is provided.

(b) *Unmanned barge.* (1) The owner, managing operator, master, and person in charge of a vessel towing a tank barge that need not be manned, and each of them, shall be responsible for monitoring the security and integrity of the tank barge and for ensuring adherence to proper safety precautions.

§ 35.05–20

These responsibilities include, but are not limited to—

(i) Ensuring that any tank barge added to the tow has all tank openings properly secured; has its freeing-ports and scuppers, if any, unobstructed; meets any loadline or freeboard requirements; and neither leaks cargo into the water, voids, or cofferdams nor leaks water into the tanks, voids, or cofferdams;

(ii) Ensuring that every tank barge in the tow is properly secured within the tow;

(iii) Ensuring that periodic checks are made of every tank barge in the tow for leakage of cargo into the water, voids, or cofferdams and for leakage of water into the tanks, voids, or cofferdams;

(iv) Knowing the cargo of every tank barge in the tow, any hazards associated with the cargo, and what to do on discovery of a leak;

(v) Ensuring that the crew of the vessel know the cargo of every tank barge in the tow, any hazards associated with the cargo, and what to do on discovery of a leak;

(vi) Reporting to the Coast Guard any leaks from a tank barge in the tow into the water, as required by 33 CFR 151.15; and

(vii) Ensuring that the crew of the vessel and other personnel in the vicinity of the tank barges in the tow follow the proper safety precautions for tank vessels, and that no activity takes place in the vicinity of the barges that could create a hazard.

(2) When a barge is moored and contains more oil than the normal clingage and unpumpable bilge or sump residues, the barge must be kept under surveillance by a person responsible for the security of the barge and for keeping unauthorized persons off the barge.

(3) When a barge is moored and contains no oil but is not gas free:

(i) It must be maintained under surveillance as required in paragraph (b)(2) of this section; or

(ii) All cargo tank hatches must be clearly marked in not less than three inch lettering “Danger—Keep Out,” and all hatch covers must be closed and dogged down in such a way that the

46 CFR Ch. I (10–1–00 Edition)

hatch cannot be opened by the use of bare hands alone.

[CGFR 65–50, 30 FR 16704, Dec. 30, 1965, as amended by CGD 80–009, 48 FR 36459, Aug. 11, 1983; CGD 79–116, 60 FR 17155, Apr. 4, 1995]

§ 35.05–20 Physical condition of crew—TB/ALL.

No person shall be engaged as a member of the crew on a tank vessel if he is known by the employer to be physically or mentally incapable of performing the duties assigned him.

§ 35.05–25 Illness, alcohol, drugs—TB/ALL.

(a) No person, known by the individual in charge of a tank vessel to be under the influence of liquor or other stimulant, or to be ill to such an extent as to unfit him for any particular service on the tank vessel, shall be allowed to perform such service while in such condition.

(b) When a member of the crew of a tank vessel which is loading bulk cargo of Grade A, B, or C arrives at the gangway and is observed to be in an intoxicated condition, he shall not be permitted to board the vessel without escort.

Subpart 35.07—Logbook Entries

§ 35.07–1 Application—TB/ALL.

(a) Except as specifically noted, the provisions of this subpart shall apply to all tank vessels.

§ 35.07–5 Logbooks and records—TB/ALL.

(a) The master or person in charge of a vessel that is required by 46 U.S.C. 11301 to have an official logbook shall maintain the logbook on form CG–706. The official logbook is available free to masters of U.S.-flag vessels from the officer in Charge, Marine Inspection, as form CG–706B or CG–706C, depending on the number of persons employed in the crew. When the voyage is completed, the master or person in charge shall file the logbook with the Officer in Charge, Marine Inspection.

(b) The master or person in charge of a vessel that is not required by 46 U.S.C. 11301 to have an official logbook, shall maintain, on board, an unofficial logbook or record in any form desired

for the purposes of making entries therein as required by law or regulations in this subchapter. Such logs or records are not filed with the Officer in Charge, Marine Inspection, but must be kept available for review by a marine inspector for a period of 1 year after the date to which the records refer. Separate records of tests and inspections of fire fighting equipment must be maintained with the vessel's logs for the period of validity of the vessel's certificate of inspection.

[CGD 95-027, 61 FR 25999, May 23, 1996]

§ 35.07-10 Actions required to be logged—TB/ALL.

(a) *General—TB/ALL.* The actions and observations noted in this section shall be entered in the Official Logbook or in logs or records considered to take place of the Official Logbooks. This section contains no requirements which are not made in specific laws or in other regulations in this subchapter, the items being merely grouped together for convenience.

(b) *Entries—T/ALL.* Entries shall be made in the logs of tankships with respect to the following:

(1) Onboard training, musters, and drills: held in accordance with subchapter W (Lifesaving Appliances or Arrangements) of this chapter.

(2) Draft and load line marks. For tankships of 150 gross tons and over, prior to leaving port for ocean, coastwise, and Great Lakes voyages only. See § 35.20-5.

(3) Verification of vessel compliance with applicable stability requirements. After loading and prior to departure and at all other times necessary to assure the safety of the vessel. See § 35.20-7.

(4) Steering gear tests. Prior to departure, or for tank ships on voyages of less than 48 hours duration or tankships operating on lakes, bays, sounds and rivers, once every week. See § 35.20-10.

(5) Fuel oil data. Upon receipt of fuel oil on board to be used as fuel. See § 35.25-10.

(6) Inspections and tests of fire-fighting equipment. Once every year. See § 31.10-18 of this subchapter.

(7) Operation and inspection of the emergency lighting and power systems.

Once in each week that the vessel is navigated. See § 35.10-15.

(8) Cargo gear inspections: At least once a month. See § 31.37-70 of this subchapter.

(c) *Entries—B/ALL.* Entries shall be made in the records for tank barges with respect to the following:

(1) Inspections and tests of fire-fighting equipment. Once every year. See § 31.10-18 of this subchapter.

(2) Draft and load line marks. For tank barges of 150 gross tons and over, prior to leaving port for ocean, coastwise, and Great Lakes voyages only.

(3) Cargo gear inspections: At least once a month. See § 31.37-70 of this subchapter.

(4) Verification of vessel compliance with applicable stability requirements. After loading and prior to departure and at all other times necessary to assure the safety of the vessel. See § 35.20-7.

[CGFR 65-50, 30 FR 16704, Dec. 30, 1965, as amended by CGD 89-037, 57 FR 41821, Sept. 11, 1992; CGD 84-069, 61 FR 25286, May 20, 1996, CGD 95-028, 62 FR 51199, Sept. 30, 1997]

Subpart 35.08—Stability Information

§ 35.08-1 Posting of stability letter.

If a stability letter is issued under § 170.120 of this chapter, it must be posted under glass or other suitable transparent material in the pilothouse of the vessel.

[CGD 79-023, 48 FR 51006, Nov. 4, 1983]

Subpart 35.10—Fire and Emergency Requirements

§ 35.10-1 Emergency training, musters, and drills—T/ALL.

Onboard training, musters, and drills must be in accordance with subchapter W (Lifesaving Appliances and Arrangements) of this chapter.

[CGD 84-069, 61 FR 25286, May 20, 1996]

§ 35.10-3 Display of plans—TB/ALL.

Barges with sleeping accommodations for more than six persons and all self-propelled vessels shall have permanently exhibited for the guidance of

§ 35.10-5

the officer in charge of the vessel the following plans:

(a) General arrangement plans showing for each deck the fire control stations, the various sections enclosed by fire-resisting bulkheads, together with particulars of the fire alarms, detecting systems, the sprinkle installation (if any), the fire extinguishing appliances, means of access to different compartments, decks, etc., and the ventilating systems including particulars of the maste fan controls, the positions of dampers, the location of the remote means of stopping fans, and identification numbers of the ventilating fans serving each section. If cargo compartments are "specially suited for vehicles," they shall be so indicated on the plan. Alternatively, at the discretion of the Commandant, the aforementioned details may be set out in any other medium, such as a booklet or on computer software, provided that the aforementioned details are available to each officer and a copy is retained on board at all times and is accessible during emergencies. For vessels constructed on or after September 30, 1997 or for existing vessels which have their plans redrawn, the symbols used to identify the aforementioned details shall be in accordance with IMO Assembly resolution A.654(16). These identical symbols can also be found in ASTM Adjunct F 1626 (incorporated by reference, see § 35.01-3).

(b) Plans showing clearly for each deck the boundaries of the watertight compartments, the openings therein with the means of closure and position of any controls thereof, and the arrangements for the correction of any list due to flooding.

(c) The information contained in the plans shall be kept up-to-date, and any changes shall be recorded as soon as possible.

[CGD 95-028, 62 FR 51199, Sept. 30, 1997, as amended by USCG-2000-7790, 65 FR 58459, Sept. 29, 2000]

§ 35.10-5 Muster lists, emergency signals, and manning—T/ALL.

The requirements for muster lists, emergency signals, and manning must be in accordance with subchapter W

46 CFR Ch. I (10-1-00 Edition)

(Lifesaving Appliances and Arrangements) of this chapter.

[CGD 84-069, 61 FR 25287, May 20, 1996]

§ 35.10-15 Emergency lighting and power systems—T/ALL.

(a) Where fitted, it shall be the duty of the master to see that the emergency lighting and power systems are tested and inspected at least once in each week that the vessel is navigated to be assured that the system is in proper operating condition.

(b) Internal combustion engine driven emergency generators shall be tested under load for at least 2 hours, at least once in each month that the vessel is navigated.

(c) Storage batteries for emergency lighting and power systems shall be tested at least once in each 6-month period that the vessel is navigated to demonstrate the ability of the storage battery to supply the emergency loads for the period of time specified in Table 112.05-5(a) of this chapter.

(d) The date of the tests required by this section and the condition and performance of the apparatus shall be noted in the vessel's Official Logbook or in logs or records considered to take the place of the Official Logbook.

[CGFR 65-50, 30 FR 16709, Dec. 30, 1965, as amended by CGFR 70-143, 35 FR 19905, Dec. 30, 1970]

Subpart 35.15—Notice and Reporting of Casualty and Voyage Records

§ 35.15-1 Notice and reporting of casualty and voyage records—TB/ALL.

The requirements for providing notice and reporting of marine casualties and for retaining voyage records are contained in part 4 of this chapter.

[CGD 84-099, 52 FR 47535, Dec. 14, 1987; 53 FR 13117, Apr. 21, 1988]

Subpart 35.20—Navigation

§ 35.20-1 Notice to mariners; aids to navigation—T/OCLB.

(a) Licensed officers are required to acquaint themselves with the latest information published by the Coast Guard and the U.S. Navy regarding aids to navigation, and neglect to do so

is evidence of neglect of duty. It is desirable that vessels navigating oceans and coastwise and Great Lakes water shall have available in the pilothouse for convenient reference at all times a file of the applicable Notice to Mariners.

(b) Weekly Notices to Mariners (Great Lakes Edition), published by the Commander, 9th Coast Guard District, contain announcements and information on changes in aids to navigation and other marine information affecting the safety of navigation on the Great Lakes. These notices may be obtained free of charge, by making application to Commander, 9th Coast Guard District.

(c) Weekly Notices to Mariners (worldwide coverage) are prepared jointly by the U.S. Naval Oceanographic Office, the U.S. Coast and Geodetic Survey and the U.S. Coast Guard. They include changes in aids to navigation in assembled form for the 1st, 5th, 7th, Greater Antilles Section, 8th, 11th, 13th, 14th, and 17th Coast Guard Districts. Foreign marine information is also included in these notices. These notices are available without charge from the U.S. Naval Oceanographic Office, Washington, DC 20390, Branch Oceanographic Offices, U.S. Collector of Customs of the major seaports in the United States and are also on file in the U.S. Consulates where they may be inspected.

(d) As appropriate for the intended voyage, all vessels must carry adequate and up-to-date:

- (1) Charts;
- (2) Sailing directions;
- (3) Coast pilots;
- (4) Light lists;
- (5) Notices to mariners;
- (6) Tide tables;
- (7) Current tables; and
- (8) All other nautical publications necessary.¹

[CGFR 66-33, 31 FR 15268, Dec. 6, 1966, as amended by CGFR 68-32, 33 FR 5714, Apr. 12, 1968; CGD 75-074, 42 FR 5963, Jan. 31, 1977; CGD 88-070, 53 FR 34534, Sept. 7, 1988]

¹ For United States vessels in or on the navigable waters of the United States, see 33 CFR 164.33.

§ 35.20-5 Draft of tankships—T/OC.

The master of every tankship shall, whenever leaving port, enter the maximum draft of his vessel in the logbook.

§ 35.20-7 Verification of vessel compliance with applicable stability requirements—TB/ALL.

(a) Except as provided in paragraph (d) of this section, after loading and prior to departure and at all other times necessary to assure the safety of the vessel, the master or person in charge shall determine that the vessel complies with all applicable stability requirements in the vessels's trim and stability book, stability letter, Certificate of Inspection, and Load Line Certificate, as the case may be. The vessel may not depart until it is in compliance with these requirements.

(b) When determining compliance with applicable stability requirements the vessel's draft, trim, and stability must be determined as necessary.

(c) If a log book is required by § 35.07-5, then the master or person in charge must enter an attestation statement verifying that the vessel complies with the applicable stability requirements at the times specified in paragraph (a) and any stability calculations made in support of the determination must be retained on board the vessel for the duration of the voyage.

(d) Stability verification is not required for tank barges whose Certificate of Inspection carries draft restrictions for purposes other than stability.

[CGD 88-037, 57 FR 41821, Sept. 11, 1992]

§ 35.20-10 Steering gear test—T/ALL.

On all tankships making voyages of more than 48 hours' duration, the entire steering gear, the whistle, the means of communication, and the signaling appliances between the bridge or pilothouse and engineroom shall be examined and tested by a licensed officer of the vessel within a period of not more than 12 hours before leaving port. All such vessels making voyages of less than 48 hours' duration or operating on lakes, bays, sounds, and rivers shall be so examined and tested at least once in every week. The fact and time of such

§ 35.20-20

examination and test shall be recorded in the ship's logbook.

§ 35.20-20 Master's and officer's responsibility—TB/ALL.

Nothing in this part shall exonerate any master or officer in command from the consequences of any neglect to keep a proper lookout or the neglect of any precaution which may be required by the ordinary practice of seamen or by the special circumstances of the case.

§ 35.20-30 Flashing the rays of a searchlight or other blinding light—T/ALL.

No person shall flash, or cause to be flashed, the rays of a search light or other blinding light onto the bridge or into the pilothouse of any vessel under way.

[CGD 95-027, 61 FR 26000, May 23, 1996]

§ 35.20-35 Whistling—T/ALL.

The unnecessary sounding of a vessel's whistle is prohibited within any harbor limits of the United States.

[CGD 95-027, 61 FR 26000, May 23, 1996]

§ 35.20-40 Maneuvering characteristics—T/OC.

For each ocean and coastwise tankship of 1,600 gross tons or over, the following apply:

(a) The following maneuvering information must be prominently displayed in the pilothouse on a fact sheet:

(1) For full and half speed, a turning circle diagram to port and starboard that shows the time and the distance of advance and transfer required to alter the course 90 degrees with maximum rudder angle and constant power settings.

(2) The time and distance to stop the vessel from full and half speed while maintaining approximately the initial heading with minimum application of rudder.

(3) For each vessel with a fixed propeller, a table of shaft revolutions per minute for a representative range of speeds.

(4) For each vessel with a controllable pitch propeller a table of control settings for a representative range of speeds.

46 CFR Ch. I (10-1-00 Edition)

(5) For each vessel that is fitted with an auxiliary device to assist in maneuvering, such as a bow thruster, a table of vessel speeds at which the auxiliary device is effective in maneuvering the vessel.

(b) The maneuvering information must be provided for the normal load and normal ballast condition for:

(1) Calm weather—wind 10 knots or less, calm sea;

(2) No current;

(3) Deep water conditions—water depth twice the vessel's draft or greater; and

(4) Clean hull.

(c) At the bottom of the fact sheet, the following statement must appear:

WARNING

The response of the (name of the vessel) may be different from those listed above if any of the following conditions, upon which the maneuvering information is based, are varied:

(1) Calm weather—wind 10 knots or less, calm sea;

(2) No current;

(3) Water depth twice the vessel's draft or greater;

(4) Clean hull; and

(5) Intermediate drafts or unusual trim.

(d) The information on the fact sheet must be:

(1) Verified six months after the vessel is placed in service; or

(2) Modified six months after the vessel is placed into service and verified within three months thereafter.

(e) The information that appears on the fact sheet may be obtained from:

(1) Trial trip observations;

(2) Model tests;

(3) Analytical calculations;

(4) Simulations;

(5) Information established from another vessel of similar hull form, power, rudder and propeller; or

(6) Any combination of the above.

The accuracy of the information in the fact sheet required is that attainable by ordinary shipboard navigation equipment.

(f) The requirements for information for fact sheets for specialized craft such as semi-submersibles, hydrofoils, hovercraft and other vessels of unusual design will be specified on a case by case basis.

[CGD 73-78, 40 FR 2689, Jan. 15, 1975]

Coast Guard, DOT

§ 35.30-1

§ 35.20-45 Use of Auto Pilot—T/ALL.

Except as provided in 33 CFR 164.13, when the automatic pilot is used in:

- (a) Areas of high traffic density;
- (b) Conditions of restricted visibility; and
- (c) All other hazardous navigational situations, the master shall ensure that:
 - (1) It is possible to immediately establish manual control of the ship's steering;
 - (2) A competent person is ready at all times to take over steering control; and
 - (3) The changeover from automatic to manual steering and vice versa is made by, or under, the supervision of the officer of the watch.

[CGD 75-074, 42 FR 5963, Jan. 31, 1977, as amended by CGD 91-204, 58 FR 27633, May 10, 1993]

Subpart 35.25—Engine Department

§ 35.25-1 Examination of boilers and machinery by engineer—T/ALL.

It shall be the duty of an engineer when assuming charge of the boilers to examine the same forthwith and thoroughly. If any part thereof is found in bad condition, the engineer shall immediately report the facts to the master, owner, or agent, and to the nearest Officer in Charge, Marine Inspection.

[CGD 95-027, 61 FR 26000, May 23, 1996]

§ 35.25-5 Repairs of boilers and unfired pressure vessels and reports of repairs or accidents by chief engineer—TB/ALL.

(a) Before making any repairs to boilers or unfired pressure vessels, the chief engineer shall submit a report covering the nature of the repairs to the Officer in Charge, Marine Inspection, at or nearest to the port where the repairs are to be made.

(b) In the event of an accident to a boiler, unfired pressure vessel, or machinery tending to render the further use of the item itself unsafe until repairs are made, or if by ordinary wear such items become unsafe, a report shall be made by the chief engineer immediately to the Officer in Charge, Ma-

rine Inspection, or if at sea, immediately upon arrival at port.

§ 35.25-10 Requirements for fuel oil—T/ALL.

(a) Oil to be used as fuel to be burned under boilers on tankships shall have a flashpoint of not less than 140°F. (Pensky-Martens Closed Cup Method, ASTM D 93) (incorporated by reference, see § 35.01-3).

(b) It shall be the duty of the chief engineer to make an entry in the log of each supply of fuel oil received on board, stating the quantity received, the name of the vendor, the name of the oil producer, and the flashpoint (Pensky-Martens Closed Cup Method, ASTM D 93) (incorporated by reference, see § 35.01-3) for which it is certified by the producer.

(c) It shall be the further duty of the chief engineer to draw and seal at the time the supply is received on board, a half-pint sample of each lot of fuel oil, such sample to be preserved until that particular supply of oil is exhausted.

[CGFR 65-50, 30 FR 16704, Dec. 30, 1965, as amended by CGFR 68-82, 33 FR 18805, Dec. 18, 1968; CGD 73-254, 40 FR 40163, Sept. 2, 1975; USCG-2000-7790, 65 FR 58459, Sept. 29, 2000]

§ 35.25-15 Carrying of excess steam—TB/ALL.

It shall be the duty of the chief engineer of any tank vessel to see that a steam pressure is not carried in excess of that allowed by the certificate of inspection, and to see that the safety valves, once set by the inspector, are in no way tampered with or made inoperative.

[CGD 95-028, 62 FR 51199, Sept. 30, 1997]

Subpart 35.30—General Safety Rules

§ 35.30-1 Warning signals and signs—TB/ALL.

(a) *Red warning signals.* During transfer of bulk cargo while fast to a dock, a red signal (flag by day and electric lantern at night) shall be so placed that it will be visible on all sides. While transferring bulk cargo at anchor, a red flag only shall be displayed.

§ 35.30-5

(b) *Warning sign at gangway.* A sign shall be displayed to warn persons approaching the gangway, while a vessel is moored or anchored unless it is empty and gas-free. The sign shall state in letters not less than 2 inches high substantially as follows:

Warning

No open lights.
No smoking.
No visitors.

(c) *Warning sign in radio room.* A sign shall be placed in radio room warning against the use of radio equipment during transfer of Grade A, B, or C liquids, except by permission of senior deck officer.

(d) [Reserved]

(e) Additional placards or signs required in connection with the movement of certain open hopper type barges are described in §35.01-45.

[CGFR 65-50, 30 FR 16704, Dec. 30, 1965, as amended by CGFR 70-143, 35 FR 19905, Dec. 30, 1970; CGD 73-96, 42 FR 49024, Sept. 26, 1977; CGD 73-243, 45 FR 18000, Mar. 20, 1980]

§ 35.30-5 Fires, matches, and smoking—TB/ALL.

(a) *General.* In making the determinations required under paragraphs (b), (c), and (d) of this section the senior deck officer on duty, who shall be a licensed officer or certificated tankerman, shall exercise his skill and experience with due regard to attendant conditions and circumstances, including consideration for location of shore side facilities, maintenance of mobility, provision for fire protection, state or change of winds, tides, sea, weather conditions, forces of nature and other circumstances generally beyond human control.

(b) *Boiler fires.* Boiler fires are normally permitted during cargo transfer operations: *Provided,* That prior to loading Grades A, B, and C cargoes, the senior deck officer on duty, who shall be a licensed officer or certificated tankerman, shall make an inspection to determine whether in his judgment boiler fires may be maintained with reasonable safety during the loading operation.

(c) *Smoking.* Smoking is prohibited on the weather decks of tank vessels when they are not gas free or are alongside

46 CFR Ch. I (10-1-00 Edition)

docks. At other times and places the senior deck officer on duty, who shall be a licensed officer or certificated tankerman, shall designate when and where the crew may smoke: *Provided,* That prior to loading Grade A, B, or C cargo the master or senior deck officer on duty shall make an inspection to determine if and where, in his judgment, smoking may be permitted with reasonable safety during the loading operation.

(d) *Matches.* The use of other than safety matches is forbidden aboard tank vessels at all times.

[CGFR 65-50, 30 FR 16704, Dec. 30, 1965, as amended by CGD 95-012, 60 FR 48049, Sept. 18, 1995]

§ 35.30-10 Cargo tank hatches, ullage holes, and Butterworth plates—TB/ALL.

No cargo tank hatches, ullage holes, or Butterworth plates shall be opened or shall remain open without flame screens, except under the supervision of the senior members of the crew on duty, unless the tank opened is gas free.

§ 35.30-15 Combustible gas indicator—TB/ALL.

(a) The provisions of this section shall apply only to United States flag vessels.

(b) Manned tank barges and tankships authorized to carry Grade A, B, C, or D liquids at any temperature, or Grade E liquids at elevated temperatures, shall be provided with a combustible gas indicator suitable for determining the presence of explosive concentrations of the cargo carried. An indicator which bears the label of Underwriters' Laboratories Inc., Factory Mutual Engineering Division, or other organizations acceptable to the Commandant will be accepted as meeting this requirement.

§ 35.30-20 Emergency equipment—TB/ALL

(a) Two emergency outfits, stored for use in widely separated, accessible locations, are required for the following:

- (1) All tankships on international voyage.
- (2) All tankships over 1,000 gross tons.

Coast Guard, DOT

§ 35.30-30

(3) All tankships having cargo tanks which exceed 15 feet in depth, measured from the deck to the lowest point at which cargo is carried.

(b) One emergency outfit is required for all manned tank barges having cargo tanks which exceed 15 feet in depth, measured from the deck to the lowest point at which cargo is carried.

(c) Each emergency outfit shall be equipped as follows:

(1) One pressure-demand, open-circuit, self-contained breathing apparatus, approved by the Mine Safety and Health Administration (MSHA) and by the National Institute for Occupational Safety and Health (NIOSH) and having at a minimum a 30-minute air supply, a full facepiece, and a spare charge.

(2) One lifeline with a belt or a suitable harness.

(3) One, Type II or Type III, flash-light constructed and marked in accordance with ASTM F 1014 incorporated by reference, see § 35.01-3).

(4) One fire ax.

(5) Boots and gloves of rubber or other electrically nonconducting material.

(6) A rigid helmet which provides effective protection against impact.

(7) Protective clothing of material that will protect the skin from the heat of fire and burns from scalding steam. The outer surface shall be water resistant.

(d) A self-contained compressed-air breathing apparatus previously approved by MSHA and NIOSH under part 160, subpart 160.011, of this chapter may continue in use as required equipment if it was part of the vessel's equipment on November 23, 1992, and as long as it is maintained in good condition to the satisfaction of the Officer in Charge, Marine Inspection.

(e) Lifelines shall be of steel or bronze wire rope. Steel wire rope shall be either inherently corrosion resistant or made so by galvanizing or tinning. Each end shall be fitted with a hook with keeper having a throat opening which can be readily slipped over a 5/8-inch bolt. The total length of the lifeline shall be dependent upon the size and arrangement of the vessel, and more than one line may be hooked together to achieve the necessary length. No individual length of lifeline may be

less than 50 feet in length. The assembled lifeline shall have a minimum breaking strength of 1,500 pounds.

[CGD 73-11R, 38 FR 27354, Oct. 3, 1973, as amended by CGD 75-074, 42 FR 5963, Jan. 31, 1977; CGD 82-042, 53 FR 17704, May 18, 1988; CGD 86-036, 57 FR 48324, Oct. 23, 1992; 57 FR 56406, Nov. 27, 1992; CGD 95-028, 62 FR 51199, Sept. 30, 1997; USCG-1999-5151, 64 FR 67177, Dec. 1, 1999]

§ 35.30-25 Explosives—TB/ALL.

Fulminates or other detonating compounds in bulk in dry condition; explosive compositions that ignite spontaneously or undergo marked decomposition when subjected for forty-eight consecutive hours to a temperature of 167° F. or more; composition containing an ammonium salt and a chlorate; and other like explosives shall not be accepted, stored, stowed or transported on board tank vessels.

§ 35.30-30 Portable electric equipment—TB/ALL.

Portable electric equipment must not be used in a hazardous location described in subpart 111.105 of this chapter except:

(a) Self-contained, battery-fed, explosion-proof lamps approved by Underwriters Laboratories Inc., Factory Mutual Research Corporation, or other independent laboratory recognized by the Commandant, for use in a Class I, Division 1 location for the electrical group classification of the cargo;

(b) Intrinsically safe equipment approved by Underwriters Laboratories Inc., Factory Mutual Research Corporation, or other independent laboratory recognized by the Commandant, for use in a Class I, Division 1 location for the electrical group classification of the cargo; and

(c) Any electrical equipment, if:

(1) The hazardous location is:

(i) Enclosed; and

(ii) Gas free;

(2) The adjacent compartments are:

(i) Gas free;

(ii) Inerted;

(iii) Filled with water;

(iv) Filled with Grade E liquid; or

(v) Spaces where flammable gases are not expected to accumulate; and

(3) Each compartment where flammable gas is expected to accumulate is:

§ 35.30–35

- (i) Closed; and
- (ii) Secured.

[CGD 74–125A, 47 FR 15230, Apr. 8, 1982]

§ 35.30–35 Spark producing devices—TB/ALL.

(a) Where Grades A, B, C, and D liquid cargoes are involved, power driven or manually operated spark producing devices shall not be used in bulk cargo tanks, fuel oil tanks, cargo pump-rooms, or enclosed spaces immediately above or adjacent to bulk cargo tanks unless all the following conditions are met:

- (1) The compartment itself is gas-free;
- (2) The compartments adjacent and the compartments diagonally adjacent are either (i) gas-free, (ii) inerted, (iii) filled with water, (iv) contain Grade E liquid and are closed and secured, or (v) are spaces in which flammable vapors and gases normally are not expected to accumulate; and,
- (3) All other compartments of the vessel in which flammable vapors and gases may normally be expected to accumulate are closed and secured.

(b) This section does not prohibit the use of small hand tools in such locations.

§ 35.30–40 Flammable liquid and gas fuels as ship's stores—TB/ALL.

Flammable liquids and gases other than diesel fuel, to be used as fuel for approved equipment must satisfy the following:

- (a) Stowage must be in containers approved by DOT or A.S.M.E. for the contents carried, or in a portable safety container approved by a recognized testing laboratory for the contents carried.
- (b) The contents must be marked on the containers, and the containers must be labeled in accordance with DOT requirements for flammable liquids and gases.
- (c) Containers must be stowed on or above the weather deck in locations designated by the master. Containers specified in paragraph (a)(1) of this section which do not exceed a capacity of

46 CFR Ch. I (10–1–00 Edition)

five gallons may be stowed below the weather deck in a paint or lamp locker.

[CGD 80–009, 48 FR 36459, Aug. 11, 1983, as amended by CGD 86–033, 53 FR 36024, Sept. 16, 1988; CGD 95–028, 62 FR 51199, Sept. 30, 1997]

Subpart 35.35—Cargo Handling

§ 35.35–1 Persons on duty—TB/ALL.

(a) On each tankship required to be documented under the laws of the United States, the owner, managing operator, master, and person in charge of the vessel, and each of them, shall ensure that—

(1) Enough “Tankerman-PICs” or restricted “Tankerman-PICs”, and “Tankerman-Assistants”, authorized for the classification of cargo carried, are on duty to safely transfer liquid cargo in bulk or safely clean cargo tanks; and

(2) Each transfer of liquid cargo in bulk and each cleaning of a cargo tank is supervised by a person qualified to be the person in charge of the transfer or the cleaning under subpart C of 33 CFR part 155.

(b) On each United States tank barge subject to inspection—

(1) The owner, managing operator, master, and person in charge of the vessel, and each of them, shall ensure that no transfer of liquid cargo in bulk or cleaning of a cargo tank takes place unless under the supervision of a qualified person designated as the person in charge of the transfer or the cleaning under subpart C of 33 CFR part 155; and

(2) The person designated as the person in charge of the transfer shall ensure that—

(i) Enough qualified personnel are on duty to safely transfer liquid cargo in bulk or safely clean cargo tanks; and

(ii) The approved portable extinguishers required by Table 34.50–10(a) of this chapter are aboard and readily available before any transfer of liquid cargo in bulk or any operation of barge machinery or boilers.

(c) On each foreign tankship, the owner, managing operator, master, and person in charge of the vessel, and each of them, shall ensure that—

(1) Enough personnel, qualified for the classification of cargo carried, are on duty to safely transfer liquid cargo in bulk or safely clean cargo tanks; and

(2) Each transfer of liquid cargo in bulk and each cleaning of a cargo tank is supervised by a qualified person designated as a person in charge of the transfer or the cleaning under subpart C of 33 CFR part 155.

(d) On each foreign tank barge—

(1) The owner, managing operator, master, and person in charge of the vessel, and each of them, shall ensure that no transfer of liquid cargo in bulk or cleaning of a cargo tank takes place unless under the supervision of a qualified person designated as the person in charge of the transfer or the cleaning under subpart C of 33 CFR part 155.

(2) The person designated as the person in charge of the transfer shall ensure that enough qualified personnel are on duty to safely transfer liquid cargo in bulk or safely clean cargo tanks.

(e) The person in charge of the transfer of liquid cargo in bulk on the tank vessel shall be responsible for the safe loading and discharge of the liquid cargo in bulk.

(f) The person in charge of the transfer of liquid cargo in bulk on each United States tank vessel, when lightering to or from a foreign tank vessel, shall ensure that the person in charge on the foreign tank vessel, or his or her interpreter, is capable of reading, speaking, and understanding the English language well enough to allow a safe transfer.

[CGD 79-116, 60 FR 17155, Apr. 4, 1995]

§ 35.35-5 Electric bonding—TB/ALL.

A tank vessel may be electrically connected to the shore piping, through which the cargo is to be transferred, prior to the connecting of a cargo hose. This electrical connection, if made, shall be maintained until after the cargo hose has been disconnected, and any spillage has been removed.

[CGFR 65-50, 30 FR 16704, Dec. 30, 1965, as amended by CGFR 66-33, 31 FR 15268, Dec. 6, 1966]

§ 35.35-10 Closing of freeing-ports, scuppers, and sea valves—TB/ALL.

The person in charge of each transfer of liquid cargo in bulk shall ensure that all freeing-ports and scuppers are properly plugged during the transfer

except on tank vessels using water for cooling decks. Although under no circumstances may sea valves be secured by locks, the valves must be closed, and lashed or sealed, to indicate that they should not be opened during the transfer.

[CGD 79-116, 60 FR 17156, Apr. 4, 1995]

§ 35.35-15 Connecting for cargo transfer—TB/ALL.

(a) Movement of the vessel must be considered to insure safe cargo transfer. Suitable material must be used in joints and in couplings to insure that connections are tight. A bolted flanged coupling must not have less than four bolts, under any circumstances.

(b) When cargo connections are supported by ship's tackle, the person in charge of the transfer of liquid cargo in bulk shall determine the weights involved to ensure that adequate tackle is used.

(c) Pans or buckets shall be placed under cargo hose connections on the tank vessel.

[CGFR 65-50, 30 FR 16704, Dec. 30, 1965, as amended by CGD 80-009, 48 FR 36459, Aug. 11, 1983; CGD 79-116, 60 FR 17156, Apr. 4, 1995]

§ 35.35-20 Inspection before transfer of cargo—TB/ALL.

Before the transfer of liquid cargo in bulk, the person in charge of the transfer shall inspect the vessel to ensure the following:

(a) Warnings are displayed as required.

(b) No repair work in way of cargo spaces is being carried on without his permission.

(c) Cargo connections have been made as described in § 35.35-15 and cargo valves are set.

(d) All cargo connections have been made to the vessel's pipeline, and not through an open end hose led through a hatch.

(e) In loading Grades A, B, and C cargoes, there are no fires or open flames present on the deck, or in any compartment which is located on, facing, open, and adjacent to that part of the deck on which cargo connections have been made.

(f) The shore terminal or the other tank vessel concerned has reported itself in readiness for transfer of cargo.

(g) All sea valves connected to the cargo piping system are closed.

(h) In loading Grades A, B, and C cargoes, that an inspection has been made to determine whether boiler fires can be maintained with reasonable safety.

(i) In loading Grades A, B, and C cargoes, that an inspection has been made to determine whether galley fires can be maintained with reasonable safety.

(j) In loading Grades A, B, or C cargoes, that an inspection has been made to determine whether smoking may be permitted with reasonable safety in areas other than the weather deck.

(k) On tankships the construction or conversion of which is started on or after July 1, 1951, which are to load or discharge Grade A cargo, all openings in the top of the tanks, except the branch vent lines and covers to ullage hole sounding pipes, are tightly closed. (See §§ 32.20–20 and 32.55–20 of this subchapter.)

(l) On tankships the construction or conversion of which is started on or after July 1, 1951, which are to load or discharge Grade A cargo, the method for determining the liquid level in the tank without opening ullage holes, cargo hatches or Butterworth plates is in proper order. (See § 32.20–20 of this subchapter.)

(m) When a transfer operation includes collection of cargo vapor from a vessel's cargo tanks through a vapor control system not located on the vessel:

(1) Each part of the vapor collection system is aligned to allow vapor to flow to a facility vapor control system, or if lightering, to the other vessel;

(2) Vapor collection hoses or arms are connected to the vessel vapor collection connection;

(3) The electrical insulation requirements of 33 CFR 154.810(g) or § 39.40–3(c) of this subchapter are provided between the vessel vapor connection and the facility or service vessel vapor connection;

(4) The maximum cargo transfer rate is determined in accordance with § 39.30–1(d) of this subchapter;

(5) The maximum and minimum operating pressures at the facility vapor connection, or vessel vapor connection if lightering, are determined;

(6) The overfill control system on a tank barge, if fitted in accordance with § 39.20–9(b) of this subchapter, is connected to the facility, tested and operating properly;

(7) Each alarm required by §§ 39.20–7, 39.20–9 and 39.40–3(a) of this subchapter has been tested not more than 24 hours prior to the start of the transfer operation and is operating properly;

(8) Each vapor recovery hose has no unrepaired loose covers, kinks, bulges, soft spots, or any other defect which would permit the discharge of vapors through the hose material, and no gouges, cuts, or slashes that penetrate the first layer of hose reinforcement; and

(9) The oxygen content of the vessel's cargo tanks, if inerted, is at or below 8 percent by volume.

[CGFR 65–50, 30 FR 16704, Dec. 30, 1965, as amended by CGD 80–009, 48 FR 36459, Aug. 11, 1983; CGD 88–102, 55 FR 25446, June 21, 1990; CGD 79–116, 60 FR 17156, Apr. 4, 1995]

§ 35.35–25 Approval to start transfer of cargo—TB/ALL.

When the person in charge of the transfer of liquid cargo in bulk has ensured that the requirements of §§ 35.35–20 and 35.35–30 have been met, he or she may give approval to start the transfer.

[CGD 79–116, 60 FR 17156, Apr. 4, 1995]

§ 35.35–30 “Declaration of Inspection” for tank vessels—TB/ALL.

(a) After an inspection under § 35.35–20, but before a transfer of cargo, fuel oil, or bunkers may commence as described in this section and 33 CFR 156.120 and 156.150, the person in charge of the transfer shall prepare, in duplicate, a Declaration of Inspection. The original must be kept aboard the vessel, and the duplicate provided to the terminal supervisor or that person's representative. The supervisor or the representative may, upon demand, inspect the vessel to determine whether its condition is as stated on the Declaration of Inspection.

(b) The Declaration of Inspection may be in any form, but must contain at least:

Declaration of Inspection Before Transfer of Liquid Cargo in Bulk

Coast Guard, DOT

§ 35.35–35

Date _____
Vessel _____
Port of _____
Product[s] _____ being _____ transferred—
(Classification[s] and Kind[s]) _____

I, _____, the person in charge of the transfer of liquid cargo in bulk about to begin, do certify that I have personally inspected this vessel with reference to the following requirements set forth in 46 CFR 35.35–20, and that opposite each of the applicable items listed below I have indicated whether the vessel complies with all pertinent regulations.

- (1) Are warnings displayed as required?
- (2) Is there any repair work in way of cargo spaces being carried on for which permission has not been given?
- (3) Have cargo connections been made as described in 46 CFR 35.35–15 and are cargo valves set?
- (4) Have all cargo connections been made to the vessel's pipeline and not through an open-end hose led through a hatch?
- (5) Are there any fires or open flames present on the deck or in any compartment which is located on, open or adjacent to or facing the main deck of the vessels on which the cargo connections have been made?
- (6) Has the shore terminal or other tank vessel concerned reported itself in readiness for transfer of cargo?
- (7) Are sea valves connected to the cargo piping system closed?
- (8) If Grades A, B, or C cargoes are to be loaded and boiler fires are lighted, has an inspection been made to determine whether these fires may be maintained with reasonable safety?
- (9) If Grades A, B, or C cargoes are to be loaded and galley fires are lighted, has an inspection been made to determine whether the galley fires may be maintained with reasonable safety?
- (10) If Grades A, B, or C cargoes are to be loaded, has an inspection been made to determine whether smoking is to be permitted in areas not on the weather decks?
- (11) If smoking is to be permitted in areas not on the weather decks, have those areas been designated?
- (12) Is the inert gas system being operated as necessary to maintain an inert atmosphere in the cargo tanks in compliance with 46 CFR 32.53–5?
- (13) Have the applicable sections of the vessel response plan been reviewed before commencing transfer, and arrangements or contingencies made for implementation of the Plan should the need arise?

(c) In addition to the requirements in paragraph (b) of this section, if a trans-

fer operation includes the collection of cargo vapor from a vessel's cargo tanks through a vapor control system not located on the vessel, the Declaration of Inspection must include the following as an appendix:

- (1) Is each part of the vapor collection system aligned to allow vapor to flow to the facility vapor connection or, if lightering, to the other vessel?
- (2) Are the vapor collection hoses or arms connected to the vessel's vapor collection connection?
- (3) Are the vessel and facility vapor connections electrically isolated?
- (4) Have the initial transfer rate and the maximum transfer rate been determined?
- (5) Have the maximum and minimum operating pressures at the facility vapor connection, or the vessel vapor connection if lightering, been determined?
- (6) Have all alarms required by §§ 39.20–7, 39.20–9 and 39.40–3(a) of this subchapter been tested within 24 hours prior to the start of the transfer operation and found to be operating properly?
- (7) Is each vapor recovery hose free of unrepaired loose covers, kinks, bulges, soft spots, or any other defect which would permit the discharge of vapors through the hose material, and gouges, cuts, or slashes that penetrate the first layer of hose reinforcement?
- (8) Has the oxygen concentration of all inerted cargo tanks been verified to be 8 percent or less?

[CGD 80–009, 48 FR 36459, Aug. 11, 1983, as amended by CGD 88–102, 55 FR 25446, June 21, 1990; CGD 79–116, 60 FR 17156, Apr. 4, 1995; CGD 79–116, 62 FR 25135, May 8, 1997]

§ 35.35–35 Duties of person in charge of transfer—TB/ALL.

The person in charge of the transfer of liquid cargo in bulk, fuel oil in bulk, or bunkers in bulk shall control the transfer as follows:

- (a) Supervise the operations of cargo-system valves.
- (b) Commence transfer of cargo at slow rate of cargo flow.
- (c) Observe cargo connections for leakage.
- (d) Observe pressure on cargo system.

§ 35.35-40

(e) If transfer is loading (rather than discharging), observe rate of loading to avoid overflow of tanks.

(f) Comply with 33 CFR 156.120 and 156.150.

[CGD 79-116, 60 FR 17156, Apr. 4, 1995, as amended by CGD 79-116, 62 FR 25135, May 8, 1997]

§ 35.35-40 Conditions under which transfer operations shall not be commenced or if started shall be discontinued—TB/ALL.

Cargo transfer operations shall not be started or, if started, shall be discontinued under the following conditions:

(a) During severe electrical storms.

(b) If a fire occurs on the wharf or on the tanker or in the vicinity.

§ 35.35-42 Restrictions on vessels alongside a tank vessel loading or unloading cargo of Grade A, B, or C—TB/ALL.

(a) No vessel may come alongside or remain alongside a tank vessel in way of its cargo tanks while it is loading or unloading cargo of Grade A, B, or C without permission of the person in charge of the transfer on the tank vessel.

(b) No vessel may come alongside or remain alongside a tank vessel in way of its cargo tanks while it is loading or unloading cargo of Grade A, B, or C unless the conditions then prevailing are acceptable to the persons in charge of cargo-handling on both vessels.

[CGD 79-116, 60 FR 17156, Apr. 4, 1995]

§ 35.35-45 Auxiliary steam, air, or electric current—B/ALL.

When discharging cargo from one or more barges, the towing vessel may furnish steam, air, or electric current for pumps on barges or dock, but in no case shall the cargo pass through or over the towing vessel.

§ 35.35-50 Termination of transfer operations—TB/ALL.

(a) When transfer operations are completed the valves on cargo connections on the vessel shall be closed. The cargo connections shall be drained of cargo.

(b) [Reserved]

46 CFR Ch. I (10-1-00 Edition)

§ 35.35-55 Transfer of other cargo or stores on tank vessels—TB/ALL.

(a) No packaged goods, freight, or ship's stores may be loaded or unloaded during the loading or unloading of cargo of Grade A, B, or C except by permission of the person in charge of the transfer of liquid cargo in bulk. No explosives may be loaded, unloaded, or carried as cargo on any tank vessel containing cargo of Grade A, B, or C.

(b) Where package and general cargo is carried directly over bulk cargo tanks, it shall be properly dunnaged to prevent chafing of metal parts and securely lashed or stowed.

[CGFR 65-50, 30 FR 16704, Dec. 30, 1965, as amended by CGD 79-116, 60 FR 17157, Apr. 4, 1995]

§ 35.35-60 Transportation of other cargo or stores on tank barges—B/ALL.

(a) Tank barges may be permitted to transport deck cargoes directly over bulk cargo spaces when the nature of such deck cargoes and the methods of loading and unloading same do not create an undue hazard. Such tank barges shall have their decks properly dunnaged to prevent chafing between the steel parts of the vessel and the deck cargo.

(b) [Reserved]

§ 35.35-70 Maintenance of cargo handling equipment—TB/ALL.

The cargo handling equipment shall be maintained by the tank vessel's personnel in accordance with the regulations in this subchapter, including the following:

(a) Cargo hose shall not be used in transfer operations in which the pressures are such that leakage of cargo occurs through the body of the hose.

(b) Cargo pump relief valves shall be tested at least once each year to determine that they function satisfactorily at the pressure at which they are set to open.

(c) Cargo pump pressure gage shall be tested at least once a year for accuracy.

(d) The cargo discharge piping of all tank vessels shall be tested at least once each year for tightness, at the maximum working pressure.

Coast Guard, DOT

§ 35.40-30

§ 35.35-75 Emergencies—TB/ALL.

In case of emergencies nothing in the regulations in this subchapter shall be construed as preventing the senior officer present from pursuing the most effective action in his judgment for rectifying the conditions causing the emergency.

§ 35.35-85 Air compressors—TB/ALL.

No person may operate, install, or re-install an air compressor in a cargo area described in § 32.35-15 of this subchapter.

[CGD 95-028, 62 FR 51200, Sept. 30, 1997]

Subpart 35.40—Posting and Marking Requirements—TB/ALL.

§ 35.40-1 General alarm contact maker—TB/ALL.

Each general alarm contact maker must be marked in accordance with requirements in subchapter J (Electrical Engineering Regulations) of this chapter.

[CGD 74-125A, 47 FR 15231, Apr. 8, 1982]

§ 35.40-5 General alarm bells—TB/ALL.

General alarm bells must be marked in accordance with requirements in subchapter J (Electrical Engineering Regulations) of this chapter.

[CGD 74-125A, 47 FR 15231, Apr. 8, 1982]

§ 35.40-6 Emergency lights—TB/ALL.

Emergency lights must be marked in accordance with requirements in subchapter J (Electrical Engineering Regulations) of this chapter.

[CGD 74-125A, 47 FR 15231, Apr. 8, 1982]

§ 35.40-7 Carbon dioxide alarm—T/ALL.

Adjacent to all carbon dioxide fire extinguishing alarms installed after November 19, 1952, there shall be conspicuously marked: "WHEN ALARM SOUNDS VACATE AT ONCE. CARBON DIOXIDE BEING RELEASED."

§ 35.40-10 Steam, foam, or CO₂ fire smothering apparatus—TB/ALL.

Steam, foam, or CO₂ fire smothering apparatus shall be marked "STEAM FIRE APPARATUS" or "FOAM FIRE

APPARATUS" or "CO₂ FIRE APPARATUS," as appropriate, in not less than 2-inch red letters. The valves of all branch pipes leading to the several compartments shall be distinctly marked to indicate the compartments or parts of the vessel to which they lead.

§ 35.40-15 Fire hose stations—TB/ALL.

At each fire hose valve there shall be marked in not less than 2-inch red letters and figures: "FIRE STATION 1," 2, 3, etc.

§ 35.40-17 Foam hose/monitor stations—T/ALL.

(a) At each required foam hose/monitor valve there shall be marked in not less than 2-inch red letters and figures: "FOAM STATION 1," 2, 3, etc.

(b) [Reserved]

§ 35.40-18 Water spray systems—TB/ALL.

(a) Water spray system apparatus shall be marked: "WATER SPRAY SYSTEM," as appropriate, in not less than 2-inch red letters.

(b) The control valve, and its control if located remotely, shall be distinctly marked to indicate the compartment protected.

§ 35.40-20 Emergency equipment—TB/ALL.

Each locker and space where emergency equipment is stowed must be marked "EMERGENCY EQUIPMENT" or "SELF-CONTAINED BREATHING APPARATUS", as appropriate.

[CGD 86-036, 57 FR 43824, Oct. 23, 1992]

§ 35.40-25 Fire extinguishers—TB/ALL.

Each fire extinguisher shall be marked with a number and the location where stowed shall be marked in corresponding numbers in at least ½ inch figures.

§ 35.40-30 Instructions for changing steering gear—TB/ALL.

Instructions in at least ½ inch letters and figures shall be posted in the steering engineroom, relating in order, the different steps to be taken in changing to the emergency steering gear. Each clutch, gear wheel, lever, valve or switch which is used during

§ 35.40–35

the changeover shall be numbered or lettered on a brass plate or painted so that the markings can be recognized at a reasonable distance. The instructions shall indicate each clutch or pin to be “in” or “out” and each valve or switch which is to be “opened” or “closed” in shifting to any means of steering for which the vessel is equipped. Instructions shall be included to line up all steering wheels and rudder amidship before changing gears.

§ 35.40–35 Rudder orders—TB/ALL.

At all steering stations, there shall be installed a suitable notice on the wheel or device or in such other position as to be directly in the helmsman’s line of vision, to indicate the direction in which the wheel or device must be turned for “right rudder” or “left rudder.”

§ 35.40–40 Marking and instructions for fire and emergency equipment—TB/ALL.

Lifesaving appliances, instructions to passengers, and stowage locations for all tank vessels must be in accordance with subchapter W (Lifesaving Appliances and Arrangements) of this chapter.

[CGD 84–069, 61 FR 25287, May 20, 1996]

PART 36—ELEVATED TEMPERATURE CARGOES

Subpart 36.01—General

Sec.

36.01–1 Scope of regulations—TB/ALL.

36.01–5 Certificate of inspection—TB/ALL.

Subpart 36.05—Cargo Tanks

36.05–1 Installation of cargo tanks—TB/ALL.

36.05–10 Protection of personnel—TB/ALL.

Subpart 36.10—Piping, Valves, Fittings, and Accessory Equipment

36.10–1 Cargo pump relief valves—TB/ALL.

Subpart 36.20—Vents and Ventilation

36.20–1 Flame screens—TB/ALL.

36.20–5 Ventilation of pumproom—TB/ALL.

Subpart 36.30—Periodic Inspections

36.30–1 Lagged tanks—TB/ALL.

46 CFR Ch. I (10–1–00 Edition)

AUTHORITY: 46 U.S.C. 3306, 3703; E.O. 12234, 45 FR 58801, 3 CFR, 1980 Comp., p. 277; 49 CFR 1.46.

SOURCE: CGFR 65–50, 30 FR 16716, Dec. 30, 1965, unless otherwise noted.

Subpart 36.01—General

§ 36.01–1 Scope of regulations—TB/ALL.

(a) The regulations in this part contain requirements for the transportation in bulk of materials considered to be Grade E liquids when shipped in molten form at elevated temperatures.

(b) The materials covered by this part shall meet the applicable regulations of this subchapter, except that materials having a flash point of 300° F. or above, shall be exempt from the requirements prescribed in the following sections of this subchapter:

(1) Inspection prior to making repairs—§ 35.01–1(b).

(2) Watchman for a tank vessel—§ 35.05–15.

(3) Warning sign at gangway—§ 35.30–1(b).

(4) Cargo tank hatches, ullage holes and Butterworth plates—§ 35.30–10.

(5) Men on duty—§ 35.35–1.

(6) Inspection prior to transfer of cargo—§ 35.35–20.

(7) Approval to start transfer of cargo—§ 35.35–25.

(8) “Declaration of inspection” for tank ships—§ 35.35–30.

(9) Transportation of other cargo or stores on tank barges—§ 35.35–60.

(c) The regulations governing the transportation in the solid state of materials referred to in § 36.01–1(a) are contained in part 148 of subchapter N (Dangerous Cargoes) of this chapter.

[CGFR 65–50, 30 FR 16716, Dec. 30, 1965, as amended by CGD 97–057, 62 FR 51043, Sept. 30, 1997]

§ 36.01–5 Certificate of inspection—TB/ALL.

(a) The certificate of inspection shall be endorsed for the carriage of elevated temperature cargoes as follows: “Inspected and approved for the carriage of Grade E combustible liquids when transported in molten form at elevated temperatures.”

(b) [Reserved]

Subpart 36.05—Cargo Tanks**§ 36.05-1 Installation of cargo tanks—TB/ALL.**

(a) All cargo tanks carrying liquids at elevated temperatures for the purpose of maintaining the material in the molten form shall be installed with the access openings located above the weather deck.

(b) [Reserved]

§ 36.05-10 Protection of personnel—TB/ALL.

(a) Decks, bulkheads, or other structures shall be insulated with an approved incombustible material, or other suitable means of protection shall be employed where practicable and necessary for the protection of personnel.

(b) [Reserved]

Subpart 36.10—Piping, Valves, Fittings, and Accessory Equipment**§ 36.10-1 Cargo pump relief valves—TB/ALL.**

(a) Cargo pump relief valves and pressure gages may be omitted, however, a suitable device shall be fitted to stop the pumping before the designed pressure of the piping is exceeded.

(b) [Reserved]

Subpart 36.20—Vents and Ventilation**§ 36.20-1 Flame screens—TB/ALL.**

(a) Flame screens may be omitted in the vent lines on cargo tanks.

(b) [Reserved]

§ 36.20-5 Ventilation of pumproom—TB/ALL.

(a) Where personnel are required to enter pumprooms located below the weather deck under normal circumstances of handling cargo, such pumprooms shall be equipped with power ventilation.

(b) [Reserved]

Subpart 36.30—Periodic Inspections**§ 36.30-1 Lagged tanks—TB/ALL.**

(a) Lagged tanks shall have part of the lagging removed on the lower portion of the cargo tanks as directed by the marine inspector, at least once every eight years for external examination.

(b) [Reserved]

PART 38—LIQUEFIED FLAMMABLE GASES**Subpart 38.01—General**

Sec.

38.01-1 Scope of regulations—TB/ALL.

38.01-2 Transportation of portable cylinders or portable tanks containing or having previously contained liquefied flammable gases in dry cargo spaces—TB/ALL.

38.01-3 Incorporation by reference.

38.01-5 Certificate of inspection—TB/ALL.

Subpart 38.05—Design and Installation

38.05-1 Design and construction of vessels—general—TB/ALL.

38.05-2 Design and construction of cargo tanks—general—TB/ALL.

38.05-3 Design and construction of pressure vessel type cargo tanks—TB/ALL.

38.05-4 Design and construction of nonpressure vessel type cargo tanks—TB/ALL.

38.05-5 Markings—TB/ALL.

38.05-10 Installation of cargo tanks—general—TB/ALL.

38.05-20 Insulation—TB/ALL.

38.05-25 Refrigerated systems—TB/ALL.

Subpart 38.10—Piping, Valves, Fittings, and Accessory Equipment

38.10-1 Valves, fittings, and accessories—TB/ALL.

38.10-5 Filling and discharge pipes—TB/ALL.

38.10-10 Cargo piping—TB/ALL.

38.10-15 Safety relief valves—TB/ALL.

38.10-20 Liquid level gaging devices—TB/ALL.

Subpart 38.15—Special Requirements

38.15-1 Filling of tanks—TB/ALL.

38.15-5 Cargo hose—TB/ALL.

38.15-10 Leak detection systems—T/ALL.

38.15-15 Electrical installations—TB/ALL.

38.15-20 Remote shutdowns—TB/ALL.

Subpart 38.20—Venting and Ventilation

38.20-1 Venting—T/ALL.

§ 38.01-1

46 CFR Ch. I (10-1-00 Edition)

38.20-5 Venting—T/ALL.
38.20-10 Ventilation—T/ALL.

Subpart 38.25—Periodic Tests and Inspections

38.25-1 Tests and inspections—TB/ALL.
38.25-3 Nondestructive testing—TB/ALL.
38.25-5 Removal of defective tanks—TB/ALL.
38.25-10 Safety relief valves—TB/ALL.

AUTHORITY: 46 U.S.C. 2103, 3306, 3703; 49 U.S.C. 5101, 5106; E.O. 12234, 45 FR 58801, 3 CFR, 1980 Comp., p. 277; 49 CFR 1.46.

SOURCE: CGFR 66-33, 31 FR 15269, Dec. 6, 1966, unless otherwise noted.

Subpart 38.01—General

§ 38.01-1 Scope of regulations—TB/ALL.

(a) The regulations in this part contain requirements for the transportation of liquefied or compressed gases, whose primary hazard is one of flammability.

(b) The transportation *on deck* of liquefied flammable gases in portable cylinders and tanks and the transportation of empty cylinders and portable tanks previously used shall be in accordance with the requirements of 49 CFR parts 171-179. The transportation of such containers *under deck* shall be in accordance with the requirements of § 38.01-2.

[CGFR 66-33, 31 FR 15269, Dec. 6, 1966, as amended by CGD 86-033, 53 FR 36024, Sept. 16, 1988]

§ 38.01-2 Transportation of portable cylinders or portable tanks containing or having previously contained liquefied flammable gases in dry cargo spaces—TB/ALL.

(a) DOT cylinders, DOT Specification portable tanks or other approved portable tanks containing liquefied flammable gases may be transported under deck, provided the following requirements are met:

(1) The cargo space shall be provided with efficient means of ventilation, be protected from artificial heat, and be readily accessible from hatches.

(2) Containers shall be stored in such a position that the safety relief device is in communication with the vapor space of the container. They shall be

properly stowed, dunnaged, and secured to prevent movement in any direction.

(3) Unless a method acceptable to the Commandant is used, the containers shall not be overstowed in the same dry cargo space with other liquefied flammable gas containers, nor with other cargo.

(4) The containers shall be suitably protected against physical damage from other cargo, ship's stores, or equipment in such spaces.

(5) Cylinders shall have their valves protected at all times by one of the following methods:

(i) By metal caps securely attached to the cylinders and of sufficient strength to protect the valves from injury.

(ii) By having the valves recessed into the cylinders or otherwise protected so that they will not be subject to a blow if the cylinder is dropped on a flat surface.

(6) Portable tanks shall have their valves protected at all times by a housing in accordance with the requirements under which they were manufactured.

(7) Electrical circuits in the cargo spaces must meet the hazardous area requirements in subchapter J (Electrical Engineering Regulations) of this chapter. If an electrical circuit does not meet those requirements, it must be deenergized by a positive means and not reenergized until the cargo has been removed and the space has been tested and found free of flammable vapor.

(8) During the stowage of portable cylinders or portable tanks in a hold or compartment that is not fitted with electrical fixtures meeting the hazardous area requirements of subchapter J (Electrical Engineering Regulations) of this chapter, portable lights must not be used within the space unless the portable lights are explosion-proof. Electrical connections for portable lights must be made from outlets on the weather deck. Hand flashlights used in the stowage area must be explosion-proof.

(9) The following dangerous cargoes shall not be stowed in the same hold or compartment with liquefied flammable gas containers:

Coast Guard, DOT

§ 38.05-1

- (i) Division 1.1, 1.2, 1.3, or 1.4 (explosive) materials, as defined in 49 CFR 173.50.
- (ii) Flammable solids.
- (iii) Oxidizing materials.
- (iv) Corrosive liquids.
- (v) Poisonous articles.
- (vi) Cotton and similar fibrous materials.

[CGFR 66-33, 31 FR 15269, Dec. 6, 1966, as amended by CGFR 68-32, 33 FR 5714, Apr. 12, 1968; CGD 74-125A, 47 FR 15231, Apr. 8, 1982; CGD 92-050, 59 FR 39666, Aug. 5, 1994]

§ 38.01-3 Incorporation by reference.

(a) Certain standards and specifications are incorporated by reference into this part with the approval of the Director of the Federal Register in accordance with 5 U.S.C. 552(a). To enforce any edition other than the ones listed in paragraph (b) of this section, notice of change must be published in the FEDERAL REGISTER and the material made available to the public. All approved material is on file at the Office of the Federal Register, 800 North Capitol Street, NW., suite 700, Washington, DC and is available from the sources indicated in paragraph (b) of this section.

(b) The standards and specifications approved for incorporation by reference in this part, and the sections affected, are:

American Society for Nondestructive Testing (ASNT)

4153 Arlingate Road, Caller #28518, Columbus, OH, 43228-0518

ASNT "Recommended Practice No. SNT-TC-1A (1988), Personnel Qualification and Certification in Non-destructive Testing".....38.25-3(c)(2)

American Society of Mechanical Engineers (ASME) International

Three Park Avenue, New York, NY 10016-5990
ASME Boiler and Pressure Vessel Code Section V, Nondestructive Examination (1986)38.25-3(a)(1)

American Society for Testing and Materials (ASTM)

100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

ASTM D 4986-98, Standard Test Method for Horizontal Burning Characteristics of Cellular Polymeric Ma-

terials.....38.05-20

[CGD 85-061, 54 FR 50962, Dec. 11, 1989, as amended by USCG-1999-6216, 64 FR 53224, Oct. 1, 1999; USCG-1999-5151, 64 FR 67177, Dec. 1, 1999]

§ 38.01-5 Certificate of inspection—TB/ALL.

(a) The certificate of inspection shall be endorsed for the carriage of liquefied flammable gases as follows:

Inspected and approved for the carriage of liquefied flammable gases (1) at a pressure not to exceed ——— p.s.i., and (2) at temperatures not less than ———°F.

(b) Tanks approved to carry cargoes at below ambient temperatures shall have the applicable limiting temperatures indicated on the certificate. Tanks designed to carry cargoes only at ambient temperatures should have the word "ambient" entered in these spaces.

Subpart 38.05—Design and Installation

§ 38.05-1 Design and construction of vessels—general—TB/ALL.

(a) Vessels designed for the carriage of liquefied gases shall comply with the applicable requirements of this subchapter.

(b) Access and ventilation intakes to the machinery, accommodation and working spaces should be so arranged as to prevent the flow of cargo vapor from the weather deck into such spaces. In this respect openings in the forward or after ends of poops, forecastles, and deckhouses adjacent the cargo area shall be at least 24 inches above the cargo handling deck.

(c) Materials used in the fabrication of cargo tanks and piping shall have adequate notch toughness at the service temperature. Where a secondary barrier is required, the material of that barrier and of contiguous hull structure shall have sufficient notch toughness at the lowest temperature which may result during the containment of leakage cargo within the secondary

barrier. Materials used in the fabrication of the cargo containment and handling system shall satisfy the requirements for toughness specified in subchapter F (Marine Engineering) of this chapter.

(d) Cargo tank spaces are to be isolated from the remainder of the vessel by cofferdams in accordance with § 32.60-10 of this subchapter. In a non-pressure vessel configuration, the void between the primary and secondary barriers shall not be acceptable as the required cofferdam between the tank spaces and the main machinery spaces.

(e) Compartments containing cargo tanks or pipes shall be accessible from the weather deck only. No openings from these compartments to other parts of the vessel are permitted.

(f) Barges utilized for the carriage of liquefied gases shall be of Type II barge hull as defined in § 32.63-5(b)(2) of this subchapter. The Commandant may, based on the properties of the liquefied gas to be carried, require a Type I barge hull, as defined in § 32.63-5(b)(1) of this subchapter, to ensure the hull is consistent with the degree and nature of the hazard of the liquefied gas to be carried.

[CGFR 66-33, 31 FR 15269, Dec. 6, 1966, as amended by CGFR 68-82, 33 FR 18806, Dec. 18, 1968; CGFR 68-65, 33 FR 19985, Dec. 28, 1968; CGFR 70-10, 35 FR 3709, Feb. 25, 1970]

§ 38.05-2 Design and construction of pressure vessel type cargo tanks—general—TB/ALL.

(a) The maximum allowable temperature of the cargo is defined as the boiling temperature of the liquid at a pressure equal to the setting of the relief valve.

(b) The service temperature is the minimum temperature at which cargo is loaded and/or transported in the cargo tank. However, the service temperature shall in no case be taken higher than given by the following formula:

$$t_s = t_w - 0.25(t_w - t_b) \quad (1)$$

where:

t_s = Service temperature.

t_w = Boiling temperature of gas at normal working pressure of tank but not higher than +32° F.

t_b = Boiling temperature of gas at atmospheric pressure.

(c) Heat transmission studies, where required, shall assume the minimum ambient temperatures of 0° F. still air and 32° F. still water, and maximum ambient temperatures of 115° F. still air and 90° F. still water.

(d) Cargo tanks in vessels in ocean; Great Lakes; lakes, bays, and sounds; or coastwise service shall be designed to withstand, simultaneously, the following dynamic loadings:

(1) Rolling 30° each side (120°) in 10 seconds.

(2) Pitching 6° half amplitude (24°) in 7 seconds.

(3) Heaving $L/80'$ half amplitude ($L/20'$) in 8 seconds.

(e) Cargo tanks on barges shall be designed in accordance with § 32.63-25 of this subchapter.

(f) Each liquefied flammable gas tank shall be provided with not less than a 15-inch by 23-inch or an 18-inch nominal diameter manhole fitted with a cover located above the maximum liquid level and as close to the top of the tank as possible. Where access trunks are fitted to the tanks, the nominal diameter of the trunks shall be not less than 30 inches.

(g) Cargo tanks vented above 10 pounds per square inch gage shall be of the pressure vessel type.

§ 38.05-3 Design and construction of pressure vessel type cargo tanks—TB/ALL.

(a) Cargo tanks of pressure vessel configuration (e.g. cylindrical, spherical, etc.) shall be designed, fabricated, inspected, and tested in accordance with the applicable requirements of part 54 of subchapter F (Marine Engineering) of this chapter, except as otherwise provided for in this part.

(b) The requirements of this section anticipate that cargo tanks constructed as pressure vessels will, by themselves, constitute the cargo containment system and usually will not require a secondary barrier.

(c) In the design of the tank, consideration shall be given to the possibility of the tank being subjected to external loads. Consideration shall also be given to excessive loads that can be imposed on the tanks by their support due to static and dynamic forces under operating conditions or during testing. The

design shall show the manner in which the tanks are to be installed, supported, and secured, and shall be approved prior to tank installation.

(d) Tanks with a service temperature of minus 20° F. or lower and fabricated of ferritic materials shall be stress relieved.

(e) Unlagged cargo tanks, where the cargo is transported, at or near ambient temperatures, shall be designed for the vapor pressure of the gas at 115° F. The design shall also be based on the minimum internal pressure (maximum vacuum), plus the maximum external static head to which the tank may be subjected. Whenever surrounding cargo is at a greater temperature than the maximum allowable temperature of the liquefied flammable gas tanks, the liquefied flammable gas cargo is to be such that the design pressure of the liquefied flammable gas tank is not exceeded.

(f) Where cargo tanks, in which the cargo is transported at or near ambient temperature, are lagged with an insulation material of a thickness to provide a thermal conductance of not more than 0.075 B.t.u. per square foot per degree Fahrenheit differential in temperature per hour, the tanks shall be designed for a pressure of not less than the vapor pressure of the gas at 105° F. The insulation material shall conform to the requirements of § 38.05-20. The design shall also be based on the minimum internal pressure (maximum vacuum) plus the maximum external static head to which the tank may be subjected.

(g) Cargo tanks in which the temperature is maintained below the normal atmospheric temperature by refrigeration or other acceptable means shall be designed for a pressure of not less than 110 percent of the vapor pressure corresponding to the temperature of the liquid at which the system is maintained, or the pressure corresponding to the greatest dynamic and static loads expected to be encountered either in service or during testing. For mechanically stress relieved cargo tanks, additional factors relating design pressure and maximum allowable pressure shall be as specified by the Commandant. The material of the tank shall satisfy the requirements of

subchapter F (Marine Engineering) of this chapter for the service temperature, and this temperature shall be permanently marked on the tank as prescribed in § 38.05-5.

(h) Where applicable, the design shall investigate the thermal stresses induced in the cargo tank at the service temperature.

(i) The shell and head thickness of liquefied gas cargo tanks shall not be less than five-sixteenths inch.

[CGFR 66-33, 31 FR 15269, Dec. 6, 1966, as amended by CGFR 68-82, 33 FR 18806, Dec. 18, 1968]

§ 38.05-4 Design and construction of nonpressure vessel type cargo tanks—TB/ALL.

(a) The requirements in this section anticipate a cargo containment system consisting of a primary tank which is structurally self-supporting and, where required, a secondary barrier. Other vessel or cargo tank configurations, such as membrane type liners externally supported, will be considered upon submission of substantiating data, and based upon such additional tests as the Commandant may direct.

(b) A secondary barrier is an arrangement or structure designed to contain the cargo temporarily if leakage develops in the primary container. A secondary barrier shall be provided where leakage from the primary container may cause lowering of the temperature of the ship's structure to an unsafe level. The secondary barrier shall be constructed of material suitable to contain the cargo at the service temperature.

(c) The design of the cargo containment systems shall be such that under normal service conditions, or upon failure of the primary tank, the hull structure shall not be cooled down to a temperature which is unsafe for the materials involved. Structural members not suitable for the service temperatures of the cargo shall be protected by a secondary barrier consisting of suitable structural containment together with necessary associated insulation. Heat transmission studies and tests may be required to demonstrate that the arrangement is feasible and that the final material temperatures are acceptable.

(d) The design and construction of the cargo tanks shall be at least equivalent to the standards established by the American Bureau of Shipping or other recognized classification society. For special tanks, or designs not contemplated by standards of the classification society, a detailed analysis of the entire tank, or designated parts thereof, shall be made and submitted to the Commandant for approval.

(e) The cargo tank shall be designed for a head of cargo at least equal to the highest level the liquid cargo may attain plus the maximum venting pressure. In no case shall a head of cargo less than 4 feet above the cargo hatch or expansion trunk be used.

(f) The design shall investigate the thermal stresses induced in the cargo tank during loading. Where necessary, devices for spray loading or other methods of precooling or cooling during loading shall be included in the design.

(g) All weld intersections or crossings in joints of primary tank shells shall be radiographed for a distance of 10 thicknesses from the intersection. All other welding in the primary tank and in the secondary barrier shall be spot radiographed in accordance with the requirements of part 54 of subchapter F (Marine Engineering) of this chapter.

[CGFR 66-33, 31 FR 15269, Dec. 6, 1966, as amended by CGFR 68-82, 33 FR 18807, Dec. 18, 1968]

§ 38.05-5 Markings—TB/ALL.

(a)(1) Upon satisfactory completion of tests and inspection, pressure vessel and nonpressure vessel type cargo tanks, shall have markings as required by § 54.10-20 of subchapter F (Marine Engineering) of this chapter except that for nonpressure vessel type tanks, the Coast Guard number and pressure vessel class shall be omitted.

(2) Hydrostatic test for pressure vessel type tanks shall be that specified in § 38.25-1(b). In the case of nonpressure vessel type tanks, the hydrostatic test pressure shall mean the pressure specified in § 38.25-1(d), while the maximum allowable pressure shall mean the maximum venting pressure as used in § 38.05-4(e). Where it is not feasible to attach the nameplate to the tank, it

shall be conspicuously displayed nearby.

(b) All tank inlet and outlet connections, except safety relief valves, liquid level gaging devices, and pressure gages, shall be labeled to designate whether they terminate in the vapor or liquid space. Labels of corrosion-resistant material may be attached to valves.

(c) All tank markings shall be permanently and legibly stamped in a readily visible position, and shall not be obscured by painting. If the tanks are lagged, the markings attached to the tank proper shall be duplicated on a corrosion-resistant plate secured to the outside jacket of the lagging.

[CGFR 66-33, 31 FR 15269, Dec. 6, 1966, as amended by CGFR 68-82, 33 FR 18807, Dec. 18, 1968]

§ 38.05-10 Installation of cargo tanks—general—TB/ALL.

(a)(1) Cargo tanks shall be supported on foundations of steel or other suitable material and securely anchored in place to prevent the tanks from shifting when subjected to external forces. Each tank shall be so supported as to prevent the concentration of excessive loads on the supporting portions of the shell or head as prescribed under § 38.05-2(d).

(2) Cargo tanks installed in barges shall comply with the requirements of § 32.63-25 of this subchapter.

(b) Foundations, and stays where required, shall be designed for support and constraint of the weight of the full tank, and the dynamic loads imposed thereon. Thermal movement shall also be considered.

(c) Foundations and stays which may be exposed to the cargo shall be suitable for the temperatures involved and be impervious to the cargo.

(d) The design of the foundations and stays shall consider the resonance of the cargo tank, or parts thereof, and the vibratory forces, found in the tank vessel. If necessary, effective damping arrangements shall be provided.

(e) Independent containment systems shall be so arranged as to provide a minimum clearance of not less than 24 inches from the vessel's side and not less than 15 inches from the vessel's bottom to provide access for inspection

of the hull. Clearances for collision protection, where required by other parts of the regulations in this subchapter, may increase the clearances specified here.

(1) For pressure vessel type tanks the distance between adjacent tanks and between tanks and vessel's structure shall be adequate to permit access for inspection and maintenance of all tank surfaces and hull structure as approved by the Commandant. Alternate provisions may be made for inspection and maintenance of the vessel's structure and tanks by moving such tanks or by providing equivalent acceptable means for remote inspection.

(2) For nonpressure vessel type containment systems, access shall be arranged to permit inspection of one side each of the primary tank and secondary barrier, under normal shipyard conditions. Containment systems which, because of their peculiar design, cannot be visually inspected to this degree, may be specially considered provided an equivalent degree of safety is attained.

(f) Cargo tanks may be installed *on deck, under deck*, or with the tanks protruding through the deck. All tanks shall be installed with the manhole openings located in the open above the weather deck. Provided an equivalent degree of safety is attained, the Commandant may approve cargo tanks installed with manhole openings located below the weather deck.

(g) For pressure vessel type cargo tanks, the following conditions apply:

(1) Liquefied flammable gas cargo tanks may be located in cargo tanks or in spaces which meet the requirements for cofferdams as defined in §30.10-13 of this subchapter. When liquefied flammable gas cargo tanks are installed in cargo tanks, such cargo tanks may be used simultaneously or separately for the carriage of flammable or combustible liquids up to and including the grade for which the cargo tanks are otherwise certified in accordance with the requirements of this subchapter.

(2) Where the liquefied flammable gas tanks are installed in cargo tanks and a portion of the liquefied flammable gas tanks extend above the weather deck, the penetration shall be made gastight and watertight, and shall be

such as to provide full compliance with the structural requirements including testing for the hull and integral tanks. In the application of the requirements for the hydrostatic test of the cargo tanks, the hydrostatic test shall in no case be less severe than the worst anticipated service condition of the cargo loading. In the design and testing of independent cargo tanks and integral cargo tanks consideration shall be given to the possibility of the independent tanks being subjected to external loads.

(3) Where the liquefied flammable gas tanks are installed in nontank hull spaces and a portion of the tank extends above the weather deck, provision shall be made to maintain the weathertightness of the deck, except that the weathertightness of the upper deck need not be maintained on:

(i) Vessels operating on restricted routes which are sufficiently protected; or,

(ii) Open hopper type barges of acceptable design.

(h) No strength welding employed in the attachment of supports, lugs, fittings, etc., shall be done on tanks that require and have been stress relieved, unless authorized by the Commandant.

§ 38.05-20 Insulation—TB/ALL.

(a) Where used, tank insulation shall satisfy the following requirements for combustibility, installation, and arrangement:

(1) Insulation in a location exposed to possible high temperature or source of ignition shall be either:

(i) Incombustible, complying with the requirements of subpart 164.009 of subchapter Q (Specifications) of this chapter; or,

(ii) Self-extinguishing, as determined by ASTM D 4986, "Standard Test Method for Horizontal Burning Characteristics of Cellular Polymeric Materials," (incorporated by reference, see §38.01-3) and covered by a suitable steel cover.

(2) Insulation in a location protected against possible ignition by enclosure in a tight steel envelope in which inert conditions are maintained need satisfy no requirement for combustibility except chemical stability.

(3) Insulation in a location protected against possible high temperature or

§ 38.05-25

source of ignition by continuous surrounding structural voids or ballast tanks need satisfy no requirement for combustibility except chemical stability.

(b) All insulation shall be of a vapor-proof construction, or have a vapor-proof coating of a fire-retardant material acceptable to the Commandant. Unless the vapor barrier is inherently weather resistant, tanks exposed to the weather shall be fitted with a removable sheet metal jacket of not less than 0.083-inch thick over the vapor-proof coating and flashed around all openings so as to be weathertight. Weather resistant coatings shall have sheet metal over areas subject to mechanical damage.

(c) The insulation shall be adequately protected in areas of probable mechanical damage.

(d) Insulation which forms an integral part of the secondary barrier shall meet the following additional requirements:

(1) When the secondary barrier is called upon to contain the cargo, insulating material which is contacted shall not be affected by the cargo. Samples of the insulating material shall be tested in the cargo for solubility, absorption and shrinkage. The samples shall be checked for the above effects at intervals not exceeding 1 week, for a total test period of 6 weeks.

(2) Any adhesives, sealers, coatings, or vapor barrier compounds used in conjunction with the insulating material shall be similarly tested to insure suitable cargo resistive properties.

(3) The insulation shall have sufficient mechanical strength for the proposed design. Additionally, the thermal expansion of the insulation relative to the material to which it is affixed shall be considered in the design.

(e) The insulation for the piping systems shall be at least of the "self-extinguishing" type described in paragraph (a) of this section, and comply with the requirements contained in paragraphs (b) and (c) of this section.

[CGFR 66-33, 31 FR 15269, Dec. 6, 1966, as amended by USCG-1999-5151, 64 FR 67177, Dec. 1, 1999]

46 CFR Ch. I (10-1-00 Edition)

§ 38.05-25 Refrigerated systems—TB/ALL.

(a) When a liquefied flammable gas is carried below atmospheric temperature under the requirements of § 38.05-3(f) or § 38.05-4, maintenance of the tank pressure below the maximum allowable pressure shall be provided by one or more of the following means:

(1) A refrigeration or liquefaction system which regulates the pressure in the tanks. A standby compressor or equivalent equipment, of a capacity equal to one of the working units shall be provided.

(2) A system whereby the vapors are utilized as fuel for shipboard use.

(3) A system allowing the liquefied flammable gas to warm up and increase in pressure. The insulation and tank design pressure shall be adequate to provide for a suitable margin for the operating time and temperatures involved.

(4) Other systems acceptable to the Commandant.

(b) A system whereby the vapors are vented to the atmosphere at sea only may be employed in conjunction with paragraph (a)(1) of this section. The pressure control valves shall be independent of the safety relief valves. See § 38.20-1(j).

Subpart 38.10—Piping, Valves, Fittings, and Accessory Equipment

§ 38.10-1 Valves, fittings, and accessories—TB/ALL.

(a) All valves, flanges, fittings, and accessory equipment shall be of a type suitable for use with liquefied flammable gases, and shall be made of steel or grade A malleable iron, acceptable for the service temperature and pressure according to the requirements of part 56 of subchapter F (Marine Engineering) of this chapter. Other materials may be specially considered and approved by the Commandant.

(b) All valves, flanges, fittings, and accessory equipment shall have a pressure rating at operating temperatures not less than the maximum allowable pressure to which they may be subjected. Piping which is not protected by a relief valve or which can be isolated from its relief valve by other

valves shall be designed for the greatest of the cargo vapor pressure at 115° F., or the maximum allowable pressure of the cargo tank, or the requirements of § 38.10-10(a). Cargo liquid piping which may be subject to liquid full conditions shall be fitted with relief valves. The escape from piping systems relief valves shall be piped to a venting system or to a suitable vapor recovery system. Provision shall be made for the proper venting of all valves, fittings, etc., in which pressure buildup may occur, especially in refrigerated systems, because of an increase in product temperature.

(c) Welded connections shall be used wherever possible with the number of flanged joints kept to the minimum necessary for assembly and cleaning. Sockets in sizes 3 inches and smaller and slipon flanges in sizes 4 inches and smaller may be used. Threaded joints may be used in sizes of 1 inch and smaller. Where threaded joints are used, they shall be visible and accessible for inspection under all service conditions, and limited to instrument and control lines properly valved from the main lines. Where threaded joints are sealed by brazing or welding, they need not be exposed.

(d) Valve seat material, packing, gaskets, etc., shall be resistant to the action of the liquefied flammable gas. All flange and manhole cover gaskets shall be compressed asbestos, spiral-wound metal asbestos, metal jacketed asbestos, solid aluminum, corrugated steel, solid steel, or iron, or other materials with equal or better resistance to fire exposure.

(e) Provisions shall be made by the use of offsets, loops, bands, expansion joints, etc., to protect the piping and tank from excessive stress due to thermal movement and/or movements of the tank and hull structure. Expansion joints shall be held to a minimum and where used shall be of the bellows type and subject to special approval by the Commandant.

(f) Low temperature piping shall be thermally isolated from the hull structure. Arrangements should provide for the protection of the hull structure from leaks in way of pumps, flanges, joints, etc.

(g) Each tank shall be provided with the necessary fill and discharge liquid and vapor shutoff valves, safety relief valve connections, refrigeration connections where necessary, liquid level gaging devices, thermometer well and pressure gage, and shall be provided with suitable access for convenient operation. Piping shall enter the cargo tanks above weather deck and as close to the top of the tank or dome as possible, except as otherwise permitted in this section. Connections to the tanks shall be protected against mechanical damage and tampering. No underdeck cargo piping shall be installed between the outboard side of the cargo containment system and the shell of the vessel, unless provision is made to maintain the minimum inspection and collision protection clearances of § 38.05-10(e) between the piping and the shell. Other openings in the tanks, except as specifically permitted by the Commandant, are prohibited.

(h) Cargo loading and discharge piping may be connected to the tanks below the weather deck or below the liquid level subject to approval by the Commandant, provided:

(1) A remotely controlled quick-closing shutoff valve is flanged to the tank outlet connection. The control mechanism for this valve shall meet the requirements of § 38.10-5.

(2) The piping which is below the weather deck or liquid level shall be joined by welding except for a flanged connection to the quick-closing shutoff valve and a flanged connection to the cargo pump.

(3) The design and arrangement of this piping, including the flange bolting shall be such that excessive stresses will not be transmitted to the cargo tank outlet connection or the quick-closing valve, even in the event of abnormal displacement of the piping.

(4) Except for those vessels, the design of which permits the exclusion of a weathertight deck over the tanks, the space in which such piping is located shall be accessible only from the weather deck and shall be vented to a safe location above the weather deck.

(i) All connections to tanks, except safety relief valves and liquid level gaging devices, shall have manually

operated shutoff valves located as close to the tank as possible. In addition, all liquid and vapor connections on pressure vessel type tanks except safety relief valves, liquid level gaging devices, and filling and discharge lines, shall be equipped with either an automatic excess flow valve or a remotely controlled quick-closing shutoff valve of the fail closed type. These valves, except when necessary for the operation of the system, shall remain closed. For pressure vessel type tanks operating at low pressure and with service temperature near the cargo atmospheric boiling point, the Commandant may approve individual installations where the liquid and vapor connections normally requiring automatic excess flow valves or remotely controlled quick-closing shutoff valves are fitted with manually operated shutoff valves only.

(j) The control system for quick-closing shutoff valves shall be provided with a remote control in at least two locations and be of a type acceptable to the Commandant. The control system shall also be provided with a fusible element designed to melt between 208° F. and 220° F., which will cause the quick-closing shutoff valves to close in case of fire. The quick-closing shutoff valves shall be capable of local manual operation.

(k) Excess flow valves, where required by this subchapter, shall close automatically at the rated flow of vapor or liquid as specified by the manufacturer. The piping, including valves, fittings, and appurtenances protected by an excess flow valve, shall have a greater capacity than the rated flow of the excess flow valve.

(l) Liquid level gaging devices which are so constructed that outward flow of tank contents shall not exceed that passed by a No. 54 drill size (0.055-inch diameter) opening, need not be equipped with excess flow valves.

(m) Pressure gage connections need not be equipped with excess flow valves if the openings are not larger than No. 54 drill size (0.055-inch diameter).

(n) Excess flow valves may be designed with a bypass not to exceed a No. 60 drill size (0.040-inch diameter) opening to allow equalization of pressure.

(o) Suitable valves shall be installed on the cargo headers to relieve the pressure on the liquid and vapor lines to a safe location prior to disconnecting shore lines.

(p) A pressure gage shall be located at the highest practicable point. A thermometer well where installed on the tank proper shall be attached to the tank by welding.

(q) For nonpressure vessel type tanks, the following additional fittings are required:

(1) A liquid level gaging device shall be provided to determine the level of the liquid cargo without opening the tank. The gage shall be readable from the open deck, or from a control room or station when the loading or discharging is controlled from such a room or station. Tables shall be readily available for direct determination of volume of liquid in the tanks, with necessary corrections for trim, temperature, and density.

(2) An independent high level alarm shall be provided for each tank. The alarm indication shall register at the station where loading is controlled.

(3) Each tank shall be provided with remote reading temperature sensors located near both the cargo liquid level and the bottom of the tank. The temperature shall be read at the control station for loading and unloading cargo, if provided, otherwise near the cargo control valves.

(4) Each tank shall be fitted with a pressure and a vacuum gage which shall be read at the control station for loading and unloading cargo, is provided, otherwise near the cargo control valves. In addition, the liquid loading and discharge headers at the ship's shore connection station shall be fitted with pressure gages.

(r) Spaces surrounding cargo tanks shall be provided with suitable means for pumping out.

(1) Where pressure vessel type tanks are installed or in other cases where no secondary containment is required, this may consist of a bilge system independent of the bilge system for the rest of the vessel, and having no pipe connections between the cargo tank spaces and the engineroom or boilerroom, except that eductors may be supplied from engineroom pumps.

(2) Secondary containment spaces of structurally self-supporting tanks shall be provided with suitable means for pumping out leaked cargo. These should be arranged so as to provide the following alternatives:

(i) Return of the cargo to the same primary tank or other tank.

(ii) Pumping the cargo off the ship either in port through a regular shore unloading connection or at sea overboard in a safe manner.

[CGFR 66-33, 31 FR 15269, Dec. 6, 1966, as amended by CGFR 68-82, 33 FR 18807, Dec. 18, 1968]

§ 38.10-5 Filling and discharge pipes—TB/ALL.

(a) Filling and discharge connections shall be provided with the manually operated valve required by § 38.10-1(i) and with a positive acting remote controlled quick-closing valve. The remote controlled quick-closing valve shall satisfy the requirements of § 38.10-1(j).

(b) For pressure vessel type tanks the remote controlled quick-closing valves shall be located on the inside of the tank or on the outside where the piping enters the tank. For pressure vessel type tanks operating at low pressure and with service temperature near the cargo atmospheric boiling point, the Commandant may approve individual installations where these valves are located at the loading and discharge headers.

(c) For nonpressure vessel type tanks the remote controlled quick-closing valves may be located at the loading and discharge headers.

§ 38.10-10 Cargo piping—TB/ALL.

(a) The piping shall be designed for a working pressure of not less than the maximum pressure to which it may be subjected but in no case less than the design pressure of the cargo tanks. In the case of piping on the discharge side of the liquid pumps or vapor compressors, the design pressure shall not be less than the pump or compressor discharge relief valve setting; or, provided the piping is not protected by relief valves, the design pressure shall not be less than the total discharge head of the pump or compressor.

(b) Piping subject to tank pressure shall be seamless drawn steel or elec-

tric resistance welded steel. Pipe used in refrigerated tank systems shall be of a material which is suitable for the minimum service temperature to which it may be subjected, according to the requirements of part 56 of subchapter F (Marine Engineering) of this chapter.

(c) Piping shall be provided with adequate support to take the weight of the piping off valves and fittings and to prevent excessive vibration and stresses on tank connections.

(d) For nonpressure vessel type tanks, the cargo handling arrangements and piping shall provide for emptying of a damaged tank, including cargo contained by a secondary barrier.

[CGFR 66-33, 31 FR 15269, Dec. 6, 1966, as amended by CGFR 68-82, 33 FR 18807, Dec. 18, 1968]

§ 38.10-15 Safety relief valves—TB/ALL.

(a) Each tank shall be fitted with or (subject to approval by the Commandant) connected to one or more safety relief valves designed, constructed and flow tested for capacity in conformance with subpart 162.017 or 162.018 of subchapter Q (Specifications) of this chapter.

(b) Safety relief valves conforming to subpart 162.017 of subchapter Q (Specifications) of this chapter may be used on tanks for a maximum pressure of 10 pounds per square inch gage. Safety relief valves conforming to subpart 162.018 of subchapter Q (Specifications) of this chapter may be used for any pressure.

(c) The safety relief valves shall have a combined relieving capacity to discharge the greater of the following with not more than 20 percent rise in pressure (in the tank) above the maximum allowable pressure:

(1) The vapors evaporated by an ambient air temperature of 115° F. plus the maximum flow rate of the cargo filling pipes or,

(2) The vapors generated under fire exposure computed using the formulas of § 54.15-25(c) of subchapter F (Marine Engineering) of this chapter.

(d) The safety relief valves shall meet the arrangement and inspection requirements of § 54.15-25 of subchapter F (Marine Engineering) of this chapter.

§ 38.10-20

(e) Means shall be provided to protect nonpressure vessel tanks from excessive external pressure.

(f) Void spaces between the primary and secondary barriers of nonpressure vessel type tanks shall be protected by relief devices. The relief setting shall not be higher than the void test pressure, and shall not exceed 90 percent of the setting of the safety relief valve protecting the primary tank.

[CGFR 68-82, 33 FR 18807, Dec. 18, 1968]

§ 38.10-20 Liquid level gaging devices—TB/ALL.

(a) Each tank shall be fitted with a liquid level gaging device of approved design to indicate the maximum level to which the tank may be filled with liquid:

(1) Between -20° F. and 130° F. for unrefrigerated service; or,

(2) Within the operating temperature range for tanks operating below atmospheric temperature.

(b) Liquid level gaging devices may be of the following types: Rotary tube, slip tube, magnetic, automatic float, or similar types approved by the Commandant. Except as otherwise provided in this section, fixed tube devices are not acceptable as the primary gaging device.

(c) All gaging devices shall be arranged so that the maximum liquid level for product being carried, to which the tank may be filled is readily determinable. The maximum gallonage capacity as required by § 38.15-1 shall be:

(1) Marked on the tank system nameplate or gaging device; or,

(2) Shown in the ullage tables.

(d) Gaging devices that require bleeding of the product to the atmosphere, such as the rotary tube, fixed tube, and slip tube, shall be so designed that the bleed valve maximum opening is not larger than a No. 54 drill size (0.055-inch diameter), unless provided with an excess flow valve.

(e) For pressure vessel type tanks each automatic float, continuous reading tape or similar type gage not mounted directly on the tank or dome shall be fitted with a shutoff device located as close to the tank as practicable. When an automatic float gaging device, which gages the entire

46 CFR Ch. I (10-1-00 Edition)

height of the tank is used, a fixed tube gage set in the range of 85 percent to 90 percent of the water capacity of the tank shall be provided in addition as a means of checking the accuracy of the automatic float, gage, or other alternate means acceptable to the Commandant may be used.

(f) A gaging device shall be designed for a pressure at least equal to the maximum allowable pressure of the tank on which it is installed.

(g) Gage glasses of the columnar type are prohibited.

(h) Flat sight glasses may be used in the design of automatic float continuous reading tape gages: *Provided*, That such glasses shall be made of high strength material suitable for the operating temperatures of not less than one-half inch in thickness and adequately protected by a metal cover.

Subpart 38.15—Special Requirements

§ 38.15-1 Filling of tanks—TB/ALL.

(a) Refrigerated and semirefrigerated tanks shall be filled so that there is an outage of at least 2 percent of the volume of the tank at the temperature corresponding to the vapor pressure of the cargo at the safety relief valve setting. A reduction in the required outage may be permitted by the Commandant when warranted by special design considerations. Normally then, the maximum volume to which a tank may be loaded is:

$$V_L = 0.98 d_r V / d_L$$

where:

V_L = maximum volume to which tank may be loaded.

V = volume of tank.

d_r = density of cargo at the temperature required for a cargo vapor pressure equal to the relief valve setting.

d_L = density of cargo at the loading temperature and pressure.

(b) Nonrefrigerated tanks shall be filled so that their filling densities shall not exceed the ratios indicated in Table 38.15-1(b).

(c) The "filling density" is defined as the percent ratio of the weight of the gas in a tank to the weight of water the tank will hold at 60° F.

TABLE 38.15-1(b)—MAXIMUM PERMISSIBLE FILLING DENSITIES FOR TANKS OPERATING AT OR NEAR AMBIENT TEMPERATURE

Specific gravity at 60° F.	Maximum permitted filling density		
	Unlagged tanks—water capacity		Lagged tanks— all capacities
	1,200 gal. and under	Over 1,200 gal.	
0.473-0.480	38	41	42
0.481-0.488	39	42	43
0.489-0.495	40	43	44
0.496-0.503	41	44	45
0.504-0.510	42	45	46
0.511-0.519	43	46	47
0.520-0.527	44	47	48
0.528-0.536	45	48	49
0.537-0.544	46	49	50
0.545-0.552	47	50	51
0.553-0.560	48	51	52
0.561-0.568	49	52	53
0.569-0.576	50	53	54
0.577-0.584	51	54	55
0.585-0.592	52	55	56
0.593-0.600	53	56	57
0.601-0.608	54	57	58
0.609-0.617	55	58	59
0.618-0.626	56	59	60
0.627-0.634	57	60	61

NOTE: Increase in filling densities to provide for seasonal changes may be considered by the Commandant upon presentation of factual evidence that safe operation can be effected.

§ 38.15-5 Cargo hose—TB/ALL.

(a) When the liquid and vapor line hoses used for loading and discharging the cargo are carried on board the vessel, they shall be of flexible metal and fabricated of seamless steel pipe and flexible joints of steel or bronze, or of other suitable material resistant to the action of the cargo. Hose used in refrigerated systems shall be suitable for the minimum temperature to which it may be subjected and shall be acceptable to the Commandant.

(b) Hose subject to tank pressure, or the discharge pressure of pumps or vapor compressors, shall be designed for a bursting pressure of not less than five times the maximum safety relief valve setting of the tank, pump, or compressor.

(c) Before being placed in service each new cargo hose, with all necessary fittings attached, shall be hydrostatically tested by its manufacturer to a pressure not less than twice its maximum working pressure nor more than two-fifth its bursting pressure. The hose shall be marked with its maximum working pressure, and if used in

refrigerated service, its minimum temperature.

§ 38.15-10 Leak detection systems—T/ALL.

(a) A detection system shall be permanently installed to sense cargo leaks. The detectors shall be located within the space so as to permit the sensing of an initial leak and prevent an undetected gas accumulation. The sensitivity shall be in accordance with paragraph (b) of this section. The detectors shall be fitted in the following compartments:

(1) Between the primary and secondary barriers for nonpressure vessel type tanks.

(2) Cargo handling rooms and spaces containing cargo piping or cargo handling systems.

(3) All enclosed spaces, except tanks and cofferdams, which are separated from the cargo tanks by only the secondary barrier.

(4) Other spaces where gas concentrations might be expected.

(5) Cargo holds, containing pressure vessel type tanks and no cargo piping, are exempt from the requirements of this paragraph.

(b) The indicating instruments for the detection system shall be located on the bridge or at the cargo control station. An audio and visual warning shall be given before any gas concentration reaches 30 percent of the lower explosive limit. The alarm shall indicate both on the bridge and at the cargo control station. Sampling of each detector shall be at least once every half hour.

(c) Means shall be provided to measure the full range of cargo gas concentration in the spaces.

[CGFR 66-33, 31 FR 15269, Dec. 6, 1966, as amended by CGFR 68-65, 33 FR 19985, Dec. 28, 1968]

§ 38.15-15 Electrical installations—TB/ALL.

(a) All electrical installations shall comply with the requirements contained in this subchapter and in subchapter J (Electrical Engineering) of this chapter for tank vessels, except as otherwise specified in this part.

(b) Spaces containing cargo pumps, compressors, and piping are considered

§ 38.15-20

as equivalent to a tank vessel pump-room, and no electrical devices, except Coast Guard approved intrinsically safe devices, shall be installed in these spaces. Electric motors shall be segregated from these spaces by a gastight bulkhead. Electric lighting of the explosion-proof type may be installed in these spaces provided all switching is done from outside the space.

(c) All cargo tanks, piping, valves, etc., shall be effectively grounded to the vessel's hull. Tanks with an insulated inner shell (primary barrier) shall have an effective grounding bond to the outer shell (secondary barrier) or to the vessel's hull.

(d) Electric submerged motor cargo pumps may be used, when in compliance with the following requirements and subject to approval by the Commandant.

(1) Design details of the submerged motor pump, with an evaluation of the cooling efficiency of the product being pumped, shall be submitted.

(2) Provisions shall be made to exclude air from the tanks containing cargo in either vapor or liquid phase. The pump motor shall be deenergized when this condition is not satisfied.

(3) A liquid level sensing device shall automatically shut down the motor and sound an alarm at a predetermined low liquid level. The alarm location may be the station from which cargo handling is controlled or such other location outside the cargo area as is acceptable to the Commandant.

(4) Details of the power cable, tank penetrations and pump connections shall be submitted.

(5) An auxiliary means of emptying the cargo tanks shall be provided in accordance with § 38.10-10(d).

(6) Means for positively disconnecting the power supply between the switchboard and the pump power panel shall be provided, i.e., disconnect links, lockable breakers, etc.

(7) All materials used in the fabrication of the submerged motor cargo pumps shall be suitable for use with the liquid cargo at the design pressures and temperatures.

46 CFR Ch. I (10-1-00 Edition)

§ 38.15-20 Remote shutdowns—TB/ALL.

(a) All machinery associated with cargo loading, unloading, or cooling shall be capable of being shut down from a remote location. This location may be the station from which the cargo handling is controlled or such other location outside the cargo area as is acceptable to the Commandant.

(b) [Reserved]

Subpart 38.20—Venting and Ventilation

§ 38.20-1 Venting—T/ALL.

(a) Each safety relief valve installed on a cargo tank shall be connected to a branch vent of a venting system which shall be constructed so that the discharge of gas will be directed vertically upward to a point which shall extend to a height above the weather deck equal to at least one-third the beam of the vessel and to a minimum of at least 10 feet, and shall terminate at a comparable distance from any other living or working space, ventilator inlet, or source of vapor ignition. When special conditions will prevent the vent line header outlets being permanently installed at a height above the deck of one-third the beam of the vessel, then an adjustable system shall be provided which, when extended vertically, shall be capable of reaching a height of one-third the beam of the vessel.

(b) The capacity of branch vents or vent headers shall depend upon the number of cargo tanks connected to such branch or header as provided for in the Table 38.20-1(b), and upon the total safety relief valve discharge capacity.

TABLE 38.20-1(b)—CAPACITY OF BRANCH VENTS OR VENT HEADERS

Number of cargo tanks	Percent of total valve discharge
1 or 2	100
3	90
4	80
5	70
6 or more	60

(c) In addition to the requirements specified in paragraphs (a) and (b) of this section, the size of the branch vents or vent headers, shall be such that the back pressure in the relief valve discharge lines shall not be more than 10 percent of the safety relief valve setting. In nonpressure vessel vent systems, however, where the maximum back pressure of 10 percent of the relief valve setting is insufficient to move the gases through any but an extremely large diameter vent pipe, the back pressure may exceed 10 percent provided:

(1) The pressure in the tank during venting does not exceed 120 percent of the tank maximum allowable pressure; and,

(2) The safety relief valve is sized to discharge the required capacity with the tank pressure and vent back pressure actually used.

(d) Return bends and restrictive pipe fittings are not permitted.

(e) Vents and headers shall be so installed as to prevent excessive stresses on safety relief valve mountings.

(f) The vent discharge riser shall be so located as to provide protection against mechanical injury and such discharge pipes shall be fitted with loose raincaps or other suitable means to prevent entrance of rain or snow.

(g) No valve of any type shall be fitted in the vent pipe between the safety relief valve and the vent outlets.

(h) Provisions shall be made to drain condensate from the vent header piping. Special precautions shall insure that condensate does not accumulate at or near the relief valves.

(i) Relief valves discharging liquid cargo shall not be connected to the branch vent or vent header lines from the cargo tanks. They may, however, be connected to an accumulator, the vapor space of which, may in turn, be connected to the vent header system. Relief valves in the cargo piping system may discharge back to the cargo tanks.

(j) Vapor discharged to the atmosphere in accordance with § 38.05-25(b) shall utilize valves separate from the safety relief valves.

§ 38.20-5 Venting—T/ALL.

(a) Safety relief valves on cargo tanks in barges may be connected to individual or common risers which shall extend to a reasonable height above the deck. An alternate arrangement consisting of a branch vent header system as required by § 38.20-1 may be installed. In any case, the provisions of § 38.20-1 (d) through (j) shall apply.

(b) Arrangements providing for venting cargo tanks at sea on unmanned barges will be considered by the Commandant upon presentation of plans.

§ 38.20-10 Ventilation—T/ALL.

(a) A power ventilation system shall be provided for compartments containing pumps, compressors, pipes, control spaces, etc. connected with the cargo handling facilities. These compartments shall be ventilated in such a way as to remove vapors from points near the floor level or bilges, or other areas where vapor concentrations may be expected. The compartments shall be equipped with power ventilation of the exhaust type having capacity sufficient to effect a complete change of air in not more than 3 minutes equal to the volume of the compartment and associated trunks.

(b) The power ventilation units shall not produce a source of vapor ignition in either the compartment or the ventilation system associated with the compartment. Inlets to exhaust ducts shall be provided and located at points where concentrations of vapors may be expected. Ventilation from the weather deck shall be provided. Ventilation outlets shall terminate away from any openings to the interior part of the vessel a lateral distance at least equal to that specified in § 38.20-1(a). These outlets shall be so located as to minimize the possibility of recirculating contaminated air through the compartment.

(c) Means shall be provided for purging the following spaces of cargo vapors:

(1) The space surrounding nonpressure vessel type tanks, i.e., within the secondary barrier.

(2) The space surrounding pressure-vessel type tanks whose piping connections are below the weather deck in accordance with § 38.10-1(h).

§ 38.25-1

46 CFR Ch. I (10-1-00 Edition)

(3) The space surrounding tanks whose manhole openings are below the weather deck in accordance with § 38.05-10(f).

(d) Power ventilation shall be provided for each auxiliary machinery or working space located on and accessible from the cargo handling deck. Such ventilation systems shall be designed to preclude the entry of cargo vapors into the space via the open access or the ventilation system itself.

[CGFR 66-33, 31 FR 15269, Dec. 6, 1966, as amended by CGFR 68-65, 33 FR 19985, Dec. 28, 1968]

Subpart 38.25—Periodic Tests and Inspections

§ 38.25-1 Tests and inspections—TB/ALL.

(a) Each tank shall be subjected to the tests and inspections described in this section in the presence of a marine inspector, except as otherwise provided in this part.

(1) An internal inspection of the tank is conducted within—

(i) Ten years after the last internal inspection if the tank is a pressure vessel type cargo tank on an unmanned barge carrying cargo at temperatures of -67°F (-55°C) or warmer; or

(ii) Eight years after the last internal inspection if the tank is of a type other than that described in paragraph (a)(1)(i) of this section.

(2) An external examination of unlagged tanks and the visible parts of lagged tanks shall be made at each inspection for certification and at such other times as considered necessary.

(3) The owner shall ensure that the amount of insulation deemed necessary by the marine inspector is removed from insulated tanks during each internal inspection to allow spot external examination of the tanks and insulation, or the thickness of the tanks may be gauged by a nondestructive means accepted by the marine inspector without the removal of insulation.

(4) If required by the Officer in Charge, Marine Inspection, the owner shall conduct nondestructive testing of each tank in accordance with § 38.25-3.

(5) If the tank is a pressure vessel type cargo tank with an internal inspection interval of 10 years, is 30 years

old or older, determined from the date it was built, the owner shall conduct nondestructive testing of that tank, in accordance with § 38.25-3, during each internal inspection.

(b) If the marine inspector considers a hydrostatic test necessary to determine the condition of the tank, the owner shall perform the test at a pressure of $1\frac{1}{2}$ times the tanks's—

(1) Maximum allowable pressure, as determined by the safety relief valve setting; or

(2) Design pressure, when cargo tanks operate at maximum allowable pressures reduced below the design pressure in order to satisfy special mechanical stress relief requirements.

NOTE: See the ASME Code, Section VIII, Appendix 3 for information on design pressure.

(c) For pressure vessels designed and/or supported such that they cannot safely be filled with water, the Commandant will consider a pneumatic test in lieu of the hydrostatic test. A leak test shall be performed in conjunction with the pneumatic test. Pneumatic testing shall be in accordance with subchapter F (Marine Engineering) of this chapter.

(d) Nonpressure vessel type tanks shall be tested to a pressure equal to the pressure on the bottom of the tank under the design conditions listed in § 38.05-4(e).

(e) In the application of the requirements for testing of the cargo tanks, the test shall in no case be less severe than the worst anticipated service condition of the cargo loading.

(f) In the design and testing of the independent cargo tanks, consideration shall be given to the possibility of the independent tanks being subjected to external loads.

[CGFR 66-33, 31 FR 15269, Dec. 6, 1966, as amended by CGD 85-061, 54 FR 50962, Dec. 11, 1989]

§ 38.25-3 Nondestructive testing—TB/ALL.

(a) Before nondestructive testing may be conducted to meet § 38.25-1 (a)(4) and (a)(5), the owner shall submit a proposal to the Officer in Charge, Marine Inspection for acceptance that includes—

Coast Guard, DOT

§ 39.10-1

(1) The test methods and procedures to be used, all of which must meet section V of the ASME Boiler and Pressure Vessel Code (1986);

(2) Each location on the tank to be tested; and

(3) The test method and procedure to be conducted at each location on the tank.

(b) If the Officer in Charge, Marine Inspection rejects the proposal, the Officer in Charge, Marine Inspection informs the owner of the reasons why the proposal is rejected.

(c) If the Officer in Charge, Marine Inspection accepts the proposal, then the owner shall ensure that—

(1) The proposal is followed; and

(2) Nondestructive testing is performed by personnel meeting ASNT “Recommended Practice No. SNT-TC-1A (1988), Personnel Qualification and Certification in Nondestructive Testing.”

(d) Within 30 days after completing the nondestructive test, the owner shall submit a written report of the results to the Officer in Charge, Marine Inspection.

[CGD 85-061, 54 FR 50963, Dec. 11, 1989]

§ 38.25-5 Removal of defective tanks—TB/ALL.

If a tank fails to pass the tests prescribed in this subpart, it shall be removed from service unless otherwise authorized by the Commandant.

§ 38.25-10 Safety relief valves—TB/ALL.

(a) The cargo tank safety relief valves shall be inspected at least once in every 2 years.

(b) The safety relief valve discs must be lifted from their seats in the presence of a marine inspector by either liquid, gas, or vapor pressure at least once every 5 years to determine the accuracy of adjustment and, if necessary, must be reset.

[CGFR 66-33, 31 FR 15269, Dec. 6, 1966, as amended by CGD 95-027, 61 FR 26000, May 23, 1996]

PART 39—VAPOR CONTROL SYSTEMS

Subpart 39.10—General

Sec.

39.10-1 Applicability—TB/ALL.

39.10-3 Definitions—TB/ALL.

39.10-5 Incorporation by reference—TB/ALL.

39.10-9 Vessel vapor processing unit—TB/ALL.

39.10-11 Personnel training—TB/ALL.

39.10-13 Submission of vapor control system designs—TB/ALL.

Subpart 39.20—Design and Equipment

39.20-1 Vapor collection system—TB/ALL.

39.20-3 Cargo gauging system—TB/ALL.

39.20-7 Tankship liquid overfill protection—T/ALL.

39.20-9 Tank barge liquid overfill protection—B/ALL.

39.20-11 Vapor overpressure and vacuum protection—TB/ALL.

39.20-13 High and low vapor pressure protection for tankships—T/ALL.

Subpart 39.30—Operations

39.30-1 Operational requirements—TB/ALL.

Subpart 39.40—Lightering and Topping-Off Operations with Vapor Balancing

39.40-1 General requirements for vapor balancing—TB/ALL.

39.40-3 Design and equipment for vapor balancing—TB/ALL.

39.40-5 Operational requirements for vapor balancing—TB/ALL.

AUTHORITY: 33 U.S.C. 1231; 46 U.S.C. 3306, 3703, 3715(b); 45 FR 58801, 3 CFR, 1980 Comp., p. 277; 49 CFR 1.46.

SOURCE: CGD 88-102, 55 FR 25446, June 21, 1990, unless otherwise noted.

Subpart 39.10—General

§ 39.10-1 Applicability—TB/ALL.

(a) Except as specified by paragraph (c) of this section, this part applies to each tank vessel operating in the navigable waters of the United States, when collecting vapors of crude oil, gasoline blends, or benzene emitted from a vessel's cargo tanks through a vapor control system.

(b) A tank vessel which transfers vapors of flammable or combustible cargoes other than crude oil, gasoline blends, or benzene, to a facility covered

§ 39.10-3

46 CFR Ch. I (10-1-00 Edition)

by 33 CFR part 154 must meet the requirements prescribed by the Commandant (G-MSO).

(c) A tank vessel with an existing vapor collection system specifically approved by the Coast Guard for the collection of cargo vapor which was operating prior to July 23, 1990, is subject only to § 39.30-1 and § 39.40-5 of this part as long as it transfers cargo vapor only to the specific facilities for which it was approved.

(d) This part does not apply to the collection of vapors of liquefied flammable gases as defined in § 30.10-39 of this subchapter.

[CGD 88-102, 55 FR 25446, June 21, 1990, as amended by CGD 95-072, 60 FR 50462, Sept. 29, 1995; CGD 96-041, 61 FR 50727, Sept. 27, 1996]

§ 39.10-3 Definitions—TB/ALL.

As used in this part:

Cargo deck area means that part of the weather deck that is directly over the cargo tanks.

Existing vapor collection system means a vapor collection system which was operating prior to July 23, 1990.

Facility vapor connection means the point in a facility's fixed vapor collection system where it connects with the vapor collection hose or the base of the vapor collection arm.

Independent as applied to two systems means that one system will operate with a failure of any part of the other system except power sources and electrical feeder panels.

Inerted means the oxygen content of the vapor space in a cargo tank is reduced to 8 percent by volume or less in accordance with the inert gas requirements of § 32.53 or § 153.500 of this chapter.

Lightering or *lightering operation* means the transfer of a bulk liquid cargo from a tank vessel to a service vessel.

Marine Safety Center means the Commanding Officer, U.S. Coast Guard Marine Safety Center, 400 Seventh Street, SW., Washington, DC 20590-0001.

Maximum allowable transfer rate means the maximum volumetric rate at which a vessel may receive cargo or ballast.

New vapor collection system means a vapor collection system which is not an existing vapor collection system.

Service vessel means a vessel which transports bulk liquid cargo between a facility and another vessel.

Topping-off operation means the transfer of a bulk liquid cargo from a service vessel to another vessel in order to load the receiving vessel to a deeper draft.

Vapor balancing means the transfer of vapor displaced by incoming cargo from the tank of a vessel receiving cargo into a tank of the vessel or facility delivering cargo via a vapor collection system.

Vapor collection system means an arrangement of piping and hoses used to collect vapor emitted from a vessel's cargo tanks and to transport the vapor to a vapor processing unit.

Vapor control system means an arrangement of piping and equipment used to control vapor emissions collected from a vessel. It includes the vapor collection system and vapor processing unit.

Vapor processing unit means the components of a vapor control system that recovers, destroys, or disperses vapor collected from a vessel.

Vessel vapor connection means the point in a vessel's fixed vapor collection system where it connects with the vapor collection hose or arm.

§ 39.10-5 Incorporation by reference—TB/ALL.

(a) Certain materials are incorporated by reference into this part with the approval of the Director of the FEDERAL REGISTER in accordance with 5 U.S.C. 552(a). To enforce any edition other than the one listed in paragraph (b) of this section, notice of change must be published in the FEDERAL REGISTER and the material made available to the public. All approved material is on file at the Office of the Federal Register, 800 North Capitol Street, NW., suite 700, Washington, DC and at the U.S. Coast Guard, Office of Operating and Environmental Standards (G-MSO), 2100 Second Street, SW., Washington, DC 20593-0001, and is available from the sources indicated in paragraph (b) of this section.

(b) The material approved for incorporation by reference in this part, and the sections affected are:

Coast Guard, DOT

§ 39.10-13

American Petroleum Institute (API),
1220 L Street NW., Washington,
DC 20005

API Standard 2000, Venting
Atmospheric and Low-Pressure
Storage Tanks (Non-
refrigerated and Refriger-
ated), Third Edition, Janu-
ary 1982 (reaffirmed Decem-
ber 1987)

39.20-11

*American National Standards Insti-
tute (ANSI)*, 11 West 42nd Street,
New York, NY 10036

ANSI B16.5, Steel Pipe Flanges
and Flanged Fittings, 1981 ...

39.20-1

*American Society for Testing and
Materials (ASTM)*, 100 Barr Har-
bor Drive, West Conshohocken,
PA 19428-2959

ASTM F 1271-90 (1995)—Stand-
ard Specification for Spill
Valves for Use in Marine
Tank Liquid Overpressure
Protection Applications

39.20-9

*International Electrotechnical Com-
mission (IEC)*, Bureau Central de
la Commission Electrotechnique
Internationale, 1 rue de
Varembe', Geneva, Switzerland

IEC 309-1—Plugs, Socket-Out-
lets and Couplers for Indus-
trial Purposes: Part 1, Gen-
eral Requirements, 1979

39.20-9

IEC 309-2—Plugs, Socket-Out-
lets and Couplers for Indus-
trial Purposes: Part 2, Di-
mensional Interchange-
ability Requirements for Pin
and Contact-tube Acces-
sories, 1981

39.20-9

*National Electrical Manufacturers
Association (NEMA)*, 2101 L St.
NW., Washington, DC 20036

ANSI/NEMA WD6—Wiring De-
vices, Dimensional Require-
ments, 1988

39.20-9

*National Fire Protection Association
(NFPA)*, 1 Batterymarch Park,
Quincy, MA 02269

NFPA 70—National Electrical
Code, 1987

39.20-9

*Oil Companies International Marine
Forum (OCIMF)*, 15th Floor, 96
Victoria Street, London SW1E
5JW, England

International Safety Guide for
Oil Tankers and Terminals,
Third Edition, 1988

39.30-1

[CGD 88-102, 55 FR 25446, June 21, 1990, as
amended by CGD 95-072, 60 FR 50462, Sept. 29,
1995; CGD 96-041, 61 FR 50727, Sept. 27, 1996;
CGD 97-057, 62 FR 51043, Sept. 30, 1997; USCG-
1999-5151, 64 FR 67177, Dec. 1, 1999]

§ 39.10-9 Vessel vapor processing unit—TB/ALL.

Each vessel which has a vapor pro-
cessing unit located on board must meet
the requirements of 33 CFR part 154,
subpart E to the satisfaction of the
Commandant (G-MSO) in addition to
complying with the requirements of
this part.

[CGD 88-102, 55 FR 25446, June 21, 1990, as
amended by CGD 95-072, 60 FR 50462, Sept. 29,
1995; CGD 96-041, 61 FR 50727, Sept. 27, 1996]

§ 39.10-11 Personnel training—TB/ ALL.

(a) A person in charge of a transfer
operation utilizing a vapor collection
system must have completed a training
program covering the particular sys-
tem installed on the vessel. Training
must include drills or demonstrations
using the installed vapor control sys-
tem covering normal operations and
emergency procedures.

(b) The training program required by
paragraph (a) of this section must
cover the following subjects:

- (1) Purpose of a vapor control sys-
tem;
- (2) Principles of the vapor control
system;
- (3) Components of the vapor control
system;
- (4) Hazards associated with the vapor
control system;
- (5) Coast Guard regulations in this
part;
- (6) Operating procedures, including:
 - (i) Testing and inspection require-
ments,
 - (ii) Pre-transfer procedures,
 - (iii) Connection sequence,
 - (iv) Start-up procedures, and
 - (v) Normal operations; and
- (7) Emergency procedures.

[CGD 88-102, 55 FR 25446, June 21, 1990; 55 FR
39270, Sept. 26, 1990]

§ 39.10-13 Submission of vapor control system designs—TB/ALL.

(a) Plans, calculations, and specifica-
tions for a new vessel vapor collection
system must be submitted to the Ma-
rine Safety Center for approval prior to
installation.

(b) An existing vapor collection sys-
tem installation that has been Coast
Guard approved to transfer cargo vapor

to specific facilities must be reviewed and approved by the Marine Safety Center prior to transferring vapors to other facilities.

(c) The owners/operators of a foreign flag vessel may submit certification by the classification society which classes the vessel that the vessel meets the requirements of this part as an alternative to meeting the requirements in paragraphs (a) and (b) of this section.

(d) Upon satisfactory completion of plan review and inspection of the vapor collection system or receipt of the certification provided for in paragraph (d) of this section, the Officer in Charge, Marine Inspection, shall endorse the Certificate of Inspection for U.S. flag vessels, or the Certificate of Compliance for foreign flag vessels, that the vessel is acceptable for collecting the vapor from crude oil, gasoline blends, and benzene, or any other vapor it is found acceptable to collect.

[CGD 88-102, 55 FR 25446, June 21, 1990, as amended by CGD 95-028, 62 FR 51200, Sept. 30, 1997]

Subpart 39.20—Design and Equipment

§ 39.20-1 Vapor collection system—TB/ALL.

(a) Each vapor collection system must meet the following requirements:

(1) Except as allowed by paragraph (a)(3) of this section or the Commandant (G-MSO), vapor collection piping must be permanently installed, with the vessel's vapor connection located as close as practical to the loading manifold;

(2) If the vessel collects vapors from incompatible cargoes simultaneously, it must keep the incompatible vapors separate throughout the entire vapor collection system;

(3) A vessel certified to carry cargo listed in Table 151.05 of part 151 or Table 1 of part 153 of this chapter may have vapor connections located in the vicinity of each tank in order to preserve segregation of cargo systems, in lieu of common header piping;

(4) A means must be provided to eliminate liquid condensate which may collect in the system, such as draining and collecting liquid from each low point in the line;

(5) Vapor collection piping must be electrically bonded to the hull and must be electrically continuous; and

(6) An inerted tankship must have a means to isolate the inert gas supply from the vapor collection system. The inert gas main isolation valve required by SOLAS 74, as amended, chapter II-2, Regulation 62.10.8 may be used to satisfy this requirement.

(b) The vapor collection system must not interfere with the proper operation of the cargo tank venting system.

(c) An isolation valve capable of manual operation must be provided at the vessel vapor connection. The valve must have an indicator to show clearly whether the valve is in the open or closed position, unless the valve position can be readily determined from the valve handle or valve stem.

(d) The last 1.0 meter (3.3 feet) of vapor piping before the vessel vapor connection must be:

(1) Painted red/yellow/red with:
(i) The red bands 0.1 meter (0.33 feet) wide, and

(ii) The middle yellow band 0.8 meter (2.64 feet) wide; and

(2) Labeled "VAPOR" in black letters at least 50 millimeters (2 inches) high.

(e) Each vessel vapor connection flange must have a permanently attached 0.5 inch diameter stud at least 1.0 inch long projecting outward from the flange face. The stud must be located at the top of the flange, midway between bolt holes, and in line with the bolt hole pattern.

(f) Each hose used for transferring vapors must:

(1) Have a design burst pressure of at least 25 psig;

(2) Have a maximum allowable working pressure of at least 5 psig;

(3) Be capable of withstanding at least 2.0 psi vacuum without collapsing or constricting;

(4) Be electrically continuous with a maximum resistance of ten thousand (10,000) ohms;

(5) Have flanges with:

(i) A bolt hole arrangement complying with the requirements for 150 pound class ANSI B16.5 flanges, and

(ii) One or more 0.625 inch diameter holes in the flange located midway between bolt holes and in line with the bolt hole pattern;

(6) Be abrasion resistant and resistant to kinking; and

(7) Have the last 1.0 meter (3.3 feet) of each end of the vapor hose marked in accordance with paragraph (d) of this section.

(g) Vapor hose handling equipment must be provided with hose saddles which provide adequate support to prevent kinking or collapse of hoses.

[CGD 88-102, 55 FR 25446, June 21, 1990, as amended by CGD 95-072, 60 FR 50462, Sept. 29, 1995; CGD 96-041, 61 FR 50727, Sept. 27, 1996]

§ 39.20-3 Cargo gauging system—TB/ALL.

(a) Each cargo tank of a tank vessel that is connected to a vapor collection system must be equipped with a cargo gauging device which:

(1) Provides a closed gauging arrangement as defined in §151.15.10 of this chapter that does not require opening the tank to the atmosphere during cargo transfer;

(2) Allows the operator to determine the liquid level in the tank for the full range of liquid levels in the tank;

(3) Indicates the liquid level in the tank at the location where cargo transfer is controlled; and

(4) If portable, is installed on the tank during the entire transfer operation.

(b) Except when a tank barge complies with §39.20-9(a) of this part, each cargo tank of a barge must have a high level indicating device that:

(1) Provides a visual indication of the liquid level in the cargo tank when the cargo level is within 1.0 meter (3.28 feet) of the tank top;

(2) Has the maximum liquid level permitted under §39.30-1(e) of this part at even keel conditions conspicuously and permanently marked on the indicating device; and

(3) Is visible from all cargo control areas on the tank barge.

§ 39.20-7 Tankship liquid overfill protection—T/ALL.

(a) Each cargo tank of a tankship must be equipped with an intrinsically safe high level alarm and a tank overfill alarm.

(b) The high level alarm and tank overfill alarm required by paragraph

(a) of this section, if installed after July 23, 1990 must:

(1) Be independent of each other;

(2) Alarm in the event of loss of power to the alarm system or failure of electrical circuitry to the tank level sensor; and

(3) Be able to be checked at the tank for proper operation prior to each transfer or contain an electronic self-testing feature which monitors the condition of the alarm circuitry and sensor.

(c) The high level alarm required by paragraph (a) of this section must:

(1) Alarm before the tank overfill alarm, but no lower than 95 percent of tank capacity;

(2) Be identified with the legend "High Level Alarm" in black letters at least 50 millimeters (2 inches) high on a white background; and

(3) Have audible and visible alarm indications that can be seen and heard on the vessel where cargo transfer is controlled.

(d) The tank overfill alarm required by paragraph (a) of this section must:

(1) Be independent of the cargo gauging system;

(2) Have audible and visible alarm indications that can be seen and heard on the vessel where cargo transfer is controlled and in the cargo deck area;

(3) Be identified with the legend "TANK OVERFILL ALARM" in black letters at least 50 millimeters (2 inches) high on a white background; and

(4) Alarm early enough to allow the person in charge of transfer operations to stop the transfer operation before the cargo tank overflows.

(e) If a spill valve is installed on a cargo tank fitted with a vapor collection system, it must meet the requirements of §39.20-9(c) of this part.

(f) If a rupture disk is installed on a cargo tank fitted with a vapor collection system, it must meet the requirements of §39.20-9(d) of this part.

§ 39.20-9 Tank barge liquid overfill protection—B/ALL.

Each cargo tank of a tank barge must have one of the following liquid overfill protection arrangements.

(a) A system meeting the requirements of §39.20-7 of this part which:

§ 39.20-11

(1) Includes a self-contained power supply;

(2) Is powered by generators installed on the barge; or

(3) Receives power from a facility and is fitted with a shore tie cable and a 120 volt 20 amp explosion-proof plug which meets:

(i) ANSI/NEMA WD6;

(ii) NFPA 70, Articles 410-57 and 501-12; and

(iii) § 111.105-9 of this chapter.

(b) An intrinsically safe overfill control system which:

(1) Is independent of the cargo gauging device required by § 39.20-3(a) of this part;

(2) Actuates an alarm and automatic shutdown system at the facility overfill control panel, or on the vessel to be lightered if a lightering operation, 60 seconds before the tank becomes 100 percent liquid full;

(3) Is able to be checked at the tank for proper operation prior to each loading;

(4) Consists of components which, individually or in series, will not generate or store a total of more than 1.2 V, 0.1 A, 25 mW, or 20 microjoules;

(5) Has at least one tank overfill sensor switch with normally closed contacts per cargo tank;

(6) Has all tank overfill sensor switches connected in series;

(7) Has interconnecting cabling that meets § 111.105-15(b) of this chapter; and

(8) Has a male plug with a 5 wire, 16 amp connector body meeting IEC 309-1/309-2 which is:

(i) Configured with pins S2 and R1 for the tank overfill sensor circuit, pin G connected to the cabling shield, and pins N and T3 reserved for an optional high level alarm circuit meeting the requirements of this paragraph; and

(ii) Labeled "Connector for Barge Overflow Control System" and with the total inductance and capacitance of the connected switches and cabling.

(c) A spill valve which:

(1) Meets ASTM F 1271 (incorporated by reference, see § 39.10-5);

(2) Relieves at a pressure higher than the pressure at which the pressure relief valves meeting the requirements of § 39.20-11 operate;

(3) Limits the maximum pressure at the cargo tank top during liquid over-

46 CFR Ch. I (10-1-00 Edition)

fill, at the maximum loading rate for the tank, to not more than the maximum design working pressure for the tank; and

(4) If the vessel is in ocean or coast-wise service, has provisions to prevent opening due to cargo sloshing.

(d) A rupture disk arrangement which meets paragraphs (c)(2), (c)(3) and (c)(4) of this section and is approved by the Commandant (G-MSO).

[CGD 88-102, 55 FR 25446, June 21, 1990, as amended by CGD 95-072, 60 FR 50462, Sept. 29, 1995; CGD 96-041, 61 FR 50727, Sept. 27, 1996; USCG-2000-7790, 65 FR 58459, Sept. 29, 2000]

§ 39.20-11 Vapor overpressure and vacuum protection—TB/ALL.

(a) The cargo tank venting system required by § 32.55 of this chapter must:

(1) Be capable of discharging cargo vapor at 1.25 times the maximum transfer rate such that the pressure in the vapor space of each tank connected to the vapor collection system does not exceed:

(i) The maximum design working pressure for the tank, or

(ii) If a spill valve or rupture disk is fitted, the pressure at which the device operates;

(2) Not relieve at a pressure corresponding to a pressure in the cargo tank vapor space of less than 1.0 psig;

(3) Prevent a vacuum in the cargo tank vapor space, whether generated by withdrawal of cargo or vapor at maximum rates, that exceeds the maximum design vacuum for any tank connected to the vapor collection system; and

(4) Not relieve at a vacuum corresponding to a vacuum in the cargo tank vapor space of less than 0.5 psi below atmospheric pressure.

(b) Each pressure-vacuum relief valve must:

(1) Be tested for venting capacity in accordance with paragraph 1.5.1.3 of API 2000; and

(2) Have a means to check that the device operates freely and does not remain in the open position, if installed after July 23, 1991.

(c) The relieving capacity test required by paragraph (b)(1) of this section must be carried out with a flame screen fitted at the vacuum relief opening and at the discharge opening if the

pressure-vacuum relief valve is not designed to ensure a minimum vapor discharge velocity of 30 meters (98.4 ft.) per second.

§ 39.20-13 High and low vapor pressure protection for tankships—T/ALL.

Each tankship vapor collection system must be fitted with a pressure sensing device that senses the pressure in the main vapor collection line, which:

(a) Has a pressure indicator located on the vessel where the cargo transfer is controlled; and

(b) Has a high pressure and a low pressure alarm that:

(1) Is audible and visible on the vessel where cargo transfer is controlled;

(2) Alarms at a high pressure of not more than 90 percent of the lowest pressure relief valve setting in the cargo tank venting system; and

(3) Alarms at a low pressure of not less than four inches water gauge (0.144 psig) for an inerted tankship, or the lowest vacuum relief valve setting in the cargo tank venting system for a non-inerted tankship.

Subpart 39.30—Operations

§ 39.30-1 Operational requirements—TB/ALL.

(a) Vapor from a tank vessel may not be transferred to:

(1) A facility in the United States which does not have its letter of adequacy endorsed as meeting the requirements of 33 CFR part 154, subpart E; or

(2) In the case of a lightering or topping off operation, a vessel which does not have its certificate of inspection or certificate of compliance endorsed as meeting the requirements of this part.

(b) The pressure drop through the vapor collection system from the most remote cargo tank to the vessel vapor connection must be:

(1) Determined for each cargo handled by the vapor collection system at the maximum transfer rate and at lesser transfer rates;

(2) Based on a 50 percent cargo vapor and air mixture, and a vapor growth rate appropriate for the cargo being loaded; and

(3) Included in the vessel's oil transfer procedures as a table or graph showing the liquid transfer rate versus the pressure drop.

(c) If a vessel carries vapor hoses, the pressure drop through the hoses must be included in the pressure drop calculations required by paragraph (b) of this section.

(d) The rate of cargo transfer must not exceed the maximum allowable transfer rate as determined by the lesser of the following:

(1) Eighty (80) percent of the total venting capacity of the pressure relief valves in the cargo tank venting system when relieving at the set pressure required by § 39.20-11(a) of this part;

(2) The total vacuum relieving capacity of the vacuum relief valves in the cargo tank venting system when relieving at the set pressure required by § 39.20-11(a) of this part;

(3) The rate based on pressure drop calculations at which, for a given pressure at the facility vapor connection, or if lightering at the vapor connection of the vessel receiving cargo, the pressure in any cargo tank connected to the vapor collection system exceeds 80 percent of the setting of any pressure relief valve in the cargo tank venting system.

(e) A cargo tank must not be filled higher than:

(1) 98.5 percent of the cargo tank volume; or

(2) The level at which an overflow alarm complying with § 39.20-7 or § 39.20-9(b)(2) of this part is set.

(f) A cargo tank must not be opened to the atmosphere during cargo transfer operations except as provided in paragraph (g) of this section.

(g) A cargo tank may be opened to the atmosphere for gauging or sampling while a tank vessel is connected to a vapor control system if the following conditions are met:

(1) The cargo tank is not being filled;

(2) Except when the tank is inerted, any pressure in the cargo tank vapor space is first reduced to atmospheric pressure by the vapor control system;

(3) The cargo is not required to be closed or restricted gauged by Table 151.05 of part 151 or Table 1 in part 153 of this chapter; and

§ 39.40-1

46 CFR Ch. I (10-1-00 Edition)

(4) For static accumulating cargo, all metallic equipment used in sampling or gauging is electrically bonded to the vessel before it is put into the tank, remains bonded to the vessel until it is removed from the tank, and if the tank is not inerted, a period of 30 minutes has elapsed since loading of the tank was completed.

(h) For static accumulating cargo the initial transfer rate must be controlled in accordance with Section 7.4 of the OCIMF, International Safety Guide for Oil Tankers and Terminals, in order to minimize the development of a static electrical charge.

(i) If cargo vapor is collected by a facility that requires the vapor from the vessel to be inerted in accordance with 33 CFR 154.820(a) or (b), the oxygen content in the vapor space of each cargo tank connected to the vapor collection system must not exceed 8 percent by volume at the start of cargo transfer. The oxygen content of each tank must be measured at a point one meter (3.28 feet) below the tanktop and at a point equal to one-half of the ullage. Where tanks have partial bulkheads, the oxygen content of each area of that tank formed by each partial bulkhead must be measured at a point one meter (3.28 feet) below the tanktop and at a point equal to one-half of the ullage.

(j) If the vessel is equipped with an inert gas system, the isolation valve required by §39.20-1(a)(6) of this part must remain closed during vapor transfer.

(k) Unless equipped with an automatic self-test and circuit monitoring feature, each high level alarm and tank overfill alarm required by §39.20-7 or §39.20-9 of this part, on a cargo tank being loaded, must be tested at the tank for proper operation within 24 hours prior to the start of cargo transfer.

[CGD 88-102, 55 FR 25446, June 21, 1990; 55 FR 39270, Sept. 26, 1990]

Subpart 39.40—Lightering and Topping-Off Operations with Vapor Balancing

§39.40-1 General requirements for vapor balancing—TB/ALL.

(a) Except as provided in paragraph (b) of this section, each vessel which uses vapor balancing while conducting a lightering or topping-off operation must meet the requirements of this subpart in addition to the requirements of subparts 39.10, 39.20, and 39.30 of this part.

(b) An arrangement to control vapor emissions during a lightering or topping-off operation which does not use vapor balancing must receive approval from the Commandant (G-MSO).

(c) A vapor balancing operation must not use a compressor or blower to assist vapor transfer without approval from the Commandant (G-MSO).

(d) Vapor balancing is prohibited when the cargo tanks on a vessel discharging cargo are inerted and the cargo tanks on a vessel receiving cargo are not inerted.

(e) A vessel which intends to engage in a lightering or topping-off operation while collecting cargo vapor from other than crude oil, gasoline, or benzene must receive specific approval from the Commandant (G-MSO).

[CGD 88-102, 55 FR 25446, June 21, 1990; 55 FR 39270, Sept. 26, 1990, as amended by CGD 95-072, 60 FR 50462, Sept. 29, 1995; CGD 96-041, 61 FR 50727, Sept. 27, 1996]

§39.40-3 Design and equipment for vapor balancing—TB/ALL.

(a) If the cargo tanks on a vessel discharging cargo and a vessel receiving cargo are inerted, the service vessel must:

(1) Have a means to inert the vapor transfer hose prior to transferring cargo vapor; and

(2) Have an oxygen analyzer with a sensor or sampling connection fitted within 3 meters (9.74 ft.) of the vessel vapor connection which:

(i) Activates an audible and visible alarm at a location on the service vessel where cargo transfer is controlled when the oxygen content in the vapor collection system exceeds 8 percent by volume;

(ii) Has an oxygen concentration indicator located on the service vessel where the cargo transfer is controlled; and

(iii) Has a connection for injecting a span gas of known concentration for calibration and testing of the oxygen analyzer.

(b) If the cargo tanks on a vessel discharging cargo are not inerted, the vapor collection line on the service vessel must be fitted with a detonation arrester that meets the requirements of 33 CFR 154.822(a) located within 3 meters (9.74 ft.) of the vessel vapor connection.

(c) An electrical insulating flange or one length of non-conductive hose must be provided between the vessel vapor connection on the service vessel and the vapor connection on the vessel being lightered or topped-off.

§ 39.40-5 Operational requirements for vapor balancing—TB/ALL.

(a) During a lightering or topping-off operation each cargo tank being loaded must be connected by the vapor collection system to a cargo tank which is being discharged.

(b) If the cargo tanks on both the vessel discharging cargo and the vessel receiving cargo are inerted, the following requirements must be met:

(1) Each tank on a vessel receiving cargo which is connected to the vapor collection system must be tested prior to cargo transfer to ensure that the oxygen content in the vapor space does not exceed 8 percent by volume. The oxygen content of each tank must be measured at a point one meter (3.28 feet) below the tanktop and at a point equal to one-half of the ullage. Where tanks have partial bulkheads, the oxygen content of each area of that tank formed by each partial bulkhead must

be measured at a point one meter (3.28 feet) below the tanktop and at a point equal to one-half of the ullage;

(2) The oxygen analyzer required by § 39.40-3(a) must be tested for proper operation prior to the start of each transfer operation;

(3) The oxygen content of vapors being transferred must be continuously monitored during the transfer operation;

(4) Cargo transfer must be terminated if the oxygen content exceeds 8 percent by volume and must not be restarted until the oxygen content in the tanks of the vessel receiving cargo is reduced to 8 percent by volume or less; and

(5) The vapor transfer hose must be purged of air and inerted prior to starting vapor transfer.

(c) The isolation valve, required by § 39.20-1(c) of this part, located on the service vessel must not be opened until the pressure in the vapor collection system on the vessel receiving cargo exceeds the pressure in the vapor collection system on the vessel discharging cargo.

(d) The cargo transfer rate must be controlled from the vessel discharging cargo, and must not exceed the maximum allowable transfer rate for the vessel receiving cargo.

(e) The pressure in the vapor space of any cargo tank connected to the vapor collection line on either the vessel receiving cargo or the vessel discharging cargo must not exceed 80 percent of the lowest setting of any pressure relief valve during ballasting or cargo transfer.

(f) All impressed current cathodic protection systems must be deenergized during cargo transfer operations.

(g) Tank washing is prohibited unless the cargo tanks on both the vessel discharging cargo and the vessel receiving cargo are inerted or the tank is isolated from the vapor collection line.

[CGD 88-102, 55 FR 25446, June 21, 1990; 55 FR 39270, Sept. 26, 1990]

INDEX

SUBCHAPTER D—TANK VESSELS

EDITORIAL NOTE: This listing is provided for informational purposes only. It is compiled and kept current by the U.S. Coast Guard, Department of Transportation.

Part, subpart, or section

A

Accident or casualty report	Subpart 35.15
Accommodations for crew	Subpart 32.40
Application	32.40-1
Construction	32.40-15
Heating and cooling	32.40-50
Hospital space	32.40-35
Insect screens	32.40-55
Location of Crew spaces	32.40-10
Messrooms	32.40-30
On tankships constructed before June 15, 1987	32.40-65
On tankships of less than 100 gross tons and manned tank barges	32.40-60
Other spaces	32.40-40
Sleeping Accommodations	32.40-20
Washrooms and toilet rooms	32.40-25
Aids to Navigation:	
Charts or information regarding	35.20-1
Coast pilots	35.20-1
Current tables	35.20-1
Light lists	35.20-1
Nautical publications	35.20-1
Notice to Mariners	35.20-1
Sailing directions	35.20-1
Tide tables	35.20-1
Air compressor	32.35-15, 35.35-85
Alarm bells	32.25
Marking required	35.40-5
Switches, markings of	35.40-1
Alarm systems	Subpart 32.25
Alcohol or drugs, used by crew	35.05-25
Alterations and repairs, regulations governing	30.01-10, 31.10-25
American Bureau of Shipping	31.10-1
Annual inspection:	
Application for:	31.01-15
Fire extinguishers	31.10-18
Anode installations, sacrificial	35.01-25
Appeal right of	30.20-50
Application for inspection	31.01-15, 31.1-20
Application, electrical installations Subpart	32.45
Application of regulations:	
Governing alterations and repairs	30.01-10
Vessels on an international voyage	30.01-6
Approved, definition	30.10-3

46 CFR Ch. I (10–1–00 Edition)

Arresters, flame.....	30.10-23, 32.20-10
Assignment of functions.....	31.01-10
Auto pilot	35.20-45
Auxiliary machinery:	
Construction	32.35-1
Design	32.35-1
Installation of internal combustion engine	32.35-5
Axes, fire	34.05-20, 34.60

B

Ballasting.....	31.10-32
Bell, alarm Subpart	32.25
Bell signals.....	32.30-5
Bilge injection valves	31.10-20
Bilge systems Subpart	32.52
Bills of lading required	35.01-10
Boilerroom, fire extinguishing systems for	34.05-5
Boilers:	
Accident report by chief engineer	35.25-5
Examination by engineer	35.25-1
Safety rules for fires	35.30-5
Breeches buoy, poster containing instruction regarding use of.....	Subpart 35.12
Breathing apparatus, fresh air	35.30-20, 35.40-20
Butterworth plates, safety rules regarding	35.30-10

C

Carbon dioxide extinguishing systems:	
Alarms.....	34.15-30
Amount of carbon dioxide required.....	34.15-5
Application	34.15-1
Controls.....	34.15-10
Discharge outlets.....	34.15-25
Dry cargo spaces	34.15-5
Enclosed ventilation systems for rotating electrical propulsion equip- ment.....	34.15-5
Enclosure openings.....	34.15-35
Installation contracted for prior to January 1, 1962	34.15-90
Machinery spaces pumprooms paint lockers and similar spaces	34.15-5
Piping	34.15-15
Pressure relief	34.15-40
Quantity, pipe sizes, and discharge rates	34.15-5
Storage	34.15-20
Total available supply	34.15-5
Cargo definition	30.10-5
Cargo discharge	32.5-3
Cargoes elevated temperatures.....	Part 36
Cargoes regulated.....	Subpart 30.25
Cargo gear certificates or registers	31.10-16, Subpart 31.37
Cargo gear inspection	31.10-16, 31.37
Cargo handling:	
Equipment maintenance.....	35.35-70
General	35.35
Liquefied petroleum gases	Subpart 38.15
Loading information.....	35.35
Safety requirements	35.30
Unmanned tank barges	35.35-1
Cargo handling room, definitions.....	30.10-6

Subchapter D Index

Cargo hose	35.35-15, 35.35-70, 38.15-5
Cargo piping.....	40.15-1, 38.10-10
Cargo pumps.....	Subpart 32.50
Cargo pump relief valves.....	36.10-1
Cargo pump, testing of	35.35-70
Cargo tank hatches, ullage holes and Butterworth plates, safety rules re- garding	35.30-10
Cargo tanks:	
Construction and testing of	32.60-40, 32.65-40, 32.70-25, 32.75-10
Design and installation of.....	38.05
Electric bonding and grounding of	32.75-15
Filling densities	38.15-1
Fire extinguishing systems for	34.05-5
Hydrostatic test of.....	38.25-1
Installation for carrying liquids at elevated temperatures	36.05-1
Independent.....	32.60-30, 32.65-30, 32.70-25, 32.75-10
Lagging.....	38.05-20
Liquefied petroleum gases	Part 38
Liquid level gauging devices	38.10-20, 32.20-20
Marking of	38.05-5
Periodic test.....	38.25-1
Piping	38.10-10
Refrigeration system used with.....	38.05-25
Removal from service	38.25-5
Venting of.....	Subpart 32.55, 38.20-1, 38.20-5
Cargo transfer:	
Approval of	35.35-25
Conditions affecting	35.35-40
Connecting of cargo hose.....	35.35-15
Declaration of inspection	35.35-30
Duties of senior deck officer.....	35.35-35
Electric bonding.....	35.35-5
Filling densities	38.15-1
Handling of packaged goods, etc.....	35.35-55
Inspection prior to.....	35.35-20
Liquefied flammable gases	38.15-5
Maintenance of equipment	35.35-70
Men on duty	35.35-1
Tank barges.....	35.35-60
Termination of	35.35-50
Towing vessels furnishing steam, air or electricity	35.35-45
Vapor control systems.....	Part 39
Vessels coming alongside during	35.35-42
Carriage of person other than crew	35.01-15
Casualty or accident report	Subpart 35.15
Certificate of class	31.10-5
Certificate of inspection:	
Application for	31.01-15, 31.01-20
Cargoes of elevated temperatures, carriage of.....	36.01-5
Delivery of	31.05-1
Endorsed for liquefied flammable gas	38.01-5
Indication of water traveled on.....	31.20-1
Ocean or unlimited coastwise vessels on inland and Great Lakes Routes-TB/OC.....	30.01-7
Posting of.....	31.05-5
Terms, endorsements.....	31.05-15
Certificates regarding shipboard cargo gear.....	31.10-16, 31.37

46 CFR Ch. I (10–1–00 Edition)

Certificates under International Convention for Safety of Life at Sea.....	31.10-16, 31.37
1960 American Bureau of Shipping.....	31.40-45
Application	31.40-1
Cargo Ship Safety Construction Certificate.....	31.40-5
Cargo Ship Safety Equipment Certificate.....	31.40-10
Cargo Ship Safety Radiotelegraphy Certificate.....	31.40-15
Cargo Ship Safety Radiotelephony Certificate.....	31.40-20
Duration of Convention Certificate.....	31.40-40
Exemption Certificate	31.40-25
Posting of Convention Certificates.....	31.40-35
Certified crewmembers	31.15-1
Certified definition	30.10-7
Charts of navigable waters required	35.20-1
Chief Engineer:	
Repairs of boilers and unfired pressure vessels and reports or accidents.....	35.25-5
Class, certificate of	31.10-5
Classification requirements, definition	30.10-9
CO ₂ fire apparatus, marking required.....	35.40-10
Coast Guard District Commander	30.10-19
Coast pilots	35.20-1
Coastwise, definition	30.10-11
Cofferdam:	
Definition of	30.10-13
Location of.....	32.60-10, 32.65-15, 32.70-10
Requirements of	32.70-10
Venting of.....	32.55-45
Combustible gas indicator.....	35.30-15
Combustible liquids, definition	30.10-15
Commandant, definition.....	30.10-17
Commodities regulated.....	Subpart 30.25
Communication, interior system	Subpart 32.30
Construction and testing of cargo tanks and bulkheads on tank vessels	32.65-40, 32.60-40, 32.75-10
Construction of tank barges of materials other than steel or iron, requirements.....	32.80-1
Construction of tank vessels:	
Cargo spaces segregated from cargo tanks	32.57-10, 32.60
Ceilings	32.57-1
Deck	32.57-10
Enclosed spaces	32.60-10
General cargo spaces	32.60-15
Hatch covers.....	32.57-10
Hull requirements.....	32.60, 32.65, 32.70, 32.75
Lamp Lockers.....	32.57-10
Living quarters.....	32.60-25, 32.65-25
Location of cargo tank spaces.....	32.60-10
Location of independent	tanks32.60-30
Machinery	32.35-1
Paint lockers	32.57-10
Requirements for scantlings, material and workmanship	32.60-1, 32.65-1, 32.70-5, 32.75-5
Segregation of cargo.....	32.60-10
Stowage spaces	32.60-10
Subdivision of cargo space	32.60-5, 32.65-10
Testing of cargo tanks and bulkheads	32.60-40, 32.65-40, 32.70-25, 32.75-10

Subchapter D Index

Construction of vessels for liquefied gases.....	38.05-1
Construction of wood hull tank vessels:	
Application of regulations	32.75-1
Electric bonding and grounding of cargo tanks.....	32.75-15
Hold spaces	32.75-20
Independent cargo tanks	32.75-10
Convention certificates.....	Subpart 31.40
Conversion of vessels to tank vessels	31.10-10
Crew:	
Certified members of.....	31.15-1
Illness of	35.05-25
Licensed officers	31.15-1
Physical condition of.....	35.05-20
Required for cargo handling.....	35.35-1
Crew accommodations:	
Inspection of.....	31.10-45
Requirements for	Subpart 32.40
Sanitary condition of.....	35.01-5
Current tables	35.20-1

D

Deck foam system	Subpart 34.20
Declaration of inspection prior to bulk cargo transfer	35.35-30
Definition of terms	Subpart 30.10
Delivery of certificate of inspection	31.05-1
Design:	
Cargo tanks.....	38.05-2
Main and auxiliary machinery.....	32.35-1
Vapor control system.....	Subpart 39.20
Devices, spark producing.....	35.30-35
Display of Plans	35.10-3
Draft marks.....	32.05-1, 35.20-5
Drills:	
Boat.....	35.10-5
Fire	35.10-5
Line throwing appliance	35.10-1
Drydock or hauling out	31.10-20

E

Effective date of regulation.....	30.01-15
Electric bonding and grounding.....	32.75-15, 35.35-5
Electrical installations.....	31.35, 32.45
Elevated temperature cargoes:	
Cargo pump relief valves.....	36.10-1
Certificate of inspection	36.01-5
Flame Screens, vents and ventilations	36.20-1
Installation of cargo tanks	36.05-1
Lagged tanks, periodic inspections.....	36.30-1
Protection of personnel	36.05-10
Ventilation of pumproom.....	36.20-5
Emergency:	
Authority of senior officer	35.35-75
Breathing equipment, marking	35.40-20
Lighting and power systems.....	35.10-15
Outfit.....	35.30-20
Repairs to firefighting equipment	35.01-35
Signals	35.10-5

46 CFR Ch. I (10–1–00 Edition)

Training	35.10-1
Enclosed ventilating system, fire extinguishing system	34.05-5
Enforcement.....	30.20-1
Engineering, electrical	31.35, 32.45
Engineering, marine Subpart	31.30
Equipment:	
Cargo handling.....	Subpart 32.50
Emergency.....	35.30-20
Fire and emergency, marking.....	Subpart 35.40, 35.40-40
Installed but not required	34.01-5
Portable electrical.....	35.30-30
Previously approved	30.01-15
Equipment installations	Subpart 32.20
Equipment installations on vessels during World War II	32.20-1
Equipment, navigation	Subpart 32.15
Equivalents	30.15-1
Escape, means of	32.02-1
Examination of tail shaft	61.15-15
Examination of sea chests, sea valves, sea strainers, and bilge injection valves.....	31.10-20
Exemption certificate.....	31.40-25
Explosives, transportation of	35.30-25

F

Fire axes.....	34.05-20, 34.60
Location of	34.60-10
Number required	34.60-5
Fire drills	35.10-5
Fire extinguishers, portable and semiportable:	
Application	34.50-1
Classification	34.50-5
Location	34.50-10
Spare charges	34.50-15
Vessels contracted for prior to January 1, 1962	34.50-90
Fire extinguishing deck foam system:	
Application	34.20-1
Area protected	34.20-5
Cargo area definitions.....	34.20-3
Controls.....	34.20-10
Discharge outlets.....	34.20-20
Installations contracted for prior to January 1, 1970.....	34.20-90
Marking.....	35.40-10
Piping	34.20-15
Quantity of foam required	34.20-5
Rate of application.....	34.20-5
Separate supply of foam-producing material.....	34.20-5
Supply of foam producing material.....	34.20-5
Water supply	34.20-5
Fire extinguishing fixed foam systems:	
Additional protection required.....	34.17-25
Application	34.17-1
Area protected	34.17-5
Controls.....	34.17-10
Discharge outlets.....	34.17-20
Installations contracted for prior to January 1, 1962.....	34.17-90
Piping	34.17-15
Rate of Application.....	34.17-5

Subchapter D Index

Separate supply of foam-producing material	34.17-5
Supply of foam producing material	34.17-5
Water supply for required pumps	34.17-5
Fire extinguishing systems:	
Boilerrooms	34.05-5
Carbon dioxide	34.15
Cargo tanks	34.05-5
Dry cargo compartments	34.05-5
Enclosed ventilating systems	34.05-5
Foam, deck	Subpart 34.20
Foam, fixed	Subpart 34.17
Installations contracted for prior to January 1, 1962	34.10-90
Lamp, paint lockers and similar pages	34.05-5
Machinery spaces	34.05-5
Marking	35.40-10
Piping	34.10-15
Pumprooms	34.05-5
Fire extinguishing system, steam smothering:	
Application	34.13-1
Installations contracted for prior to January 1, 1962	34.17-90
Firefighting equipment:	
Application	34.01-1
Fire axes	34.05-20, 34.60
Fire main system	34.05-1
Hose	34.10-10
Nozzles	35.40-10
Hydrants	35.40-15
Installed but not required	34.01-5
Portable, vessel's name on	35.40-40
Protection for unusual arrangements or special products	34.01-10
Testing and inspection	31.10-18, 31.10-19
Fire main system:	
Application	34.10-1
Fire pumps	34.10-5
Fire station hydrants hose and nozzles	34.10-10
Fire, matches and smoking safety rules	35.30-5
Fire protection, structural, for tank vessels contracted for on or after	
January 1, 1963	Subpart 32.57
Fire protection, structural for ships with a keel laying date on or after	
January 1, 1975	Subpart 32.56
Fire station	34.10-10
Fitting and piping for liquefied petroleum gases	38.10-10
Fittings, cargo	Subpart 32.50
Flame arresters	30.10-23, 32.20-10
Flame screen	30.10-25, 36.20-1
Flammable liquid, definition	30.10-22
Flammable liquid and gas fuels as ships' stores	35.30-40
Flammable or inflammable, definition	30.10-21
Flashpoint, definition	30.10-27
Foam hose/monitor stations	35.40-17
Fresh air breathing apparatus	35.30-20, 35.40-20
Fuel oil, requirements	35.25-10
Fuels, flammable liquid and gas	35.30-40
Functions, assignment of	30.01-3

G

Galley fires, safety rules	35.30-5
----------------------------------	---------

46 CFR Ch. I (10–1–00 Edition)

Gangway signs	35.30-1
Gas chemist certified by American Bureau of Shipping	35.01-1
Gas free, definition	30.10-29
Gauge, liquid level	32.20-20, 38.10-20, 39.20-3
Gear, shipboard cargo, certificates or registers	31.10-16, 31.37
General alarm switch, marking of	35.40-1
General alarm systems:	
Alarm bells for tankships constructed on or after September 15, 1943.....	32-25-1
Alarm bells for tankships constructed prior to September 15, 1943	32.25
Alarm bells for manned barges	32.25
General rules and regulations	30.10-31
Grade D, combustible liquid	30.10-15
Grade E, combustible liquid	30.10-15
Great Lakes	30.10-33

H

Hauling out or drydocking	31.10-20
Headquarters	30.10-35
Hose, cargo	32.50-30
Hospital accommodations	32.40-1
Hull and cargo tank requirements:	
Alternative arrangements.....	32.63-8
Application	32.63-1
Barge hull classifications.....	32.63-5
Cargo tanks and supports	32.63-25
Hull structure.....	32.63-20
Rakes and coamings	32.63-10
Hull requirements.....	32.60, 32.63, 32.65, 32.70, 32.75, 32.80
Hydrostatic test for cargo tanks.....	38.25-1

I

Independent cargo tanks.....	32.60-30, 32.60-35, 32.65-30, 32.70-25 32.75-10
Inert gas system.....	Subpart 32.53
Inspection:	
Alternations and repairs.....	31.10-25
Bilges.....	31.10-50
Certificate of.....	Subpart 31.05
Conversion of a vessel to a tank vessel, application for	31.01-20
Crew accommodations	31.10-45
During trial trip	31.10-40
General requirements	Subpart 31.01
Initial, scope of	31.01-5
Lagged tanks.....	36.30-1
New tank vessel	31.01-20, 31.10-5
Plans and specifications.....	31.10-5
Recognized classification society	31.10-1
Required.....	31.01-1
Required before making repairs.....	35.01-1
Required, liquefied, petroleum gas tanks	38.25-1
Required on new tank vessels	31.01-1
Safety valves	38.25-10
Two years	31.10-15, 31.10-17
Inspection and certification of cargo gear.....	31.10-16
Inspection and test, periodic, of independent cargo tanks	38.25
Inspection of cargo gear:	
Additions to gear.....	31.37-60

Subchapter D Index

Advance notice that cargo gear testing is desired.....	31.37-80
Alterations, renewals, or repairs of cargo gear	31.37-65
Annealing	31.37-55
Cargo gear plans	31.37-15
Certification.....	31.10-16
Definitions of terms.....	31.37-3
Dismantling or disassembling.....	31.37-3
Factors of safety.....	31.37-25
Loose gear certificates and tests.....	31.37-30
Marking of booms and cranes.....	31.37-45
Proof test of cargo gear as a unit	31.37-40
Records	31.37-75
Responsibility for conducting required tests and examinations	31.37-85
Responsibility of ship's officer for inspection of cargo gear.....	31.37-70
Safe working load	31.37-3
Tests and examinations of shipboard cargo gear	31.37-5
Thorough examination.....	31.37-3
Ton.....	31.37-3
When made.....	31.37-1
Installation of cargo tanks.....	38.05-10
Installation of internal combustion engines.....	32.35-5
Installations made during the Unlimited National Emergency.....	32.20-1
Internal combustion installations, fire extinguishing systems	34.05-5
International voyage.....	30.01-6
Interior communications system:	
Bell signals between engineroom and pilothouse.....	32.30-5
Inspection of.....	32.30
Telegraph systems	32.30
Telephone equipment.....	32.30-1
Voice tubes.....	32.30-1
Issuance of certificates of inspection.....	31.05-1

L

Lagging for independent cargo tanks.....	38.05-20
Lakes, bays and sounds	30.10-41
Lamp and paintrooms:	
Fire extinguishing system for.....	34.05-5
Fireproofing of.....	32.85-1
Licensed officers required	31.15-1
Lifeboat drills	35.10-5
Lifesaving Appliances and Approaches	Subpart 31.36
Actions to be required	35.07-10
Certificate of inspection regulation.....	31.05-1
Drills.....	35.10-1
Inspections required.....	31.01-1
Musters	35.10-5
Lights, flashing the ray of.....	35.20-30
Light List.....	35.20-1
Liquid, flammable	30.10-22
Liquid level gauging devices	32.20-20, 38.10-1, 38.10-20 39.20-3
Liquefied flammable gas.....	30.10-39
Cargo hose.....	38.15-5
Cargo piping	38.10-10
Certificate of inspection	38.01-5
Design and construction of cargo tanks.....	38.05-2
Design and construction of nonpressure vessel type cargo tanks	38.05-4
Design and construction of pressure vessel type cargo tanks.....	38.05-3

46 CFR Ch. I (10–1–00 Edition)

Design and construction of vessels, general.....	38.05-1
Electrical installations	38.15-15
Filling and discharge pipes	38.10-5
Filling of tanks	38.15-1
Installation of cargo tanks.....	38.05-10
Insulation	38.05-20
Leak detection systems.....	38.15-10
Liquid level gauging devices.....	38.10-20
Markings.....	38.05-5
Refrigerated systems.....	38.05-25
Remote shutdowns.....	38.15-20
Removal of defective tanks.....	38.25-5
Safety relief valves.....	38.25-10
Safety relief valves for pressure vessel type tanks.....	38.10-15
Scope of regulations.....	38.01-1
Tests and inspections.....	38.25-1
Transportation of.....	Part 38
Transportation of portable cylinders or portable tanks containing or having previously contained liquefied flammable gases in dry cargo spaces.....	38.01-2
Valves, fittings, and accessories	38.10-1
Vapor control system	Part 39
Ventilation.....	38.20-10
Venting.....	38.20-1, 38.20-5
Living quarters.....	32.60-25, 32.65-25
Load lines.....	Subpart 31.25
Loading information.....	31.10-32
Logbook entries:	
Actions required to be logged	35.07-10
Application	35.07-1
Draft of tank ship	35.20-5
Fire and lifeboat drills.....	35.10-5
Fuel oil requirements	35.25-10
Logbooks and records.....	35.07-5
Steering gear tests	35.20-10

M

Machinery spaces, fire extinguishing systems for	34.05-5
Machinery, main and auxiliary:	
Accident report by chief engineer	35.25-5
Air compressors	32.35-15
Construction	32.35-1
Design	32.35-1
Examination by engineer	32.25-1
Installation of internal combustion engines.....	32.35-5
Steering apparatus	32.35-10
Maneuvering characteristics, display of.....	35.20-40
Manning:	
Tank vessels.....	31.15, 35.35-1
Marine engineering and material specifications.....	Subpart 31.30
Marine inspector, authority of	31.01-10
Markings:	
Booms and cranes	31.37-45
CO ₂ alarm.....	35.40-7
Draft marks	32.05-1
Emergency breathing apparatus.....	35.40-20
Emergency lights	35.40-6

Subchapter D Index

Fire and emergency equipment.....	Subpart 35.40
Firehose stations.....	35.40-15
General alarm bell	35.40-5
General alarm bell switch.....	35.40-1
Lifesaving equipment	35.40-40
Portable fire extinguishers.....	35.40-25
Steam, foam or CO ₂ apparatus.....	35.40-10
Steering station.....	35.40-35
Tanks for liquefied flammable gas, marking of	38.05-5
Vapor control system piping.....	39.20-1
Vessel's name	32.05-10, 32.05-15
Vessel's name on equipment	32.05-5
Master:	
Casualty or accident report	35.15-1
Licensed officer.....	35.05-1
Station bills and muster list	35.10-1, 35.10-5
Master's and officer's responsibility.....	35.20-20
Matches:	
Use of	35.30-5
Materials specification	Subpart 31.30
Material, scantlings and workmanship	32.60-1, 32.65-1
Means of escape.....	32.02-1
Muster list.....	35.10-1, 35.10-5

N

Nautical publications.....	35.20-1
Navigation, use of Auto Pilot.....	35.20-45
Navigation equipment:	
Anchors for seagoing barges	32.15-15
Magnetic compass and gyro compass	32.15-35
Radar	32.15-30
Sounding machines.....	32.15-10
Whistles	32.15-5
New tank vessels, inspection of	31.10-5
New tank vessels, plans for inspection of	31.10-5(a)
Notice to mariners	35.20-1

O

Ocean, definition	30.10-45
Officer in Charge, Marine Inspection.....	30.10-47
Officers required on tank vessels	Subpart 35.05
Open hopper type barges.....	35.01-45
Overfill protection, liquid, tank barge.....	39.20-9
Overfill protection, liquid, tank ship.....	39.20-7
Overpressure and vacuum protection, vapor, tank barge and ship.....	39.20-11
Oxygen breathing apparatus, marking of	35.40-20

P

Paintrooms.....	Subparts 32.85, 34.05-05
Penalties for violations of regulations.....	30.20-10
Period covered by certificate of inspection	31.05-10
Permit definition.....	30.10-49
Permit to proceed to another port for repairs.....	31.10-35
Piping:	
Fire extinguishing systems	34.10-10, 34.10-15, 34.10-90, 34.15-15, 34.17-15, 34.20-15, 34.25-15

46 CFR Ch. I (10–1–00 Edition)

Piping, bilge	32.52-5
Piping, cargo	Subpart 32.50
Cargo tanks	38.10-10
Steering apparatus	32.35-10
Placard of lifesaving signals and breeches buoy instructions	Subpart 35.12
Application	35.12-1
Availability	35.12-5
Plans, Display of	35.10-3
Plans for inspection of new tank vessels	31.10-5(a)
Portable and semiportable extinguishers	34.05-10, 34.50
Portable tanks-interpretive rulings	30.01-20
Portable electrical equipment	35.30-30
Posting of certificate of inspection	31.05-5
Pressure-vacuum relief valve	30.10-55, 32.20-5
Prevention of oil pollution	35.01-40
Proof test of cargo gear as a unit	31.37-40
Protection for personnel	36.05-10
Pumprooms:	
Electrical installations	32.60-20
Fire extinguishing systems for	34.05-5
Lighting	32.60-20
Location of	32.60-20, 32.65-20
Requirements for	32.70-15, 32.70-20
Ventilation	32.60-20, 36.20-5
Pumps, bilge	32.60-20, 36.20-5
Pumps, cargo	32.52-1

Q

Quarters, living	32.60-25, 32.65-25
------------------------	--------------------

R

Radar	32.15-30
Radio room warning signs	35.30-1
Recognized classification society, definition	30.10-57
Refrigerated systems	38.05-25
Registers regarding shipboard cargo gear	31.10-16, Subpart 31-37
Regulations:	
Application of	30.01-5
Authority vested in Commandant	30.01-1
Effective date	30.01-15
Explanation of vessel description	30.01-5
Governing alterations and repairs	30.01-10
Liquefied flammable gas	Part 38
Scope of	36.01-1
Vapor control system	Part 39
Reid vapor pressure, definition	30.10-59
Reinspection	31.10-17
Relief valves:	
Cargo pump	36.10-1
Cargo pump, testing of	35.35-70
Cargo tanks	38.10-15
Repairs:	
Application of regulations	30.01-10
Firefighting equipment	35.01-35
Inspection before making	35.01-1
Involving hot work	35.01-1
Permit to proceed to another port	31.10-35

Subchapter D Index

Reports of engineers.....	35.25-5
Right of appeal	30.20-50
Rivers, definition.....	30.10-61
Rudder:	
Indicators	35.40-35

S

Safety requirements:	
Means of escape.....	32.02-1
Safety relief valves for cargo tanks.....	38.10-15
Safety rules.....	Subpart 35.30
Safety valve seal, breaking of	35.25-20
Sailing directions.....	35.20-1
Sanitary inspection by master and chief engineer.....	35.01-5
Scantlings, material and workmanship.....	32.60-1, 32.65-5
Scuppers, closing of.....	35.35-10
Sea chests, examination of.....	31.10-20
Sea strainers, examination of.....	31.10-20
Sea valves, closing of.....	35.35-10
Segregation of spaces containing the emergency source of electric power	32.60-45
Shipboard cargo gear, certificates or registers.....	31.10-16, Subpart 31.37
Shipping papers required.....	35.01-10
Sleeping quarters.....	Subpart 32.40
Smoking safety rules	35.30-5
Sounding machines.....	32.15-10
Spark arrester	30.10-63
Spark producing devices.....	35.30-35
Spray nozzles.....	34.10-10
Specifications, material.....	Subpart 31.30
Special operating requirements.....	Subpart 35.01
Special operating requirements for tank barges carrying certain dangerous bulk cargoes	35.01-50
Stability requirements.....	31.10-30
Station bills required.....	35.10-1
Steam fire extinguishing systems, marking of.....	35.40-10
Steam, carrying of excess.....	35.25-15
Steam smothering system	Subpart 34.13
Steel hull tank vessels	Subparts 32.70, 32.60, 32.63, 32.65
Steering apparatus on tank vessel	32.35-10
Steering gear, instruction for changing	35.40-30
Steering gear test.....	35.20-10
Steering orders, marking	35.40-35
Stowage of package and general cargo	35.35-55
Subdivision of cargo spaces	32.60-5, 32.65-10

T

Tank barge:	
Carrying bulk cargoes having dangerous characteristics in addition to flammability and combustibility	35.01-50
Definition	30.10-65
Watchman for	35.05-15
Tankerman, definition	30.10-71
Tankship:	
Definition	30.10-67
Licensed officers and crew	35.05-1

46 CFR Ch. I (10–1–00 Edition)

Tanks, portable-interpretive rulings.....	30.01-20
Tank vessel:	
Definition	30.10-69
Laid up or dismantled	31.01-1
Telegraph equipment, engine order	Subpart 32.30
Telephone equipment, sound powered.....	Subpart 32.30
Testing of firefighting equipment	31.10-19
Tide tables	35.20-1
Toilet facilities.....	32.40-25
Towing vessels.....	31.15-10, 35.35-45
Trial trip inspection.....	31.10-40

U

Ullage holes, safety rules regarding	35.30-10
--------------------------------------------	----------

V

Valves:	
Back pressure check type.....	38.10-1, 38.10-5
Excess flow	38.10-1, 38.10-5
Liquefied flammable gas	38.10-1, 38.10-5
Pressure vacuum relief.....	30.10.55, 32.20.5
Relief.....	35.35-70, 38.10-1, 38.10-10, 38.10-15
Shutoff	38.10-1
Vapor balancing:	
Design and equipment for	39.40-3
General requirements for	39.40-1
Operational requirements for.....	39.40-5
Vapor collection system	39.20-1
Vapor control systems.....	Part 39
Applicability	39.10-1
Cargo gauging system	39.20-3
Definitions	39.10-3
Design and equipment	Subpart 39.20
General requirements	Subpart 39.10
Lightering and topping-off operations with vapor balancing	Subpart 39.40
Operational requirements	39.30-1
Operations.....	Subpart 39.30
Personnel training.....	39.10-11
Submission of vapor control system designs	39.10-13
Tank barge and ship vapor overpressure and vacuum protection.....	39.20-11
Tank barge liquid overfill protection	39.20-9
Tankship high and low vapor pressure protection.....	39.20-13
Vessel vapor processing units	39.10-9
Ventilation and venting:	
Cargo tanks.....	Subpart 32.55
Cargo tanks, independent	Subpart 38.20
Cofferdams	Subpart 32.55
Flame screen.....	36.20-1
Hold spaces	32.55-15
Pumproom.....	36.20-5
Tank ships with a keel laying date on or after January 1, 1975	32.55-50
Vessels coming alongside	35.35-42
Vessels converted to tank vessels.....	31.10-10
Vessel's name on equipment.....	35.40-40
Vessel's name	32.05-10, 32.05-15
Voice tubes.....	32.30-1

Subchapter D Index

W

Warning signals and signs	35.30-1
Warning signs	35.30-1
Washing facilities	32.40-25
Watchman for tank barge	35.05-15
Water spray extinguishing systems, details	Subpart 34-25
Application	34.25-1
Capacity and arrangement	34.25-5
Controls	34.25-10
Installations contracted for prior to January 1, 1964	34.25-90
Piping	34.25-15
Spray nozzles	34.25-20
Water spray systems, marking of	35.40-18
Waters, travel permitted on	Subpart 31.20
Welding repairs	35.01-1
Whistles	32.15-5
Whistle signals for drills	35.10-5
Whistling, unnecessary	35.20-35
Wire rope	31.37-35, 31.37-50
Work vests:	
Application of	35.03-1
Approved unicellular plastic foam	35.03-5
Shipboard inspection	35.03-20
Shipboard stowage	35.03-15
Use	35.03-10
Workmanship, material, and scantlings	132.60-1, 32.65-5

FINDING AIDS

A list of CFR titles, subtitles, chapters, subchapters and parts and an alphabetical list of agencies publishing in the CFR are included in the CFR Index and Finding Aids volume to the Code of Federal Regulations which is published separately and revised annually.

Material Approved for Incorporation By Reference
Table of CFR Titles and Chapters
Alphabetical List of Agencies Appearing in the CFR
List of CFR Sections Affected

Material Approved for Incorporation by Reference

(Revised as of October 1, 2000)

The Director of the Federal Register has approved under 5 U.S.C. 552(a) and 1 CFR part 51 the incorporation by reference of the following publications. This list contains only those incorporations by reference effective as of the revision date of this volume. Incorporations by reference found within a regulation are effective upon the effective date of that regulation. For more information on incorporation by reference, see the preliminary pages of this volume.

46 CFR (PARTS 1–40)

COAST GUARD, DEPARTMENT OF TRANSPORTATION

46 CFR

American Boat and Yacht Council, Inc.

3069 Solomon's Island Road, Edgewater, MD 21037

Standard A–1–78 Marine LPG—Liquefied Petroleum Gas Systems, 25.45–2
December 15, 1978.

Standard A–22–78 Marine CNG—Compressed Natural Gas Systems, 25.45–2
December 15, 1978.

ABYC E–1–1972, Bonding of Direct Current Systems 28.345

ABYC E–8–1985, Alternating Current (AC) Electrical Systems on Boats 28.345

ABYC E–9–1981, Recommended Practices and Standards Covering 28.345
Direct Current (DC) Electrical Systems on Boats.

ABYC H–2–1989, Ventilation of Boats Using Gasoline 28.340

ABYC H–25–1986, Portable Fuel Systems for Flammable Liquids 27.102; 27.340;
28.335

ABYC H–33–1989, Diesel Fuel Systems 27.102; 27.340;
28.335

ABYC P–1–1986, Installation of Exhaust Systems for Propulsion and 28.380
Auxiliary Engines.

American Bureau of Shipping

Publications Dept., Two World Trade Center, 106th Floor, New
York, NY 10048

Rules for Building and Classing Steel Vessels, 1989 32.15; 32.60; 32.65

Rules for Building and Classing Steel Vessels, 1996 31.01–3(b)

Rules for Building and Classing Steel Vessels, 1998 8.110(b); 31.01–3(b)

U.S. Supplement to ABS Rules for Steel Vessels for Vessels on Inter-
national Voyages, October 21, 1996. 31.01–3(b)

U.S. Supplement to ABS Rules for Mobile Offshore Drilling Units, 8.110(b)
November 1, 1998.

U.S. Supplement to ABS Rules for Steel Vessels for Vessels on Inter-
national Voyages, August 1, 1997. 8.110(b); 31.01–3(b)

American National Standards Institute (ANSI)

11 West 42nd Street, New York, NY 10036 Telephone: (212) 642–
4900

ANSI B16.5–81 Steel Pipe Flanges and Flanged Fittings 39.10–5; 39.20–1

ANSI/ASQC Q9001–1994, Quality Systems—Model for Quality Assur- 8.230
ance in Design, Development, Production, Installation, and Serv-
icing, 1994.

Title 46—Shipping

46 CFR (PARTS 1–40)—Continued

COAST GUARD, DEPARTMENT OF TRANSPORTATION—Continued

46 CFR

American Petroleum Institute (API)

1220 L Street NW., Washington, DC 20005–4070; Telephone: (202) 682–8000

API Standard 2000, Venting Atmospheric and Low-Pressure Storage Tanks (Nonrefrigerated and Refrigerated), Third Edition, January 1982, Reaffirmed, December 1987. 39.10–5; 39.20–11

American Society for Nondestructive Testing (ASNT)

P.O. Box 21142, Columbus, OH 43221

Recommended Practice No. SNT–TC–1A (1988), Personnel Qualification and Certification in Nondestructive Testing. 38.25–3(c)(2)

American Society for Testing and Materials

100 Barr Harbor Drive, West Conshohocken, PA, 19428-2959, Telephone (610) 832-9585, FAX (610) 832-9555

ASTM D 93–80 Test for Flash Point by Pensky-Martens Closed Tester. 35.25–10

ASTM D 93-97, Standard Test Methods for Flash Point by Pensky-Martens Closed Cup Tester. 35.01-3; 35.25-10

ASTM D 323–79 Test for Vapor Pressure of Petroleum Products (Reid Method). 30.10–22; 30.10–59

ASTM D 323–94, Standard Test Method for Vapor Pressure of Petroleum Products (Reid Method). 30.01-3; 30.10-22; 30.10-59

ASTM D 4986–98, Standard Test Method for Horizontal Burning Characteristics of Cellular Polymeric Materials. 32.01-1; 32.57-10; 38.01-3; 38.05-20

ASTM F 1014–86 Standard Specification for Flashlights on Vessels 33.15–10(j); 35.30–20(c)(3)

ASTM F 1014-92, Standard Specification for Flashlights on Vessels 35.01-3; 35.30-20

ASTM F 1121–87 International Shore Connections for Marine Fire Applications. 34.10

ASTM F 1121-87 (1993), Standard Specification for International Shore Connections for Marine Fire Applications. 34.01-15

ASTM F 1271 Standard Specification for Spill Values for Use in Marine Tank Liquid Overpressure Protection Applications, December 29, 1989. 39.10–5; 39.20–9

ASTM F 1271-90 (1995), Standard Specification for Spill Valves for Use in Marine Tank Liquid Overpressure Protections Applications. 39.10-5

ASTM F 1273-91 (1997), Standard Specification for Tank Vent Flame Arresters. 32.01-1; 32.20-10

ASTM F 1321–92, Standard Guide for Conducting a Stability Test (Lightweight Survey and Inclining Experiment) To Determine the Light Ship Displacement and Centers of Gravity of a Vessel. 28.40; 28.535

ASTM Adjunct F 1626 Symbols for Use in Accordance with Regulation II-2/20 of the 1974 SOLAS Convention As Amended PCN: 12–616260–01 (1996). 35.01–3; 35.10–3;

American Society of Mechanical Engineers,

Three Park Avenue, New York, NY 10016–5990; Telephone: (800) THE–ASME

ASME Boiler and Pressure Vessel Code Section V, Nondestructive Examination (1986). 38.25–3(a)(1)

Coast Guard

Commandant [G–MVI], 2100 2nd St. SW., Washington, DC 20593
160.14 “Compass and Mounting, dated Dec. 14, 1944” (Specification for Compasses: Magnetic, Liquid-filled, Mariners, Compensating, for Life boats (with mounting) for Merchant Vessels.), 1944. 33.15–10

Material Approved for Incorporation by Reference

46 CFR (PARTS 1–40)—Continued

COAST GUARD, DEPARTMENT OF TRANSPORTATION—Continued

46 CFR

Department of Defense

DODSSP Standardization Document Order Desk, 700 Robbins Ave.,
Bldg 4D, Philadelphia, PA 19111-5098

Federal Specifications:

ZZ-H-451 Hose, Fire, Woven-Jacketed Rubber or Cambric-Lined, with Couplings, F 34.10–10

International Electrotechnical Commission (IEC)

Bureau Central de la Commission Electrotechnique Internationale,
1 rue de Varembe', Geneva, Switzerland

IEC 309-1 Plugs, Socket-outlets and Couplers for Industrial Purposes: Part 1, General Requirements, 1979. 39.10-5; 39.20-9

IEC 309-2 Plugs, Socket-outlets, and Couplers for Industrial Purposes: Part 2, Dimensional Interchangeability Requirements for Pin and Contact-tube Accessories, 1981. 39.10-5; 39.20-9

International Maritime Organization (IMO) (formerly Inter-Governmental Maritime Organization)

4 Albert Embankment, London SE1 7SR, England Telephone: 0171-587 3210; FAX: 0171-587 3210; Telex: 23588. Purchase from: IMO Sales, New York Nautical Instrument and Service Corp., 140 W. Broadway, New York, NY 10013. Telephone: (212) 962-4522; FAX: (212) 406-8420

A.264 (VIII) Carriage of Grain, 1973 31.10-33

A.654 (XVI) Graphical Symbols for Fire Control Plans, October 19, 1989. 35.01-3; 35.10-3

IMO Resolution A.658(16), Use and Fitting of Retro-Reflective Materials on Life-Saving Appliances, dated November 1989. 28.135

STCW, International Convention on Standards of Training, Certification and Watchkeeping for Seafarers, 1978, as amended in 1995 (STCW Convention), and Seafarer's Training, Certification and Watchkeeping Code (STCW Code). 10.103; 10.205;
10.304; 10.603;
10.901; 10.903;
10.1005; 12.01-1;
12.01-6; 12.02-7;
12.02-11; 12.05-3;
12.05-7; 12.05-11;
12.10-3; 12.10-5;
12.10-7; 12.10-9;
12.10-11; 12.15-3;
12.15-7; 12.25-45;
12.30-5; 15.103;
15.1101; 15.1103;
15.1105; 15.1109

Lloyd's Register of Shipping (LF)

100 Leadenhall Street, London, ECA 3BP

Rules and Regulations for the Classification of Ships, 1998 31.01-3(b)

Lloyd's Register of Shipping Supplemental Requirements, 1998 31.01-3(b)

National Electrical Manufacturers Association (NEMA)

1300 North 17th Street, Suite 1847, Rosslyn, VA 22209; Telephone: (703) 841-3200; FAX: (703) 841-3300

ANSI/NEMA WD6 Wiring Devices-Dimensional Requirements, 1988 39.10-5; 39.20-9

National Fire Protection Association

1 Batterymarch Park, Quincy, MA 02269-9101, Telephone: (800) 344-3555

306 Control of Gas Hazards on Vessels, 1975 35.01-1

302-89 Fire Protection Standard for Motor Craft, Pleasure and Commercial. 25.45

Title 46—Shipping

46 CFR (PARTS 1–40)—Continued

COAST GUARD, DEPARTMENT OF TRANSPORTATION—Continued

46 CFR

NFPA 13-1996 Standard for the Installation of Sprinkler Systems	34.01–15; 34.30–1
NFPA 70 National Electrical Code, 1987	39.10–5; 39.20–9
NFPA 70–1990, National Electrical Code	28.350; 28.370; 28.40; 28.865
NFPA 302–1989, Pleasure and Commercial Motor Craft	27.102; 27.340; 28.335; 28.340; 28.345
NFPA 17–1985, Dry Chemical Extinguishing Systems	28.330
NFPA 17A–1986, Wet Chemical Extinguishing Systems	28.330
Oil Companies International Marine Forum (OCIMF)	
6th Floor, Portland House, Stag Place, London, SW1E 5BH, England	
International Safety Code for Oil Tankers and Terminals, Third Edition, 1988.	39.10–5; 39.20–9
Society of Automotive Engineers	
400 Commonwealth Dr., Warrendale, PA 15096–0001, Telephone: (412) 776-4841	
SAE J1475–1984, Hydraulic Hose Fittings for Marine Applications	27.102; 27.340; 28.40; 28.880
SAE J1928–89, Devices Providing Backfire Flame Control for Gasoline Engines in Marine Applications.	25.35
SAE J1942–1989, Hose and Hose Assemblies for Marine Applications	27.102; 27.340; 28.405
Underwriters Laboratories, Inc.	
Available from: Global Engineering Documents, 15 Inverness Way East, Englewood, CO 80112, Telephone (800) 854–7179 or Global Engineering Documents, 7730 Carondelet Ave., Suite 470, Clayton, MO 63105, Telephone (800) 854–7179	
UL 19–78 Woven Jacketed, Rubber Lined Fire Hose	34.10–10
UL 217–1985, Single and Multiple Station Smoke Detectors	28.325; 28.40; 28.830
UL 710–1990, Exhaust Hoods for Commercial Cooking Equipment	28.330
UL 1111–88 Marine Carburetor Flame Arresters	25.35

Table of CFR Titles and Chapters

(Revised as of October 1, 2000)

Title 1—General Provisions

- I Administrative Committee of the Federal Register (Parts 1—49)
- II Office of the Federal Register (Parts 50—299)
- IV Miscellaneous Agencies (Parts 400—500)

Title 2—[Reserved]

Title 3—The President

- I Executive Office of the President (Parts 100—199)

Title 4—Accounts

- I General Accounting Office (Parts 1—99)
- II Federal Claims Collection Standards (General Accounting Office—Department of Justice) (Parts 100—299)

Title 5—Administrative Personnel

- I Office of Personnel Management (Parts 1—1199)
- II Merit Systems Protection Board (Parts 1200—1299)
- III Office of Management and Budget (Parts 1300—1399)
- V The International Organizations Employees Loyalty Board (Parts 1500—1599)
- VI Federal Retirement Thrift Investment Board (Parts 1600—1699)
- VII Advisory Commission on Intergovernmental Relations (Parts 1700—1799)
- VIII Office of Special Counsel (Parts 1800—1899)
- IX Appalachian Regional Commission (Parts 1900—1999)
- XI Armed Forces Retirement Home (Part 2100)
- XIV Federal Labor Relations Authority, General Counsel of the Federal Labor Relations Authority and Federal Service Impasses Panel (Parts 2400—2499)
- XV Office of Administration, Executive Office of the President (Parts 2500—2599)
- XVI Office of Government Ethics (Parts 2600—2699)
- XXI Department of the Treasury (Parts 3100—3199)
- XXII Federal Deposit Insurance Corporation (Part 3201)

Title 5—Administrative Personnel—Continued

Chap.	
XXIII	Department of Energy (Part 3301)
XXIV	Federal Energy Regulatory Commission (Part 3401)
XXV	Department of the Interior (Part 3501)
XXVI	Department of Defense (Part 3601)
XXVIII	Department of Justice (Part 3801)
XXIX	Federal Communications Commission (Parts 3900—3999)
XXX	Farm Credit System Insurance Corporation (Parts 4000—4099)
XXXI	Farm Credit Administration (Parts 4100—4199)
XXXIII	Overseas Private Investment Corporation (Part 4301)
XXXV	Office of Personnel Management (Part 4501)
XL	Interstate Commerce Commission (Part 5001)
XLI	Commodity Futures Trading Commission (Part 5101)
XLII	Department of Labor (Part 5201)
XLIII	National Science Foundation (Part 5301)
XLV	Department of Health and Human Services (Part 5501)
XLVI	Postal Rate Commission (Part 5601)
XLVII	Federal Trade Commission (Part 5701)
XLVIII	Nuclear Regulatory Commission (Part 5801)
L	Department of Transportation (Part 6001)
LII	Export-Import Bank of the United States (Part 6201)
LIII	Department of Education (Parts 6300—6399)
LIV	Environmental Protection Agency (Part 6401)
LVII	General Services Administration (Part 6701)
LVIII	Board of Governors of the Federal Reserve System (Part 6801)
LIX	National Aeronautics and Space Administration (Part 6901)
LX	United States Postal Service (Part 7001)
LXI	National Labor Relations Board (Part 7101)
LXII	Equal Employment Opportunity Commission (Part 7201)
LXIII	Inter-American Foundation (Part 7301)
LXV	Department of Housing and Urban Development (Part 7501)
LXVI	National Archives and Records Administration (Part 7601)
LXIX	Tennessee Valley Authority (Part 7901)
LXXI	Consumer Product Safety Commission (Part 8101)
LXXIII	Department of Agriculture (Part 8301)
LXXIV	Federal Mine Safety and Health Review Commission (Part 8401)
LXXVI	Federal Retirement Thrift Investment Board (Part 8601)
LXXVII	Office of Management and Budget (Part 8701)

Title 6—[Reserved]

Title 7—Agriculture

SUBTITLE A—OFFICE OF THE SECRETARY OF AGRICULTURE (PARTS 0—26)

SUBTITLE B—REGULATIONS OF THE DEPARTMENT OF AGRICULTURE

Title 7—Agriculture—Continued

Chap.	
I	Agricultural Marketing Service (Standards, Inspections, Marketing Practices), Department of Agriculture (Parts 27—209)
II	Food and Nutrition Service, Department of Agriculture (Parts 210—299)
III	Animal and Plant Health Inspection Service, Department of Agriculture (Parts 300—399)
IV	Federal Crop Insurance Corporation, Department of Agriculture (Parts 400—499)
V	Agricultural Research Service, Department of Agriculture (Parts 500—599)
VI	Natural Resources Conservation Service, Department of Agriculture (Parts 600—699)
VII	Farm Service Agency, Department of Agriculture (Parts 700—799)
VIII	Grain Inspection, Packers and Stockyards Administration (Federal Grain Inspection Service), Department of Agriculture (Parts 800—899)
IX	Agricultural Marketing Service (Marketing Agreements and Orders; Fruits, Vegetables, Nuts), Department of Agriculture (Parts 900—999)
X	Agricultural Marketing Service (Marketing Agreements and Orders; Milk), Department of Agriculture (Parts 1000—1199)
XI	Agricultural Marketing Service (Marketing Agreements and Orders; Miscellaneous Commodities), Department of Agriculture (Parts 1200—1299)
XIII	Northeast Dairy Compact Commission (Parts 1300—1399)
XIV	Commodity Credit Corporation, Department of Agriculture (Parts 1400—1499)
XV	Foreign Agricultural Service, Department of Agriculture (Parts 1500—1599)
XVI	Rural Telephone Bank, Department of Agriculture (Parts 1600—1699)
XVII	Rural Utilities Service, Department of Agriculture (Parts 1700—1799)
XVIII	Rural Housing Service, Rural Business-Cooperative Service, Rural Utilities Service, and Farm Service Agency, Department of Agriculture (Parts 1800—2099)
XXVI	Office of Inspector General, Department of Agriculture (Parts 2600—2699)
XXVII	Office of Information Resources Management, Department of Agriculture (Parts 2700—2799)
XXVIII	Office of Operations, Department of Agriculture (Parts 2800—2899)
XXIX	Office of Energy, Department of Agriculture (Parts 2900—2999)
XXX	Office of the Chief Financial Officer, Department of Agriculture (Parts 3000—3099)
XXXI	Office of Environmental Quality, Department of Agriculture (Parts 3100—3199)
XXXII	Office of Procurement and Property Management, Department of Agriculture (Parts 3200—3299)

Title 7—Agriculture—Continued	
Chap.	
XXXIII	Office of Transportation, Department of Agriculture (Parts 3300—3399)
XXXIV	Cooperative State Research, Education, and Extension Service, Department of Agriculture (Parts 3400—3499)
XXXV	Rural Housing Service, Department of Agriculture (Parts 3500—3599)
XXXVI	National Agricultural Statistics Service, Department of Agriculture (Parts 3600—3699)
XXXVII	Economic Research Service, Department of Agriculture (Parts 3700—3799)
XXXVIII	World Agricultural Outlook Board, Department of Agriculture (Parts 3800—3899)
XLI	[Reserved]
XLII	Rural Business-Cooperative Service and Rural Utilities Service, Department of Agriculture (Parts 4200—4299)

Title 8—Aliens and Nationality

- I Immigration and Naturalization Service, Department of Justice (Parts 1—599)

Title 9—Animals and Animal Products

- I Animal and Plant Health Inspection Service, Department of Agriculture (Parts 1—199)
- II Grain Inspection, Packers and Stockyards Administration (Packers and Stockyards Programs), Department of Agriculture (Parts 200—299)
- III Food Safety and Inspection Service, Department of Agriculture (Parts 300—599)

Title 10—Energy

- I Nuclear Regulatory Commission (Parts 0—199)
- II Department of Energy (Parts 200—699)
- III Department of Energy (Parts 700—999)
- X Department of Energy (General Provisions) (Parts 1000—1099)
- XVII Defense Nuclear Facilities Safety Board (Parts 1700—1799)
- XVIII Northeast Interstate Low-Level Radioactive Waste Commission (Part 1800)

Title 11—Federal Elections

- I Federal Election Commission (Parts 1—9099)

Title 12—Banks and Banking

- I Comptroller of the Currency, Department of the Treasury (Parts 1—199)

Chap. **Title 12—Banks and Banking—Continued**

- II Federal Reserve System (Parts 200—299)
- III Federal Deposit Insurance Corporation (Parts 300—399)
- IV Export-Import Bank of the United States (Parts 400—499)
- V Office of Thrift Supervision, Department of the Treasury (Parts 500—599)
- VI Farm Credit Administration (Parts 600—699)
- VII National Credit Union Administration (Parts 700—799)
- VIII Federal Financing Bank (Parts 800—899)
- IX Federal Housing Finance Board (Parts 900—999)
- XI Federal Financial Institutions Examination Council (Parts 1100—1199)
- XIV Farm Credit System Insurance Corporation (Parts 1400—1499)
- XV Department of the Treasury (Parts 1500—1599)
- XVII Office of Federal Housing Enterprise Oversight, Department of Housing and Urban Development (Parts 1700—1799)
- XVIII Community Development Financial Institutions Fund, Department of the Treasury (Parts 1800—1899)

Title 13—Business Credit and Assistance

- I Small Business Administration (Parts 1—199)
- III Economic Development Administration, Department of Commerce (Parts 300—399)
- IV Emergency Steel Guarantee Loan Board (Parts 400—499)
- V Emergency Oil and Gas Guaranteed Loan Board (Parts 500—599)

Title 14—Aeronautics and Space

- I Federal Aviation Administration, Department of Transportation (Parts 1—199)
- II Office of the Secretary, Department of Transportation (Aviation Proceedings) (Parts 200—399)
- III Commercial Space Transportation, Federal Aviation Administration, Department of Transportation (Parts 400—499)
- V National Aeronautics and Space Administration (Parts 1200—1299)

Title 15—Commerce and Foreign Trade

SUBTITLE A—Office of the Secretary of Commerce (Parts 0—29)

SUBTITLE B—Regulations Relating to Commerce and Foreign Trade

- I Bureau of the Census, Department of Commerce (Parts 30—199)
- II National Institute of Standards and Technology, Department of Commerce (Parts 200—299)
- III International Trade Administration, Department of Commerce (Parts 300—399)

Title 15—Commerce and Foreign Trade—Continued

Chap.

- IV Foreign-Trade Zones Board, Department of Commerce (Parts 400—499)
- VII Bureau of Export Administration, Department of Commerce (Parts 700—799)
- VIII Bureau of Economic Analysis, Department of Commerce (Parts 800—899)
- IX National Oceanic and Atmospheric Administration, Department of Commerce (Parts 900—999)
- XI Technology Administration, Department of Commerce (Parts 1100—1199)
- XIII East-West Foreign Trade Board (Parts 1300—1399)
- XIV Minority Business Development Agency (Parts 1400—1499)
- SUBTITLE C—Regulations Relating to Foreign Trade Agreements
- XX Office of the United States Trade Representative (Parts 2000—2099)
- SUBTITLE D—Regulations Relating to Telecommunications and Information
- XXIII National Telecommunications and Information Administration, Department of Commerce (Parts 2300—2399)

Title 16—Commercial Practices

- I Federal Trade Commission (Parts 0—999)
- II Consumer Product Safety Commission (Parts 1000—1799)

Title 17—Commodity and Securities Exchanges

- I Commodity Futures Trading Commission (Parts 1—199)
- II Securities and Exchange Commission (Parts 200—399)
- IV Department of the Treasury (Parts 400—499)

Title 18—Conservation of Power and Water Resources

- I Federal Energy Regulatory Commission, Department of Energy (Parts 1—399)
- III Delaware River Basin Commission (Parts 400—499)
- VI Water Resources Council (Parts 700—799)
- VIII Susquehanna River Basin Commission (Parts 800—899)
- XIII Tennessee Valley Authority (Parts 1300—1399)

Title 19—Customs Duties

- I United States Customs Service, Department of the Treasury (Parts 1—199)
- II United States International Trade Commission (Parts 200—299)
- III International Trade Administration, Department of Commerce (Parts 300—399)

	Title 20—Employees' Benefits
Chap.	
I	Office of Workers' Compensation Programs, Department of Labor (Parts 1—199)
II	Railroad Retirement Board (Parts 200—399)
III	Social Security Administration (Parts 400—499)
IV	Employees' Compensation Appeals Board, Department of Labor (Parts 500—599)
V	Employment and Training Administration, Department of Labor (Parts 600—699)
VI	Employment Standards Administration, Department of Labor (Parts 700—799)
VII	Benefits Review Board, Department of Labor (Parts 800—899)
VIII	Joint Board for the Enrollment of Actuaries (Parts 900—999)
IX	Office of the Assistant Secretary for Veterans' Employment and Training, Department of Labor (Parts 1000—1099)

Title 21—Food and Drugs

I	Food and Drug Administration, Department of Health and Human Services (Parts 1—1299)
II	Drug Enforcement Administration, Department of Justice (Parts 1300—1399)
III	Office of National Drug Control Policy (Parts 1400—1499)

Title 22—Foreign Relations

I	Department of State (Parts 1—199)
II	Agency for International Development (Parts 200—299)
III	Peace Corps (Parts 300—399)
IV	International Joint Commission, United States and Canada (Parts 400—499)
V	Broadcasting Board of Governors (Parts 500—599)
VII	Overseas Private Investment Corporation (Parts 700—799)
IX	Foreign Service Grievance Board Regulations (Parts 900—999)
X	Inter-American Foundation (Parts 1000—1099)
XI	International Boundary and Water Commission, United States and Mexico, United States Section (Parts 1100—1199)
XII	United States International Development Cooperation Agency (Parts 1200—1299)
XIII	Board for International Broadcasting (Parts 1300—1399)
XIV	Foreign Service Labor Relations Board; Federal Labor Relations Authority; General Counsel of the Federal Labor Relations Authority; and the Foreign Service Impasse Disputes Panel (Parts 1400—1499)
XV	African Development Foundation (Parts 1500—1599)
XVI	Japan-United States Friendship Commission (Parts 1600—1699)
XVII	United States Institute of Peace (Parts 1700—1799)

Title 23—Highways

Chap.

- I Federal Highway Administration, Department of Transportation (Parts 1—999)
- II National Highway Traffic Safety Administration and Federal Highway Administration, Department of Transportation (Parts 1200—1299)
- III National Highway Traffic Safety Administration, Department of Transportation (Parts 1300—1399)

Title 24—Housing and Urban Development

SUBTITLE A—Office of the Secretary, Department of Housing and Urban Development (Parts 0—99)

SUBTITLE B—Regulations Relating to Housing and Urban Development

- I Office of Assistant Secretary for Equal Opportunity, Department of Housing and Urban Development (Parts 100—199)
- II Office of Assistant Secretary for Housing—Federal Housing Commissioner, Department of Housing and Urban Development (Parts 200—299)
- III Government National Mortgage Association, Department of Housing and Urban Development (Parts 300—399)
- IV Office of Housing and Office of Multifamily Housing Assistance Restructuring, Department of Housing and Urban Development (Parts 400—499)
- V Office of Assistant Secretary for Community Planning and Development, Department of Housing and Urban Development (Parts 500—599)
- VI Office of Assistant Secretary for Community Planning and Development, Department of Housing and Urban Development (Parts 600—699) [Reserved]
- VII Office of the Secretary, Department of Housing and Urban Development (Housing Assistance Programs and Public and Indian Housing Programs) (Parts 700—799)
- VIII Office of the Assistant Secretary for Housing—Federal Housing Commissioner, Department of Housing and Urban Development (Section 8 Housing Assistance Programs, Section 202 Direct Loan Program, Section 202 Supportive Housing for the Elderly Program and Section 811 Supportive Housing for Persons With Disabilities Program) (Parts 800—899)
- IX Office of Assistant Secretary for Public and Indian Housing, Department of Housing and Urban Development (Parts 900—999)
- X Office of Assistant Secretary for Housing—Federal Housing Commissioner, Department of Housing and Urban Development (Interstate Land Sales Registration Program) (Parts 1700—1799)
- XII Office of Inspector General, Department of Housing and Urban Development (Parts 2000—2099)
- XX Office of Assistant Secretary for Housing—Federal Housing Commissioner, Department of Housing and Urban Development (Parts 3200—3899)
- XXV Neighborhood Reinvestment Corporation (Parts 4100—4199)

Title 25—Indians

Chap.

- I Bureau of Indian Affairs, Department of the Interior (Parts 1—299)
- II Indian Arts and Crafts Board, Department of the Interior (Parts 300—399)
- III National Indian Gaming Commission, Department of the Interior (Parts 500—599)
- IV Office of Navajo and Hopi Indian Relocation (Parts 700—799)
- V Bureau of Indian Affairs, Department of the Interior, and Indian Health Service, Department of Health and Human Services (Part 900)
- VI Office of the Assistant Secretary-Indian Affairs, Department of the Interior (Part 1001)
- VII Office of the Special Trustee for American Indians, Department of the Interior (Part 1200)

Title 26—Internal Revenue

- I Internal Revenue Service, Department of the Treasury (Parts 1—799)

Title 27—Alcohol, Tobacco Products and Firearms

- I Bureau of Alcohol, Tobacco and Firearms, Department of the Treasury (Parts 1—299)

Title 28—Judicial Administration

- I Department of Justice (Parts 0—199)
- III Federal Prison Industries, Inc., Department of Justice (Parts 300—399)
- V Bureau of Prisons, Department of Justice (Parts 500—599)
- VI Offices of Independent Counsel, Department of Justice (Parts 600—699)
- VII Office of Independent Counsel (Parts 700—799)

Title 29—Labor

SUBTITLE A—Office of the Secretary of Labor (Parts 0—99)

SUBTITLE B—Regulations Relating to Labor

- I National Labor Relations Board (Parts 100—199)
- II Office of Labor-Management Standards, Department of Labor (Parts 200—299)
- III National Railroad Adjustment Board (Parts 300—399)
- IV Office of Labor-Management Standards, Department of Labor (Parts 400—499)
- V Wage and Hour Division, Department of Labor (Parts 500—899)
- IX Construction Industry Collective Bargaining Commission (Parts 900—999)
- X National Mediation Board (Parts 1200—1299)

Title 29—Labor—Continued

- Chap.
- XII Federal Mediation and Conciliation Service (Parts 1400—1499)
 - XIV Equal Employment Opportunity Commission (Parts 1600—1699)
 - XVII Occupational Safety and Health Administration, Department of Labor (Parts 1900—1999)
 - XX Occupational Safety and Health Review Commission (Parts 2200—2499)
 - XXV Pension and Welfare Benefits Administration, Department of Labor (Parts 2500—2599)
 - XXVII Federal Mine Safety and Health Review Commission (Parts 2700—2799)
 - XL Pension Benefit Guaranty Corporation (Parts 4000—4999)

Title 30—Mineral Resources

- I Mine Safety and Health Administration, Department of Labor (Parts 1—199)
- II Minerals Management Service, Department of the Interior (Parts 200—299)
- III Board of Surface Mining and Reclamation Appeals, Department of the Interior (Parts 300—399)
- IV Geological Survey, Department of the Interior (Parts 400—499)
- VI Bureau of Mines, Department of the Interior (Parts 600—699)
- VII Office of Surface Mining Reclamation and Enforcement, Department of the Interior (Parts 700—999)

Title 31—Money and Finance: Treasury

- SUBTITLE A—Office of the Secretary of the Treasury (Parts 0—50)
- SUBTITLE B—Regulations Relating to Money and Finance
 - I Monetary Offices, Department of the Treasury (Parts 51—199)
 - II Fiscal Service, Department of the Treasury (Parts 200—399)
 - IV Secret Service, Department of the Treasury (Parts 400—499)
 - V Office of Foreign Assets Control, Department of the Treasury (Parts 500—599)
 - VI Bureau of Engraving and Printing, Department of the Treasury (Parts 600—699)
 - VII Federal Law Enforcement Training Center, Department of the Treasury (Parts 700—799)
 - VIII Office of International Investment, Department of the Treasury (Parts 800—899)

Title 32—National Defense

- SUBTITLE A—Department of Defense
 - I Office of the Secretary of Defense (Parts 1—399)
 - V Department of the Army (Parts 400—699)
 - VI Department of the Navy (Parts 700—799)

Title 32—National Defense—Continued

Chap.	
VII	Department of the Air Force (Parts 800—1099)
	SUBTITLE B—Other Regulations Relating to National Defense
XII	Defense Logistics Agency (Parts 1200—1299)
XVI	Selective Service System (Parts 1600—1699)
XXVIII	National Counterintelligence Center (Parts 1800—1899)
XIX	Central Intelligence Agency (Parts 1900—1999)
XX	Information Security Oversight Office, National Archives and Records Administration (Parts 2000—2099)
XXI	National Security Council (Parts 2100—2199)
XXIV	Office of Science and Technology Policy (Parts 2400—2499)
XXVII	Office for Micronesian Status Negotiations (Parts 2700—2799)
XXVIII	Office of the Vice President of the United States (Parts 2800— 2899)

Title 33—Navigation and Navigable Waters

I	Coast Guard, Department of Transportation (Parts 1—199)
II	Corps of Engineers, Department of the Army (Parts 200—399)
IV	Saint Lawrence Seaway Development Corporation, Department of Transportation (Parts 400—499)

Title 34—Education

	SUBTITLE A—Office of the Secretary, Department of Education (Parts 1—99)
	SUBTITLE B—Regulations of the Offices of the Department of Education
I	Office for Civil Rights, Department of Education (Parts 100—199)
II	Office of Elementary and Secondary Education, Department of Education (Parts 200—299)
III	Office of Special Education and Rehabilitative Services, Depart- ment of Education (Parts 300—399)
IV	Office of Vocational and Adult Education, Department of Edu- cation (Parts 400—499)
V	Office of Bilingual Education and Minority Languages Affairs, Department of Education (Parts 500—599)
VI	Office of Postsecondary Education, Department of Education (Parts 600—699)
VII	Office of Educational Research and Improvement, Department of Education (Parts 700—799)
XI	National Institute for Literacy (Parts 1100—1199)
	SUBTITLE C—Regulations Relating to Education
XII	National Council on Disability (Parts 1200—1299)

Title 35—Panama Canal

I	Panama Canal Regulations (Parts 1—299)
---	----------------------------------------

Chap. **Title 36—Parks, Forests, and Public Property**

- I National Park Service, Department of the Interior (Parts 1—199)
- II Forest Service, Department of Agriculture (Parts 200—299)
- III Corps of Engineers, Department of the Army (Parts 300—399)
- IV American Battle Monuments Commission (Parts 400—499)
- V Smithsonian Institution (Parts 500—599)
- VII Library of Congress (Parts 700—799)
- VIII Advisory Council on Historic Preservation (Parts 800—899)
- IX Pennsylvania Avenue Development Corporation (Parts 900—999)
- X Presidio Trust (Parts 1000—1099)
- XI Architectural and Transportation Barriers Compliance Board (Parts 1100—1199)
- XII National Archives and Records Administration (Parts 1200—1299)
- XV Oklahoma City National Memorial Trust (Part 1501)

Title 37—Patents, Trademarks, and Copyrights

- I United States Patent and Trademark Office, Department of Commerce (Parts 1—199)
- II Copyright Office, Library of Congress (Parts 200—299)
- IV Assistant Secretary for Technology Policy, Department of Commerce (Parts 400—499)
- V Under Secretary for Technology, Department of Commerce (Parts 500—599)

Title 38—Pensions, Bonuses, and Veterans' Relief

- I Department of Veterans Affairs (Parts 0—99)

Title 39—Postal Service

- I United States Postal Service (Parts 1—999)
- III Postal Rate Commission (Parts 3000—3099)

Title 40—Protection of Environment

- I Environmental Protection Agency (Parts 1—799)
- IV Environmental Protection Agency and Department of Justice (Parts 1400—1499)
- V Council on Environmental Quality (Parts 1500—1599)
- VII Environmental Protection Agency and Department of Defense; Uniform National Discharge Standards for Vessels of the Armed Forces (Parts 1700—1799)

Title 41—Public Contracts and Property Management

- SUBTITLE B—Other Provisions Relating to Public Contracts
- 50 Public Contracts, Department of Labor (Parts 50-1—50-999)

Title 41—Public Contracts and Property Management—Continued

Chap.

- 51 Committee for Purchase From People Who Are Blind or Severely Disabled (Parts 51-1—51-99)
- 60 Office of Federal Contract Compliance Programs, Equal Employment Opportunity, Department of Labor (Parts 60-1—60-999)
- 61 Office of the Assistant Secretary for Veterans Employment and Training, Department of Labor (Parts 61-1—61-999)
- SUBTITLE C—Federal Property Management Regulations System
- 101 Federal Property Management Regulations (Parts 101-1—101-99)
- 102 Federal Management Regulation (Parts 102-1—102-299)
- 105 General Services Administration (Parts 105-1—105-999)
- 109 Department of Energy Property Management Regulations (Parts 109-1—109-99)
- 114 Department of the Interior (Parts 114-1—114-99)
- 115 Environmental Protection Agency (Parts 115-1—115-99)
- 128 Department of Justice (Parts 128-1—128-99)
- SUBTITLE D—Other Provisions Relating to Property Management [Reserved]
- SUBTITLE E—Federal Information Resources Management Regulations System
- 201 Federal Information Resources Management Regulation (Parts 201-1—201-99) [Reserved]
- SUBTITLE F—Federal Travel Regulation System
- 300 General (Parts 300-1—300-99)
- 301 Temporary Duty (TDY) Travel Allowances (Parts 301-1—301-99)
- 302 Relocation Allowances (Parts 302-1—302-99)
- 303 Payment of Expenses Connected with the Death of Certain Employees (Part 303-70)
- 304 Payment from a Non-Federal Source for Travel Expenses (Parts 304-1—304-99)

Title 42—Public Health

- I Public Health Service, Department of Health and Human Services (Parts 1—199)
- IV Health Care Financing Administration, Department of Health and Human Services (Parts 400—499)
- V Office of Inspector General-Health Care, Department of Health and Human Services (Parts 1000—1999)

Title 43—Public Lands: Interior

- SUBTITLE A—Office of the Secretary of the Interior (Parts 1—199)
- SUBTITLE B—Regulations Relating to Public Lands
- I Bureau of Reclamation, Department of the Interior (Parts 200—499)
- II Bureau of Land Management, Department of the Interior (Parts 1000—9999)

Chap. **Title 43—Public Lands: Interior—Continued**

- III Utah Reclamation Mitigation and Conservation Commission
(Parts 10000—10005)

Title 44—Emergency Management and Assistance

- I Federal Emergency Management Agency (Parts 0—399)
- IV Department of Commerce and Department of Transportation
(Parts 400—499)

Title 45—Public Welfare

- SUBTITLE A—Department of Health and Human Services (Parts 1—199)
- SUBTITLE B—Regulations Relating to Public Welfare
- II Office of Family Assistance (Assistance Programs), Administration for Children and Families, Department of Health and Human Services (Parts 200—299)
- III Office of Child Support Enforcement (Child Support Enforcement Program), Administration for Children and Families, Department of Health and Human Services (Parts 300—399)
- IV Office of Refugee Resettlement, Administration for Children and Families Department of Health and Human Services (Parts 400—499)
- V Foreign Claims Settlement Commission of the United States, Department of Justice (Parts 500—599)
- VI National Science Foundation (Parts 600—699)
- VII Commission on Civil Rights (Parts 700—799)
- VIII Office of Personnel Management (Parts 800—899)
- X Office of Community Services, Administration for Children and Families, Department of Health and Human Services (Parts 1000—1099)
- XI National Foundation on the Arts and the Humanities (Parts 1100—1199)
- XII Corporation for National and Community Service (Parts 1200—1299)
- XIII Office of Human Development Services, Department of Health and Human Services (Parts 1300—1399)
- XVI Legal Services Corporation (Parts 1600—1699)
- XVII National Commission on Libraries and Information Science (Parts 1700—1799)
- XXIII Harry S. Truman Scholarship Foundation (Parts 1800—1899)
- XXI Commission on Fine Arts (Parts 2100—2199)
- XXIII Arctic Research Commission (Part 2301)
- XXIV James Madison Memorial Fellowship Foundation (Parts 2400—2499)
- XXV Corporation for National and Community Service (Parts 2500—2599)

Chap.

Title 46—Shipping

- I Coast Guard, Department of Transportation (Parts 1—199)
- II Maritime Administration, Department of Transportation (Parts 200—399)
- III Coast Guard (Great Lakes Pilotage), Department of Transportation (Parts 400—499)
- IV Federal Maritime Commission (Parts 500—599)

Title 47—Telecommunication

- I Federal Communications Commission (Parts 0—199)
- II Office of Science and Technology Policy and National Security Council (Parts 200—299)
- III National Telecommunications and Information Administration, Department of Commerce (Parts 300—399)

Title 48—Federal Acquisition Regulations System

- 1 Federal Acquisition Regulation (Parts 1—99)
- 2 Department of Defense (Parts 200—299)
- 3 Department of Health and Human Services (Parts 300—399)
- 4 Department of Agriculture (Parts 400—499)
- 5 General Services Administration (Parts 500—599)
- 6 Department of State (Parts 600—699)
- 7 United States Agency for International Development (Parts 700—799)
- 8 Department of Veterans Affairs (Parts 800—899)
- 9 Department of Energy (Parts 900—999)
- 10 Department of the Treasury (Parts 1000—1099)
- 12 Department of Transportation (Parts 1200—1299)
- 13 Department of Commerce (Parts 1300—1399)
- 14 Department of the Interior (Parts 1400—1499)
- 15 Environmental Protection Agency (Parts 1500—1599)
- 16 Office of Personnel Management Federal Employees Health Benefits Acquisition Regulation (Parts 1600—1699)
- 17 Office of Personnel Management (Parts 1700—1799)
- 18 National Aeronautics and Space Administration (Parts 1800—1899)
- 19 Broadcasting Board of Governors (Parts 1900—1999)
- 20 Nuclear Regulatory Commission (Parts 2000—2099)
- 21 Office of Personnel Management, Federal Employees Group Life Insurance Federal Acquisition Regulation (Parts 2100—2199)
- 23 Social Security Administration (Parts 2300—2399)
- 24 Department of Housing and Urban Development (Parts 2400—2499)
- 25 National Science Foundation (Parts 2500—2599)
- 28 Department of Justice (Parts 2800—2899)
- 29 Department of Labor (Parts 2900—2999)

Title 48—Federal Acquisition Regulations System—Continued

Chap.

- 34 Department of Education Acquisition Regulation (Parts 3400—3499)
- 35 Panama Canal Commission (Parts 3500—3599)
- 44 Federal Emergency Management Agency (Parts 4400—4499)
- 51 Department of the Army Acquisition Regulations (Parts 5100—5199)
- 52 Department of the Navy Acquisition Regulations (Parts 5200—5299)
- 53 Department of the Air Force Federal Acquisition Regulation Supplement (Parts 5300—5399)
- 54 Defense Logistics Agency, Department of Defense (Part 5452)
- 57 African Development Foundation (Parts 5700—5799)
- 61 General Services Administration Board of Contract Appeals (Parts 6100—6199)
- 63 Department of Transportation Board of Contract Appeals (Parts 6300—6399)
- 99 Cost Accounting Standards Board, Office of Federal Procurement Policy, Office of Management and Budget (Parts 9900—9999)

Title 49—Transportation

SUBTITLE A—Office of the Secretary of Transportation (Parts 1—99)

SUBTITLE B—Other Regulations Relating to Transportation

- I Research and Special Programs Administration, Department of Transportation (Parts 100—199)
- II Federal Railroad Administration, Department of Transportation (Parts 200—299)
- III Federal Motor Carrier Safety Administration, Department of Transportation (Parts 300—399)
- IV Coast Guard, Department of Transportation (Parts 400—499)
- V National Highway Traffic Safety Administration, Department of Transportation (Parts 500—599)
- VI Federal Transit Administration, Department of Transportation (Parts 600—699)
- VII National Railroad Passenger Corporation (AMTRAK) (Parts 700—799)
- VIII National Transportation Safety Board (Parts 800—999)
- X Surface Transportation Board, Department of Transportation (Parts 1000—1399)
- XI Bureau of Transportation Statistics, Department of Transportation (Parts 1400—1499)

Title 50—Wildlife and Fisheries

- I United States Fish and Wildlife Service, Department of the Interior (Parts 1—199)

	Title 50—Wildlife and Fisheries—Continued
Chap.	
II	National Marine Fisheries Service, National Oceanic and Atmospheric Administration, Department of Commerce (Parts 200—299)
III	International Fishing and Related Activities (Parts 300—399)
IV	Joint Regulations (United States Fish and Wildlife Service, Department of the Interior and National Marine Fisheries Service, National Oceanic and Atmospheric Administration, Department of Commerce); Endangered Species Committee Regulations (Parts 400—499)
V	Marine Mammal Commission (Parts 500—599)
VI	Fishery Conservation and Management, National Oceanic and Atmospheric Administration, Department of Commerce (Parts 600—699)

CFR Index and Finding Aids

Subject/Agency Index
 List of Agency Prepared Indexes
 Parallel Tables of Statutory Authorities and Rules
 List of CFR Titles, Chapters, Subchapters, and Parts
 Alphabetical List of Agencies Appearing in the CFR

Alphabetical List of Agencies Appearing in the CFR

(Revised as of October 1, 2000)

Agency	CFR Title, Subtitle or Chapter
Administrative Committee of the Federal Register	1, I
Advanced Research Projects Agency	32, I
Advisory Commission on Intergovernmental Relations	5, VII
Advisory Council on Historic Preservation	36, VIII
African Development Foundation	22, XV
Federal Acquisition Regulation	48, 57
Agency for International Development, United States	22, II
Federal Acquisition Regulation	48, 7
Agricultural Marketing Service	7, I, IX, X, XI
Agricultural Research Service	7, V
Agriculture Department	5, LXXIII
Agricultural Marketing Service	7, I, IX, X, XI
Agricultural Research Service	7, V
Animal and Plant Health Inspection Service	7, III; 9, I
Chief Financial Officer, Office of	7, XXX
Commodity Credit Corporation	7, XIV
Cooperative State Research, Education, and Extension Service	7, XXXIV
Economic Research Service	7, XXXVII
Energy, Office of	7, XXIX
Environmental Quality, Office of	7, XXXI
Farm Service Agency	7, VII, XVIII
Federal Acquisition Regulation	48, 4
Federal Crop Insurance Corporation	7, IV
Food and Nutrition Service	7, II
Food Safety and Inspection Service	9, III
Foreign Agricultural Service	7, XV
Forest Service	36, II
Grain Inspection, Packers and Stockyards Administration	7, VIII; 9, II
Information Resources Management, Office of	7, XXVII
Inspector General, Office of	7, XXVI
National Agricultural Library	7, XLI
National Agricultural Statistics Service	7, XXXVI
Natural Resources Conservation Service	7, VI
Operations, Office of	7, XXXVIII
Procurement and Property Management, Office of	7, XXXII
Rural Business-Cooperative Service	7, XVIII, XLII
Rural Development Administration	7, XLII
Rural Housing Service	7, XVIII, XXXV
Rural Telephone Bank	7, XVI
Rural Utilities Service	7, XVII, XVIII, XLII
Secretary of Agriculture, Office of	7, Subtitle A
Transportation, Office of	7, XXXIII
World Agricultural Outlook Board	7, XXXVIII
Air Force Department	32, VII
Federal Acquisition Regulation Supplement	48, 53
Alcohol, Tobacco and Firearms, Bureau of	27, I
AMTRAK	49, VII
American Battle Monuments Commission	36, IV
American Indians, Office of the Special Trustee	25, VII
Animal and Plant Health Inspection Service	7, III; 9, I
Appalachian Regional Commission	5, IX
Architectural and Transportation Barriers Compliance Board	36, XI

Agency	CFR Title, Subtitle or Chapter
Arctic Research Commission	45, XXIII
Armed Forces Retirement Home	5, XI
Army Department	32, V
Engineers, Corps of	33, II; 36, III
Federal Acquisition Regulation	48, 51
Benefits Review Board	20, VII
Bilingual Education and Minority Languages Affairs, Office of	34, V
Blind or Severely Disabled, Committee for Purchase From People Who Are	41, 51
Board for International Broadcasting	22, XIII
Broadcasting Board of Governors	22, V
Federal Acquisition Regulation	48, 19
Census Bureau	15, I
Central Intelligence Agency	32, XIX
Chief Financial Officer, Office of	7, XXX
Child Support Enforcement, Office of	45, III
Children and Families, Administration for	45, II, III, IV, X
Civil Rights, Commission on	45, VII
Civil Rights, Office for	34, I
Coast Guard	33, I; 46, I; 49, IV
Coast Guard (Great Lakes Pilotage)	46, III
Commerce Department	44, IV
Census Bureau	15, I
Economic Affairs, Under Secretary	37, V
Economic Analysis, Bureau of	15, VIII
Economic Development Administration	13, III
Emergency Management and Assistance	44, IV
Export Administration, Bureau of	15, VII
Federal Acquisition Regulation	48, 13
Fishery Conservation and Management	50, VI
Foreign-Trade Zones Board	15, IV
International Trade Administration	15, III; 19, III
National Institute of Standards and Technology	15, II
National Marine Fisheries Service	50, II, IV, VI
National Oceanic and Atmospheric Administration	15, IX; 50, II, III, IV, VI
National Telecommunications and Information Administration	15, XXIII; 47, III
National Weather Service	15, IX
Patent and Trademark Office, United States	37, I
Productivity, Technology and Innovation, Assistant Secretary for	37, IV
Secretary of Commerce, Office of	15, Subtitle A
Technology, Under Secretary for	37, V
Technology Administration	15, XI
Technology Policy, Assistant Secretary for	37, IV
Commercial Space Transportation	14, III
Commodity Credit Corporation	7, XIV
Commodity Futures Trading Commission	5, XLI; 17, I
Community Planning and Development, Office of Assistant Secretary for	24, V, VI
Community Services, Office of	45, X
Comptroller of the Currency	12, I
Construction Industry Collective Bargaining Commission	29, IX
Consumer Product Safety Commission	5, LXXI; 16, II
Cooperative State Research, Education, and Extension Service	7, XXXIV
Copyright Office	37, II
Corporation for National and Community Service	45, XII, XXV
Cost Accounting Standards Board	48, 99
Council on Environmental Quality	40, V
Customs Service, United States	19, I
Defense Contract Audit Agency	32, I
Defense Department	5, XXVI; 32, Subtitle A; 40, VII
Advanced Research Projects Agency	32, I
Air Force Department	32, VII
Army Department	32, V; 33, II; 36, III, 48, 51

Agency	CFR Title, Subtitle or Chapter
Defense Intelligence Agency	32, I
Defense Logistics Agency	32, I, XII; 48, 54
Engineers, Corps of	33, II; 36, III
Federal Acquisition Regulation	48, 2
National Imagery and Mapping Agency	32, I
Navy Department	32, VI; 48, 52
Secretary of Defense, Office of	32, I
Defense Contract Audit Agency	32, I
Defense Intelligence Agency	32, I
Defense Logistics Agency	32, XII; 48, 54
Defense Nuclear Facilities Safety Board	10, XVII
Delaware River Basin Commission	18, III
Drug Enforcement Administration	21, II
East-West Foreign Trade Board	15, XIII
Economic Affairs, Under Secretary	37, V
Economic Analysis, Bureau of	15, VIII
Economic Development Administration	13, III
Economic Research Service	7, XXXVII
Education, Department of	5, LIII
Bilingual Education and Minority Languages Affairs, Office of	34, V
Civil Rights, Office for	34, I
Educational Research and Improvement, Office of	34, VII
Elementary and Secondary Education, Office of	34, II
Federal Acquisition Regulation	48, 34
Postsecondary Education, Office of	34, VI
Secretary of Education, Office of	34, Subtitle A
Special Education and Rehabilitative Services, Office of	34, III
Vocational and Adult Education, Office of	34, IV
Educational Research and Improvement, Office of	34, VII
Elementary and Secondary Education, Office of	34, II
Emergency Oil and Gas Guaranteed Loan Board	13, V
Emergency Steel Guarantee Loan Board	13, IV
Employees' Compensation Appeals Board	20, IV
Employees Loyalty Board	5, V
Employment and Training Administration	20, V
Employment Standards Administration	20, VI
Endangered Species Committee	50, IV
Energy, Department of	5, XXIII; 10, II, III, X
Federal Acquisition Regulation	48, 9
Federal Energy Regulatory Commission	5, XXIV; 18, I
Property Management Regulations	41, 109
Energy, Office of	7, XXIX
Engineers, Corps of	33, II; 36, III
Engraving and Printing, Bureau of	31, VI
Environmental Protection Agency	5, LIV; 40, I, IV, VII
Federal Acquisition Regulation	48, 15
Property Management Regulations	41, 115
Environmental Quality, Office of	7, XXXI
Equal Employment Opportunity Commission	5, LXII; 29, XIV
Equal Opportunity, Office of Assistant Secretary for	24, I
Executive Office of the President	3, I
Administration, Office of	5, XV
Environmental Quality, Council on	40, V
Management and Budget, Office of	25, III, LXXVII; 48, 99
National Drug Control Policy, Office of	21, III
National Security Council	32, XXI; 47, 2
Presidential Documents	3
Science and Technology Policy, Office of	32, XXIV; 47, II
Trade Representative, Office of the United States	15, XX
Export Administration, Bureau of	15, VII
Export-Import Bank of the United States	5, LII; 12, IV
Family Assistance, Office of	45, II
Farm Credit Administration	5, XXXI; 12, VI
Farm Credit System Insurance Corporation	5, XXX; 12, XIV
Farm Service Agency	7, VII, XVIII
Federal Acquisition Regulation	48, 1

Agency	CFR Title, Subtitle or Chapter
Federal Aviation Administration	14, I
Commercial Space Transportation	14, III
Federal Claims Collection Standards	4, II
Federal Communications Commission	5, XXIX; 47, I
Federal Contract Compliance Programs, Office of	41, 60
Federal Crop Insurance Corporation	7, IV
Federal Deposit Insurance Corporation	5, XXII; 12, III
Federal Election Commission	11, I
Federal Emergency Management Agency	44, I
Federal Acquisition Regulation	48, 44
Federal Employees Group Life Insurance Federal Acquisition Regulation	48, 21
Federal Employees Health Benefits Acquisition Regulation	48, 16
Federal Energy Regulatory Commission	5, XXIV; 18, I
Federal Financial Institutions Examination Council	12, XI
Federal Financing Bank	12, VIII
Federal Highway Administration	23, I, II
Federal Home Loan Mortgage Corporation	1, IV
Federal Housing Enterprise Oversight Office	12, XVII
Federal Housing Finance Board	12, IX
Federal Labor Relations Authority, and General Counsel of the Federal Labor Relations Authority	5, XIV; 22, XIV
Federal Law Enforcement Training Center	31, VII
Federal Management Regulation	41, 102
Federal Maritime Commission	46, IV
Federal Mediation and Conciliation Service	29, XII
Federal Mine Safety and Health Review Commission	5, LXXIV; 29, XXVII
Federal Motor Carrier Safety Administration	49, III
Federal Prison Industries, Inc.	28, III
Federal Procurement Policy Office	48, 99
Federal Property Management Regulations	41, 101
Federal Railroad Administration	49, II
Federal Register, Administrative Committee of	1, I
Federal Register, Office of	1, II
Federal Reserve System	12, II
Board of Governors	5, LVIII
Federal Retirement Thrift Investment Board	5, VI, LXXVI
Federal Service Impasses Panel	5, XIV
Federal Trade Commission	5, XLVII; 16, I
Federal Transit Administration	49, VI
Federal Travel Regulation System	41, Subtitle F
Fine Arts, Commission on	45, XXI
Fiscal Service	31, II
Fish and Wildlife Service, United States	50, I, IV
Fishery Conservation and Management	50, VI
Food and Drug Administration	21, I
Food and Nutrition Service	7, II
Food Safety and Inspection Service	9, III
Foreign Agricultural Service	7, XV
Foreign Assets Control, Office of	31, V
Foreign Claims Settlement Commission of the United States	45, V
Foreign Service Grievance Board	22, IX
Foreign Service Impasse Disputes Panel	22, XIV
Foreign Service Labor Relations Board	22, XIV
Foreign-Trade Zones Board	15, IV
Forest Service	36, II
General Accounting Office	4, I, II
General Services Administration	5, LVII; 41, 105
Contract Appeals, Board of	48, 61
Federal Acquisition Regulation	48, 5
Federal Management Regulation	41, 102
Federal Property Management Regulations	41, 101
Federal Travel Regulation System	41, Subtitle F
General	41, 300
Payment From a Non-Federal Source for Travel Expenses	41, 304
Payment of Expenses Connected With the Death of Certain Employees	41, 303

Agency	CFR Title, Subtitle or Chapter
Relocation Allowances	41, 302
Temporary Duty (TDY) Travel Allowances	41, 301
Geological Survey	30, IV
Government Ethics, Office of	5, XVI
Government National Mortgage Association	24, III
Grain Inspection, Packers and Stockyards Administration	7, VIII; 9, II
Harry S. Truman Scholarship Foundation	45, XVIII
Health and Human Services, Department of	5, XLV; 45, Subtitle A
Child Support Enforcement, Office of	45, III
Children and Families, Administration for	45, II, III, IV, X
Community Services, Office of	45, X
Family Assistance, Office of	45, II
Federal Acquisition Regulation	48, 3
Food and Drug Administration	21, I
Health Care Financing Administration	42, IV
Human Development Services, Office of	45, XIII
Indian Health Service	25, V
Inspector General (Health Care), Office of	42, V
Public Health Service	42, I
Refugee Resettlement, Office of	45, IV
Health Care Financing Administration	42, IV
Housing and Urban Development, Department of	5, LXV; 24, Subtitle B
Community Planning and Development, Office of Assistant Secretary for	24, V, VI
Equal Opportunity, Office of Assistant Secretary for	24, I
Federal Acquisition Regulation	48, 24
Federal Housing Enterprise Oversight, Office of	12, XVII
Government National Mortgage Association	24, III
Housing—Federal Housing Commissioner, Office of Assistant Secretary for	24, II, VIII, X, XX
Housing, Office of, and Multifamily Housing Assistance Restructuring, Office of	24, IV
Inspector General, Office of	24, XII
Public and Indian Housing, Office of Assistant Secretary for	24, IX
Secretary, Office of	24, Subtitle A, VII
Housing—Federal Housing Commissioner, Office of Assistant Secretary for	24, II, VIII, X, XX
Housing, Office of, and Multifamily Housing Assistance Restructuring, Office of	24, IV
Human Development Services, Office of	45, XIII
Immigration and Naturalization Service	8, I
Independent Counsel, Office of	28, VII
Indian Affairs, Bureau of	25, I, V
Indian Affairs, Office of the Assistant Secretary	25, VI
Indian Arts and Crafts Board	25, II
Indian Health Service	25, V
Information Resources Management, Office of	7, XXVII
Information Security Oversight Office, National Archives and Records Administration	32, XX
Inspector General	
Agriculture Department	7, XXVI
Health and Human Services Department	42, V
Housing and Urban Development Department	24, XII
Institute of Peace, United States	22, XVII
Inter-American Foundation	5, LXIII; 22, X
Intergovernmental Relations, Advisory Commission on	5, VII
Interior Department	
American Indians, Office of the Special Trustee	25, VII
Endangered Species Committee	50, IV
Federal Acquisition Regulation	48, 14
Federal Property Management Regulations System	41, 114
Fish and Wildlife Service, United States	50, I, IV
Geological Survey	30, IV
Indian Affairs, Bureau of	25, I, V
Indian Affairs, Office of the Assistant Secretary	25, VI
Indian Arts and Crafts Board	25, II
Land Management, Bureau of	43, II

Agency	CFR Title, Subtitle or Chapter
Minerals Management Service	30, II
Mines, Bureau of	30, VI
National Indian Gaming Commission	25, III
National Park Service	36, I
Reclamation, Bureau of	43, I
Secretary of the Interior, Office of	43, Subtitle A
Surface Mining and Reclamation Appeals, Board of	30, III
Surface Mining Reclamation and Enforcement, Office of	30, VII
Internal Revenue Service	26, I
International Boundary and Water Commission, United States and Mexico, United States Section	22, XI
International Development, United States Agency for	22, II
Federal Acquisition Regulation	48, 7
International Development Cooperation Agency, United States	22, XII
International Fishing and Related Activities	50, III
International Investment, Office of	31, VIII
International Joint Commission, United States and Canada	22, IV
International Organizations Employees Loyalty Board	5, V
International Trade Administration	15, III; 19, III
International Trade Commission, United States	19, II
Interstate Commerce Commission	5, XL
James Madison Memorial Fellowship Foundation	45, XXIV
Japan–United States Friendship Commission	22, XVI
Joint Board for the Enrollment of Actuaries	20, VIII
Justice Department	5, XXVIII; 28, I; 40, IV
Drug Enforcement Administration	21, II
Federal Acquisition Regulation	48, 28
Federal Claims Collection Standards	4, II
Federal Prison Industries, Inc.	28, III
Foreign Claims Settlement Commission of the United States	45, V
Immigration and Naturalization Service	8, I
Offices of Independent Counsel	28, VI
Prisons, Bureau of	28, V
Property Management Regulations	41, 128
Labor Department	5, XLII
Benefits Review Board	20, VII
Employees' Compensation Appeals Board	20, IV
Employment and Training Administration	20, V
Employment Standards Administration	20, VI
Federal Acquisition Regulation	48, 29
Federal Contract Compliance Programs, Office of	41, 60
Federal Procurement Regulations System	41, 50
Labor-Management Standards, Office of	29, II, IV
Mine Safety and Health Administration	30, I
Occupational Safety and Health Administration	29, XVII
Pension and Welfare Benefits Administration	29, XXV
Public Contracts	41, 50
Secretary of Labor, Office of	29, Subtitle A
Veterans' Employment and Training, Office of the Assistant Secretary for	41, 61; 20, IX
Wage and Hour Division	29, V
Workers' Compensation Programs, Office of	20, I
Labor-Management Standards, Office of	29, II, IV
Land Management, Bureau of	43, II
Legal Services Corporation	45, XVI
Library of Congress	36, VII
Copyright Office	37, II
Management and Budget, Office of	5, III, LXXVII; 48, 99
Marine Mammal Commission	50, V
Maritime Administration	46, II
Merit Systems Protection Board	5, II
Micronesia Status Negotiations, Office for	32, XXVII
Mine Safety and Health Administration	30, I
Minerals Management Service	30, II
Mines, Bureau of	30, VI

Agency	CFR Title, Subtitle or Chapter
Minority Business Development Agency	15, XIV
Miscellaneous Agencies	1, IV
Monetary Offices	31, I
National Aeronautics and Space Administration	5, LIX; 14, V
Federal Acquisition Regulation	48, 18
National Agricultural Library	7, XLI
National Agricultural Statistics Service	7, XXXVI
National and Community Service, Corporation for	45, XII, XXV
National Archives and Records Administration	5, LXVI; 36, XII
Information Security Oversight Office	32, XX
National Bureau of Standards	15, II
National Capital Planning Commission	1, IV
National Commission for Employment Policy	1, IV
National Commission on Libraries and Information Science	45, XVII
National Council on Disability	34, XII
National Counterintelligence Center	32, XVIII
National Credit Union Administration	12, VII
National Drug Control Policy, Office of	21, III
National Foundation on the Arts and the Humanities	45, XI
National Highway Traffic Safety Administration	23, II, III; 49, V
National Imagery and Mapping Agency	32, I
National Indian Gaming Commission	25, III
National Institute for Literacy	34, XI
National Institute of Standards and Technology	15, II
National Labor Relations Board	5, LXI; 29, I
National Marine Fisheries Service	50, II, IV, VI
National Mediation Board	29, X
National Oceanic and Atmospheric Administration	15, IX; 50, II, III, IV, VI
National Park Service	36, I
National Railroad Adjustment Board	29, III
National Railroad Passenger Corporation (AMTRAK)	49, VII
National Science Foundation	5, XLIII; 45, VI
Federal Acquisition Regulation	48, 25
National Security Council	32, XXI
National Security Council and Office of Science and Technology Policy	47, II
National Telecommunications and Information Administration	15, XXIII; 47, III
National Transportation Safety Board	49, VIII
National Weather Service	15, IX
Natural Resources Conservation Service	7, VI
Navajo and Hopi Indian Relocation, Office of	25, IV
Navy Department	32, VI
Federal Acquisition Regulation	48, 52
Neighborhood Reinvestment Corporation	24, XXV
Northeast Dairy Compact Commission	7, XIII
Northeast Interstate Low-Level Radioactive Waste Commission	10, XVIII
Nuclear Regulatory Commission	5, XLVIII; 10, I
Federal Acquisition Regulation	48, 20
Occupational Safety and Health Administration	29, XVII
Occupational Safety and Health Review Commission	29, XX
Offices of Independent Counsel	28, VI
Oklahoma City National Memorial Trust	36, XV
Operations Office	7, XXVIII
Overseas Private Investment Corporation	5, XXXIII; 22, VII
Panama Canal Commission	48, 35
Panama Canal Regulations	35, I
Patent and Trademark Office, United States	37, I
Payment From a Non-Federal Source for Travel Expenses	41, 304
Payment of Expenses Connected With the Death of Certain Employees	41, 303
Peace Corps	22, III
Pennsylvania Avenue Development Corporation	36, IX
Pension and Welfare Benefits Administration	29, XXV
Pension Benefit Guaranty Corporation	29, XL
Personnel Management, Office of	5, I, XXXV; 45, VIII

Agency	CFR Title, Subtitle or Chapter
Federal Acquisition Regulation	48, 17
Federal Employees Group Life Insurance Federal Acquisition Regulation	48, 21
Federal Employees Health Benefits Acquisition Regulation	48, 16
Postal Rate Commission	5, XLVI; 39, III
Postal Service, United States	5, LX; 39, I
Postsecondary Education, Office of	34, VI
President's Commission on White House Fellowships	1, IV
Presidential Documents	3
Presidio Trust	36, X
Prisons, Bureau of	28, V
Procurement and Property Management, Office of	7, XXXII
Productivity, Technology and Innovation, Assistant Secretary	37, IV
Public Contracts, Department of Labor	41, 50
Public and Indian Housing, Office of Assistant Secretary for	24, IX
Public Health Service	42, I
Railroad Retirement Board	20, II
Reclamation, Bureau of	43, I
Refugee Resettlement, Office of	45, IV
Regional Action Planning Commissions	13, V
Relocation Allowances	41, 302
Research and Special Programs Administration	49, I
Rural Business-Cooperative Service	7, XVIII, XLII
Rural Development Administration	7, XLII
Rural Housing Service	7, XVIII, XXXV
Rural Telephone Bank	7, XVI
Rural Utilities Service	7, XVII, XVIII, XLII
Saint Lawrence Seaway Development Corporation	33, IV
Science and Technology Policy, Office of	32, XXIV
Science and Technology Policy, Office of, and National Security Council	47, II
Secret Service	31, IV
Securities and Exchange Commission	17, II
Selective Service System	32, XVI
Small Business Administration	13, I
Smithsonian Institution	36, V
Social Security Administration	20, III; 48, 23
Soldiers' and Airmen's Home, United States	5, XI
Special Counsel, Office of	5, VIII
Special Education and Rehabilitative Services, Office of	34, III
State Department	22, I
Federal Acquisition Regulation	48, 6
Surface Mining and Reclamation Appeals, Board of	30, III
Surface Mining Reclamation and Enforcement, Office of	30, VII
Surface Transportation Board	49, X
Susquehanna River Basin Commission	18, VIII
Technology Administration	15, XI
Technology Policy, Assistant Secretary for	37, IV
Technology, Under Secretary for	37, V
Tennessee Valley Authority	5, LXIX; 18, XIII
Thrift Supervision Office, Department of the Treasury	12, V
Trade Representative, United States, Office of	15, XX
Transportation, Department of	5, L
Coast Guard	33, I; 46, I; 49, IV
Coast Guard (Great Lakes Pilotage)	46, III
Commercial Space Transportation	14, III
Contract Appeals, Board of	48, 63
Emergency Management and Assistance	44, IV
Federal Acquisition Regulation	48, 12
Federal Aviation Administration	14, I
Federal Highway Administration	23, I, II
Federal Motor Carrier Safety Administration	49, III
Federal Railroad Administration	49, II
Federal Transit Administration	49, VI
Maritime Administration	46, II
National Highway Traffic Safety Administration	23, II, III; 49, V

Agency	CFR Title, Subtitle or Chapter
Research and Special Programs Administration	49, I
Saint Lawrence Seaway Development Corporation	33, IV
Secretary of Transportation, Office of	14, II; 49, Subtitle A
Surface Transportation Board	49, X
Transportation Statistics Bureau	49, XI
Transportation, Office of	7, XXXIII
Transportation Statistics Bureau	49, XI
Travel Allowances, Temporary Duty (TDY)	41, 301
Treasury Department	5, XXI; 12, XV; 17, IV
Alcohol, Tobacco and Firearms, Bureau of	27, I
Community Development Financial Institutions Fund	12, XVIII
Comptroller of the Currency	12, I
Customs Service, United States	19, I
Engraving and Printing, Bureau of	31, VI
Federal Acquisition Regulation	48, 10
Federal Law Enforcement Training Center	31, VII
Fiscal Service	31, II
Foreign Assets Control, Office of	31, V
Internal Revenue Service	26, I
International Investment, Office of	31, VIII
Monetary Offices	31, I
Secret Service	31, IV
Secretary of the Treasury, Office of	31, Subtitle A
Thrift Supervision, Office of	12, V
Truman, Harry S. Scholarship Foundation	45, XVIII
United States and Canada, International Joint Commission	22, IV
United States and Mexico, International Boundary and Water Commission, United States Section	22, XI
Utah Reclamation Mitigation and Conservation Commission	43, III
Veterans Affairs Department	38, I
Federal Acquisition Regulation	48, 8
Veterans' Employment and Training, Office of the Assistant Secretary for	41, 61; 20, IX
Vice President of the United States, Office of	32, XXVIII
Vocational and Adult Education, Office of	34, IV
Wage and Hour Division	29, V
Water Resources Council	18, VI
Workers' Compensation Programs, Office of	20, I
World Agricultural Outlook Board	7, XXXVIII

List of CFR Sections Affected

All changes in this volume of the Code of Federal Regulations which were made by documents published in the FEDERAL REGISTER since January 1, 1986, are enumerated in the following list. Entries indicate the nature of the changes effected. Page numbers refer to FEDERAL REGISTER pages. The user should consult the entries for chapters and parts as well as sections for revisions.

For the period before January 1, 1986, see the "List of CFR Sections Affected, 1949-1963, 1964-1972, and 1973-1985" published in seven separate volumes.

1986		1987	
46 CFR	51 FR Page	46 CFR	52 FR Page
Chapter I		Chapter I	
1 Authority citation revised; section authority citations removed	22805	1.05 (b) Note amended; interim	38623
1.10 (b) and (c) revised	22805	4.03-35 Added	47534
1.25 (a) revised	22805	4.03-45 Added	47534
2 Authority citation revised; subpart and section authority citations removed	19340	4.03-50 Added	47534
2.01-3 Added	19340	4.03-55 Added	47534
4 Heading and authority citation revised; section authority citations removed	19341	4.05-10 Revised	47534
4.01-1 Revised	19341	4.05-12 Added	47534
4.04-1-4.04-5 (Subpart 4.04) Added	19341	4.05-35 Added	47534
5.64 Removed	19341	5.201 Revised	47535
10.07-9 (b), (e), and (g) revised; interim	52330	5.205 Added	47535
Confirmed	10838	5.901 (d), (e) and (f) added	47535
25 Authority citation revised; section authority citations removed	4350	10 Revised; interim; eff. in part 12-1-88	38623
25.25-5 (f) added	4350	10.103 Amended; interim; eff. 4-1-89	38666
35 Authority citation revised; section authority citations removed	4350	10.201 (f)(1) revised; interim; eff. 4-1-89	38666
35.03-5 Revised	4350	10.205 (f)(1) revised; interim; eff. 4-1-89	38666
35.03-25 Added	4350	10.468 Text added; interim; eff. 4-1-89	38667
(a) introductory text and (1) corrected	15497	10.470 Added; interim; eff. 4-1-89	38668
		10.540 Text added; interim; eff. 4-1-89	38668
		10.701-10.713 (Subpart G) Added; interim	38659
		10.920 Text added; interim; eff. 4-1-89	38669
		10.950 Table amended; interim; eff. 4-1-89	38669
		15 Redesignated from Part 157 and revised; interim	38652
		15.301 (b) (8), (9), and (10) added; interim; eff. 10-1-89	38670

46 CFR (10-1-00 Edition)

46 CFR—Continued

52 FR
Page

Chapter I—Continued	
15.520 Text added; interim; eff. 10-1-89.....	38670
26.08-1 (Subpart 26.08) Text and authority citation revised	47535
26.25-1—26.25-5 (Subpart 26.25) Removed; interim.....	38652
30 Authority citation revised; section authority citations removed.....	7774
30.25-1 Revised.....	7774
31 Authority citation revised; section authority citations removed	39649
31.10-20 Revised.....	39649
31.10-21 Added	39649
31.10-22 Added	39651
31.10-24 Added	39651
32 Authority citation revised; section authority citations removed	18362
32.01-10 (d) added	18362
(d) corrected	22751
32.15-15 Revised.....	18362
(a) and (d) corrected	22751
32.15-20 Removed.....	18362
32.15-25 Removed.....	18362
32.40-1—32.40-90 (Subpart 32.40) Revised	18362
32.40-1 (a) and (c) corrected	22751
32.40-35 (d) corrected	22751
32.40-40 (c) and (l) corrected	22751
(l) correctly designated	23515
32.40-90 Corrected.....	22751
35.05-5 Removed; interim.....	38652
35.05-10 Removed; interim	38652
35.15-1 (Subpart 35.15) Revised	47535

1988

46 CFR

53 FR
Page

Chapter I	
1.01 (b)(2) amended.....	34533
1.05 (a) (1) and (2) amended.....	34533
2 Authority citation revised.....	7748, 36023, 37564
2.01-7 (a) table amended	36023
(a) table corrected	46871
2.45-20 (a) amended	34533
2.75-1 (c) and (d) amended.....	34533
2.75-5 (a) amended	34533
2.75-10 (b) amended	34533
2.75-15 (a) amended	34533
2.75-17(d)(1) amended	34533
2.75-60 Revised.....	7748
3 Authority citation revised	37564
4 Authority citation revised	47077

46 CFR—Continued

53 FR
Page

Chapter I—Continued	
4.03-2 Added	47077
4.03-4 Added	47077
4.03-5 Added	47077
4.03-6 Added	47077
4.03-7 Added	47077
4.05-1 (e) revised	47077
4.05-20 Amended.....	34533
4.06—4.06-60 (Subpart) Added.....	47078
5 Authority citation revised	37564
5.569 Table amended	47079
6 Authority citation revised	37564
6.06 Heading, (a), (b) introductory text, and (d) amended.....	34533
7 Authority citation revised	37564
9 Authority citation revised	37564
10 Authority citation revised; section authority citations removed	37564
10.103 Amended.....	18562
Technical correction	21822
10.482 Added	18562
Technical correction	21822
12 Authority citation revised; subpart and section authority citations removed	37564
14 Authority citation revised; subpart and section authority citations removed	37564
15 Authority citation revised; section authority citations removed	37565
15.301 (a) and (b) introductory text amended; (b)(8) added.....	18562
Technical correction	21822
15.410 Added	18562
Technical correction	21822
16 Added.....	47079
16.105 Corrected.....	48367
16.370 (a) and (c) corrected.....	48367
24 Authority citation revised; section authority citations removed	36023, 37565
24.01-10 Removed.....	36023
24.05-1 (a) table amended	36023
(a) table corrected	46871
25 Authority citation revised.....	31006
Authority citation revised; subpart authority citations removed	36023, 37565
25.26-1—25.26-5 (Subpart 25.26) Added; eff. 10-3-88	31006
25.45-1 Amended.....	36023
26 Authority citation revised; section authority citations removed	37565

List of CFR Sections Affected

46 CFR—Continued

53 FR
Page

Chapter I—Continued	
26.08–1 (Subpart 26.08) Authority citation correctly revised	13117
26.08–1 Corrected	13117
30 Authority citation revised.....	28972, 36023, 37565
30.01–2 (b) table amended (OMB numbers)	34297
30.01–5 (a)(1)(ii), (2)(ii) and (3)(iii) and (d) table amended	36023
(d) table corrected	46871
30.01–25 (c) amended.....	36024
30.10–35 Amended.....	34533
30.25–1 Revised; interim.....	28972
31 Authority citation revised; section authority citations removed.....	7748, 36024, 37565
Authority citation revised	32229
31.10–1 (b) amended	34533
(b) corrected	37570
(b) corrected.....	44011
31.10–18 (b) table footnote 1 and (c) table footnote 1 revised	7748
31.10–20 (a) and (d) amended.....	32229
31.10–21 (a) (1) and (2) amended; (b) through (f) redesignated as (c) through (g); new (b) added; (a) introductory text, (1) Table 31.10–21(a) and (2) Table 31.10–21(b), new (e) introductory text, and new (f) revised	32230
(a)(1) Tables 31.10–21(a) and 31.10–21(b) corrected.....	34872
31.10–24 Heading revised; (a) amended.....	32230
31.10–33 (a)(2) amended.....	34533
32 Interpretation.....	32050
Authority citation revised	37565
32.53–3 (a), (b), (d), and (e) amended	34534
33 Authority citation revised; section authority citations removed	36024, 37565
33.01–3 Added	17703
33.15–10 (j) revised.....	17704
34 Authority citation revised	7748, 37565
34.15–20 (i) revised	7748
35 Authority citation revised.....	17704, 36024, 37565
35.01–3 Added	17704
35.01–45 (d) amended.....	36024
35.12–5 (a) amended; (b) removed	27688
35.15–1 Heading and text corrected.....	13117

46 CFR—Continued

53 FR
Page

Chapter I—Continued	
35.20–1 (c) amended	34534
35.30–20 (c)(3) revised	17704
35.30–40 (a)(1) amended.....	36024
36 Authority citation revised; section authority citations removed	37565
37 Authority citation revised; section authority citations removed	36024, 37565
38 Authority citation revised; section and subpart authority citations removed	36024, 37565
38.01–1 (b) amended.....	36024
40 Authority citation revised.....	37565

1989

46 CFR

54 FR
Page

Chapter I	
1 Revised.....	50376
1.05 Regulation at 52 FR 38623 confirmed	132
2.01–70 Revised	50379
3.10–10 Added	50379
6.06 Heading, (a), (b) and (d) corrected	3038
10 Regulation at 52 FR 38623 confirmed; authority citation revised.....	132
10.103 Amended.....	132
Regulation at 53 FR 38666 effective date suspended.....	8334
10.107 (b) (1) and (2) revised; (b) (3) through (5) removed.....	133
10.201 Heading, (a), (b), (c), and (f) (1) and (2) revised	133
Regulation at 53 FR 38666 effective date suspended.....	8334
10.202 Heading, (b), (d), (g), and (h) revised	133
10.203 Table amended.....	133
10.204 Revised.....	50379
10.205 (c)(1)(ii), (d)(2) introductory text, and (4), (f) (1) and (2), (h) introductory text, (1)(iii) and (2) (ii) and (iii), and (i)(1) revised; (f)(4) and (h)(2)(iv) added.....	133
Regulation at 53 FR 38666 effective date suspended.....	8334
10.207 (c)(5) amended.....	134
10.209 (a) amended; (c)(2) removed; (c) (3) through (5) redesignated as (c) (2) through (4); new (c)(4), (e)(3)(i) (B) and (C), and (f) revised; (g) added	134

46 CFR (10-1-00 Edition)

46 CFR—Continued

54 FR
Page

Chapter I—Continued	
10.211 (c) revised	135
10.217 (a) (1) revised	135
10.219 Revised	135
10.304 (a) revised	135
10.401 (d) and (g) introductory text revised; (h) added	135
10.402 (a), (b), and (c) (3) revised; (d) added	135
10.403 Figures 10.403-1 and 10.403-2 removed; Figure 10.403 added	136
10.406 (b) (2) revised	138
10.410 Heading and (a) introduc- tory text revised; (c) re- moved	138
10.412 Revised	138
10.414 Revised	138
10.416 Revised	138
10.418 Revised	138
10.420 Revised	138
10.421 Added	138
10.422 (b) (4) revised	139
10.424 Revised	139
10.426 Revised	139
10.427 Redesignated from 10.428 and (a) (1) and (2) and (b) re- vised	139
10.428 Redesignated as 10.427 and (a) (1) and (2) and (b) revised; new 10.428 redesignated from 10.429 and revised	138
10.429 Redesignated as 10.428 and revised; new 10.429 added	139
10.430 Revised	139
10.440 Removed	140
10.442 Revised	140
10.444 Revised	140
10.446 Added	140
10.448 Added	140
10.452 Revised	140
10.454 (a) and (d) revised	140
10.455 Redesignated as 10.456; (b) revised; (d) added; new 10.455 added	140
10.456 Redesignated as 10.457; new 10.456 redesignated from 10.455 and (b) revised and (d) added	141
10.457 Redesignated from 10.456	141
10.459 Added	141
10.460 Section and Figure re- moved	141
10.462 (b), (c), and (d) revised	141
10.464 (e) introductory text re- vised	142

46 CFR—Continued

54 FR
Page

Chapter I—Continued	
10.466 (a) revised; (c) through (g) redesignated as (e), (c), (f), (g), and (h); new (d) and (g) (4) added	142
10.468 Regulation at 53 FR 38668 effective date suspended	8334
10.470 Regulation at 53 FR 38668 effective date suspended	8334
10.480 (k) revised	142
10.501 (b) introductory text re- vised	142
10.502 (b) introductory text re- vised; (c) added	142
10.504 Redesignated as 10.505 and Figure 10.505 revised; new 10.504 added	142
10.505 Redesignated from 10.504 and new Figure 10.505 re- vised	142
10.540 Regulation at 53 FR 38668 effective date suspended	8334
10.701—10.713 (Subpart G) Addi- tion at 52 FR 38659 con- firmed	132
10.701 (d) revised	144
10.703 (a) introductory text re- vised; (d) added	144
10.705 (b) revised	144
10.805 (d) revised	144
10.901 (c) removed	144
10.903 (a) and (b) (2) revised	144
10.905 Removed	144
10.910 Tables 10.910-1 and 10.910-2 revised	144
10.920 Regulation at 52 FR 38669 effective date suspended	8334
10.950 Table 10.950 revised	147
Regulation at 53 FR 38669 effec- tive date suspended	8334
12.02-25 Revised	50379
12.20-1 (c) revised	149
15 Redesignation from Part 157 and revision at 52 FR 38652 con- firmed	132
Authority citation revised	149
15.301 (a) amended	149
Regulation at 52 FR 38670 effec- tive date suspended	8334
15.401 Revised	149
15.501 (b) revised	149
15.510 Revised	50379
15.520 Regulation at 52 FR 38670 effective date suspended	8334
15.801 Revised	149
15.805 (a) (4) added	149

List of CFR Sections Affected

46 CFR—Continued

54 FR
Page

Chapter I—Continued

15.810 (a) through (d) redesignated as (b) through (e); new (a) added; new (b) introductory text and (d) revised	149
15.901 Revised	150
15.905 Revised	150
15.910 (a) and (b) revised	150
15.915 Revised	150
16.205 (a) revised	26378
(a) revised	52944
16.207 (b) revised	53287
24.01-7 Added	50380
25 Authority citation revised	18409
25.01-3 Added; interim	6401
25.01-5 Added (OMB number); interim	6401
25.26-1 (a) introductory text revised	14812
25.45-1—25.45-2 (Subpart 25.45) Revised; interim	6402
25.50-1 (Subpart 25.50) Added; interim	18409
26.25-1—26.25-5 (Subpart 26.25) Removal at 52 FR 38652 confirmed	132
30 Authority citation revised	40009
30.10-71 Revised	150
30.20-50 Revised	50380
30.25-1 Regulation at 53 FR 28972 confirmed	12629
Table 30.25-1 revised; interim	40009
31.15-1 (b) revised	150
31.15-5 Revised	151
35.05-5 Removal at 52 FR 38652 confirmed	132
35.05-10 Removal at 52 FR 38652 confirmed	132
35.35-1 (b) revised	151
38.01-3 Added; interim	50962
38.25-1 (a) (1), (3), and (b) revised; (a) (4), (5), and (b) note added; interim	50962
38.25-3 Added; interim	50963

1990

46 CFR

55 FR
Page

Chapter I

2.01-6 (a) (1), (3), (4), and (b) (1) revised	30659
2.01-7 (a) Table 2.01-7(a) footnote 6 revised	30659
2.01-8 (a) revised	30659
2.01-25 Heading, (a) (1) introductory text revised	30659
10.103 Amended; interim	14798

46 CFR—Continued

55 FR
Page

Chapter I—Continued

10.107 (b) (1) revised; interim	14799
10.201 (f) (1) revised; interim	14799
10.205 (f) (1) revised; interim	14799
10.468 Regulation at 54 FR 8334 withdrawn; added; interim	14799
10.470 Regulation at 54 FR 8334 withdrawn; added; interim	14799
10.472 Regulation at 54 FR 8334 withdrawn; added; interim	14801
10.474 Regulation at 54 FR 8334 withdrawn; added; interim	14801
10.476 Added; interim	14802
10.540 Regulation at 54 FR 8334 withdrawn; added; interim	14802
10.542 Added; interim	14802
10.544 Added; interim	14802
10.920 Regulation at 54 FR 8334 withdrawn; added; interim	14802
10.950 Regulation at 54 FR 8334 withdrawn; Table 10.950 amended; interim	14804
15.301 Regulation at 54 FR 8334 withdrawn; (b) (8) through (10) added; interim; eff. 1-1-91	14805
15.520 Regulation at 54 FR 8334 withdrawn; revised; interim; eff. 1-1-91	14805
15.720 (a) revised; (b) redesignated as (d); new (b) and (c) added; new (d) revised; interim	1212
15.810 (b) (2) through (4) redesignated (b) (3) through (5); (b) (1) revised; and new (b) (2) added; interim; eff. 1-1-91	14805
16.205 (a) revised	635
(a) and (b) revised	40179
24.05-1 (a) Table 24.05-1(a) footnote 6 revised	30659
24.10-13 Revised	30659
25.01-3 Revised	3959
25.01-5 Regulation at 54 FR 6401 confirmed	3959
25.26-1 (a) introductory text revised; (c) added	14920
25.45-1—25.45-2 (Subpart 25.45) Regulation at 54 FR 6402 confirmed	3959
25.45-2 (b) revised	3960
25.50-1 (Subpart 25.50) Regulation at 54 FR 18409 confirmed	35988
25.50-1 Revised	18583, 39968
30 Authority citation revised	25446
30.01-2 (b) table amended (OMB numbers)	25446
30.01-5 (d) Table 30.01-5(d) footnote 6 and (e) (1) revised	30660

46 CFR (10-1-00 Edition)

46 CFR—Continued

	55 FR Page
Chapter I—Continued	
(a) revised.....	37408
30.01-6 (a) revised.....	30660
30.25-1 Regulation at 54 FR 40009 confirmed; Table 30.25-1 amended.....	17276
31.10-5 (a)(2) added.....	32247
Technical correction.....	38441
31.37-1 (d) amended.....	21550
31.37-5 (a) amended.....	21550
31.40-1—31.40-45 (Subpart 31.40) Heading revised.....	30660
31.37-40 (a) and (c) amended.....	21550
31.40-45 (a) revised.....	30660
32.16-1 (Subpart 32.16) Added.....	32247
Technical correction.....	38441
32.53-85 Existing text designated as (a); (b) added.....	25446
33.15-10 (nn) revised.....	30660
35.35-20 (m) added.....	25446
35.35-30 (c) added.....	25446
38 Technical correction.....	43063
38.01-3 Regulation at 54 FR 50962 confirmed.....	41917
38.25-1 Regulation at 54 FR 50962 confirmed.....	41917
38.25-3 Regulation at 54 FR 50963 confirmed.....	41917
39 Added.....	25446
39.10-11 Heading and (b) cor- rected.....	39270
39.10-13 Heading corrected.....	39270
39.30-1 Heading and (d)(2) cor- rected.....	39270
39.40-1 (e) corrected.....	39270
39.40-5 (c) corrected.....	39270

1991

46 CFR

	56 FR Page
Chapter I	
16 Technical correction.....	41392
16.105 Amended.....	31033
16.201 (c) and (d) revised.....	31034
16.205 Revised.....	31034, 60930
16.207 (b) revised.....	18983
16.230 Revised.....	31034
25.01-3 Revised.....	35820
25.35-1 (c) revised; (d) and (e) re- moved.....	35820
25.50-1 Revised.....	8880
28 Added.....	40393
28.30 (a) corrected.....	49822
28.110 (b) table corrected.....	49822
28.115 Table corrected.....	47679, 49822
28.120 (a) table and (c) table cor- rected.....	47679

46 CFR—Continued

	56 FR Page
Chapter I—Continued	
(h)(2) corrected.....	49822
28.135 (a) and table corrected.....	49822
28.140 Table corrected.....	49822
28.160 Table corrected.....	47679
28.375 (c)(6) corrected.....	49822
28.380 (b) corrected.....	49822
28.385 (b) corrected.....	49822
28.410 Heading corrected.....	49822
28.500 (a) corrected.....	47679
28.550 (b)(1) and (2) corrected.....	47679
28.575 Corrected.....	47679
28.580 Corrected.....	47680
30.25-1 Table amended.....	52134
30.25-3 Correctly added.....	65006
32.01-1—32.01-15 (Subpart 32.01) Redesignated as Subpart 32.02.....	35821
32.01-1 Redesignated as 32.02-1; new 32.01-1 (Subpart 32.01) added.....	35820
32.01-5 Redesignated as 32.02-5.....	35820
32.01-10 Redesignated as 32.02- 10.....	35820
32.01-15 Redesignated as 32.02- 15.....	35820
32.02-1—32.02-15 (Subpart 32.02) Redesignated from Subpart 32.01.....	32820
32.02-1 Redesignated from 32.01- 1.....	35820
32.02-5 Redesignated from 32.01- 5.....	35820
32.02-10 Redesignated from 32.01- 10.....	35820
32.02-15 Redesignated from 32.01- 15.....	35820
32.20-10 Revised.....	35821
34.01-1—34.01-10 (Subpart 34.01-1) Heading revised.....	35821
34.01-1 Heading revised.....	35821
34.01-15 Added.....	35821
34.10-15 (d) revised.....	35821

1992

46 CFR

	57 FR Page
Chapter I	
10.504 Correctly added.....	7326
16.207 (b) revised.....	31275
28.110 Table revised; interim.....	34189
28.500 (b) revised.....	364
28.580 (a) revised.....	364
30 Note revised; interim.....	36246
30.01-2 (b) revised (OMB num- bers); eff. 12-10-92.....	41821
30.01-5 Note added; interim.....	36246

List of CFR Sections Affected

46 CFR—Continued

	57 FR Page
Chapter I—Continued	
Regulation at 57 FR 36246 comment period reopened	60402
32.05-1 Heading and (a) revised; (b) and (c) redesignated as (c) and (d); (b), (e), (f) and (g) added; eff. 12-10-92.....	41821
32.60-1-32.60-45 (Subpart 32.60) Note added; interim.....	36246
Regulation at 57 FR 36246 comment period reopened	60402
32.95-1 (Subpart 32.95) Added; interim.....	36246
Regulation at 57 FR 36246 comment period reopened	60402
35.07-10 (b)(4) through (9) redesignated as (b)(5) through (10); new (b)(4) and (c)(4) added; eff. 12-10-92.....	41821
35.20-7 Added; eff. 12-10-92.....	41821
35.30-20 (c)(1), (2) and (d) revised.....	48324
(d) corrected.....	56406
35.40-20 Revised.....	48324

1993

46 CFR

	58 FR Page
Chapter I	
1 Technical correction.....	65131
1.03-15 (h)(1) revised.....	60265
1.03-45 Added.....	60265
4.06-50 (b) revised.....	31107
10 Authority citation revised.....	15237
10.103 Amended.....	15237
10.109 Added.....	15237
(c)(4) correctly designated.....	15901
10.110 Added.....	15237
10.111 Added.....	15237
10.112 Added.....	15238
10.205 (a) revised.....	15238
10.207 (a) revised.....	15238
10.209 (a) revised.....	15238
10.217 (a) revised.....	15238
10.219 Existing text redesignated as (a); (b) and (c) added.....	15238
12 Authority citation revised.....	15238
12.01-6 Added.....	15238
12.01-7 Amended.....	15239
12.02-18 Added.....	15239
12.02-23 (b) and (c) revised.....	15239
15 Authority citation revised.....	13361
15.720 Regulation at 55 FR 1212 confirmed.....	25
15.812 (a) introductory text revised; (f) added.....	13361
16 Common preamble.....	68194

46 CFR—Continued

	58 FR Page
Chapter I—Continued	
16.105 Amended.....	31107
16.210 Revised.....	31107
16.220 (b)(1) and (2) revised.....	31107
16.350 Revised.....	31107
16.360 (a) revised.....	31107
16.370 (a) and (b) revised.....	31107
16.500 (Subpart E) Added.....	68277
16 Appendix B added.....	68279
25.26-1-25.26-60 (Subpart 25.26) Revised.....	13367
25.26-5 (b)(3) and (c) corrected.....	27658
25.26-20 (a)(2) and (b)(3) corrected.....	27658
25.26-50 (a) corrected.....	27658
30 Authority citation revised.....	52602
30.01-5 (e)(2) revised.....	52602
31 Authority citation revised.....	52602
31.10-21a Added.....	52602
32 Authority citation revised.....	52602
32.59 (Subpart) added.....	52602
35.20-45 Introductory text revised.....	27633

1994

46 CFR

	59 FR Page
Chapter I	
4 Authority citation revised.....	39471
4.05-1 Revised; interim.....	39471
4.05-10 Revised; interim.....	39471
10 Authority citation revised.....	49297
10.103 Regulation at 55 FR 14798 confirmed.....	10756
10.107 Regulation at 55 FR 14799 confirmed.....	10756
10.109 (d)(3) added; eff. 10-27-94.....	49297
10.201 Regulation at 55 FR 14799 confirmed.....	10756
10.202 Heading, (a), (b) and (c) revised; eff. 10-27-94.....	49297
10.203 Revised; eff. 10-27-94.....	49297
Table corrected.....	50964
10.205 Regulation at 55 FR 14799 confirmed.....	10756
10.209 Revised; eff. 10-27-94.....	49299
10.305 Revised; interim.....	53757
10.306 Added; interim.....	53758
10.468 Regulation at 55 FR 14799 confirmed.....	10756
10.470 Regulation at 55 FR 14799 confirmed.....	10756
10.472 Regulation at 55 FR 14801 confirmed.....	10756
10.474 Regulation at 55 FR 14801 confirmed.....	10756

46 CFR (10-1-00 Edition)

46 CFR—Continued

	59 FR Page
Chapter I—Continued	
10.476 Regulation at 55 FR 14802 confirmed.....	10756
10.480 Revised; interim	53758
10.540 Regulation at 55 FR 14802 confirmed.....	10756
10.542 Regulation at 55 FR 14802 confirmed; (c) added.....	10756
10.544 Regulation at 55 FR 14802 confirmed; (c) added.....	10756
10.805 (f) added; eff. 10-27-94.....	49300
10.811 Added; eff. 1-1-95	49300
Table corrected	50964
10.903 (b)(1), (2) and (3) redesignated as (b)(2), (3) and (4); new (b)(1) added.....	10756
10.920 Regulation at 55 FR 14802 confirmed.....	10756
10.950 Regulation at 55 FR 14804 confirmed.....	10756
12 Authority citation revised.....	28792, 49300
12.02-9 (e) added; eff. 10-27-94.....	49300
12.02-15 Revised; eff. 10-27-94.....	49300
12.02-17 (b) revised; eff. 10-27-94.....	49300
12.02-18 (a)(7) added; eff. 10-27-94.....	49301
12.02-27 Added; eff. 10-27-94	49301
12.02-29 Added; eff. 1-1-95	49302
12.25-5 Removed	28792
15 Authority citation revised	4841
15.301 Amended; interim	4841
Regulation at 55 FR 14805 confirmed.....	10756
15.520 Regulation at 55 FR 14805 confirmed.....	10756
15.810 Regulation at 55 FR 14805 confirmed.....	10756
15.812 Revised; interim.....	4842
15.815 (c) added; interim	53759
16.105 Amended.....	28792
Amended	62226
16.205 (d) removed	62226
16.207 (b) revised	65501
16.210 (a) revised	28792
16.230 (c) and (e) revised; (f) redesignated as (k); new (f) and (g) through (j) added	62227
30.25-1 Table revised	17005
Table amended	45135, 45136
35.01-60 Added	16779
38 Authority citation revised.....	39966
38.01-2 (a)(9)(i) revised	39966
40.01-1 Amended	17011
40.01-5 Removed	17011
40.15-1 (a)(3) and (e) amended	17011

1995

46 CFR

	60 FR Page
Chapter I	
1.01-10 (b)(1) revised.....	50458
(b)(1)(ii)(C) corrected; eff. 10-19-95	54106
(b)(1) corrected; eff. 10-19-95	54106
(b)(1)(ii)(B) corrected; eff. 10-19-95	54106
(b)(1) introductory text, (ii)(B) and (C) corrected	54106
2 Authority citation revised	13563
2.01-1 (b) revised	13563
2.01-6 Heading revised; (a)(2) redesignated as (a)(2)(i); (a)(2)(ii) added.....	13563
2.10-1—2.10-135 (Subpart 2.10) Added	13563
2.10-10 Amended	50459
2.10-20 (e) amended	50459
2.10-105 (b) amended	50459
2.10-115 (b) amended	50459
2.45-20 (a) amended	50459
2.75-1 (d) and (f) amended	50459
2.75-10 (b) amended	50459
2.75-15 (a) amended	50459
2.75-17 (c)(2) revised; (d)(1) amended.....	50459
5.703 (c) amended	50459
6.06 (b) and (d) amended.....	50459
10 Authority citation revised	4524, 65483
10.103 Amended	4524, 65483
10.112 (b) amended.....	50460
10.201 (a) revised.....	4524
(b) revised; (h), (i) and (j) added	65484
10.202 Heading revised; (i) added	4524
10.205 (j) added.....	4524
(f)(2) revised; (d) added.....	65486
10.207 (g) added.....	4524
(h) and (i) added.....	65486
10.209 (g)(1) revised; (h) added	4525
(i) and (j) added.....	65486
10.302 (a) amended.....	50460
10.303 (e) amended.....	50460
10.304 (a) amended.....	50460
10.307 Amended.....	50460
10.464 (d)(2) amended.....	50460
10.470 (b)(1)(ii), (d)(1)(ii) and (h)(1)(ii) amended	50460
10.472 (a)(1)(ii) amended	50460
10.474 (a)(1)(ii) amended	50460
10.516 (a)(6) amended.....	50460
10.544 (a)(3) amended.....	50460
10.703 (c) amended.....	50460

List of CFR Sections Affected

46 CFR—Continued

Chapter I—Continued

10.805 (g) added.....	4525
12 Authority citation revised	4525,
17142, 65487	
12.01-5 (d) removed; interim; eff.	
3-31-96	17142
12.01-6 Amended.....	4525
Amended	65487
12.02-3 (b)(3) amended	50460
12.02-4 (c) added.....	4525
(a) and (b) amended	50460
(a) revised; (b) removed; (c) re-	
designated as (b); new (c), (d)	
and (e) added.....	65487
12.02-9 (f) added	4525
(g) and (h) added	65489
12.02-13 (b) amended.....	50460
12.02-14 (c) amended.....	50460
12.02-21 (b) amended.....	50460
12.02-24 Amended.....	50460
12.02-27 (g)(1) revised.....	4525
12.05-7 Introductory text, (b) in-	
troductory text and (2)	50460
12.10-3 (a)(2), (5) and (6) amend-	
ed	50460
12.15-7 (b) amended	50460
12.15-13 (a)(4) amended.....	50460
12.15-15 (a)(4) amended.....	50460
12.20-1—12.20-5 (Subpart 12.20)	
Removed; interim; eff. 3-31-	
96.....	17142
12.25-35 (a) amended.....	50460
12.25-40 Amended.....	50460
13 Added; interim; eff. 3-31-96	17142
14.01-3 Amended.....	50460
14.20-15 (d) amended.....	50460
15 Authority citation revised.....	24796
15.301 (a) amended and (c) revised;	
(d) added; interim; eff. 3-31-	
96.....	17154
Regulation at 59 FR 4841 con-	
firmed; (a) amended.....	20652
15.812 Regulation at 59 FR 4842	
confirmed; (a)(1) and (e) re-	
vised.....	20652
(f) added.....	20653
15.815 (c) revised; interim	8309
15.860 Added; interim; eff. 3-31-	
96.....	17154
15.1001—15.1040 (Subpart I)	
Added	24796
16.105 Amended.....	4525
16.205 (g) amended.....	50461
Corrected; eff. 10-19-95	54106
16.207 (b) revised	67063
16.220 Revised	4525
16.260 (b)(1) revised.....	4526

46 CFR—Continued

Chapter I—Continued

16.500 (a) and (c) amended.....	50461
Corrected; eff. 10-19-95	54106
25 Authority citation revised	2485,
48048	
25.01-3 (a) and (b) amended	50461
Corrected; eff. 10-19-95	54106
25.25-5 (f) revised.....	2485
25.40-1 (c) removed; (d) and (e) re-	
designated as (c) and (d)	48048
Regulation at 60 FR 48048 eff.	
date corrected to 10-1-95.....	50120
25.45-1 (a) amended	50461
25.45-2 (a) amended	50461
28 Authority citation revised.....	48048
28.40 (a) amended	50461
(b) revised.....	54444
28.50 Amended	54444
28.110 (a) amended	48048
Regulation at 60 FR 48048 eff.	
date corrected to 10-1-95.....	50120
28.115 (a) amended	48048
Regulation at 60 FR 48048 eff.	
date corrected to 10-1-95.....	50120
28.135 (a) amended	48048
Regulation at 60 FR 48048 eff.	
date corrected to 10-1-95.....	50120
28.145 Amended.....	48048
Regulation at 60 FR 48048 eff.	
date corrected to 10-1-95.....	50120
28.200—28.270 (Subpart C) Head-	
ing revised.....	54444
28.200 Revised.....	54444
28.210 (c), (d) and (e) revised.....	48048
Regulation at 60 FR 48048 eff.	
date corrected to 10-1-95.....	50120
28.240 (a) amended	48048
Regulation at 60 FR 48048 eff.	
date corrected to 10-1-95.....	50120
28.270 (c) revised	48048
Regulation at 60 FR 48048 eff.	
date corrected to 10-1-95.....	50120
28.575 Table amended.....	50461
28.800—28.905 (Subpart G)	
Added	54444
30 Regulation at 57 FR 36246 con-	
firmed	13324
Authority citation revised	34042,
34045, 48049	
30.01-5 Regulation at 57 FR 36246	
confirmed.....	13324
30.01-25 Removed.....	48049
Regulation at 60 FR 48049 eff.	
date corrected to 10-1-95.....	50120
30.10-44 Removed.....	48049
Regulation at 60 FR 48049 eff.	
date corrected to 10-1-95.....	50120

46 CFR (10-1-00 Edition)

46 CFR—Continued

60 FR
Page

Chapter I—Continued	
30.10-71 Revised; interim; eff. 3-31-96	17155
30.25-1 Table amended	34042, 34045
Table 1 corrected	39267
30.30-5 (a) amended	50461
30.30-7 Amended	50461
31 Authority citation revised	17155, 48049
31.01-5 (a) amended; (b) removed	48049
31.01-15 Regulation at 60 FR 48049 eff. date corrected to 10-1-95	50120
31.05-10 (a) revised; (b) amended	48049
Regulation at 60 FR 48049 eff. date corrected to 10-1-95	50120
31.10-1 (b) amended	50461
31.10-5 Regulation at 60 FR 48049 eff. date corrected to 10-1-95	50120
31.10-15 (c) removed	48049
31.10-21 (e)(1), (3) and (g) amended	50461
Corrected; eff. 10-19-95	54106
31.10-33 (a)(1) and (2) amended	50461
31.15-1 Revised; interim; eff. 3-31-96	17155
31.40-1 Revised	48049
Regulation at 60 FR 48049 eff. date corrected to 10-1-95	50120
31.40-30 Removed	48049
Regulation at 60 FR 48049 eff. date corrected to 10-1-95	50120
31.40-40 (e) removed; (f) redesignated as (e)	48049
Regulation at 60 FR 48049 eff. date corrected to 10-1-95	50120
32.01-1 (a) and (b) amended	50461
32.53-3 (b) amended	50461
32.60-1—32.60-45 (Subpart 32.60) Regulation at 57 FR 36246 confirmed	13324
32.95-1 (Subpart 32.95) Regulation at 57 FR 36246 confirmed	13324
33.01-3 (a) amended	50461
34.01-15 (a) amended	50461
35 Authority citation revised	17155, 48049
35.01-1 (a) amended	50462
35.01-30 Removed	48049
Regulation at 60 FR 48049 eff. date corrected to 10-1-95	50120
35.05-15 Heading and (b)(1) revised; interim; eff. 3-31-96	17155

46 CFR—Continued

60 FR
Page

Chapter I—Continued	
35.30-5 (c) removed; (d) and (e) redesignated as (c) and (d)	48049
Regulation at 60 FR 48049 eff. date corrected to 10-1-95	50120
35.35-1 Revised; interim; eff. 3-31-96	17155
35.35-10 Revised; interim; eff. 3-31-96	17156
35.35-15 (b) revised; interim; eff. 3-31-96	17156
35.35-20 Heading and introductory text revised; interim; eff. 3-31-96	17156
35.35-25 Revised; interim; eff. 3-31-96	17156
35.35-30 (a) and (b) amended; interim; eff. 3-31-96	17156
35.35-35 Revised; interim; eff. 3-31-96	17156
35.35-42 Revised; interim; eff. 3-31-96	17156
35.35-55 (a) revised; interim; eff. 3-31-96	17157
37 Removed	48049
Regulation at 60 FR 48049 eff. date corrected to 10-1-95	50120
39.10-1 (b) amended	50462
39.10-5 (a) and (b) amended	50462
39.10-9 Amended	50462
39.20-1 (a)(1) amended	50462
39.20-9 (d) amended	50462
39.40-1 (b), (c) and (e) amended	50462
40 Removed	48049
Regulation at 60 FR 48049 eff. date corrected to 10-1-95	50120

1996

46 CFR

61 FR
Page

Chapter I	
1.01-10 (b)(1) revised	50724
1.01-25 (b) amended	50725
1.03-15 (g), (h) and (j) revised	50725
2 Authority citation revised	13927
2.10-10 Amended	50725
2.10-20 (e) amended	50725
2.10-105 (b) amended	50725
2.10-115 (b) amended	50725
2.45-20 (a) amended	50725
2.75-1 (f) revised	13927
(c) and (d) amended	50725
2.75-5 (a) amended	50725
2.75-10 (b) amended	50725
2.75-15 (a) amended	50725
2.75-17 Removed	13927
(d)(1) amended	50725

List of CFR Sections Affected

46 CFR—Continued

	61 FR Page
Chapter I—Continued	
2.75-18 Removed	13927
2.75-19 Removed	13927
2.75-20 Removed	13927
2.75-30 Removed	13927
2.75-50 Heading and (a) revised; (c) added	13927
(c) amended	50725
4.11-10 Amended	50726
4.12-1 (e) amended	50726
5.703 (c) amended	50726
6.01 (a) amended	50726
6.06 (a), (b) and (d) amended	50726
8 Added; interim	68517
10 Comment period reopening	19859
Authority citation revised	47063
10.112 (b) amended	50726
10.205 (i)(1) revised; eff. 10-7-96	47063
10.207 (d)(1) revised; eff. 10-7-96	47063
10.217 (a)(1) and (2) amended; eff. 10-7-96	47064
10.901 (a) revised; eff. 10-7-96	47064
12 Comment period reopened	13098
12.05-9 (a) and (b) introductory text revised; eff. 10-7-96	47064
12.10-5 (a) and (b) introductory text revised; eff. 10-7-96	47064
12.15-9 (a) and (c) amended; eff. 10- 7-96	47064
13 Comment period reopened	13098
14 Revised	56637
15 Comment period reopened	13098, 19859
Authority citation revised	25997
16.205 (g) amended	50726
16.207 Revised	66613
16.500 (a) and (c) amended	50726
25.01-3 (a) and (b) amended	50726
25.30-5 (a) amended	50726
25.45-1 (a) amended	50726
25.45-2 (a) amended	50726
26.15-1 (a) and (b) removed; (c) re- designated as (b); new (a) added	25997
28 Authority citation revised	57272
28.40 (a) and (b) amended	50726
28.50 Amended	50726
Amended; interim	57272
Regulation at 61 FR 57272 eff. date delayed to 3-20-97	68161
28.60 Added; interim	57273
Regulation at 61 FR 57273 eff. date delayed to 3-20-97	68161
28.65 Added; interim	57273
Regulation at 61 FR 57273 eff. date delayed to 3-20-97	68161
28.80 (a)(2) and (d)(1) revised; in- terim	57273

46 CFR—Continued

	61 FR Page
Chapter I—Continued	
Regulation at 61 FR 57273 eff. date delayed to 3-20-97	68161
28.120 Revised; interim	57273
Regulation at 61 FR 57273 eff. date delayed to 3-20-97	68161
Table corrected	68162
28.225 (a)(3)(i) amd (ii) revised; in- terim	57275
Regulation at 61 FR 57275 eff. date delayed to 3-20-97	68161
28.270 (c) revised; interim	57275
Regulation at 61 FR 57275 eff. date delayed to 3-20-97	68161
28.275 Added; interim	57275
Regulation at 61 FR 57275 eff. date delayed to 3-20-97	68161
28.320 (b) revised; interim	57275
Regulation at 61 FR 57275 eff. date delayed to 3-20-97	68161
28.380 (j) revised; interim	57275
Regulation at 61 FR 57275 eff. date delayed to 3-20-97	68161
28.555 (c) and (d) revised; in- terim	57276
Regulation at 61 FR 57276 eff. date delayed to 3-20-97	68161
30 Comment period reopened	13098
30.01-5 (b) removed; interim	25286
30.01-6 (d) revised; interim	25286
30.30-5 (a) amended	50726
31 Comment period reopened	13098
Technical correction	41684
Authority citation revised	68521
31.01-1 (a) revised; interim	25286
31.01-3 Added; interim	68521
31.05-1 (a) revised; interim	25286
31.10-15 (a) amended	25997
31.10-21 Table 31.10-21(a) revised; eff. 11-27-96	39791
Table 31.10-21(b) revised; eff. 11- 27-96	39793
(e)(1), (3) and (g) amended	50726
31.36-1 (Subpart 31.36) Added; in- terim	25286
31.40-45 (a) amended	50726
32.01-1 (a) amended	50727
32.02-5 Revised	25997
32.15-10 Revised	25997
32.40-1—32.40-65 (Subpart 32.40) Revised	25997
32.53-3 (a), (b), (d) and (e) amend- ed	50727
32.95-1 (Subpart 32.95) Re- moved	25998
33 Removed; interim	25286
33.01-3 (a) amended	50727

46 CFR (10-1-00 Edition)

46 CFR—Continued

	61 FR Page
Chapter I—Continued	
34.01-15 (a) amended	50727
34.05-5 (a) introductory text and (1) through (4) revised	25998
34.05-15 Removed	25999
34.10-10 (e), (e-1) and (n) removed; Table 34.10(E-1) and (f) through (m) redesignated as Table 34.10(E) and (g) through (n); new (e), (f) and (o) added	25999
34.10-90 (a)(10), (11) and (b)(2) re- vised; (a)(12) and (13) removed; (a)(14) redesignated as (a)(12)	25999
34.13-1 (Subpart 34.13) Revised	25999
34.55-1—34.55-10 (Subpart 34.55) Removed	25999
35 Comment period reopened	13098
Technical corrected	41685
35.01-3 (a) amended	50727
35.01-5 (a) designation, (b) and (c) removed	25999
35.01-40 (c) revised; eff. 11-27- 96	39794
35.07-5 Revised	25999
35.07-10 (b)(1) revised; (b)(2) and (7) removed; (b)(3) through (6), (8), (9) and (10) redesignated as (b)(2) through (8); interim	25286
35.07-15 Removed	25999
35.10-1 Revised; interim	25286
35.10-5 Revised; interim	25287
35.10-6 Removed; interim	25287
35.10-7 Removed; interim	25287
35.10-9 Removed; interim	25287
35.10-20 Removed; interim	25287
35.10-25 Removed; interim	25287
35.10-30 Removed; interim	25287
35.12-1—35.12-5 (Subpart 35.12) Revised	26000
35.20-15 Removed	26000
35.20-25 Removed	26000
35.20-30 Revised	26000
35.20-35 Revised	26000
35.25-1 Revised	26000
Heading corrected	32900
35.30-45 Removed	26000
35.30-50 Removed; interim	25287
35.30-55 Removed; interim	25287
35.40-1—35.40-40 (Subpart 35.40) Heading revised; interim	25287
35.40-40 Revised; interim	25287
35.70-1—35.70-35 (Subpart 35.70) Removed	26000
38 Authority citation revised	26000
38.25-10 (b) revised	26000
39.10-1 (b) amended	50727

46 CFR—Continued

	61 FR Page
Chapter I—Continued	
39.10-5 (a) and (b) amended	50727
39.10-9 Amended	50727
39.20-1 (a)(1) amended	50727
39.20-9 (d) amended	50727
39.40-1 (b), (c) and (e) amended	5072

1997

46 CFR

	62 FR Page
Chapter I	
1.01-10 (b)(1) introductory text, (i) introductory text, (A), (B), (C), (ii) introductory text, (A), (B), (C), (iii) and (iv) amend- ed	51041
1.01-15 (b) amended	51040
1.01-25 (b) amended	51040, 51041
1.03-15 (g) and (j) amended; (h)(2) and (3) revised	51040
(h)(4) added	67532
1.03-30 Revised	51040
1.03-35 (a) amended; (c) re- moved	51041
1.03-40 Removed	51041
2 Authority citation revised	16703, 19232, 67514
Technical correction	28760
2.01-1 (c) amended	51041
(a)(1) and (d)(2) revised; eff. 10- 30-97	51194
2.01-7 (b)(4) revised	51041
2.01-10 (b) amended; eff. 10-30- 97	51194
2.01-13 (c) amended	51041
2.01-15 (a) introductory text, (2) and (b)(2) amended	51041
2.01-20 Revised; eff. 10-30-97	51195
2.01-25 (a)(1)(ix) added; (a)(2) re- vised	67514
2.01-30 Added	17748
2.01-40 (a) revised; eff. 10-30-97	51195
2.01-45 (a) revised; eff. 10-30-97	51195
2.01-50 (a) revised; eff. 10-30-97	51195
2.01-60 (a) amended	51041
2.10-1 (b) revised; interim	19232
2.10-5 Revised; interim	19232
2.10-25 Amended; interim	19232, 51041
2.10-101 Table amended; in- terim	19232
2.10-135 (a) amended	16703
2.20-1 Removed	51041
2.20-50 Amended	51041
2.45-1—2.45-20 (Subpart 2.45) Re- moved; eff. 10-30-97	51195
2.50-1 (Subpart 2.50) Heading re- vised	16703

List of CFR Sections Affected

46 CFR—Continued

62 FR
Page

Chapter I—Continued	
Section added	16703
2.75-1 (c) amended.....	51041
2.75-5 (a) amended	51041
2.75-50 (c) amended	51041
2.85-1 Revised; eff. 10-30-97.....	51195
3.01-1 Amended; eff. 10-30-97	51195
3.01-3 Removed; eff. 10-30-97.....	51195
3.03-1 Amended; eff. 10-30-97	51195
3.10-1 (a) amended; eff. 10-30-97.....	51195
4.01-3 (d) added; eff. 10-30-97	51195
4.03-2 (a)(3) amended.....	51041
4.03-40 Revised; eff. 10-30-97	51195
4.06-60 (a) amended	51041
4.07-1 (c)(3) amended.....	51041
4.07-10 (a) introductory text and (b) amended	51042
4.40-3 (b) amended; eff. 10-30-97.....	51195
4.40-5 (a) revised; eff. 10-30-97	51195
4.40-30 (f) amended; eff. 10-30-97.....	51195
5.507 (a) amended	51042
5.521 (a) amended	51042
5.527 (c) amended	51042
5.537 (c) amended	51042
6.07 (a) and (b) amended; eff. 10-30-97	51195
6.15 Removed; eff. 10-30-97.....	51195
7.1 Amended; eff. 10-30-97	51195
8 Regulation at 61 FR 68517 eff. date corrected to 12-27-96	3335
Revised.....	67532
8.120 (b) corrected.....	3335
8.130 (a)(4) and (5) corrected	3335
8.320 (b)(9) corrected.....	3335
10 Authority citation revised.....	34528
10.101 (a) and (c) revised; interim.....	34528
10.102 Added; interim.....	34529
10.103 Amended; interim.....	34529
10.107 (b)(3) added; interim.....	34529
10.112 (b) amended	51042
10.201 (a) revised; interim.....	34529
10.202 Heading revised; (j), (k) and (l) added; interim.....	34529
(k)(2) and (l)(1) corrected	40140
(k) and (l) corrected.....	40281
(e) amended; eff. 10-30-97	51195
10.205 Heading revised; (l) through (p) added; interim.....	34530
(l), (n)(1)(ii) and (2) corrected.....	40281
10.207 Heading, (c) heading and (l) revised; interim.....	34530
10.209 Heading revised; (k) added; interim.....	34531

46 CFR—Continued

62 FR
Page

Chapter I—Continued	
(k) corrected.....	40281
10.304 Heading revised; (e) through (h) added; interim	34531
10.305 Revised.....	11303
10.306 Revised.....	11304
10.309 Added; interim.....	34531
10.401—10.482 (Subpart D) Heading revised; interim	34532
10.470 (b)(2)(ii), (d)(2)(ii), (f)(2)(ii), (h)(2)(i) and (j)(2)(ii) amended; eff. 10-30-97.....	51195
10.472 (a)(2)(ii) amended; eff. 10-30-97	51195
10.474 (a)(2)(ii) amended; eff. 10-30-97	51196
10.480 Revised.....	11305
10.491 Added; interim.....	34532
10.493 Added; interim.....	34532
10.495 Added; interim.....	34532
10.497 Added; interim.....	34532
10.551 Added; interim.....	34532
Corrected.....	40140
10.553 Added; interim.....	34532
10.555 Added; interim.....	34533
10.601 Revised; interim	34533
10.603 Heading revised; (d) and (e) added; interim	34533
10.901—10.950 (Subpart I) Heading revised; interim.....	34533
10.901 (c) and (d) added; interim.....	34533
10.903 (c) and (d) added; interim.....	34533
10.1001—10.1005 (Subpart J) Added; interim	34534
12.01-1 Revised; interim.....	34534
12.01-3 Added; interim	34534
(b) corrected.....	40140
12.01-5 Removed; eff. 10-30-97	51196
12.01-6 Amended; interim	34534
Amended	51042
12.01-9 Added; interim	34535
12.02-7 (d), (e) and (f) added; interim.....	34535
12.02-11 Heading revised; (h) and (i) added; interim.....	34535
12.02-17 (e) added; interim.....	34535
12.02-19 Amended; eff. 10-30-97	51196
12.03-1 (Subpart 12.03) Added; interim.....	34536
12.05-3 Introductory text and (a) through (e) redesignated as (a) introductory text, (l) through (5); new (b) and new (c) added; interim.....	34537
(c) corrected	40140

46 CFR (10-1-00 Edition)

46 CFR—Continued

62 FR
Page

Chapter I—Continued	
12.05-7 (a)(5) added; interim	34537
(a)(5) corrected	40140
12.05-11 Heading and (a) revised; interim.....	34537
12.07-1—12.07-20 (Subpart 12.07) Removed; eff. 10-30-97	51196
12.10-3 Heading and (a)(6) revised; (c) added; interim	34537
12.10-5 (d) added; interim	34537
12.10-7 Revised; interim.....	34537
Corrected.....	40140
12.10-9 Added; interim	34537
Correctly designated	51042
12.13-1—12.13-3 (Subpart 12.13) Added; interim	34537
12.15-3 (d) and (e) added; in- terim.....	34538
12.15-7 (c) added; interim	34538
(c) corrected	40140
12.15-13 (a)(1) removed; (a)(2), (3) and (4) redesignated as (a)(1), (2) and (3); eff. 10-30-97	51196
12.15-15 (a)(1) removed; (a)(2), (3) and (4) redesignated as (a)(1), (2) and (3); eff. 10-30-97	51196
12.17-1—12.17-20 (Subpart 12.17) Removed; eff. 10-30-97	51196
12.25-1 Revised; eff. 10-30-97	51196
12.25-35 (b) amended; eff. 10-30- 97.....	51196
12.25-45 Added; interim.....	34538
12.30-1—12.30-5 (Subpart 12.30) Added; interim	34538
12.30-3 Designation and heading correctly removed	51042
13.103 Amended.....	25127
13.107 (a) through (e) revised; (g) added.....	25127
13.111 (a), (b) and (c) revised; (f) added.....	25128
13.113 Heading, (a) introductory text, (c), (d) introductory text, (1)(i), (ii), (iii), (2), (e)(1)(ii), (iii) and (f) revised; (d)(3) added.....	25128
Table revised	25129
13.115 Revised.....	25129
13.117 Revised.....	25130
13.120 Revised.....	25130
13.121 (c), (d)(3), (4), (f) and (g) re- vised; (d)(5), (6), (h), (i) and (j) added.....	25130
Table 13.121(f) revised	25131
Table 13.121(g) amended.....	25133

46 CFR—Continued

62 FR
Page

Chapter I—Continued	
13.127 Heading, (a) introductory text and (b)(6) revised; (b)(9) added.....	25133
13.129 Table revised	25133
13.203 Heading, (a)(1), (2), (3) and (b) introductory text re- vised.....	25134
13.207 Heading revised	25134
13.209 Revised.....	25134
13.303 Heading, (a)(1) and (b) in- troductory text revised.....	25134
13.305 Revised.....	25134
13.307 Heading and (a) revised.....	25134
13.309 Revised.....	25134
13.401 (e)(2) revised	25134
13.403 Heading and (a)(1) re- vised.....	25134
13.405 (a) introductory text, (2) and (b)(2) introductory text re- vised.....	25134
13.407 Heading revised	25134
13.409 Revised.....	25134
13.501 (d) revised.....	25134
13.503 Heading, (a)(1), (2), (3) and (b) revised.....	25134
13.505 (a) introductory text, (2) and (b) revised.....	25135
13.507 Heading revised	25135
13.509 Revised.....	25135
15 Authority citation revised.....	34538
Technical correction	40139
15.102 Added; interim.....	34538
15.103 (d) through (g) added; in- terim.....	34538
15.105 Added; interim.....	34539
15.301 (a) amended	25135
(b)(7) and (10) amended; (b)(11) and (c)(7) added; interim.....	34539
15.815 (c) amended; eff. 10-30-97.....	51196
15.860 (h) added; Table 860(a)(1) amended.....	25135
15.1101—15.1111 (Subpart J) Added; interim	34539
16.205 (a) through (e) removed; (f) and (g) redesignated as (a) and (b); eff. 10-30-97	51196
16.207 Regulation at 61 FR 66613 confirmed.....	34015
24.01-1—24.01-7 (Subpart 24.01) Heading revised	51196
24.01-1 Revised; eff. 10-30-97	51196
24.01-5 Removed; eff. 10-30-97	51196
24.10-9 Amended; eff. 10-30-97	51196
24.10-15 Amended; eff. 10-30-97	51196
24.10-17 (a) amended	51042
(a) amended; eff. 10-30-97	51196

List of CFR Sections Affected

46 CFR—Continued

62 FR
Page

Chapter I—Continued

24.10-21 Amended; eff. 10-30-97	51196
24.15-5 Amended; eff. 10-30-97	51196
25.25-5 (e) amended	51042
25.25-13 (b) and (c) amended.....	51042
25.26-5 (b) introductory text and (c) introductory text amended; eff. 10-30-97	51196
25.26-20 (a) introductory text and (b) introductory text amended; eff. 10-30-97	51196
25.30-20 (a)(1) table revised.....	51042
25.40-1 (c) and (d) introductory text revised; eff. 10-30-97	51196
26.03-5 Revised; eff. 10-30-97	51197
26.03-10 (a) designation re- moved	51042
26.10-1-26.10-5 (Subpart 26.10) Removed; eff. 10-30-97	51197
28.40 (b) amended	51042
28.50 Regulation at 61 FR 57272 confirmed.....	46675
28.60 Regulation at 61 FR 57273 confirmed; revised; eff. 10-6- 97.....	46675
28.65 Regulation at 61 FR 57273 confirmed.....	46675
(b)(11) and (c) revised; eff. 10-6- 97	46676
28.80 Regulation at 61 FR 57273 confirmed.....	46675
28.120 Regulation at 61 FR 57273 confirmed.....	46675
Tables (a), (b) and (c) revised; eff. 10-6-97.....	46676
28.225 Regulation at 61 FR 57275 confirmed.....	46675
(a)(3)(i) and (ii) revised; eff. 10- 6-97	46677
28.270 Regulation at 61 FR 57275 confirmed.....	46675
(c) revised; eff. 10-6-97.....	46677
28.275 Regulation at 61 FR 57275 confirmed.....	46675
(a)(2) revised; (a)(3) and note added; eff. 10-6-97.....	46677
28.320 Regulation at 61 FR 57275 confirmed.....	46675
28.380 Regulation at 61 FR 57275 confirmed.....	46675
(b) amended; eff. 10-30-97	51197
28.555 Regulation at 61 FR 57276 confirmed.....	46675
30.01-3 Removed; eff. 10-30-97	51197
30.01-5 (g) amended	51043
30.01-15 (a) and (b) designation re- moved; eff. 10-30-97	51197

46 CFR—Continued

62 FR
Page

Chapter I—Continued

30.01-20 Removed; eff. 10-30-97	51197
30.10-19 Amended; eff. 10-30-97	51197
30.10-43 Amended; eff. 10-30-97	51197
30.10-47 Amended; eff. 10-30-97	51197
30.10-62 Added	25135
30.10-65 Revised	25135
30.10-67 Revised	25135
30.10-69 Revised	25135
30.20-1-30.20-50 (Subpart 30.20) Removed; eff. 10-30-97	51197
30.30-9 Amended	51043
31 Authority citation revised.....	51043, 67514
31.01-1 (a) amended	51043
31.01-3 Regulation at 61 FR 68521 eff. date corrected to 12-27- 96	3335
Revised	67536
31.10-5 (a)(1) revised; eff. 10-30- 97.....	51197
31.10-16 (a), (b)(3), (c) and (e) re- vised; eff. 10-30-97.....	51197
31.10-20 (a) and (d) revised; eff. 10- 30-97	51197
31.10-21 (d)(4), (e) introductory text and (1) revised; eff. 10-30- 97.....	51198
31.10-33 Removed; eff. 10-30-97.....	51198
31.37-1-31.37-85 (Subpart 31.37) Removed; eff. 10-30-97	51198
31.40-30 Added	67514
31.40-40 (b) revised	67514
32 Authority citation revised.....	14830
32.01-1 (b) amended	51043
32.22T-1-33.22T-5 (Subpart 32.22T) Added; eff. 4-28-97 through 4- 28-99	14830
32.53-1 (a)(2) amended	51043
(c) revised; eff. 10-30-97	51198
32.53-3 (a), (d) and (e) amended.....	51043
32.53-10 (b) revised; (c) through (f) removed; eff. 10-30-97	51198
32.53-15 Removed; eff. 10-30-97.....	51198
32.53-20 Removed; eff. 10-30-97.....	51198
32.53-25 Removed; eff. 10-30-97.....	51198
32.53-30 Removed; eff. 10-30-97.....	51198
32.53-35 Removed; eff. 10-30-97.....	51198
32.53-40 Removed; eff. 10-30-97.....	51198
32.53-45 Removed; eff. 10-30-97.....	51198
32.53-50 Removed; eff. 10-30-97.....	51198
32.53-55 Removed; eff. 10-30-97.....	51198
32.53-60 Removed; eff. 10-30-97.....	51198
32.53-65 Removed; eff. 10-30-97.....	51198
32.53-70 Removed; eff. 10-30-97.....	51198
32.53-75 Removed; eff. 10-30-97.....	51198
32.53-80 Removed; eff. 10-30-97.....	51198

46 CFR (10-1-00 Edition)

46 CFR—Continued

62 FR
Page

Chapter I—Continued	
32.53-85	Removed; eff. 10-30-97..... 51198
32.55-20	(e) added; eff. 10-30-97 51198
32.55-40	Removed; eff. 10-30-97..... 51198
32.56-1	Existing text designated as (a); (b) added; eff. 10-30-97..... 51198
32.57-1	(b) added; eff. 10-30-97..... 51198
32.57-10	(d)(4) revised; eff. 10-30-97..... 51198
32.60-25	(a) designation and (b) removed; eff. 10-30-97 51198
34.01-15	(b) amended 51043
	(b) amended; eff. 10-30-97 51198
34.10-5	(f) revised; eff. 10-30-97 51198
34.10-10	(i) revised; eff. 10-30-97..... 51199
34.15-5	(d) removed; (e) redesignated as (d); eff. 10-30-97 51199
34.20-5	(b)(1) revised; eff. 10-30-97..... 51199
34.30-1	(Subpart 34.30) Added; eff. 10-30-97..... 51199
35.01-3	(b) amended 51043
	(b) amended; eff. 10-30-97 51199
35.01-40	Removed; eff. 10-30-97..... 51199
35.07-10	(b)(2) and (c)(2) amended; eff. 10-30-97 51199
35.10-3	Revised; eff. 10-30-97 51199
35.12-1—35.12-5	(Subpart 35.12) Removed; eff. 10-30-97 51199
35.25-15	Revised; eff. 10-30-97..... 51199
35.25-20	Removed; eff. 10-30-97..... 51199
35.30-20	(d) amended; eff. 10-30-97..... 51199
35.30-40	(b) removed; (a) introductory text, (1), (2) and (3) redesignated as introductory text, (a), (b) and (c); eff. 10-30-97 51199
35.35-30	Heading, (a) and (b) introductory text revised 25135
35.35-35	Introductory text revised; (f) added 25135
35.35-85	Revised; eff. 10-30-97..... 51200
36.01-1	(c) amended 51043
39.10-5	(b) amended 51043
39.10-13	(b) removed; (c), (d) and (e) redesignated as (b), (c) and (d); eff. 10-30-97 51200

1998

46 CFR

63 FR
Page

Chapter I	
1.01-10	(b)(1) introductory text and (iv) amended; (b)(1)(iv) redesignated as (b)(1)(ii)(D); (b)(1)(ii) revised 52188

46 CFR—Continued

63 FR
Page

Chapter I—Continued	
1.03-15	(h)(3) revised..... 52188
1.03-30	(a) amended 52188
2.01-20	Heading revised; amended 52188
2.10-1	Regulation at 62 FR 19232 confirmed..... 59474
2.10-5	Regulation at 62 FR 19232 confirmed; (c)(2) revised 59474
2.10-25	Regulation at 62 FR 19232 confirmed; amended 59474
2.10-101	Regulation at 62 FR 19232 confirmed..... 59474
2.85-1	Amended..... 52188
4.05-10	Revised 19192
7.1	Amended 52188
8	Authority citation revised 44353
8.500—8.570	(Subpart E) Added 44353
10.302	(a) introductory text amended..... 52189
10.303	(e) amended..... 52189
10.304	(a) and (d) amended..... 52189
10.307	Amended..... 52189
10.309	(a)(11) amended 52189
10.464	(d)(2) amended..... 52189
10.470	(b)(1)(ii), (d)(1)(ii) and (h)(1)(ii) amended 52189
10.472	(a)(1)(ii) amended 52189
10.474	(a)(1)(ii) amended 52189
10.516	(a)(6) amended..... 52189
10.544	(a)(3) amended..... 52189
10.703	(c) amended..... 52189
10.901	(c)(2)(v) and (vi) amended 52188
10.903	(c)(16), (17), (18) and table revised; (c)(19) added 52188
12.01-3	(a)(11) and (b) amended..... 52189
12.02-3	(b)(3) amended 52189
12.02-13	(b) amended 52189
12.02-14	(c) amended..... 52189
12.02-21	(b) amended 52189
12.02-24	Amended..... 52189
12.03-1	(a)(11) amended..... 52189
12.05-5	(b) amended 52189
12.05-7	(b) introductory text and (2) amended 52189
12.10-3	(a)(2), (5) and (6) amended 52189
12.15-5	(b) amended 52189
12.15-7	(b) introductory text amended..... 52189
12.15-13	(a)(3) amended..... 52189
12.15-15	(a)(3) amended..... 52189
12.25-35	(a) amended 52189
12.25-40	Amended..... 52189
15.1010	(c) amended 52189
15.1040	(c) amended 52189

List of CFR Sections Affected

46 CFR—Continued

	63 FR Page
Chapter I—Continued	
15.1050 Added.....	57255
25.26–5 (b)(2) and (c) amended	52189
25.26–20 (a) and (b)(2) revised; (b)(3) removed.....	52189
25.26–30 Removed.....	52189
26.03–5 (a)(2) amended	52189
28.130 (d) amended; eff. 11–2–98	52813
30.01–5 Regulation at 61 FR 25286 confirmed.....	52813
30.01–6 Regulation at 61 FR 25286 confirmed.....	52813
30.10–43 Amended.....	52190
31.01–1 Regulation at 61 FR 25286 confirmed.....	52813
31.05–1 Regulation at 61 FR 25286 confirmed.....	52813
31.36–1 (Subpart 31.36) Regulation at 61 FR 25286 confirmed	52813
32 Authority citation revised.....	71764
32.15–15 (a) and (d) revised; (f) added; interim	71764
(e) added; interim; eff. 12–11–00	71764
32.57–10 (d)(4) amended.....	52190
33 Regulation at 61 FR 25286 con- firmed	52813
35.07–10 Regulation at 61 FR 25286 confirmed.....	52813
35.10–1 Regulation at 61 FR 25286 confirmed.....	52813
35.10–5 Regulation at 61 FR 25287 confirmed.....	52813
35.10–6 Regulation at 61 FR 25287 confirmed.....	52813
35.10–7 Regulation at 61 FR 25287 confirmed.....	52813
35.10–9 Regulation at 61 FR 25287 confirmed.....	52813
35.10–20 Regulation at 61 FR 25287 confirmed.....	52813
35.10–25 Regulation at 61 FR 25287 confirmed.....	52813
35.10–30 Regulation at 61 FR 25287 confirmed.....	52813
35.30–50 Regulation at 61 FR 25287 confirmed.....	52813
35.30–55 Regulation at 61 FR 25287 confirmed.....	52813
35.40–1—35.40–40 (Subpart 35.40) Regulation at 61 FR 25287 con- firmed	52813
35.40–40 Regulation at 61 FR 25287 confirmed.....	52813

1999

46 CFR

	64 FR Page
Chapter I	
1.03–15 (h)(3) revised	4984
(h)(1), (2) and (3) revised.....	53222
1.03–45 Revised.....	4984
2.01–25 (a)(1)(iv), (4)(i), (b)(2) and (e)(2) amended; (a)(1)(v) and (4)(ii) removed; (a)(1)(vi) through (ix) and (4)(iii) redess- ignated as (a)(1)(v) through (viii) and (4)(ii).....	53222
2.10–105 (c) amended.....	53223
4.05–40 Added.....	53223
4.06–60 (e) added.....	53223
5.1—5.5 (Subpart A) Heading re- vised; interim	28075
5.1 Removed; interim.....	28075
5.3 Amended; interim	28075
5.11 Removed; interim	28075
5.13 Removed; interim	28075
5.23 Removed; interim	28075
5.25 Removed; interim	28075
5.33 Amended; interim	28075
5.35 Amended; interim	28075
5.53 Removed; interim	28075
5.55 Heading and (a) amended; in- terim.....	28075
5.63 Removed; interim	28075
5.105 (a) amended; interim	28075
5.107 Revised; interim	28075
5.305 Revised; interim	28075
5.501 Revised; interim	28075
5.503 Removed; interim	28075
5.505 Removed; interim	28075
5.507 Removed; interim	28075
5.509 Removed; interim	28075
5.511 Removed; interim	28075
5.513 Removed; interim	28075
5.515 Removed; interim	28075
5.517 Removed; interim	28075
5.519 Removed; interim	28075
5.523 Removed; interim	28075
5.525 Removed; interim	28075
5.527 Removed; interim	28075
5.529 Removed; interim	28075
5.531 Removed; interim	28075
5.533 Removed; interim	28075
5.535 Removed; interim	28075
5.537 Removed; interim	28075
5.539 Removed; interim	28075
5.541 Removed; interim	28075
5.543 Removed; interim	28075
5.545 Removed; interim	28075
5.547 Removed; interim	28075
5.549 Removed; interim	28075
5.551 Removed; interim	28075

46 CFR (10-1-00 Edition)

46 CFR—Continued

	64 FR Page
Chapter I—Continued	
5.553 Removed; interim.....	28075
5.555 Removed; interim.....	28075
5.557 Removed; interim.....	28075
5.559 Removed; interim.....	28075
5.561 Removed; interim.....	28075
5.563 Removed; interim.....	28075
5.565 Removed; interim.....	28075
5.567 (a) revised; interim.....	28075
5.571 Removed; interim.....	28075
5.573 Removed; interim.....	28075
5.577 Removed; interim.....	28075
5.601—5.607 (Subpart I) Removed; interim.....	28075
5.701 Revised; interim.....	28075
5.703 Removed; interim.....	28075
5.705 Removed; interim.....	28075
5.709 Removed; interim.....	28075
5.711 Removed; interim.....	28075
8.110 (b) revised.....	30439
10 Authority citation revised.....	63225
10.102 (a) amended.....	53223
10.103 Amended; interim; eff. 11- 20-00.....	63225
10.109 Revised; eff. 10-4-99.....	42814
Table correctly revised.....	44786, 53230, 53230
10.110 Revised; eff. 10-4-99.....	42815
10.201 (f)(1) and (2) amended; in- terim; eff. 11-20-00.....	63225
10.203 Table amended; interim; eff. 11-20-00.....	63225
10.205 (a) amended; eff. 10-4-99.....	42815
(f)(1) amended; (g)(3) revised; in- terim; eff. 11-20-00.....	63225
10.207 (a) amended; eff. 10-4-99.....	42815
10.209 (a)(1), (e)(3)(i)(A), (e)(4), and (f)(1) amended; eff. 10-4- 99.....	42815
(c)(6) and (7) added; interim; eff. 11-20-00.....	63225
10.217 (a)(1) and (2) amended; eff. 10-4-99.....	42815
10.219 (c) amended; eff. 10-4-99.....	42815
10.302 (a) introductory text re- vised; (c) and (d) amended; (e), (f) and (g) added.....	4984
10.303 (e) revised.....	4984
10.304 Heading revised; (h) redesi- gnated as (i); new (h) added; in- terim; eff. 11-20-00.....	63225
10.403 Heading and Figure 10.403 revised; interim; eff. 11-20- 00.....	63226
10.412 (a) amended; interim; eff. 11-20-00.....	63228

46 CFR—Continued

	64 FR Page
Chapter I—Continued	
10.414 (a) amended; interim; eff. 11-20-00.....	63228
10.418 (b) revised; interim; eff. 11- 20-00.....	63228
10.420 Amended; interim; eff. 11- 20-00.....	63228
10.424 (a)(2) amended; interim; eff. 11-20-00.....	63228
10.426 (a)(2) revised; interim; eff. 11-20-00.....	63228
10.442 (a) and (b) amended; in- terim; eff. 11-20-00.....	63228
10.444 (c) amended; interim; eff. 11-20-00.....	63228
10.446 (b) amended; interim; eff. 11-20-00.....	63228
10.452 (a) amended; interim; eff. 11-20-00.....	63228
10.462 (c) amended; interim; eff. 11-20-00.....	63228
10.463 Added; interim; eff. 11-20- 00.....	63228
10.464 Revised; interim; eff. 11-20- 00.....	63228
10.465 Added; interim; eff. 11-20- 00.....	63232
10.466 Redesignated as 10.467; new 10.466 added; interim; eff. 11-20- 00.....	63234
10.467 Redesignated from 10.466; interim; eff. 11-20-00.....	63234
10.482 (a) revised; interim; eff. 11- 20-00.....	63235
10.603 (c) removed; (d) and (e) re- designated as (c) and (d); new (d) introductory text amend- ed.....	53223
10.701 (a) amended; interim; eff. 11-20-00.....	63235
10.703 (a) amended; interim; eff. 11-20-00.....	63235
10.901 (b)(1) amended; interim; eff. 11-20-00.....	63235
10.903 (c) table amended; (a)(18), (b)(4) and (c)(7) revised; in- terim; eff. 11-20-00.....	63235
10.910 Table amended; interim; eff. 11-20-00.....	63235
12.01-3 (a) amended.....	53223
12.02-18 Revised; eff. 10-4-99.....	42815
Table correctly revised.....	44786, 53231
12.02-23 (b) and (c)(2) amended; eff. 10-4-99.....	42816
12.02-27 (a)(1), (e)(3)(i)(A), (4), and (f) amended; eff. 10-4-99.....	42816
15 Authority citation revised.....	63235

List of CFR Sections Affected

46 CFR—Continued

	64 FR Page
Chapter I—Continued	
15.105 (a) amended	53223
15.301 (a) amended; (b)(6) re- moved; (b)(7) through (10) re- designated as (b)(6) through (9); interim; eff. 11-20-00.....	63235
15.805 (b) revised	53223
15.610 Revised; interim; eff. 11-20- 00.....	63235
15.705 (d) amended; interim; eff. 11-20-00.....	63235
15.805 (a)(5) added; interim; eff. 11-20-00.....	63235
15.810 (d) and (e) redesignated as (d) and (f); new (d) added; in- terim; eff. 11-20-00.....	63235
15.910 Revised; interim; eff. 11-20- 00.....	63235
16 Technical correction	25405
16.500 Revised.....	22559
(b)(2) corrected	31989
27 Added; interim	56266
28.40 (b) amended	67176
28.535 (d) amended.....	67176
30.01-3 Added	67177
31.01-3 (b) revised.....	30439
31.40-15 Heading revised; (a) and (b) amended	53223
31.40-20 Removed.....	53223
31.40-40 (c) amended.....	53223
32 Meeting.....	18576
32.01-1 (b) amended	67177
32.57-10 (d)(7-a) amended	67177
34.01-15 (b) amended.....	53223, 67177
34.15-5 (a), (d)(1), (4), (5), (e)(1) table and (5) table amended	53223
34.15-10 (b), (d) and (f) amend- ed.....	53223
34.15-20 (b) amended	53223
34.15-90 (a)(2) amended.....	53223
35.01-3 (b) amended	67177
35.30-20 (c)(3) amended.....	67177
38.01-3 (b) amended	53223, 67177
38.05-20 (a)(1)(ii) amended.....	67177
39.10-5 (b) amended	67177

2000

(Regulations published from January 1,
2000, through October 1, 2000)

46 CFR

	65 FR Page
Chapter I	
1.01-10 (b)(1)(ii)(D) revised	58457
1.01-15 (b) amended	58457
1.03-15 (h)(3) revised.....	58457

46 CFR—Continued

	65 FR Page
Chapter I—Continued	
2 Authority citation revised.....	6498, 58458
2.01-3 (a) amended	6498
2.01-5 (a)(3) and (4) removed	6498
2.01-8 (b) amended	6499
2.01-25 (a)(1)(v) removed; (a)(1)(vi), (vii) and (viii) redес- ignated as (a)(1)(v), (vi) and (vii); (b)(1) amended; (a)(4), (b)(2), (e)(2) and (f) revised.....	6499
2.01-60 (a) amended.....	58458
4.01-3 (b) and (c) amended.....	58458
8.110 (b) amended	58458
9.1 Amended	58458
10.105 Amended.....	58458
10.429 (b) amended	58458
10.456 (d) amended.....	58458
10.467 (g)(4) amended.....	58458
12.01-7 Amended	58458
12.15-3 (d) introductory text amended.....	58458
25.45-2 Note added.....	58458
26 Authority citation revised.....	58458
26.03-8 Added; interim	24881
27 Regulation at 64 FR 56266 con- firmed	52046
27.210 Revised.....	52046
27.310 (c) and (d)(2) revised.....	52047
27.340 (d) and (f) revised	52047
27.355 (c) and (d) revised	52047
28 Effective date confirmation.....	10943
28.110 (b) table amended	58458
28.145 Table amended.....	58458
30 Authority citation revised	6499
Effective date confirmation	10943
30.10-2a Added.....	6499
30.10-22 Amended.....	58458
30.10-59 Amended.....	58458
31 Authority citation revised	6499
31.01-1 (a) amended.....	6499
31.01-15 Heading and (a) re- vised	6499
31.05-10 Heading and (a) re- vised	6499
31.10-1 (b) amended	58459
31.10-5 (a) introductory text amended.....	58459
31.10-15 (a) revised; (c) added.....	6499
31.10-17 Revised	6499
31.10-17a Added	6500
31.10-18 (d), (e) and (h) amend- ed.....	6500
31.40-1 Amended.....	6500
31.40-15 Revised	6500
31.40-35 Revised	6500
31.40-40 Revised	6500

46 CFR (10-1-00 Edition)

46 CFR—Continued

65 FR
Page

Chapter I—Continued	
31.40-45 (a) amended	58459
32 Effective date confirmation.....	10943
32.01-1 (b) amended	58459
32.15-15 (e) revised; eff. 12-11-00.....	31813
32.20-10 Amended.....	58459
34 Effective date confirmation.....	10943

46 CFR—Continued

65 FR
Page

Chapter I—Continued	
34.10-15 (d) amended	58459
35 Effective date confirmation.....	10943
35.10-3 (a) amended	58459
35.25-10 (a) and (b) amended.....	58459
38 Effective date confirmation.....	10943
39 Effective date confirmation.....	10943
39.20-9 (c)(1) amended	58459

